


Section D: Erosion Control Plans

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0085(81)112	D1	D4

Plotting Date: 10/10/2014

INDEX OF SHEETS

D1	General Layout W/Index
D2-D3	Estimate With General Notes & Tables
D4	Standard Plates

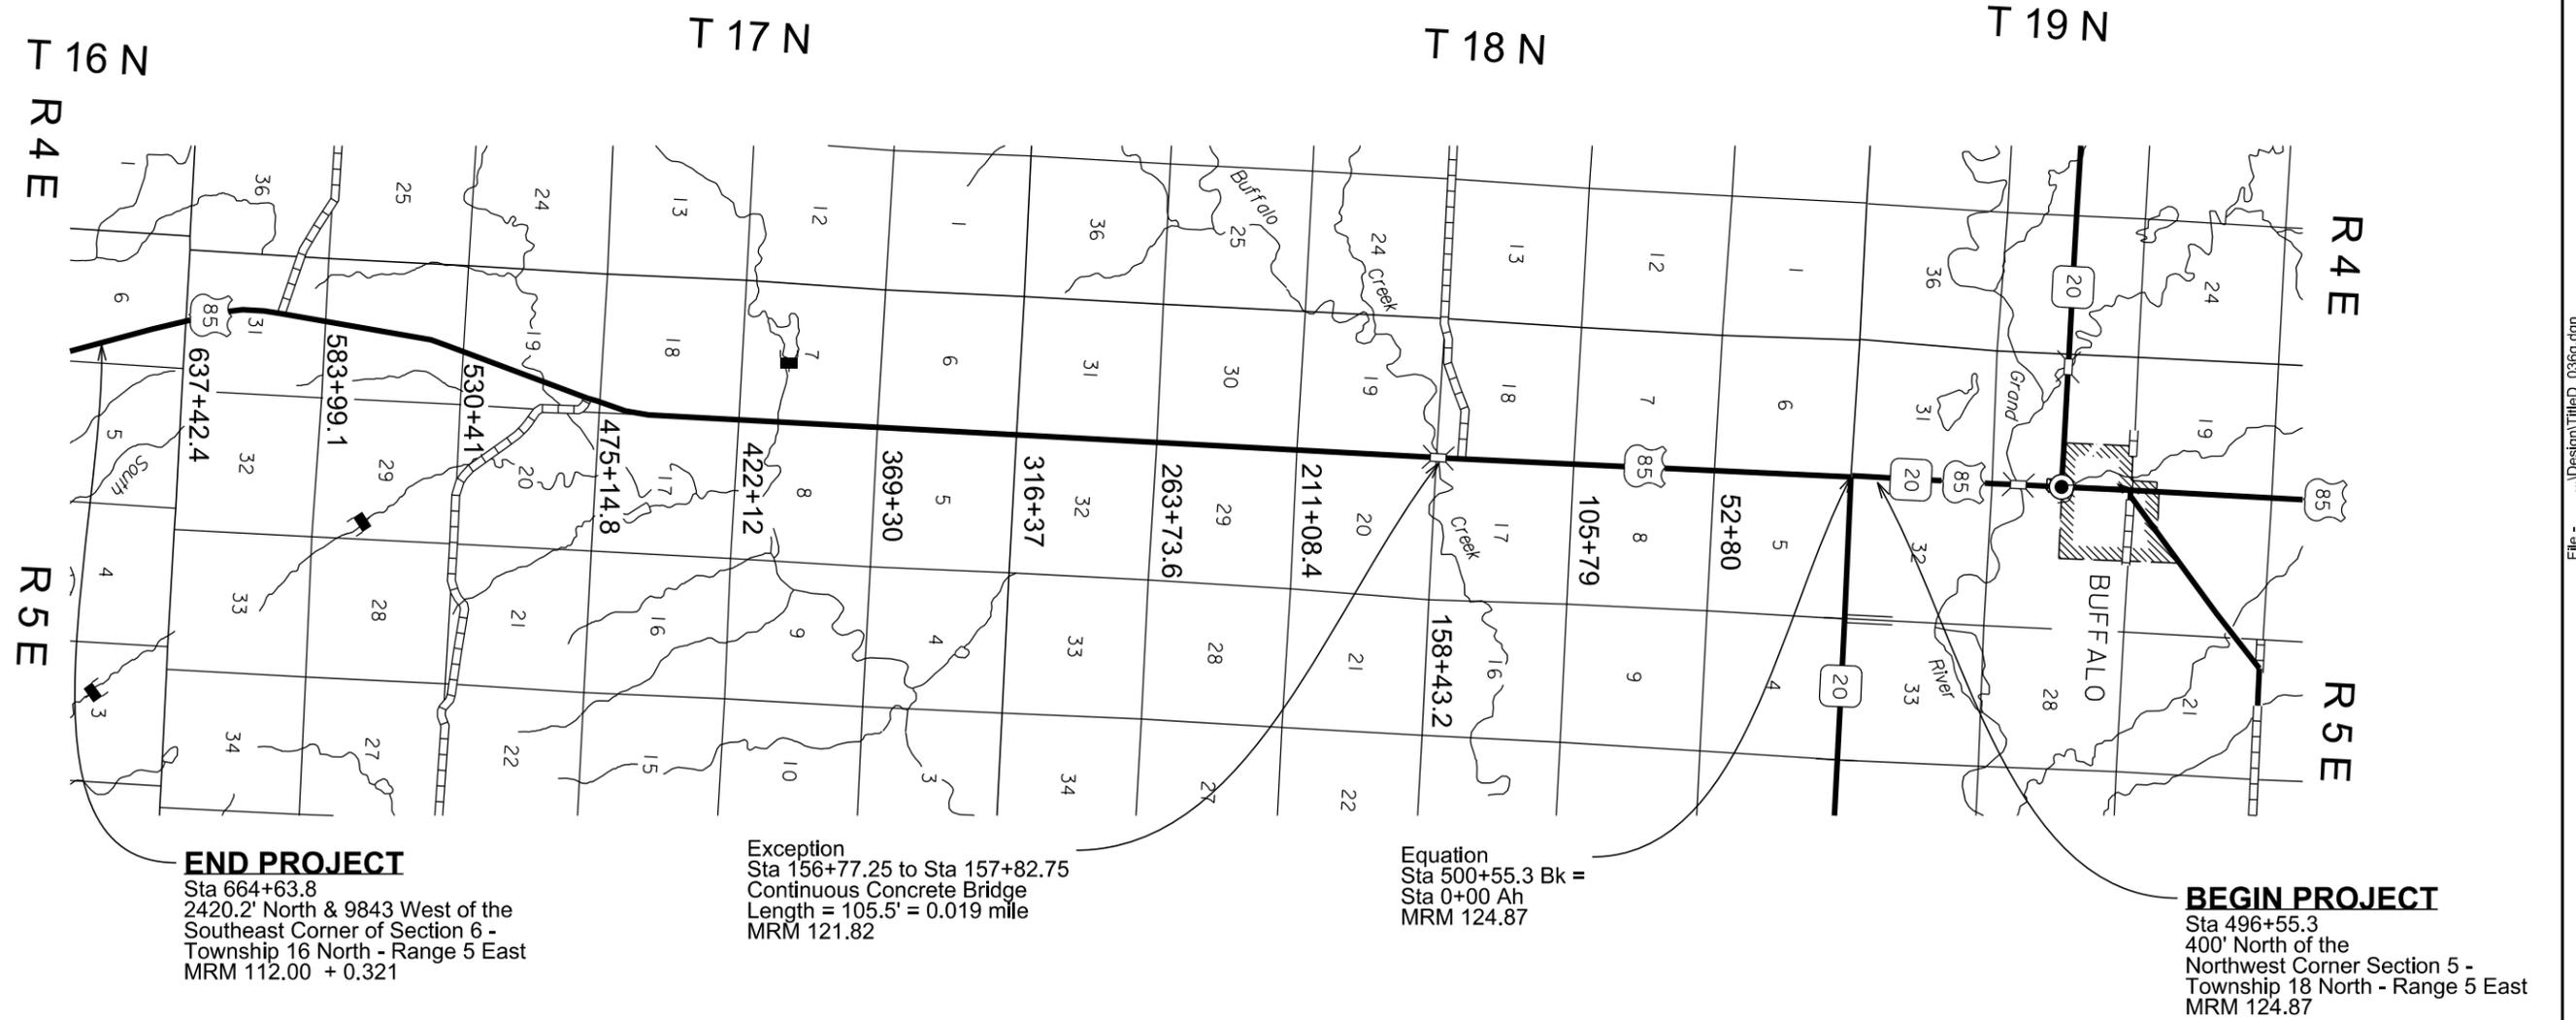

END PROJECT

Sta 664+63.8
2420.2' North & 9843 West of the
Southeast Corner of Section 6 -
Township 16 North - Range 5 East
MRM 112.00 + 0.321

Exception

Sta 156+77.25 to Sta 157+82.75
Continuous Concrete Bridge
Length = 105.5' = 0.019 mile
MRM 121.82

Equation

Sta 500+55.3 Bk =
Sta 0+00 Ah
MRM 124.87

BEGIN PROJECT

Sta 496+55.3
400' North of the
Northwest Corner Section 5 -
Township 18 North - Range 5 East
MRM 124.87

SECTION D ESTIMATE OF QUANTITIES

Bid Item Number	Item	Quantity	Unit
230E0100	Remove and Replace Topsoil	Lump Sum	LS
734E0010	Erosion Control	Lump Sum	LS
734E0154	12" Diameter Erosion Control Wattle	360	Ft

REMOVE AND REPLACE TOPSOIL

Topsoil shall also be salvaged and stockpiled prior to constructing the following: culvert extension/resets, curb & gutter, and shoulder widening area(s). Limits of this work, depth of salvage, and stockpile location will be directed by the Engineer. Following completion of construction, topsoil shall be spread evenly over the disturbed areas.

The estimated amount of topsoil to be removed and replaced is 305 CuYd.

All cost associated with removing and replacing the topsoil along areas to be resurfaced shall be incidental to the lump sum price for "Erosion Control".

EROSION CONTROL

The following items will be incidental to the contract lump sum price for "Erosion Control": Seeding, Mycorrhizal Inoculum, Fertilizing, and Fiber Mulching. Refer to Section B to see what areas will be disturbed.

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum shall consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier shall provide certification of the fungal species claimed and the live propagule count. The inoculum shall include the following fungal species:

<i>Glomus intraradices</i>	25%
<i>Glomus aggregatu</i>	25%
<i>Glomus mosseae</i>	25%
<i>Glomus etunicatum</i>	25%

All Type F seed shall be inoculated by the seed supplier with a minimum of 100,000 live propagules of mycorrhizal fungi per acre. All costs of inoculating the seed shall be incidental to the contract sump sum price for "Erosion Control".

The mycorrhizal inoculum shall be from the list below or an approved equal:

Product	Manufacturer
MycoApply	Mycorrhizal Applications, Inc. Grants Pass, OR Phone: 1-866-476-7800 http://www.mycorrhizae.com/

FERTILIZING

The Contractor shall apply an all-natural slow release fertilizer prior to seeding or placing sod. The all-natural fertilizer shall have a minimum guaranteed analysis of 4-6-4 and be USDA Certified BioBased. It should provide a minimum of 4% (N) nitrogen with a minimum water insoluble nitrogen (WIN) fraction of 3.2%, a minimum of 6% (P2O5) available phosphate, a minimum of 4% (K2O) soluble potash, and a maximum carbon to nitrogen ratio (C:N ratio) of 5:1. The all-natural fertilizer shall be free of weed-seed and pathogens accomplished through thermophilic composting, and not mechanical or chemical sterilization, to assure presence of beneficial soil microbiology. The fertilizer shall have a near neutral pH, a low salt index, a low biological oxygen demand, contain organic humic and fulvic acids, and have high aerobic organism counts. The fertilizer shall also be stable, free of bad odors, and be unattractive as a food source for animals. It should also be in a granular form that is easily spread.

The all-natural slow release fertilizer shall be applied according to the manufacturer's application recommendations.

The application rate is 34 pounds per 1,000 square feet.

The all-natural slow release fertilizer shall be from the list below or an approved equal:

Product	Manufacturer
Sustane	Sustane Corporate Headquarters Cannon Falls, Minnesota Phone: 1-800-352-9245 http://www.sustane.com/

PERMANENT SEEDING

The areas to be seeded consist of all newly graded areas within the project limits except for the top of roadways, sidewalk, and driveways.

All permanent seed shall be planted in the topsoil at a depth of ¼" to ½".

All seed broadcast must be raked or dragged in (incorporated) within the top ¼" to ½" of topsoil when possible. This requirement may be waived by the Engineer during construction when raking or dragging is deemed not feasible by conventional methods.

The varieties listed for seed mixtures are preferred varieties.

Native harvest seed will be allowed.

Type F Permanent Seed shall be used in the rural areas (estimated 0.56 acre).

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0085(81)112	D2	D4

Type F Permanent Seed Mixture shall consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Flintlock, Rodan, Rosana	7
Green Needlegrass	Lodorm	4
Sideoats Grama	Butte, Killdeer, Pierre, Trailway	3
Blue Grama	Bad River, Willis	2
Oats or Spring Wheat: April through May; Winter Wheat: August through November		10
Total:		26

FIBER MULCHING

Fiber mulch shall be applied in a separate operation following permanent seeding.

An additional 2% by weight of tackifier shall be added to the fiber mulch product selected from the approved product list. If the product selected has guar gum tackifier included, then the additional 2% of tackifier shall be guar gum. If the product selected has synthetic tackifier included, then the additional 2% of tackifier shall be synthetic.

Fiber mulch shall be applied at the rate of 46 pounds per 1000 square feet.

The Contractor shall allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

All costs for the additional tackifier added to the fiber mulch including labor, equipment, and materials shall be incidental to the lump sum price for "Erosion Control".

The fiber mulch provided shall be from the approved product list. The approved product list for fiber mulch may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

EROSION CONTROL WATTLE

Erosion control wattles for restraining the flow of runoff and sediment shall be installed at locations noted in the table and at locations determined by the Engineer during construction. Refer to Standard Plate 734.06 for details.

The Contractor shall provide certification that the erosion control wattles do not contain noxious weed seeds.


Erosion control wattles shall remain on the project to decompose.

The erosion control wattle provided shall be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

TABLE OF EROSION CONTROL WATTLE

Station	L/R	Diameter (Inch)	Location	Quantity (Ft)
2+00	L	12	Pipe Inlet	30
7+94	L	12	Pipe Inlet	30
			Additional Quantity:	300
			Total:	360

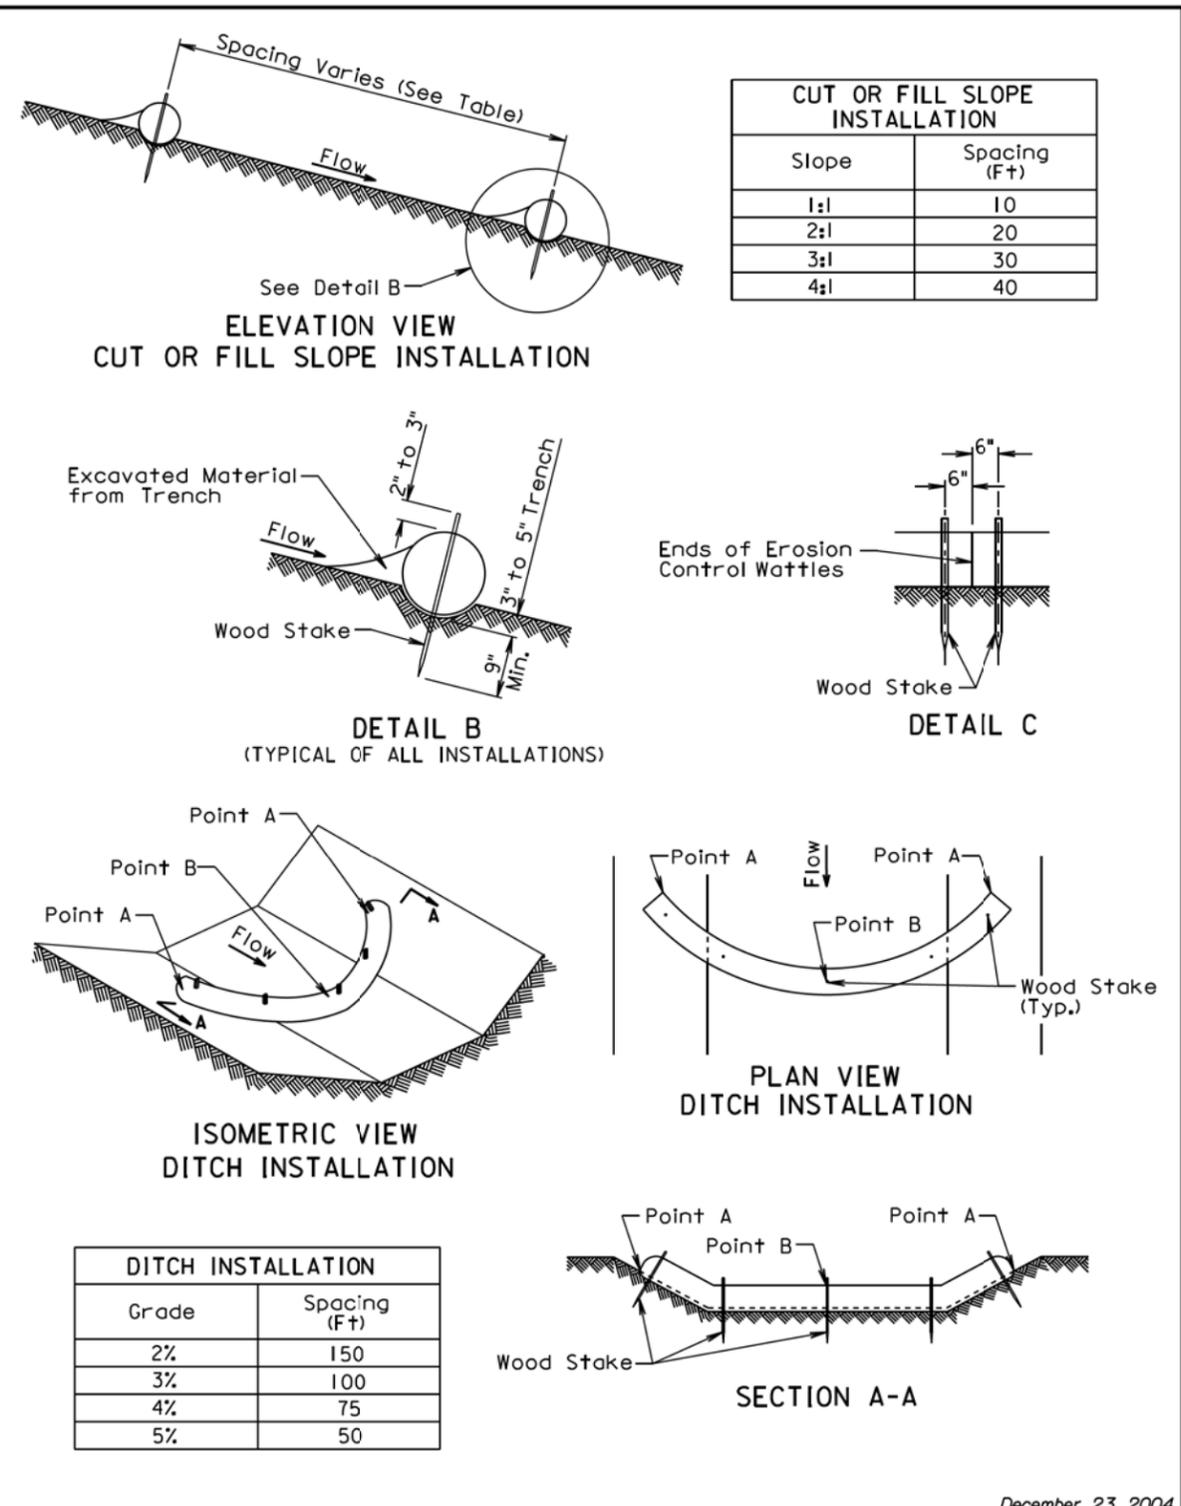

December 23, 2004

S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
		Sheet 1 of 2

Published Date: 3rd Qtr. 2014

GENERAL NOTES:

At cut or fill slope installations, wattles shall be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor shall dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes shall be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes shall be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles shall be 3' to 4'.

Where installing running lengths of wattles, the Contractor shall butt the second wattle tightly against the first and shall not overlap the ends. See Detail C.

The Contractor and Engineer shall inspect the erosion control wattles once every week and within 24 hours after every rainfall event greater than 1/2". The Contractor shall remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping shall be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping shall be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials shall be incidental to the contract unit price per foot for the corresponding erosion control wattle bid item.

All costs for removing the erosion control wattle from the project including labor, equipment, and materials shall be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".

December 23, 2004

S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
		Sheet 2 of 2

Published Date: 3rd Qtr. 2014

Plot Scale - 1:200

- Plotted From - tnc11610

File - ...I:\design\dst\PlatePg1.dgn