


Section M: Pavement Marking Plans

STATE OF SOUTH DAKOTA	PROJECT	SHEET NO.	TOTAL SHEETS
	P 0025(105)149	M1	M4

INDEX OF SHEETS

M1	General Layout with Index
M2 - M3	Estimate of Quantities & Notes
M4	Typical Pavement Marking Layout

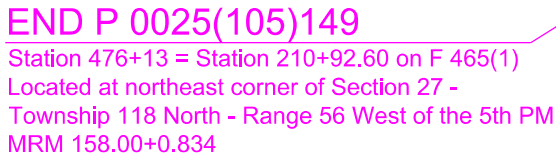

BEGIN P 0025(105)149

Station 0+86 – Station 687+52.30 on F 465(1)
 Located 654 feet West of the southeast corner of Section
 3 - Township 116 North - Range 56 West of the 5th PM
 MRM 149.80+0.000

SECTION M ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
633E0030	Cold Applied Plastic Pavement Marking, 24"	25	Ft
633E1200	High Build Waterborne Pavement Marking Paint, White	405	Gal
633E1206	High Build Waterborne Pavement Marking Paint with Reflective Elements, Yellow	160	Gal
633E5015	Grooving for Cold Applied Plastic Pavement Marking, 24"	25	Ft

PAVEMENT MARKING PAINT

The Contractor will advise the Engineer a minimum of 3 weeks prior to the application of the permanent pavement marking to allow the State to check and mark the location of no passing zones.

Cold weather waterborne paint will not be required after October 15th per Supplemental Specification Section 633.3 B.

The application of permanent pavement marking will begin no sooner than 7 calendar days following completion of the fog or flush seal. Application of permanent pavement marking will be completed within 14 calendar days following completion of the final surfacing.

COLD APPLIED PLASTIC PAVEMENT MARKING

All materials will be applied as per the manufacturer’s recommendations.

This marking will be placed for the stop bar at the intersection of SD25 and US212 at the south end of the project.

Cold Applied Plastic Pavement Markings will be 3M Series 380 IES or an approved equal.

HIGH BUILD WATERBORNE PAVEMENT MARKING PAINT

All materials will be applied as per manufacturer’s recommendations. High build waterborne pavement marking paint will conform to Section 980.1 B.

Reflective media will consist of glass beads. Reflective media will require a Certificate of Compliance for Certification for each source and lot. Acceptance sampling will not be required.

Reflective media consisting of glass beads as well as wet-reflective optics will be adhered to the paint.

The wet-reflective optics will contain either clear, white, amber, or yellow tinted beads composed of glass or a composite consisting of a core made from ceramic or glass with an outer layer of microcrystalline ceramic or glass beads. The wet-reflective optics will provide a 50/50 blend of dry to wet ratio of optics. All beads bonded to wet-reflective optics will have a minimum index of refraction of 1.8 for dry retroreflectivity and 2.4 for wet retroreflectivity when tested using the liquid oil immersion method.

Reflective media will require a Certificate of Compliance for Certification for each type, source, and lot. Acceptance sampling will not be required.

The Department will take retroreflectivity readings on the pavement marking lines no sooner than 3 days and no later than 30 days after the completion of all line applications required for an individual highway route using a portable retroreflectometer conforming to 30-meter geometry. Retroreflectivity readings will be taken on a test location with cleaning being limited to light hand brooming.

Pavement markings not conforming to the retroreflectivity requirements will be removed and replaced. If replacement of markings cannot be applied within the same year, the Contractor will schedule subject work to be completed no later than June 15th in the following year. Upon replacement, the retroreflectivity testing process will be done again requiring new readings.

The Department will randomly select one test location per mile of each edge line including ramps and one test location per mile of centerline (solid and/or skip line will be considered as one centerline). Three retroreflectivity readings will be taken at each test location. The three readings will be averaged and become the reading for that test location.

Initial readings:

Pavement Marking Color	Minimum Value
White	350 mc/m ² /lux
Yellow	275 mc/m ² /lux

All pavement markings not conforming to the requirements provided in these plans will be considered deficient and will be removed and replaced. Additional retroreflectivity readings will be taken by the Department to determine the limits of removal. The removal will be accomplished using suitable sand blasting or grinding equipment unless the Engineer authorizes other means. The removal process will remove at least 90% of the deficient line, with no excessive scarring of the existing pavement. The removal width will be one inch wider all around the nominal width of the pavement marking to be removed. Removal and replacement of the pavement markings will be at the Contractor’s expense, with no cost incurred by the State.

RATES OF MATERIALS FOR HIGH BUILD WATERBORNE PAVEMENT MARKING PAINT

Edgeline:
Solid 4” line = 22.5 Gals/Mile
Dashed 4” line = 6.2 Gal/Mile
Glass Beads = 8 Lbs/Gal.

&

Centerline in Rumble Stripes:
Solid 4” line = 27.8 Gals/Mile
Dashed 4” line = 7.6 Gal/Mile
Glass Beads = 5.3 Lbs/Gal.
Wet-Reflective Optics = 2.1 Lbs/Gal.

All cost for materials, labor, and equipment necessary to furnish and install the pavement markings will be incidental to the contract unit price for the respective High Build Waterborne Pavement Marking Paint items.

Revised: 6/3/26 MD

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P 0025(105)149	M2	M4

DATA LOGGING SYSTEM

The Contractor will provide striper computerized data logging system files as described below. The pavement marking device will have an onboard monitoring system for the purpose of managing the amount of pavement marking materials being applied to the pavement surface.

The following will be included in the documentation from the data logging system:

- State project number and PCN
- Highway number
- Beginning and end MRMs of the section marked rounded to the nearest hundredth of a mile, including direction of travel
- Beginning and ending coordinates determined by a Global Positioning System receiver with 3-meter accuracy, including direction of travel
- Date and beginning and ending time of application
- Product applied
- Lot number(s) of product (binder and reflective material) applied
- Striping Contractor (striper code)
- Designation of the marking being applied (LEL – Left Edgeline, REL – Right Edgeline, CL – Centerline, LL – Lane Line Broken or Dotted, 1LL – leftmost LL in multilane, 2LL – second to leftmost LL in multilane, etc.)
- Width of marking being applied
- Presence of recess or rumble strip
- Presence of contrast
- Average material application rate and film thickness calculated for the section striped

The following data will be included in the documentation from the data logging system reported as an average for each drive mile (or other segment approved by the Engineer) installed:

- Application vehicle speed rounded to the nearest tenth of a mile per hour
- Weight (Lbs) and/or volume (Gal) as measured through a positive displacement pump (mechanism or flow meter) of liquid material used by color
- Weight (Lbs) of reflective material used
- Ratio of reflective material used (weight) per liquid material used (volume) reported as Lbs/Gal
- Ambient air temperature (in degrees Fahrenheit)
- Road surface temperature (in degrees Fahrenheit)
- Humidity (percent)
- Dew point (in degrees Fahrenheit)

DATA LOGGING SYSTEM (Continued)

Revised: 6/3/26 MD

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P 0025(105)149	M3	M4

Provide the measurement report in the form of an electronic database file, or delimited text file, containing raw data collected. Provide the Engineer with a printed summary and submit the electronic data to the Region Traffic Engineer at the e-mail below and copy the Engineer.

Matt.Dorfschmidt@state.sd.us

The data logging system equipment will be operational, calibrated, and in use during pavement marking operations. Pavement marking installation without the use of a data logging system may not be accepted.

Upon request, provide to the Engineer the data logging system manufacturer’s recommendations for equipment calibration frequency and provide certification that the equipment meets manufacturer’s recommended calibration.

Verify that the physical and electronic measurement of distance travelled is consistent by travelling a 100-foot distance prior to the start of pavement marking operations.

All cost for materials, labor, and equipment necessary to provide the pavement marking data as described will be incidental to the contract unit price for the respective pavement marking items.

GROOVING FOR COLD APPLIED PLASTIC PAVEMENT MARKING

The Contractor will establish a positive means for the removal of the grinding and/or grooving residue. Residue from dry grooving will be vacuumed. Solid residue will be removed from the pavement surfaces before being blown by traffic action or wind. The Contractor will conduct this work to control and minimize airborne dust and similar debris that may become a hazard to motor vehicle operation or nuisance to property owners. Residue from wet grooving will not be permitted to flow across lanes being used by public traffic or into gutter or drainage facilities. Residue, whether in solid or slurry form, will be disposed of in a manner that will prevent it from reaching any waterway in a concentrated state. The cleaning of the residue for grooving will be to the satisfaction of the Engineer and may require more than one pass to adequately remove material. All costs for removal of grinding and/or grooving residue will be included in the contract unit price per foot & each, for “Grooving for Cold Applied Plastic Pavement Marking” contract items.

TYPICAL PAVEMENT MARKING LAYOUT

