


SECTION D: EROSION AND SEDIMENT CONTROL PLANS

FOR BIDDING PURPOSES ONLY

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D1	D16
EROSION AND SEDIMENT CONTROL PLANS			

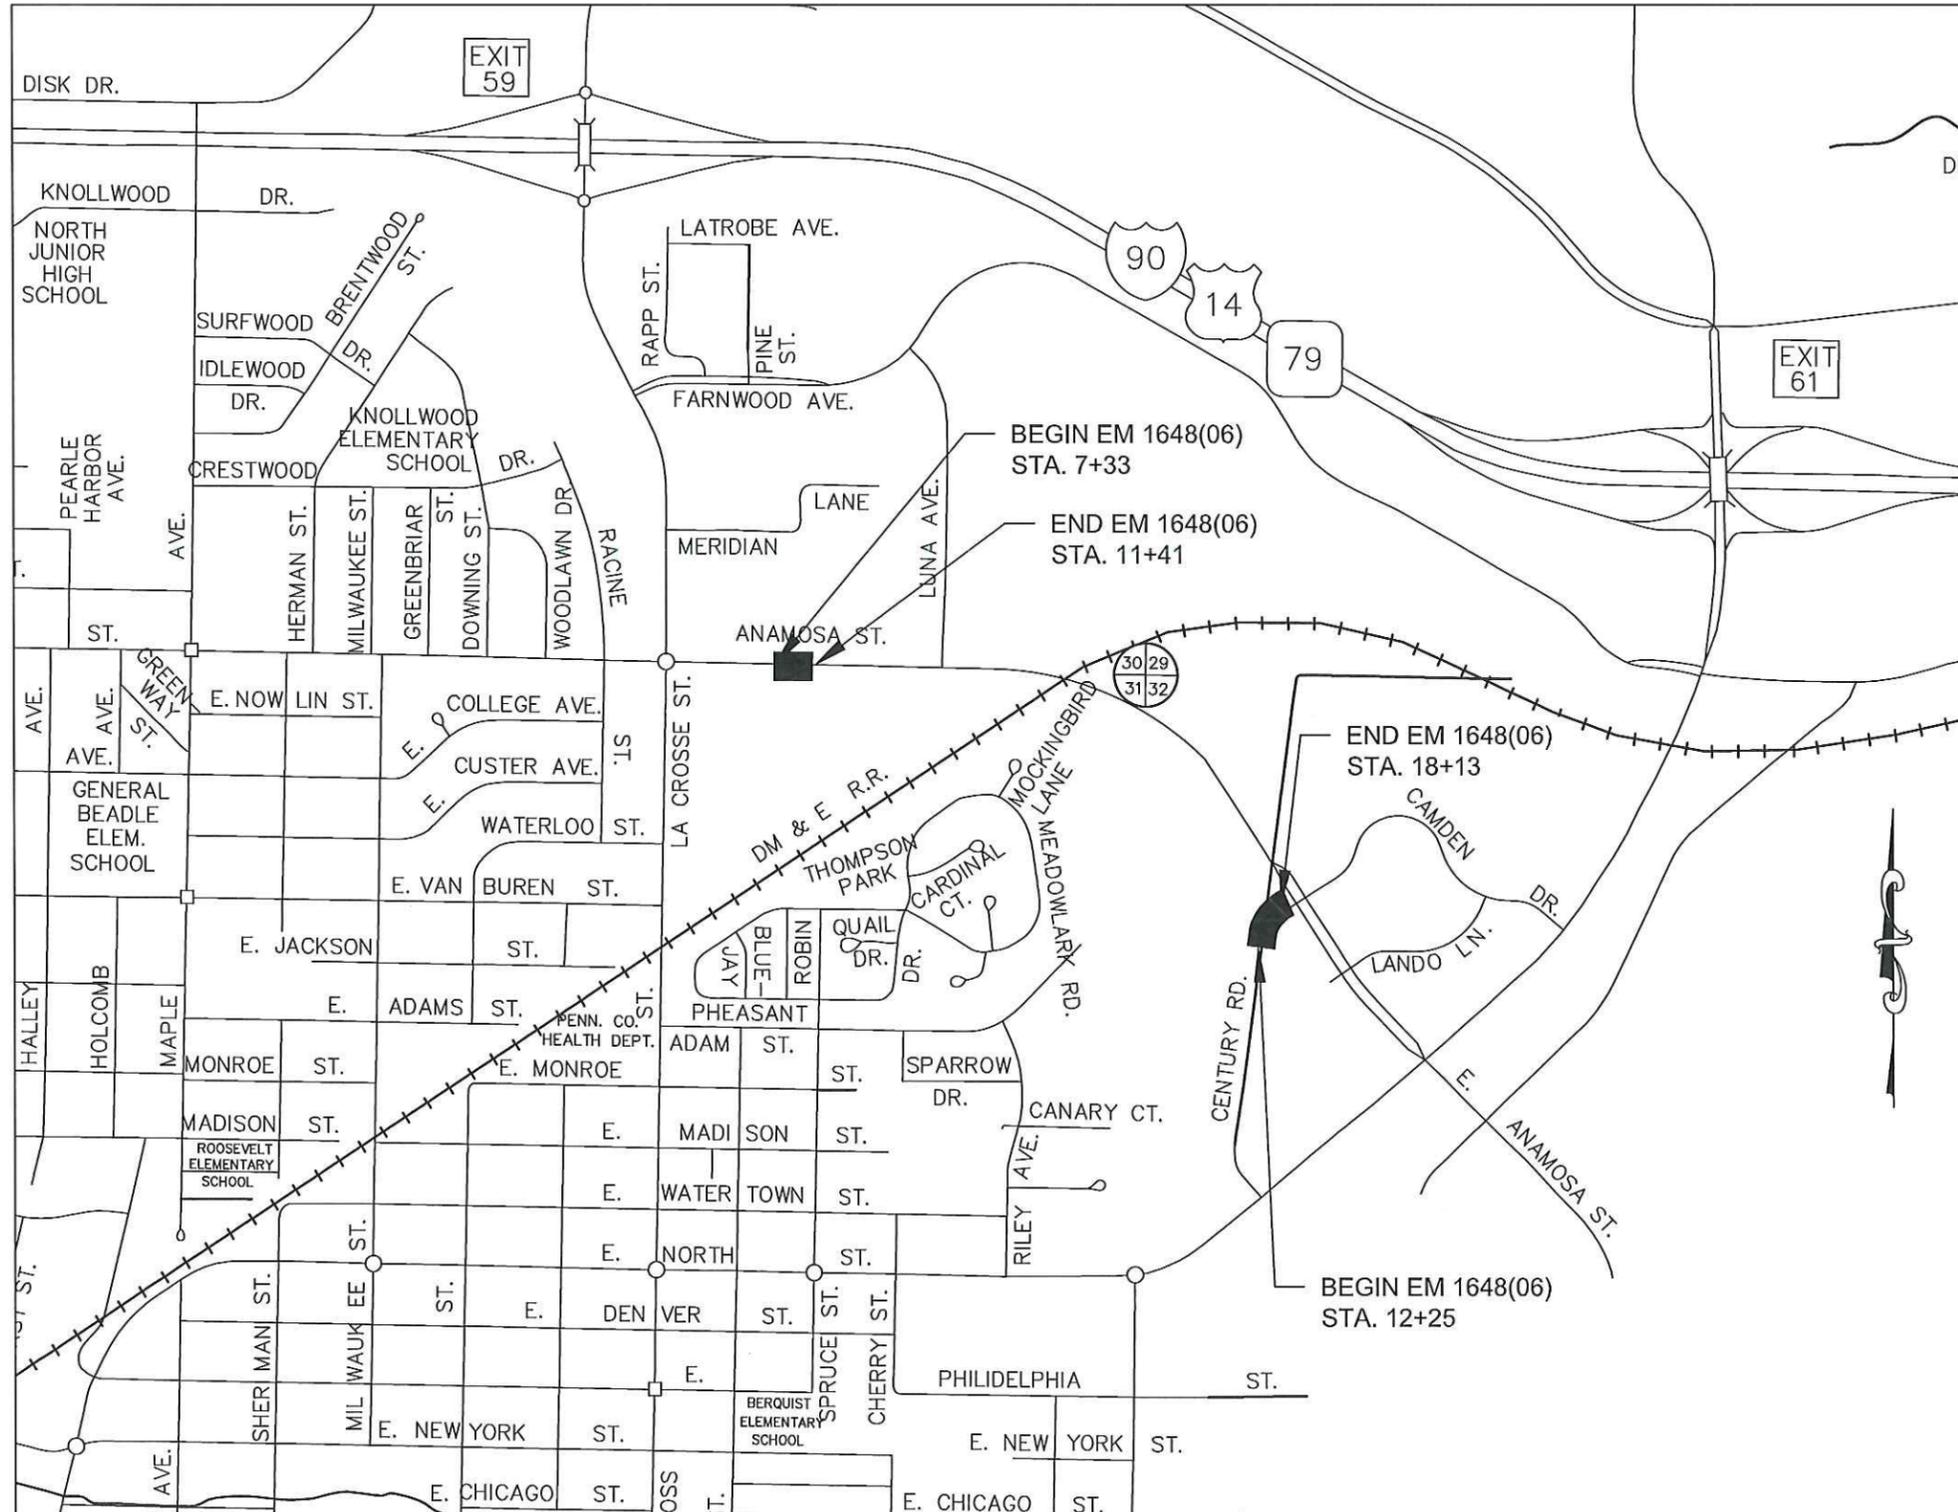

INDEX OF SHEETS

D1	SECTION TITLE SHEET
D2-D5	ESTIMATE WITH GENERAL NOTES & TABLES
D6-D8	STORM WATER POLLUTION PREVENTION PLAN (SWPPP) CHECKLIST
D9-D11	EROSION AND SEDIMENT CONTROL PLAN
D12-D16	SDDOT STANDARD PLATES

LEGEND

- GRADING CATCH LINE
- (SCE) STABILIZED CONSTRUCTION ENTRANCE
- (PIS) PROPOSED TYPE S INLET PROTECTION
- (PIB) PROPOSED TYPE B INLET PROTECTION
- (PIC) PROPOSED TYPE C INLET PROTECTION
- (EES) EXISTING END SECTION PROTECTION
- (PES) PROPOSED END SECTION PROTECTION
- ||||| EROSION CONTROL WATTLE



330 KNOLLWOOD DRIVE
 RAPID CITY, SD 57701
 PH: 605.721.5553
 FAX: 605.721.5575
 www.kljeng.com

RAPID CITY, SD

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D2	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

SECTION D - ESTIMATE OF QUANTITIES			
BID ITEM NUMBER	ITEM DESCRIPTION	TOTAL QUANTITY	UNIT
110E1690	REMOVE SEDIMENT	4	CUYD
110E1693	REMOVE EROSION CONTROL WATTLE	640	FT
110E1695	REMOVE SEDIMENT FILTER BAG	216	FT
110E1700	REMOVE SILT FENCE	176	FT
230E0010	PLACING TOPSOIL	850	CUYD
730E0100	COVER CROP SEEDING	1	BU
730E0210	TYPE F PERMANENT SEED MIXTURE	26	LB
731E0100	FERTILIZING	1500	LB
732E0100	MULCHING	4	TON
733E0100	SODDING	33	SQYD
734E0044	SOIL STABILIZER	1.0	ACRE
734E0154	12" DIAMETER EROSION CONTROL WATTLE	1060	FT
734E0180	SEDIMENT FILTER BAG	216	FT
734E0325	SURFACE ROUGHENING	1.0	ACRE
734E0604	HIGH FLOW SILT FENCE	176	FT
734E0845	SEDIMENT CONTROL AT INLET WITH FRAME AND GRATE	6	EACH
734E0847	SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLET	24	FT
734E5010	SWEEPING	20	HOURL
900E1320	CONSTRUCTION ENTRANCE	1	EACH

PLACING TOPSOIL

THE THICKNESS WILL BE APPROXIMATELY 4 INCHES WITHIN THE RIGHT-OF-WAY AND 6 INCHES ON TEMPORARY EASEMENTS.

THE ESTIMATED AMOUNT OF TOPSOIL TO BE PLACED IS 850 CUBIC YARDS.

MYCORRHIZAL INOCULUM

MYCORRHIZAL INOCULUM SHALL CONSIST OF MYCORRHIZAL FUNGI SPORES AND MYCORRHIZAL FUNGI-INFECTED ROOT FRAGMENTS IN A SOLID CARRIER. THE CARRIER MAY INCLUDE ORGANIC MATERIALS, CALCINATED CLAY, OR OTHER MATERIALS CONSISTENT WITH APPLICATION AND GOOD PLANT GROWTH. THE SUPPLIER SHALL PROVIDE CERTIFICATION OF THE FUNGAL SPECIES CLAIMED AND THE LIVE PROPAGULE COUNT. THE INOCULUM SHALL INCLUDE THE FOLLOWING FUNGAL SPECIES:

GLOMUS INTRARADICES	25%
GLOMUS AGGREGATU	25%
GLOMUS MOSSEAE	25%
GLOMUS ETUNICATUM	25%

ALL SEED SHALL BE INOCULATED BY THE SEED SUPPLIER WITH A MINIMUM OF 100,000 LIVE PROPAGULES OF MYCORRHIZAL FUNGI PER ACRE. ALL COSTS OF INOCULATING THE SEED SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER POUND FOR THE CORRESPONDING PERMANENT SEED MIXTURE.

PRIOR TO PLACING SOD, APPLY A MINIMUM OF 25,000 LIVE PROPAGULES OF INOCULUM PER 1,000 SQUARE FEET ON BARE SOIL. ALL COSTS OF INOCULATING FOR THE SOD SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER SQUARE YARD FOR "SODDING".

THE MYCORRHIZAL INOCULUM SHALL BE FROM THE LIST BELOW OR AN APPROVED EQUAL:

PRODUCT	MANUFACTURER
MYCOAPPLY	MYCORRHIZAL APPLICATIONS, INC. GRANTS PASS, OR PHONE: 1-866-476-7800 HTTP://WWW.MYCORRHIZAE.COM/

FERTILIZING- CENTURY ROAD

THE CONTRACTOR SHALL APPLY AN ALL-NATURAL SLOW RELEASE FERTILIZER PRIOR TO SEEDING OR PLACING SOD. THE ALL-NATURAL FERTILIZER SHALL HAVE A MINIMUM GUARANTEED ANALYSIS OF 4-6-4 AND BE USDA CERTIFIED BIOBASED. IT SHOULD PROVIDE A MINIMUM OF 4% (N) NITROGEN WITH A MINIMUM WATER INSOLUBLE NITROGEN (WIN) FRACTION OF 3.2%, A MINIMUM OF 6% (P2O5) AVAILABLE PHOSPHATE, A MINIMUM OF 4% (K2O) SOLUBLE POTASH, AND A MAXIMUM CARBON TO NITROGEN RATIO (C:N RATIO) OF 5:1. THE ALL-NATURAL FERTILIZER SHALL BE FREE OF WEED-SEED AND PATHOGENS ACCOMPLISHED THROUGH THERMOPHILIC COMPOSTING, AND NOT MECHANICAL OR CHEMICAL STERILIZATION, TO ASSURE PRESENCE OF BENEFICIAL SOIL MICROBIOLOGY. THE FERTILIZER SHALL HAVE A NEAR NEUTRAL PH, A LOW SALT INDEX, A LOW BIOLOGICAL OXYGEN DEMAND, CONTAIN ORGANIC HUMIC AND FULVIC ACIDS, AND HAVE HIGH AEROBIC ORGANISM COUNTS. THE FERTILIZER SHALL ALSO BE STABLE, FREE OF BAD ODORS, AND BE UNATTRACTIVE AS A FOOD SOURCE FOR ANIMALS. IT SHOULD ALSO BE IN A GRANULAR FORM THAT IS EASILY SPREAD.

THE ALL-NATURAL SLOW RELEASE FERTILIZER SHALL BE APPLIED ACCORDING TO THE MANUFACTURER'S APPLICATION RECOMMENDATIONS.

THE APPLICATION RATE IS 1,500 POUNDS PER ACRE.

THE ALL-NATURAL SLOW RELEASE FERTILIZER SHALL BE FROM THE LIST BELOW OR AN APPROVED EQUAL:

PRODUCT	MANUFACTURER
SUSTANE	SUSTANE CORPORATE HEADQUARTERS CANNON FALLS, MINNESOTA PHONE: 1-800-352-9245 HTTP://WWW.SUSTANE.COM/

PERMANENT SEEDING

THE AREAS TO BE SEEDED CONSIST OF ALL NEWLY GRADED AREAS WITHIN THE PROJECT LIMITS EXCEPT FOR THE TOP OF ROADWAYS, TEMPORARY EASEMENTS UNDER CULTIVATION, AND AREAS DESIGNATED TO BE SOD.

TYPE F PERMANENT SEED MIXTURE SHALL CONSIST OF THE FOLLOWING:

GRASS SPECIES	VARIETY	PURE LIVE SEED (PLS) (POUNDS/ACRE)
WESTERN WHEATGRASS	FLINTLOCK, RODAN, ROSANA	7
GREEN NEEDLEGRASS	LODORM	4
SIDEOATS GRAMA	BUTTE, KILLDEER, PIERRE, TRAILWAY	3
BLUE GRAMA	BAD RIVER, WILLIS	2
OATS OR SPRING WHEAT: APRIL THROUGH MAY; WINTER WHEAT: AUGUST THROUGH NOVEMBER		10
TOTAL:		26

SODDING

SOD SHALL BE PLACED BEHIND SIDEWALK IN DISTURBED AREAS ALONG EAST ANAMOSA STREET BETWEEN 9+00 AND 10+00 ON THE LEFT SIDE FOR THE INSTALLATION OF AN ADA RAMP AND ELECTRICAL ITEMS AND AT LOCATIONS DETERMINED BY THE ENGINEER DURING CONSTRUCTION. PEAT SOD IS NOT PERMITTED. ALL COSTS INVOLVED FOR WATERING SOD SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER SQUARE YARD FOR SODDING.

COVER CROP SEEDING

COVER CROP SEEDING MAY BE USED ON THIS PROJECT AS A TEMPORARY EROSION CONTROL MEASURE. THE ACTUAL LIMITS AND USE OF COVER CROP SEEDING SHALL BE DETERMINED BY THE ENGINEER DURING CONSTRUCTION.

SURFACE ROUGHENING


SURFACE ROUGHENING SHALL BE DONE AFTER TOPSOIL PLACEMENT AND BEFORE PERMANENT SEEDING, FERTILIZING, AND MULCHING APPLICATIONS. REFER TO STANDARD PLATE 734.25 FOR DETAILS.

TABLE OF SURFACE ROUGHENING

STATION TO	STATION	L/R	AREA (ACRE)
16+41	18+50	L	0.6
12+50	18+00	R	0.4
TOTAL:			1.0

MULCHING (GRASS HAY OR STRAW)

AN ADDITIONAL 2 TONS OF GRASS HAY OR STRAW MULCH HAS BEEN ADDED TO THE ESTIMATE OF QUANTITIES FOR TEMPORARY EROSION CONTROL ON AREAS DETERMINED BY THE ENGINEER DURING CONSTRUCTION.

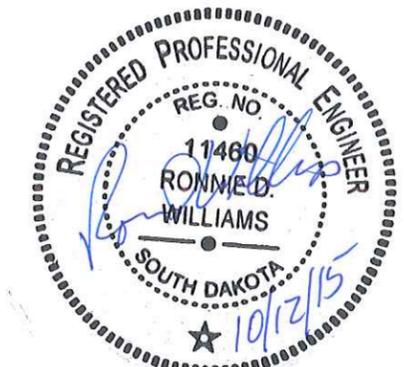

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D3	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

SOIL STABILIZER

SOIL STABILIZER SHALL BE APPLIED ON THE AREAS LISTED IN THE TABLE AND ANY OTHER AREAS DEEMED NECESSARY BY THE ENGINEER. THE SOIL STABILIZER LIMITS SHALL BE ADJUSTED AS NECESSARY BY THE ENGINEER DURING CONSTRUCTION.

THE CONTRACTOR SHALL APPLY SOIL STABILIZER ACCORDING TO THE MANUFACTURER'S APPLICATION INSTRUCTIONS AND AT THE RATE SPECIFIED IN THE LIST OF APPROVED SOIL STABILIZERS.

WOOD FIBER MULCH THAT CONTAINS A GREEN DYE SHALL BE MIXED WITH THE SOIL STABILIZER TO BE USED AS A TRACER WHEN THE SOIL STABILIZER IS APPLIED HYDRAULICALLY. WOOD FIBER MULCH SHALL BE ADDED AT A RATE OF 300 POUNDS PER ACRE TO ALL OF THE APPROVED SOIL STABILIZERS LISTED IN THE TABLE EXCEPT FOR THE PAM-12 PLUS PRODUCT. THE WOOD FIBER MULCH SHALL BE A 100% WOOD FIBER PRODUCT AND DOES NOT NEED TO CONTAIN A TACKIFIER.

ALL COSTS FOR FURNISHING AND APPLYING THE SOIL STABILIZER INCLUDING WOOD FIBER MULCH, HAULING, MATERIALS, EQUIPMENT, LABOR, AND INCIDENTALS NECESSARY SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER ACRE FOR "SOIL STABILIZER".

THE SOIL STABILIZER SHALL BE FROM THE LIST BELOW OR AN APPROVED EQUAL:

PRODUCT	MANUFACTURER
STARTAK 600 APPLIED AT A RATE OF 150 LB/ACRE	CHEMSTAR PRODUCTS COMPANY MINNEAPOLIS, MN PHONE: 1-800-328-5037 WWW.CHEMSTAR.COM
PAM-12 PLUS APPLIED AT A RATE OF: SLOPE NONE TO 4:1 1000 LB/ACRE 4:1 TO 3:1 1000 TO 2000 LB/ACRE 3:1 TO 2:1 2000 TO 3000 LB/ACRE	ENCAP, LLC GREEN BAY, WI PHONE: 1-877-405-5050 HTTP://PROFESSIONAL.ENCAP.NET/
M-BINDER APPLIED AT A RATE OF 150 LB/ACRE	ECOLOGY CONTROLS CARPINTERIA, CA PHONE: 1-805-684-0436 WWW.SSSEEDS.COM
FIBERRX APPLIED AT A RATE OF: SLOPE NONE TO 4:1 50 LB/ACRE 3:1 60 LB/ACRE 2:1 70 LB/ACRE 1:1 OR STEEPER 80 LB/ACRE	HYDROSTRAW, LLC MANTENO, IL PHONE: 1-800-545-1755 HTTP://HYDROSTRAW.COM/
ENVIROPAM APPLIED AT A RATE OF 9 LB/ACRE	INNOVATIVE TURF SOLUTIONS, LLC CINCINNATI, OH PHONE: 1-513-317-8311 WWW.INNOVATIVETURFSOLUTIONS.COM
HYDRATAACK, TACK PLUS, TACK-P, OR TACK-P PLUS APPLIED AT A RATE OF 30 LB/ACRE	INNOVATIVE TURF SOLUTIONS, LLC CINCINNATI, OH PHONE: 1-513-317-8311 WWW.INNOVATIVETURFSOLUTIONS.COM

FL-1045 HYDROBOND OR
FL-1046 HYDROBOND
APPLIED AT A RATE OF 15 LB/ACRE

JRM CHEMICAL, INC.
CLEVELAND, OH
PHONE: 1-216-475-8488
WWW.SOILMOIST.COM

HF5000 TACK
APPLIED AT A RATE OF 60 LB/ACRE

RANTEC CORPORATION
RANCHESTER, WY
PHONE: 1-307-655-9565
WWW.RANTECCORP.COM

R-TACK
APPLIED AT A RATE OF 150 LB/ACRE

RANTEC CORPORATION
RANCHESTER, WY
PHONE: 1-307-655-9565
WWW.RANTECCORP.COM

SPECTAC
APPLIED AT A RATE OF:
SLOPE
NONE 30 TO 80 LB/ACRE
4:1 50 TO 100 LB/ACRE
3:1 80 TO 120 LB/ACRE
2:1 100 TO 170 LB/ACRE

RANTEC CORPORATION
RANCHESTER, WY
PHONE: 1-307-655-9565
WWW.RANTECCORP.COM

SUPER TACK
APPLIED AT A RATE OF 60 LB/ACRE

RANTEC CORPORATION
RANCHESTER, WY
PHONE: 1-307-655-9565
WWW.RANTECCORP.COM

EARTHGUARD SFM
APPLIED AT A RATE OF 60 LB/ACRE
(APPROX. 6 GALLONS/ACRE)

TERRA NOVO INC.
BAKERSFIELD, CA
PHONE: 1-661-747-5956
WWW.TERRANOVO.COM

TABLE OF SOIL STABILIZER

STATION	TO	STATION	L/R	QUANTITY (ACRES)
12+25		16+00	L	0.25
12+25		16+00	R	0.29
16+00		18+50	L	0.28
16+00		18+00	R	0.18
Total:				1.00

EROSION CONTROL WATTLE

EROSION CONTROL WATTLES FOR RESTRAINING THE FLOW OF RUNOFF AND SEDIMENT SHALL BE INSTALLED AT LOCATIONS NOTED IN THE TABLE AND AT LOCATIONS DETERMINED BY THE ENGINEER DURING CONSTRUCTION. REFER TO STANDARD PLATE 734.06 FOR DETAILS.

THE CONTRACTOR SHALL PROVIDE CERTIFICATION THAT THE EROSION CONTROL WATTLES DO NOT CONTAIN NOXIOUS WEED SEEDS.

AN ESTIMATED QUANTITY OF EROSION CONTROL WATTLES SHALL REMAIN ON THE PROJECT UNTIL VEGETATION HAS BEEN ESTABLISHED. IT IS ESTIMATED THAT SOME OF THE EROSION CONTROL WATTLES WILL REMAIN ON THE PROJECT TO DECOMPOSE.

AN ADDITIONAL QUANTITY OF 12" DIAMETER EROSION CONTROL WATTLES HAS BEEN ADDED TO THE ESTIMATE OF QUANTITIES FOR TEMPORARY EROSION AND SEDIMENT CONTROL IN HIGHWAY DITCH CHANNELS AND AS AN ALTERNATIVE TO LOW FLOW OR HIGH FLOW SILT FENCE AT WETLAND AREAS ADJACENT TO THE HIGHWAY.


THE EROSION CONTROL WATTLE PROVIDED SHALL BE FROM THE APPROVED PRODUCT LIST. THE APPROVED PRODUCT LIST FOR EROSION CONTROL WATTLE MAY BE VIEWED AT THE FOLLOWING INTERNET SITE:

<http://sddot.com/business/certification/products/Default.aspx>

TABLE OF EROSION CONTROL WATTLE

Station	L/R	Diameter (Inch)	Quantity (Ft)
12+25 TO 16+00	R	12	370
12+50	L	12	10
13+70	R	12	10
14+85	L	12	18
15+50	R	12	10
16+00 TO 16+80	R	12	75
16+65 TO 18+10	L	12	165
16+90 TO 17+75	R	12	75
17+00 TO 17+75	L	12	125
Additional Quantity:			202

Total: 1060

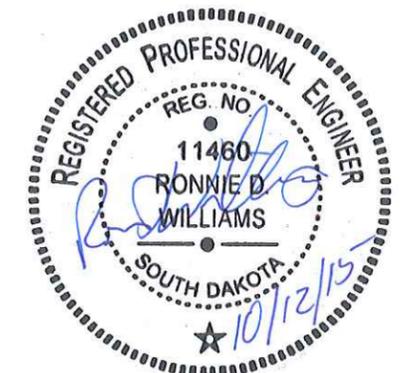

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D4	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING

REFER TO STANDARD PLATE 734.05 FOR DETAILS OF INSTALLATION OF HIGH FLOW SILT FENCE AT DROP INLETS, MANHOLES, AND JUNCTION BOXES.

THE HIGH FLOW SILT FENCE FABRIC PROVIDED SHALL BE FROM THE APPROVED PRODUCT LIST. THE APPROVED PRODUCT LIST FOR HIGH FLOW SILT FENCE MAY BE VIEWED AT THE FOLLOWING INTERNET SITE:

<http://sddot.com/business/certification/products/Default.aspx>

IN ADDITION, THE CONTRACTOR SHALL DO THE FOLLOWING FOR THIS INSTALLATION:

- A SPACE OF AT LEAST 1' SHALL BE PROVIDED BETWEEN THE SILT FENCE INSTALLATION AND THE INLET. THIS SPACE SHALL BE FILLED COMPLETELY WITH A 2" DEPTH OF AGGREGATE, 2" MINUS OR SMALLER.
- THE TOP ELEVATION OF THE SILT FENCE SHALL BE SUCH THAT A 12" HORIZONTAL FLAP OF SILT FENCE WILL REMAIN AT THE BOTTOM.
- THE BASE OF THE SILT FENCE SHALL CONFORM TO THE NATURAL GROUND PROFILE BUT DOES NOT NEED TO BE TRENCHED IN AT THE BOTTOM.
- THE EXTRA 12" OF THE SILT FENCE MATERIAL MAY BE CUT SO THAT THE MATERIAL WILL LAY FLAT UPON THE SUBGRADE.
- SEDIMENT FILTER BAGS SHALL BE PLACED ON THE 12" FLAP AROUND THE PERIMETER OF THE SILT FENCE INSTALLATION. THE SEDIMENT FILTER BAGS SHALL OVERLAP 6" AT THE ENDS AND BE PLACED TIGHTLY TOGETHER.
- THE SEDIMENT FILTER BAGS SHALL BE FILLED WITH CLEAN AGGREGATE 2" MINUS OR SMALLER.

SEDIMENT FILTER BAG

PRODUCT

SNAKE BAG

MANUFACTURER

SACRAMENTO BAG MANUFACTURING CO.
SACRAMENTO, CA
PHONE: 1-800-287-2247
WWW.SACBAG.COM

THE SEDIMENT FILTER BAG SHALL BE THE SNAKE BAG FROM SACRAMENTO BAG MANUFACTURING COMPANY OR AN APPROVED EQUAL.

ALL COSTS FOR FURNISHING AND INSTALLING THE SEDIMENT FILTER BAGS SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER FOOT FOR "SEDIMENT FILTER BAG."

ALL COSTS FOR REMOVING THE SEDIMENT FILTER BAGS SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER FOOT FOR "REMOVE SEDIMENT FILTER BAG".

PAYMENT FOR HIGH FLOW SILT FENCE SHALL BE AS STATED IN SECTION 734.5 OF THE SPECIFICATIONS.

ALL COSTS FOR FURNISHING, INSTALLING, AND REMOVING THE 2" DEPTH OF AGGREGATE SHALL BE INCIDENTAL TO OTHER EROSION AND SEDIMENT CONTROL BID ITEMS.

ALL COSTS FOR REMOVING AND DISPOSING OF SEDIMENT COLLECTED BY THE SEDIMENT CONTROL DEVICE SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER CUBIC YARD FOR "REMOVE SEDIMENT".

INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING (CONTINUED)

THE REMOVED SEDIMENT SHALL BE PLACED AT A LOCATION AWAY FROM THE DROP INLET WHERE THE SEDIMENT WILL NOT BE WASHED BACK INTO THE DROP INLET OR OTHER STORM SEWER SYSTEM.

THE CONTRACTOR AND ENGINEER SHALL INSPECT AND MAINTAIN THE SEDIMENT CONTROL DEVICE ONCE EVERY WEEK AND WITHIN 24 HOURS AFTER EVERY RAINFALL EVENT GREATER THAN 1/2".

TABLE OF INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING

STATION	L/R	HIGH FLOW SILT FENCE QUANTITY (FT)	SEDIMENT FILTER BAG QUANTITY (FT)	REMOVE SEDIMENT QUANTITY (CUYD)
13+08	L	25	30	.25
13+08	R	25	30	.25
15+53	L	25	30	.25
15+83	L	38	48	.25
15+84	R	38	48	.25
16+12	R	25	30	.25
TOTALS:		176	216	1.50

SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES

THIS TYPE OF SEDIMENT CONTROL DEVICE SHOULD BE USED WHERE THERE IS PAVEMENT IN THE VICINITY OF THE DROP INLETS AND STORM WATER OR SEDIMENT COULD POSSIBLY ENTER THE FRAME AND GRATE. SEDIMENT CONTROL AT INLETS WITH FRAME AND GRATES SHALL BE INSTALLED PRIOR TO WORKING IN THE VICINITY OF THE DROP INLETS.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING AND REPAIRING THE SEDIMENT CONTROL DEVICES FOR THE DURATION OF THE PROJECT FOR WHICH SEDIMENT CONTROL MEASURES ARE REQUIRED. MAINTENANCE SHALL BE SCHEDULED TO PREVENT STORM WATER FROM BACKING UP INTO THE DRIVING LANE.

"SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES" WILL BE PAID FOR ONE TIME AT EACH LOCATION, REGARDLESS OF THE NUMBER OF TIMES THE SEDIMENT CONTROL DEVICES ARE INSTALLED, INSPECTED, CLEANED, REMOVED, REPAIRED, OR REPLACED. ALL COSTS ASSOCIATED WITH FURNISHING, INSTALLING, INSPECTING, MAINTAINING, CLEANING, SEDIMENT REMOVAL, AND REPAIRING SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER EACH FOR "SEDIMENT CONTROL AT INLET WITH FRAME AND GRATE".

SEDIMENT COLLECTION DEVICES SHALL BE:

A COMMERCIAL MADE SEDIMENT COLLECTION DEVICE FROM THE "SEDIMENT CONTROL AT INLET WITH FRAME AND GRATE" LIST OR AN APPROVED EQUAL. THE DEVICE SHALL BE INSTALLED IN REINFORCED CONCRETE DROP INLETS ACCORDING TO THE MANUFACTURER'S RECOMMENDATIONS.


SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES (CONTINUED)

SEDIMENT CONTROL AT INLET WITH FRAME AND GRATE APPROVED LIST:

PRODUCT	MANUFACTURER
INFRA SAFE DEBRIS COLLECTION DEVICE WITH FILTER SOCK	ROYAL ENVIRONMENTAL SYSTEMS, INC. STACY, MN PHONE: 1-800-817-3240 WWW.ROYALENTERPRISES.NET
DANDY CURB SACK	DANDY PRODUCTS INC. DUBLIN, OH PHONE: 1-800-591-2284 WWW.DANDYPRODUCTS.COM
SILT TRAPPER	STORM WATER SOLUTIONS LAKEVILLE, MN PHONE: 1-952-461-4376 WWW.SILTTRAPPER.COM
DIP BASKET	SKYVIEW CONSTRUCTION CO., LLC WAUBAY, SD PHONE: 1-605-520-0555 WWW.SKYVIEWCONST.COM
FLEXSTORM INLET FILTERS	INLET AND PIPE PROTECTION, INC. NAPERVILLE, IL PHONE: 1-866-287-8655 WWW.INLETFILTERS.COM
GR-8 GUARD OR COMBO GUARD	ERTEC ENVIRONMENTAL SYSTEMS LLC ALAMEDA, CA PHONE: 1-866-521-0724 WWW.ERTECSYSTEMS.COM
SEDIMENT CATCHERS	SHAUN JENSEN BROOKINGS, SD PHONE: 1-605-690-4950
GRATE FX, SLAMMER, OR VERTPRO	ENVIROSCOPE ECM, LTD. OAKWOOD, OH PHONE: 1-419-594-3210 WWW.STRAWBLANKET.COM

TABLE OF SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES

Station	L/R	Quantity (Each)
5+25	R	1
5+25	L	1
5+36	R	1
5+36	L	1
13+08	L	1
13+08	R	1
Total:		6

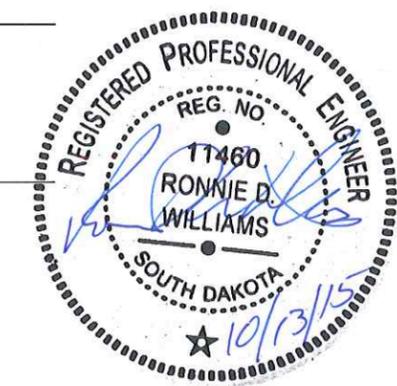

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D5	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLETS

THE SEDIMENT CONTROL DEVICE PROVIDED SHALL BE FROM THE LIST SHOWN BELOW. REFER TO STANDARD PLATE 734.11 FOR DETAILS.

PRODUCT	MANUFACTURER
DANDY CURB	DANDY PRODUCTS INC. DUBLIN, OH PHONE: 1-800-591-2284 WWW.DANDYPRODUCTS.COM
GUTTERBUDDY	ACF ENVIRONMENTAL RICHMOND, VA PHONE: 1-800-448-3636 WWW.ACFENVIRONMENTAL.COM
SS-300	SILT-SAVER, INC. CONYERS, GA PHONE: 1-888-382-7458 WWW.SILTSAVER.COM
CURB INLET GUARD	ECTEC ENVIRONMENTAL SYSTEMS LLC ALAMEDA, CA PHONE: 1-866-521-0724 WWW.ERTECSYSTEMS.COM

TABLE OF SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLETS

STATION	L/R	CLEAR OPENING WIDTH (FT)	QUANTITY* (FT)
15+83	L	10	12
16+12	R	10	12
		TOTAL:	24

* QUANTITY SHOWN IS THE MINIMUM LENGTH REQUIRED AND SHALL BE THE BASIS OF PAYMENT.

STREET SWEEPING

VEHICLE TRACKING OF SEDIMENT FROM THE CONSTRUCTION SITE SHALL BE MINIMIZED. STREET SWEEPING SHALL BE USED IF EROSION AND SEDIMENT CONTROL BEST MANAGEMENT PRACTICES ARE NOT ADEQUATE TO PREVENT SEDIMENT FROM BEING TRACKED ONTO THE STREET.

THE CONTRACTOR SHALL USE A PICKUP BROOM HAVING INTEGRAL SELF-CONTAINED STORAGE TO CLEAN THE ROADWAY. THE PICKUP BROOM USED SHALL BE A MINIMUM OF 6 FEET WIDE AND HAVE WORKING GUTTER BROOMS.

AT A MINIMUM, SWEEPING WILL BE REQUIRED:

- PRIOR TO OPENING ANY SEGMENT OR ROADWAY TO TRAFFIC.
- FOLLOWING PAVEMENT GROOVING OPERATIONS AND PRIOR TO THE APPLICATION OF THE PAVEMENT MARKING TAPE.
- WHEN SAWING OPERATIONS ARE UNDERWAY IN THE INSIDE DRIVING LANES, THE OUTSIDE DRIVING LANES AND GUTTER MAY NEED TO BE SWEEPED TO CONTROL DUST.

ALL COSTS FOR CLEANING THE ROADWAY WITH A PICKUP BROOM SHALL BE INCIDENTAL TO THE CONTRACT UNIT PRICE PER HOUR FOR "SWEEPING".

CONSTRUCTION ENTRANCE

THE CONTRACTOR SHALL INSTALL A CONSTRUCTION ENTRANCE AT LOCATIONS WHERE THERE IS A POTENTIAL FOR MUD TRACKING AND SEDIMENT FLOW FROM THE CONSTRUCTION SITE AND WORK AREA ONTO A PAVED PUBLIC ROADWAY.

IT IS THE CONTRACTOR'S OPTION TO USE THE SDDOT CONSTRUCTION ENTRANCE (SEE SDDOT CONSTRUCTION ENTRANCE NOTES AND DETAILS), A PRODUCT FROM THE LIST PROVIDED IN THESE NOTES, OR OTHER PRODUCTS OR PROCESSES AS APPROVED BY THE ENGINEER DURING CONSTRUCTION.

IF THE CONTRACTOR ELECTS TO USE ONE OF THE PRODUCTS LISTED IN THE TABLE, THEN THE CONTRACTOR SHALL INSTALL THE CONSTRUCTION ENTRANCE PRODUCT IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS OR AS DIRECTED BY THE ENGINEER.

THE CONTRACTOR SHALL MAINTAIN THE CONSTRUCTION ENTRANCE SUCH THAT MUD TRACKING AND SEDIMENT FLOW WILL NOT ENTER THE ROADWAY OR ADJACENT DRAINAGE AREAS. THE CONSTRUCTION ENTRANCE SHALL BE ROUTINELY INSPECTED AND THE CONTRACTOR SHALL REPAIR OR REPLACE MATERIAL AS DEEMED NECESSARY BY THE ENGINEER.

ALL COSTS FOR FURNISHING, INSTALLING, MAINTAINING, AND REMOVAL OF THE CONSTRUCTION ENTRANCE INCLUDING EQUIPMENT, LABOR, MATERIALS, AND INCIDENTALS SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE PER EACH FOR "CONSTRUCTION ENTRANCE".

THE FOLLOWING TABLE IS A LIST OF KNOWN CONSTRUCTION ENTRANCE PRODUCTS AVAILABLE FOR USE:

PRODUCT	MANUFACTURER
GRIZZLY RUMBLE GRATE (10' WIDTH AND 24' LENGTH REQUIRED)	TRACKOUT CONTROL, LLC TEMPE, AZ PHONE: 1-800-761-0056 WWW.TRACKOUTCONTROL.COM
RUMBLE GRID (12' WIDTH AND 24' LENGTH INCLUDING COMBINATION OF GRIDS AND RAMPS REQUIRED)	PRO-TEC EQUIPMENT, INC. CHARLOTTE, MI PHONE: 1-800-292-1225 WWW.PRO-TECEQUIPMENT.COM

SDDOT CONSTRUCTION ENTRANCE

IF THE SDDOT CONSTRUCTION ENTRANCE IS UTILIZED, THEN THE CONTRACTOR SHALL INSTALL THE SDDOT CONSTRUCTION ENTRANCE IN ACCORDANCE WITH THESE NOTES AND THE DETAIL DRAWINGS.

PIT RUN MATERIAL SHALL BE OBTAINED FROM A GRANULAR SOURCE AND SHALL CONFORM TO THE FOLLOWING GRADATION:

SIEVE SIZE	PERCENT PASSING
6"	100%
#4	0-60%
#200	0-20%

THE PIT RUN MATERIAL SHALL BE COMPACTED TO THE SATISFACTION OF THE ENGINEER.

CONSTRUCTION ENTRANCE (CONTINUED)

THE AGGREGATE FOR THE GRANULAR MATERIAL SHALL CONFORM TO THE FOLLOWING GRADATION REQUIREMENTS:

SIEVE SIZE	PERCENT PASSING
3"	100%
2 1/2"	90-100%
1 1/2"	25-60%
3/4"	0-10%
1/2"	0-5%

THE GRANULAR MATERIAL SHALL BE PLACED IN 6" MAXIMUM LIFTS.

IT IS ANTICIPATED THAT THE GRANULAR MATERIAL WILL NEED TO BE PERIODICALLY REMOVED AND REPLACED AS IT BECOMES INUNDATED WITH MUD AND SEDIMENT.

THE REINFORCEMENT FABRIC (MSE) SHALL CONFORM TO SECTION 831 OF THE SPECIFICATIONS. THE MSE GEOTEXTILE SHALL BE ON THE APPROVED PRODUCTS LIST FOR THIS MATERIAL OR WILL BE CERTIFIED BY THE SUPPLIER TO MEET THIS SPECIFICATION PRIOR TO INSTALLATION.

THE REINFORCEMENT FABRIC (MSE) SHOULD BE KEPT AS TAUT AS POSSIBLE PRIOR TO PLACING.

EQUIPMENT SHALL NOT BE ALLOWED ON THE REINFORCEMENT FABRIC (MSE) UNTIL THE FIRST LIFT OF GRANULAR MATERIAL IS IN PLACE.

ALL SEAMS IN THE REINFORCEMENT FABRIC (MSE) SHALL BE OVERLAPPED AT LEAST 2' AND SHINGLED.



STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648 (06)	D6	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

STORM WATER POLLUTION PREVENTION PLAN CHECKLIST

(THE NUMBERS RIGHT OF THE TITLE HEADINGS ARE REFERENCE NUMBERS TO THE GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES)

❖ **SITE DESCRIPTION (4.2 1)**

- PROJECT LIMITS: SEE TITLE SHEET (4.2 1.B)
- PROJECT DESCRIPTION: SEE TITLE SHEET (4.2 1.A.)
- SITE MAP(S): SEE TITLE SHEET AND PLANS (4.2 1.F. (1)-(6))
- MAJOR SOIL DISTURBING ACTIVITIES (CHECK ALL THAT APPLY)
 - CLEARING AND GRUBBING
 - EXCAVATION/BORROW
 - GRADING AND SHAPING
 - FILLING
 - CUTTING AND FILLING
 - OTHER (DESCRIBE):
- TOTAL PROJECT AREA 1.7 ACRES (4.2 1.B.)
- TOTAL AREA TO BE DISTURBED 1.7 ACRES (4.2 1.B.)
- EXISTING VEGETATIVE COVER (%)
- SOIL PROPERTIES: AASHTO SOIL OR USDA-NRCS SOIL SERIES CLASSIFICATION UNIFIED SOIL CLASSIFICATION CL (4.2 1. D.)
- NAME OF RECEIVING WATER BODY/BODIES BOX ELDER CREEK (4.2 1.E.)

❖ **ORDER OF CONSTRUCTION ACTIVITIES (4.2 1.C.)**

(STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS POSSIBLE, BUT IN NO CASE LATER THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS TEMPORARILY OR PERMANENTLY CEASED. INITIATION OF FINAL OR TEMPORARY STABILIZATION MAY EXCEED THE 14-DAY LIMIT IF EARTH DISTURBING ACTIVITIES WILL BE RESUMED WITHIN 21 DAYS.)

- INSTALL STABILIZED CONSTRUCTION ENTRANCE(S).
- INSTALL PERIMETER PROTECTION WHERE RUNOFF SHEETS FROM THE SITE.
- INSTALL CHANNEL AND DITCH BOTTOM PROTECTION.
- CLEARING AND GRUBBING.
- REMOVE AND STORE TOPSOIL.
- STABILIZE DISTURBED AREAS.
- INSTALL UTILITIES, STORM SEWERS, CURB AND GUTTER.
- INSTALL INLET AND CULVERT PROTECTION AFTER COMPLETING STORM DRAINAGE AND OTHER UTILITY INSTALLATIONS.
- COMPLETE FINAL GRADING.
- COMPLETE FINAL PAVING AND SEALING OF CONCRETE.
- COMPLETE TRAFFIC CONTROL INSTALLATION AND PROTECTION DEVICES.
- RESEED AREAS DISTURBED BY REMOVAL ACTIVITIES.

❖ **EROSION AND SEDIMENT CONTROLS (4.2 2.A.(1)(A)-(F))**

(CHECK ALL THAT APPLY)

- STABILIZATION PRACTICES (SEE DETAIL PLAN SHEETS)
 - TEMPORARY SEEDING (COVER CROP SEEDING)
 - PERMANENT SEEDING
 - SODDING
 - PLANTING (WOODY VEGETATION FOR SOIL STABILIZATION)
 - MULCHING (GRASS HAY OR STRAW)
 - HYDRAULIC MULCH (WOOD FIBER MULCH)
 - SOIL STABILIZER
 - BONDED FIBER MATRIX
 - EROSION CONTROL BLANKETS OR MATS
 - VEGETATION BUFFER STRIPS
 - ROUGHENED SURFACE (E.G. TRACKING)
 - DUST CONTROL
 - OTHER:

➤ **STRUCTURAL TEMPORARY EROSION AND SEDIMENT CONTROLS**

- SILT FENCE
- FLOATING SILT CURTAIN
- STRAW BALE CHECK
- TEMPORARY BERM
- TEMPORARY SLOPE DRAIN
- STRAW WATTLES OR ROLLS
- TURF REINFORCEMENT MAT
- RIP RAP
- GABIONS
- ROCK CHECK DAMS
- SEDIMENT TRAPS/BASINS
- INLET PROTECTION
- OUTLET PROTECTION
- SURFACE INLET PROTECTION (AREA DRAIN)
- CURB INLET PROTECTION
- STABILIZED CONSTRUCTION ENTRANCES
- ENTRANCE/EXIT EQUIPMENT TIRE WASH
- INTERCEPTOR DITCH
- CONCRETE WASHOUT AREA
- TEMPORARY DIVERSION CHANNEL
- WORK PLATFORM
- TEMPORARY WATER BARRIER
- TEMPORARY WATER CROSSING
- OTHER:

➤ **WETLAND AVOIDANCE**

WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPINGE ON REGULATED WETLANDS? YES NO IF YES, THE STRUCTURAL AND EROSION AND SEDIMENT CONTROLS HAVE BEEN INCLUDED IN THE TOTAL PROJECT WETLAND IMPACTS AND HAVE BEEN INCLUDED IN THE 404 PERMIT PROCESS WITH THE USACE.

➤ **STORM WATER MANAGEMENT (4.2 2.B., (1) AND (2))**

STORM WATER MANAGEMENT WILL BE HANDLED BY TEMPORARY CONTROLS OUTLINED IN "EROSION AND SEDIMENT CONTROLS" ABOVE, AND ANY PERMANENT CONTROLS NEEDED TO MEET PERMANENT STORM WATER MANAGEMENT NEEDS IN THE POST CONSTRUCTION PERIOD. PERMANENT CONTROLS WILL BE SHOWN ON THE PLANS AND NOTED AS PERMANENT.

➤ **OTHER STORM WATER CONTROLS (4.2 2.C., (1) AND (2))**▪ **WASTE DISPOSAL**

ALL LIQUID WASTE MATERIALS WILL BE COLLECTED AND STORED IN SEALED METAL CONTAINERS APPROVED BY THE PROJECT ENGINEER. ALL TRASH AND CONSTRUCTION DEBRIS FROM THE SITE WILL BE DEPOSITED IN THE APPROVED CONTAINERS. CONTAINERS WILL BE SERVICED AS NECESSARY, AND THE TRASH WILL BE HAULED TO AN APPROVED DISPOSAL SITE OR LICENSED LANDFILL. ALL ONSITE PERSONNEL WILL BE INSTRUCTED IN THE PROPER PROCEDURES FOR WASTE DISPOSAL, AND NOTICES STATING PROPER PRACTICES WILL BE POSTED IN THE FIELD OFFICE. THE GENERAL CONTRACTOR'S REPRESENTATIVE RESPONSIBLE FOR THE CONDUCT OF WORK ON THE SITE WILL BE RESPONSIBLE FOR SEEING WASTE DISPOSAL PROCEDURES ARE FOLLOWED.

▪ **HAZARDOUS WASTE**

ALL HAZARDOUS WASTE MATERIALS WILL BE DISPOSED OF IN A MANNER SPECIFIED BY LOCAL OR STATE REGULATIONS OR BY THE MANUFACTURER. SITE PERSONNEL WILL BE INSTRUCTED IN THESE PRACTICES, AND THE INDIVIDUAL DESIGNATED AS THE CONTRACTOR'S ON-SITE REPRESENTATIVE WILL BE RESPONSIBLE FOR SEEING THAT THESE PRACTICES ARE FOLLOWED.

▪ **SANITARY WASTE**

PORTABLE SANITARY FACILITIES WILL BE PROVIDED ON ALL CONSTRUCTION SITES. SANITARY WASTE WILL BE COLLECTED FROM THE PORTABLE UNITS IN A TIMELY MANNER BY A LICENSED WASTE MANAGEMENT CONTRACTOR OR AS REQUIRED BY ANY LOCAL REGULATIONS.

❖ **MAINTENANCE AND INSPECTION (4.2 3. AND 4.2 4.)**➤ **MAINTENANCE AND INSPECTION PRACTICES**

- INSPECTIONS WILL BE CONDUCTED AT LEAST ONE TIME PER WEEK AND AFTER A STORM EVENT OF 0.50 INCHES OR GREATER.
- ALL CONTROLS WILL BE MAINTAINED IN GOOD WORKING ORDER. NECESSARY REPAIRS WILL BE INITIATED WITHIN 24 HOURS OF THE SITE INSPECTION REPORT.
- SILT FENCE WILL BE INSPECTED FOR DEPTH OF SEDIMENT AND FOR TEARS IN ORDER TO ENSURE THE FABRIC IS SECURELY ATTACHED TO THE POSTS AND THAT THE POSTS ARE WELL ANCHORED. SEDIMENT BUILDUP WILL BE REMOVED FROM THE SILT FENCE WHEN IT REACHES 1/3 OF THE HEIGHT OF THE SILT FENCE.
- SEDIMENT BASINS AND TRAPS WILL BE CHECKED. SEDIMENT WILL BE REMOVED WHEN DEPTH REACHES APPROXIMATELY 50 PERCENT OF THE STRUCTURE'S CAPACITY, AND AT THE CONCLUSION OF THE CONSTRUCTION.
- CHECK DAMS WILL BE INSPECTED FOR STABILITY. SEDIMENT WILL BE REMOVED WHEN DEPTH REACHES 1/2 THE HEIGHT OF THE DAM.
- ALL SEEDED AREAS WILL BE CHECKED FOR BARE SPOTS, WASHOUTS, AND VIGOROUS GROWTH FREE OF SIGNIFICANT WEED INFESTATIONS.
- INSPECTION AND MAINTENANCE REPORTS WILL BE PREPARED ON FORM DOT 298 FOR EACH SITE INSPECTION, THIS FORM WILL ALSO BE USED TO DOCUMENT CHANGES TO THE SWPPP. A COPY OF THE COMPLETED INSPECTION FORM WILL BE FILED WITH THE SWPPP DOCUMENTS.
- THE SDDOT PROJECT ENGINEER AND CONTRACTOR'S SITE SUPERINTENDENT ARE RESPONSIBLE FOR INSPECTIONS. MAINTENANCE, REPAIR ACTIVITIES ARE THE RESPONSIBILITY OF THE CONTRACTOR. THE SDDOT PROJECT ENGINEER WILL COMPLETE THE INSPECTION AND MAINTENANCE REPORTS AND DISTRIBUTE COPIES PER THE DISTRIBUTION INSTRUCTIONS ON DOT 298.

❖ **NON-STORM WATER DISCHARGES (3.0)**


THE FOLLOWING NON-STORM WATER DISCHARGES ARE ANTICIPATED DURING THE COURSE OF THIS PROJECT (CHECK ALL THAT APPLY).

- DISCHARGES FROM WATER LINE FLUSHING.
- PAVEMENT WASH-WATER, WHERE NO SPILLS OR LEAKS OF TOXIC OR HAZARDOUS MATERIALS HAVE OCCURRED.
- UNCONTAMINATED GROUND WATER ASSOCIATED WITH DEWATERING ACTIVITIES.

❖ **MATERIALS INVENTORY (4.2. 2.C.(2))**

THE FOLLOWING MATERIALS OR SUBSTANCES ARE EXPECTED TO BE PRESENT ON THE SITE DURING THE CONSTRUCTION PERIOD. THESE MATERIALS WILL BE HANDLED AS NOTED UNDER THE HEADINGS "EROSION AND SEDIMENT CONTROLS" AND "SPILL PREVENTION" (CHECK ALL THAT APPLY).

- CONCRETE AND PORTLAND CEMENT
- DETERGENTS
- PAINTS
- METALS
- BITUMINOUS MATERIALS
- PETROLEUM BASED PRODUCTS
- CLEANING SOLVENTS
- WOOD
- CURE
- TEXTURE
- CHEMICAL FERTILIZERS
- OTHER:

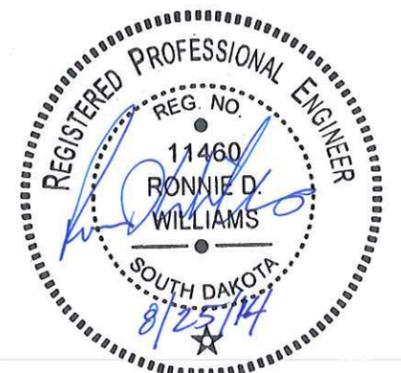

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D7	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

❖ **SPILL PREVENTION (4.2 2.C.(2))**

➤ **MATERIAL MANAGEMENT**

▪ **HOUSEKEEPING**

- ONLY NEEDED PRODUCTS WILL BE STORED ON-SITE BY THE CONTRACTOR.
- EXCEPT FOR BULK MATERIALS THE CONTRACTOR WILL STORE ALL MATERIALS UNDER COVER AND IN APPROPRIATE CONTAINERS.
- PRODUCTS MUST BE STORED IN ORIGINAL CONTAINERS AND LABELED.
- MATERIAL MIXING WILL BE CONDUCTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
- WHEN POSSIBLE, ALL PRODUCTS WILL BE COMPLETELY USED BEFORE PROPERLY DISPOSING OF THE CONTAINER OFF SITE.
- THE MANUFACTURER'S DIRECTIONS FOR DISPOSAL OF MATERIALS AND CONTAINERS WILL BE FOLLOWED.
- THE CONTRACTOR'S SITE SUPERINTENDENT WILL INSPECT MATERIALS STORAGE AREAS REGULARLY TO ENSURE PROPER USE AND DISPOSAL.
- DUST GENERATED WILL BE CONTROLLED IN AN ENVIRONMENTALLY SAFE MANNER.
- VEGETATION AREAS NOT ESSENTIAL TO THE CONSTRUCTION PROJECT WILL BE PRESERVED AND MAINTAINED AS NOTED ON THE PLANS.

▪ **HAZARDOUS MATERIALS**

- PRODUCTS WILL BE KEPT IN ORIGINAL CONTAINERS UNLESS THE CONTAINER IS NOT RESEALABLE.
- ORIGINAL LABELS AND MATERIAL SAFETY DATA SHEETS WILL BE RETAINED IN A SAFE PLACE TO RELAY IMPORTANT PRODUCT INFORMATION.
- IF SURPLUS PRODUCT MUST BE DISPOSED OF, MANUFACTURER'S LABEL DIRECTIONS FOR DISPOSAL WILL BE FOLLOWED.
- MAINTENANCE AND REPAIR OF ALL EQUIPMENT AND VEHICLES INVOLVING OIL CHANGES, HYDRAULIC SYSTEM DRAIN DOWN, DE-GREASING OPERATIONS, FUEL TANK DRAIN DOWN AND REMOVAL, AND OTHER ACTIVITIES WHICH MAY RESULT IN THE ACCIDENTAL RELEASE OF CONTAMINANTS WILL BE CONDUCTED ON AN IMPERVIOUS SURFACE AND UNDER COVER DURING WET WEATHER TO PREVENT THE RELEASE OF CONTAMINANTS ONTO THE GROUND.
- WHEEL WASH WATER WILL BE COLLECTED AND ALLOWED TO SETTLE OUT SUSPENDED SOLIDS PRIOR TO DISCHARGE. WHEEL WASH WATER WILL NOT BE DISCHARGED DIRECTLY INTO ANY STORM WATER SYSTEM OR STORM WATER TREATMENT SYSTEM.
- POTENTIAL PH-MODIFYING MATERIALS SUCH AS: BULK CEMENT, CEMENT KILN DUST, FLY ASH, NEW CONCRETE WASHINGS, CONCRETE PUMPING, RESIDUALS FROM CONCRETE SAW CUTTING (EITHER WET OR DRY), AND MIXER WASHOUT WATERS WILL BE COLLECTED ON SITE AND MANAGED TO PREVENT CONTAMINATION OF STORM WATER RUNOFF.

➤ **PRODUCT SPECIFIC PRACTICES (6.8)**

▪ **PETROLEUM PRODUCTS**

- ALL ON-SITE VEHICLES WILL BE MONITORED FOR LEAKS AND RECEIVE REGULAR PREVENTIVE MAINTENANCE TO REDUCE THE CHANCE OF LEAKAGE. PETROLEUM PRODUCTS WILL BE STORED IN TIGHTLY SEALED CONTAINERS WHICH ARE CLEARLY LABELED.

▪ **FERTILIZERS**

- FERTILIZERS WILL BE APPLIED ONLY IN THE AMOUNTS SPECIFIED BY THE SDDOT. ONCE APPLIED, FERTILIZERS WILL BE WORKED INTO THE SOIL TO LIMIT THE EXPOSURE TO STORM WATER. FERTILIZERS WILL BE STORED IN AN ENCLOSED AREA. THE CONTENTS OF PARTIALLY USED FERTILIZER BAGS WILL BE TRANSFERRED TO SEALABLE CONTAINERS TO AVOID SPILLS.

▪ **PAINTS**

- ALL CONTAINERS WILL BE TIGHTLY SEALED AND STORED WHEN NOT REQUIRED FOR USE. THE EXCESS WILL BE DISPOSED OF ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS AND ANY APPLICABLE STATE AND LOCAL REGULATIONS.

▪ **CONCRETE TRUCKS**

- CONTRACTORS WILL PROVIDE DESIGNATED TRUCK WASHOUT AREAS ON THE SITE. THESE AREAS MUST BE SELF CONTAINED AND NOT CONNECTED TO ANY STORM WATER OUTLET OF THE SITE. UPON COMPLETION OF CONSTRUCTION WASHOUT AREAS WILL BE PROPERLY STABILIZED.

➤ **SPILL CONTROL PRACTICES (4.2 2 C.(2))**

IN ADDITION TO THE PREVIOUS HOUSEKEEPING AND MANAGEMENT PRACTICES, THE FOLLOWING PRACTICES WILL BE FOLLOWED FOR SPILL PREVENTION AND CLEANUP IF NEEDED.

- FOR ALL HAZARDOUS MATERIALS STORED ON SITE, THE MANUFACTURER'S RECOMMENDED METHODS FOR SPILL CLEAN UP WILL BE CLEARLY POSTED. SITE PERSONNEL WILL BE MADE AWARE OF THE PROCEDURES AND THE LOCATIONS OF THE INFORMATION AND CLEANUP SUPPLIES.
- APPROPRIATE CLEANUP MATERIALS AND EQUIPMENT WILL BE MAINTAINED BY THE CONTRACTOR IN THE MATERIALS STORAGE AREA ON-SITE. AS APPROPRIATE, EQUIPMENT AND MATERIALS MAY INCLUDE ITEMS SUCH AS BROOMS, DUST PANS, MOPS, RAGS, GLOVES, GOGGLES, KITTY LITTER, SAND, SAWDUST, AND PLASTIC AND METAL TRASH CONTAINERS SPECIFICALLY FOR CLEAN UP PURPOSES.
- ALL SPILLS WILL BE CLEANED IMMEDIATELY AFTER DISCOVERY AND THE MATERIALS DISPOSED OF PROPERLY.
- THE SPILL AREA WILL BE KEPT WELL VENTILATED AND PERSONNEL WILL WEAR APPROPRIATE PROTECTIVE CLOTHING TO PREVENT INJURY FROM CONTACT WITH A HAZARDOUS SUBSTANCE.
- AFTER A SPILL A REPORT WILL BE PREPARED DESCRIBING THE SPILL, WHAT CAUSED IT, AND THE CLEANUP MEASURES TAKEN. THE SPILL PREVENTION PLAN WILL BE ADJUSTED TO INCLUDE MEASURES TO PREVENT THIS TYPE OF SPILL FROM REOCCURRING, AS WELL AS CLEAN UP INSTRUCTIONS IN THE EVENT OF REOCCURRENCES.
- THE CONTRACTOR'S SITE SUPERINTENDENT, RESPONSIBLE FOR DAY-TO-DAY OPERATIONS, WILL BE THE SPILL PREVENTION AND CLEANUP COORDINATOR. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT THE SITE SUPERINTENDENT HAS HAD APPROPRIATE TRAINING FOR HAZARDOUS MATERIALS HANDLING, SPILL MANAGEMENT, AND CLEANUP.

➤ **SPILL RESPONSE (4.2 2 C.(2))**

THE PRIMARY OBJECTIVE IN RESPONDING TO A SPILL IS TO QUICKLY CONTAIN THE MATERIAL(S) AND PREVENT OR MINIMIZE MIGRATION INTO STORM WATER RUNOFF AND CONVEYANCE SYSTEMS. IF THE RELEASE HAS IMPACTED ON-SITE STORM WATER, IT IS CRITICAL TO CONTAIN THE RELEASED MATERIALS ON-SITE AND PREVENT THEIR RELEASE INTO RECEIVING WATERS. IF A SPILL OF POLLUTANTS THREATENS STORM WATER OR SURFACE WATER AT THE SITE, THE SPILL RESPONSE PROCEDURES OUTLINED BELOW MUST BE IMPLEMENTED IN A TIMELY MANNER TO PREVENT THE RELEASE OF POLLUTANTS.

- THE CONTRACTOR'S SITE SUPERINTENDENT WILL BE NOTIFIED IMMEDIATELY WHEN A SPILL OR THE THREAT OF A SPILL IS OBSERVED. THE SUPERINTENDENT WILL ASSESS THE SITUATION AND DETERMINE THE APPROPRIATE RESPONSE.
- IF SPILLS REPRESENT AN IMMINENT THREAT OF ESCAPING EROSION AND SEDIMENT CONTROLS AND ENTERING RECEIVING WATERS, PERSONNEL WILL BE DIRECTED TO RESPOND IMMEDIATELY TO CONTAIN THE RELEASE AND NOTIFY THE SUPERINTENDENT AFTER THE SITUATION HAS BEEN STABILIZED.
- SPILL KITS CONTAINING APPROPRIATE MATERIALS AND EQUIPMENT FOR SPILL RESPONSE AND CLEANUP WILL BE MAINTAINED BY THE CONTRACTOR AT THE SITE.
- IF OIL SHEEN IS OBSERVED ON SURFACE WATER (E.G. SETTLING PONDS, DETENTION PONDS, SWALES), ACTION WILL BE TAKEN IMMEDIATELY TO REMOVE THE MATERIAL CAUSING THE SHEEN. THE CONTRACTOR WILL USE APPROPRIATE MATERIALS TO CONTAIN AND ABSORB THE SPILL. THE SOURCE OF THE OIL SHEEN WILL ALSO BE IDENTIFIED AND REMOVED OR REPAIRED AS NECESSARY TO PREVENT FURTHER RELEASES.

- IF A SPILL OCCURS THE SUPERINTENDENT OR THE SUPERINTENDENT'S DESIGNEE WILL BE RESPONSIBLE FOR COMPLETING THE SPILL REPORTING FORM AND FOR REPORTING THE SPILL TO SD DENR.
- PERSONNEL WITH PRIMARY RESPONSIBILITY FOR SPILL RESPONSE AND CLEAN UP WILL RECEIVE TRAINING BY THE CONTRACTOR'S SITE SUPERINTENDENT OR DESIGNEE. THE TRAINING MUST INCLUDE IDENTIFYING THE LOCATION OF THE SPILL KITS AND OTHER SPILL RESPONSE EQUIPMENT AND THE USE OF SPILL RESPONSE MATERIALS.
- SPILL RESPONSE EQUIPMENT WILL BE INSPECTED AND MAINTAINED AS NECESSARY TO REPLACE ANY MATERIALS USED IN SPILL RESPONSE ACTIVITIES.

❖ **SPILL NOTIFICATION**

IN THE EVENT OF A SPILL, THE CONTRACTOR'S SITE SUPERINTENDENT WILL MAKE THE APPROPRIATE NOTIFICATION(S), CONSISTENT WITH THE FOLLOWING PROCEDURES:

➤ A RELEASE OR SPILL OF A REGULATED SUBSTANCE (INCLUDES PETROLEUM AND PETROLEUM PRODUCTS) MUST BE REPORTED TO DENR IMMEDIATELY IF ANY ONE OF THE FOLLOWING CONDITIONS EXISTS:

- THE DISCHARGE THREATENS OR IS IN A POSITION TO THREATEN THE WATERS OF THE STATE (SURFACE WATER OR GROUND WATER).
- THE DISCHARGE CAUSES AN IMMEDIATE DANGER TO HUMAN HEALTH OR SAFETY.
- THE DISCHARGE EXCEEDS 25 GALLONS.
- THE DISCHARGE CAUSES A SHEEN ON SURFACE WATER.
- THE DISCHARGE OF ANY SUBSTANCE THAT EXCEEDS THE GROUND WATER QUALITY STANDARDS OF ARSD (ADMINISTRATIVE RULES OF SOUTH DAKOTA) CHAPTER 74:51:01.
- THE DISCHARGE OF ANY SUBSTANCE THAT EXCEEDS THE SURFACE WATER QUALITY STANDARDS OF ARSD CHAPTER 74:51:01.
- THE DISCHARGE OF ANY SUBSTANCE THAT HARMS OR THREATENS TO HARM WILDLIFE OR AQUATIC LIFE.
- THE DISCHARGE OF CRUDE OIL IN FIELD ACTIVITIES UNDER SDCL (SOUTH DAKOTA CODIFIED LAWS) CHAPTER 45-9 IS GREATER THAN 1 BARREL (42 GALLONS).
TO REPORT A RELEASE OR SPILL, CALL DENR AT 605-773-3296 DURING REGULAR OFFICE HOURS (8 A.M. TO 5 P.M. CENTRAL TIME). TO REPORT THE RELEASE AFTER HOURS, ON WEEKENDS OR HOLIDAYS, CALL STATE RADIO COMMUNICATIONS AT 605-773-3231. REPORTING THE RELEASE TO DENR DOES NOT MEET ANY OBLIGATION FOR REPORTING TO OTHER STATE, LOCAL, OR FEDERAL AGENCIES. THEREFORE, THE RESPONSIBLE PERSON MUST ALSO CONTACT LOCAL AUTHORITIES TO DETERMINE THE LOCAL REPORTING REQUIREMENTS FOR RELEASES. DENR RECOMMENDS THAT SPILLS ALSO BE REPORTED TO THE NATIONAL RESPONSE CENTER AT (800) 424-8802.



STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D8	D16
ESTIMATE WITH GENERAL NOTES & TABLES			

❖ **CONSTRUCTION CHANGES (4.4)**

WHEN CHANGES ARE MADE TO THE CONSTRUCTION PROJECT THAT WILL REQUIRE ALTERATIONS IN THE TEMPORARY EROSION CONTROLS OF THE SITE, THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) WILL BE AMENDED TO PROVIDE APPROPRIATE PROTECTION TO DISTURBED AREAS, ALL STORM WATER STRUCTURES, AND ADJACENT WATERS. THE SDDOT PROJECT ENGINEER WILL MODIFY THE SWPPP PLAN (DOT 298) AND DRAWINGS TO REFLECT THE NEEDED CHANGES. COPIES OF CHANGES WILL BE ROUTED PER DOT 298. COPIES OF FORMS AND THE SWPPP WILL BE RETAINED IN A DESIGNATED PLACE FOR REVIEW OVER THE COURSE OF THE PROJECT.

❖ **CERTIFICATIONS**

➤ **CERTIFICATION OF COMPLIANCE WITH FEDERAL, STATE, AND LOCAL REGULATIONS**

THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) FOR THIS PROJECT REFLECTS THE REQUIREMENTS OF ALL LOCAL MUNICIPAL JURISDICTIONS FOR STORM WATER MANAGEMENT AND SEDIMENT AND EROSION CONTROL AS ESTABLISHED BY ORDINANCE, AS WELL AS OTHER STATE AND FEDERAL REQUIREMENTS FOR SEDIMENT AND EROSION CONTROL PLANS, PERMITS, NOTICES OR DOCUMENTATION AS APPROPRIATE.

➤ **SOUTH DAKOTA DEPARTMENT OF TRANSPORTATION**

I CERTIFY UNDER PENALTY OF LAW THAT THIS DOCUMENT AND ALL ATTACHMENTS WERE PREPARED UNDER MY DIRECTION OR SUPERVISION IN ACCORDANCE WITH A SYSTEM DESIGNED TO ASSURE THAT QUALIFIED PERSONNEL PROPERLY GATHER AND EVALUATE THE INFORMATION SUBMITTED. BASED ON MY INQUIRY OF THE PERSON OR PERSONS WHO MANAGE THE SYSTEM, OR THOSE PERSONS DIRECTLY RESPONSIBLE FOR GATHERING THE INFORMATION, THE INFORMATION SUBMITTED IS, TO THE BEST OF MY KNOWLEDGE AND BELIEF, TRUE, ACCURATE, AND COMPLETE. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES FOR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT FOR KNOWING VIOLATIONS.

AUTHORIZED SIGNATURE (SEE THE GENERAL PERMIT, SECTION 6.7.1.C.)

➤ **PRIME CONTRACTOR**

THIS SECTION IS TO BE EXECUTED BY THE GENERAL CONTRACTOR AFTER THE AWARD OF THE CONTRACT. THIS SECTION MAY BE EXECUTED ANY TIME THERE IS A CHANGE IN THE PRIME CONTRACTOR OF THE PROJECT.

I CERTIFY UNDER PENALTY OF LAW THAT THIS DOCUMENT AND ALL ATTACHMENTS WILL BE REVISED OR MAINTAINED UNDER MY DIRECTION OR SUPERVISION IN ACCORDANCE WITH A SYSTEM DESIGNED TO ASSURE THAT QUALIFIED PERSONNEL PROPERLY GATHER AND EVALUATE THE INFORMATION SUBMITTED. BASED ON MY INQUIRY OF THE PERSON OR PERSONS WHO MANAGE THE SYSTEM, OR THOSE PERSONS DIRECTLY RESPONSIBLE FOR GATHERING THE INFORMATION, THE INFORMATION SUBMITTED IS, TO THE BEST OF MY KNOWLEDGE AND BELIEF, TRUE, ACCURATE, AND COMPLETE. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES FOR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT FOR KNOWING VIOLATIONS.

AUTHORIZED SIGNATURE

❖ **CONTACT INFORMATION**

➤ **CONTRACTOR INFORMATION:**

- PRIME CONTRACTOR NAME:
- CONTRACTOR CONTACT NAME:
- ADDRESS:
- ADDRESS:
- CITY: STATE:
- ZIP:
- OFFICE PHONE: FIELD:
- CELL PHONE: FAX:

➤ **EROSION CONTROL SUPERVISOR**

- NAME:
- ADDRESS:
- ADDRESS:
- CITY: STATE:
- ZIP:
- OFFICE PHONE: FIELD:
- CELL PHONE: FAX:

➤ **SDDOT PROJECT ENGINEER**

- NAME:
- BUSINESS ADDRESS:
- JOB OFFICE LOCATION:
- CITY: STATE:
- ZIP:
- OFFICE PHONE:
- FIELD:
- CELL PHONE:
- FAX:

➤ **SD DENR CONTACT SPILL REPORTING**

- BUSINESS HOURS MONDAY-FRIDAY (605) 773-3296
- NIGHTS AND WEEKENDS (605) 773-3231

➤ **SD DENR CONTACT FOR HAZARDOUS MATERIALS.**

- (605) 773-3153

➤ **NATIONAL RESPONSE CENTER HOTLINE**


- (800) 424-8802.



FOR BIDDING PURPOSES ONLY

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D9	D16
EROSION AND SEDIMENT CONTROL PLANS			

INSTALL SEDIMENT CONTROL AT INLET
AT THE FOLLOWING LOCATIONS:
5+25 RT 1 EACH
5+25 LT 1 EACH
5+36 RT 1 EACH
5+36 LT 1 EACH

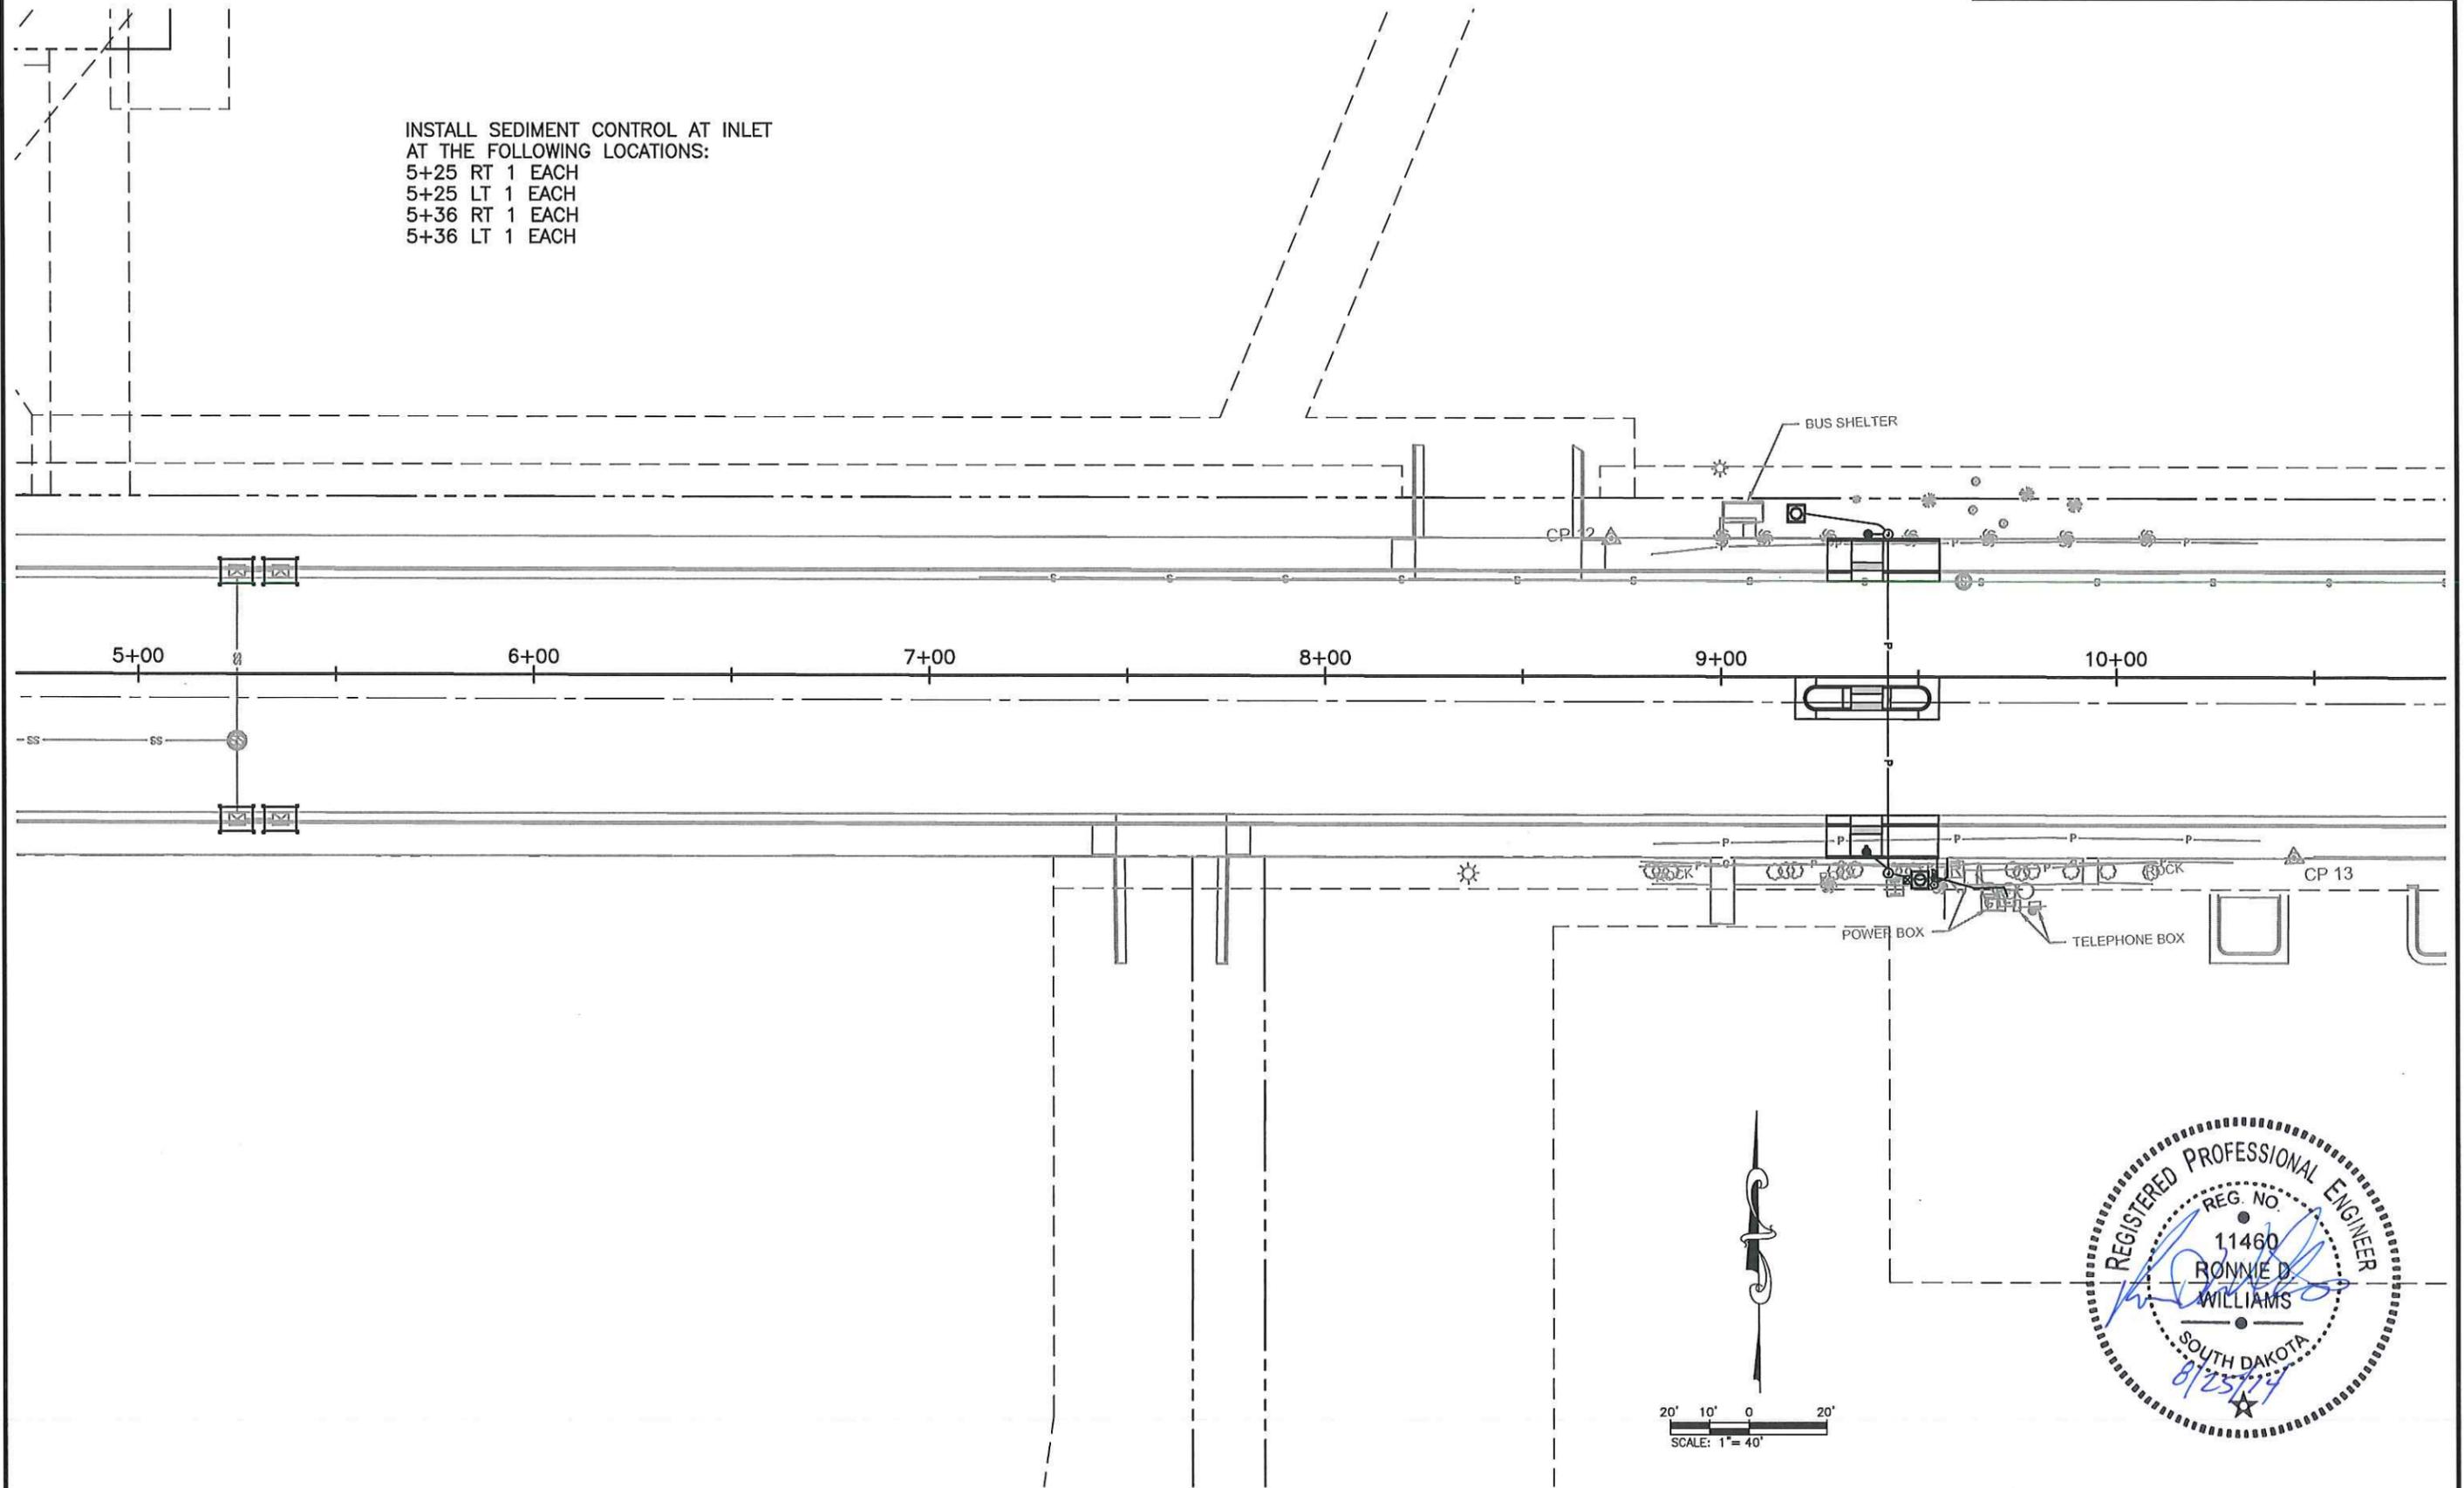

FOR BIDDING PURPOSES ONLY

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D10	D16
EROSION AND SEDIMENT CONTROL PLANS			



INSTALL EROSION CONTROL WATTLES (ECW) UNTIL FINAL LANDSCAPING IS INSTALLED/ESTABLISHED AT THE FOLLOWING LOCATIONS:
 12+25 TO 16+00 RT 370 FT
 12+50 LT 10 FT
 13+70 RT 10 FT
 14+85 LT 18 FT
 15+50 RT 10 FT

APPLY SOIL STABILIZER 2500 LBS/ACRE DURING CONSTRUCTION TO KEEP SEDIMENT OFF THE ROADWAY AND ON SITE AT THE FOLLOWING LOCATIONS AS NEEDED:
 12+25 LT TO 16+00 LT 525 LBS
 12+25 RT TO 16+00 RT 625 LBS

INSTALL INTERIM SEDIMENT CONTROL AT INLET AT THE FOLLOWING LOCATIONS:
 13+08 LT 25 FT HFSF 30 FT SED FILTER BAGS
 13+08 RT 25 FT HFSF 30 FT SED FILTER BAGS
 15+53 LT 25 FT HFSF 30 FT SED FILTER BAGS
 15+83 LT 38 FT HFSF 48 FT SED FILTER BAGS
 15+84 RT 38 FT HFSF 48 FT SED FILTER BAGS
 16+12 RT 25 FT HFSF 30 FT SED FILTER BAGS

INSTALL SEDIMENT CONTROL AT INLET AT THE FOLLOWING LOCATIONS:
 15+53 LT 1 EACH
 16+12 RT 1 EACH

INSTALL SEDIMENT CONTROL AT TYPE S INLET AT THE FOLLOWING LOCATIONS:
 15+83 LT 8 FT
 16+12 RT 8 FT

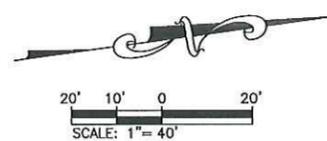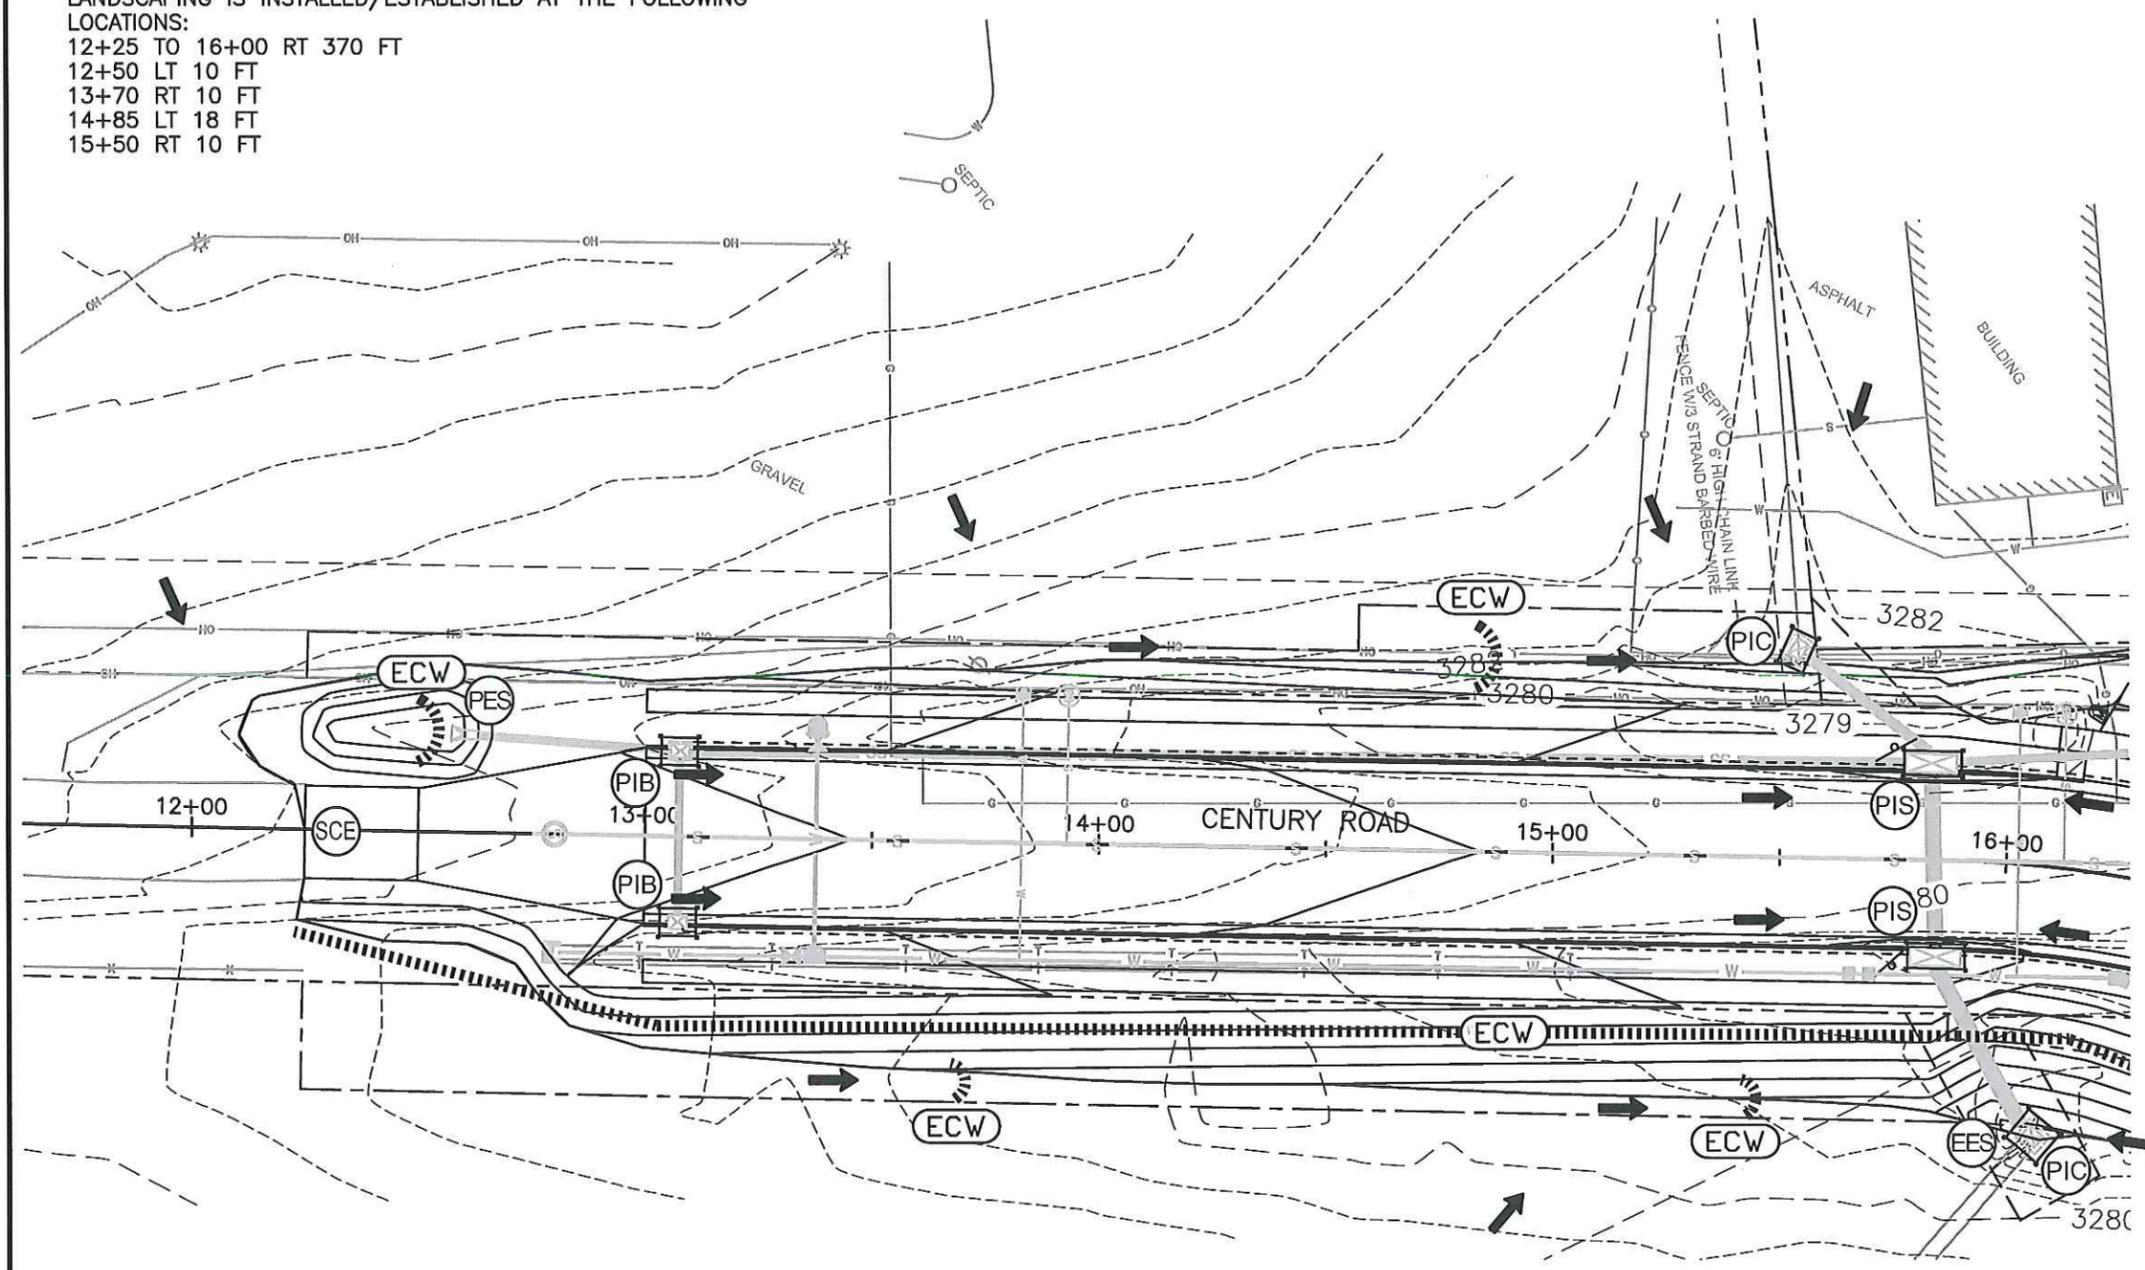

FOR BIDDING PURPOSES ONLY



STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D11	D16
EROSION AND SEDIMENT CONTROL PLANS			

INSTALL EROSION CONTROL WATTLES (ECW) UNTIL FINAL LANDSCAPING IS INSTALLED/ESTABLISHED AT THE FOLLOWING LOCATIONS:



- 16+00 TO 16+80 RT 75 FT
- 16+65 TO 18+10 LT 165 FT
- 16+90 TO 17+75 RT 75 FT
- 17+00 TO 17+75 LT 125 FT

APPLY SOIL STABILIZER 2500 LBS/ACRE DURING CONSTRUCTION TO KEEP SEDIMENT OFF THE ROADWAY AND ON SITE AT THE FOLLOWING LOCATIONS AS NEEDED:


- 16+00 LT TO 18+50 LT 575 LBS
- 16+00 RT TO 18+00 RT 350 LBS

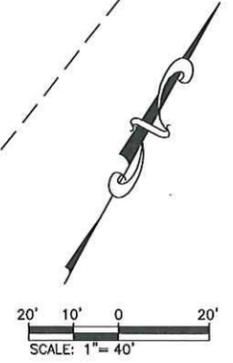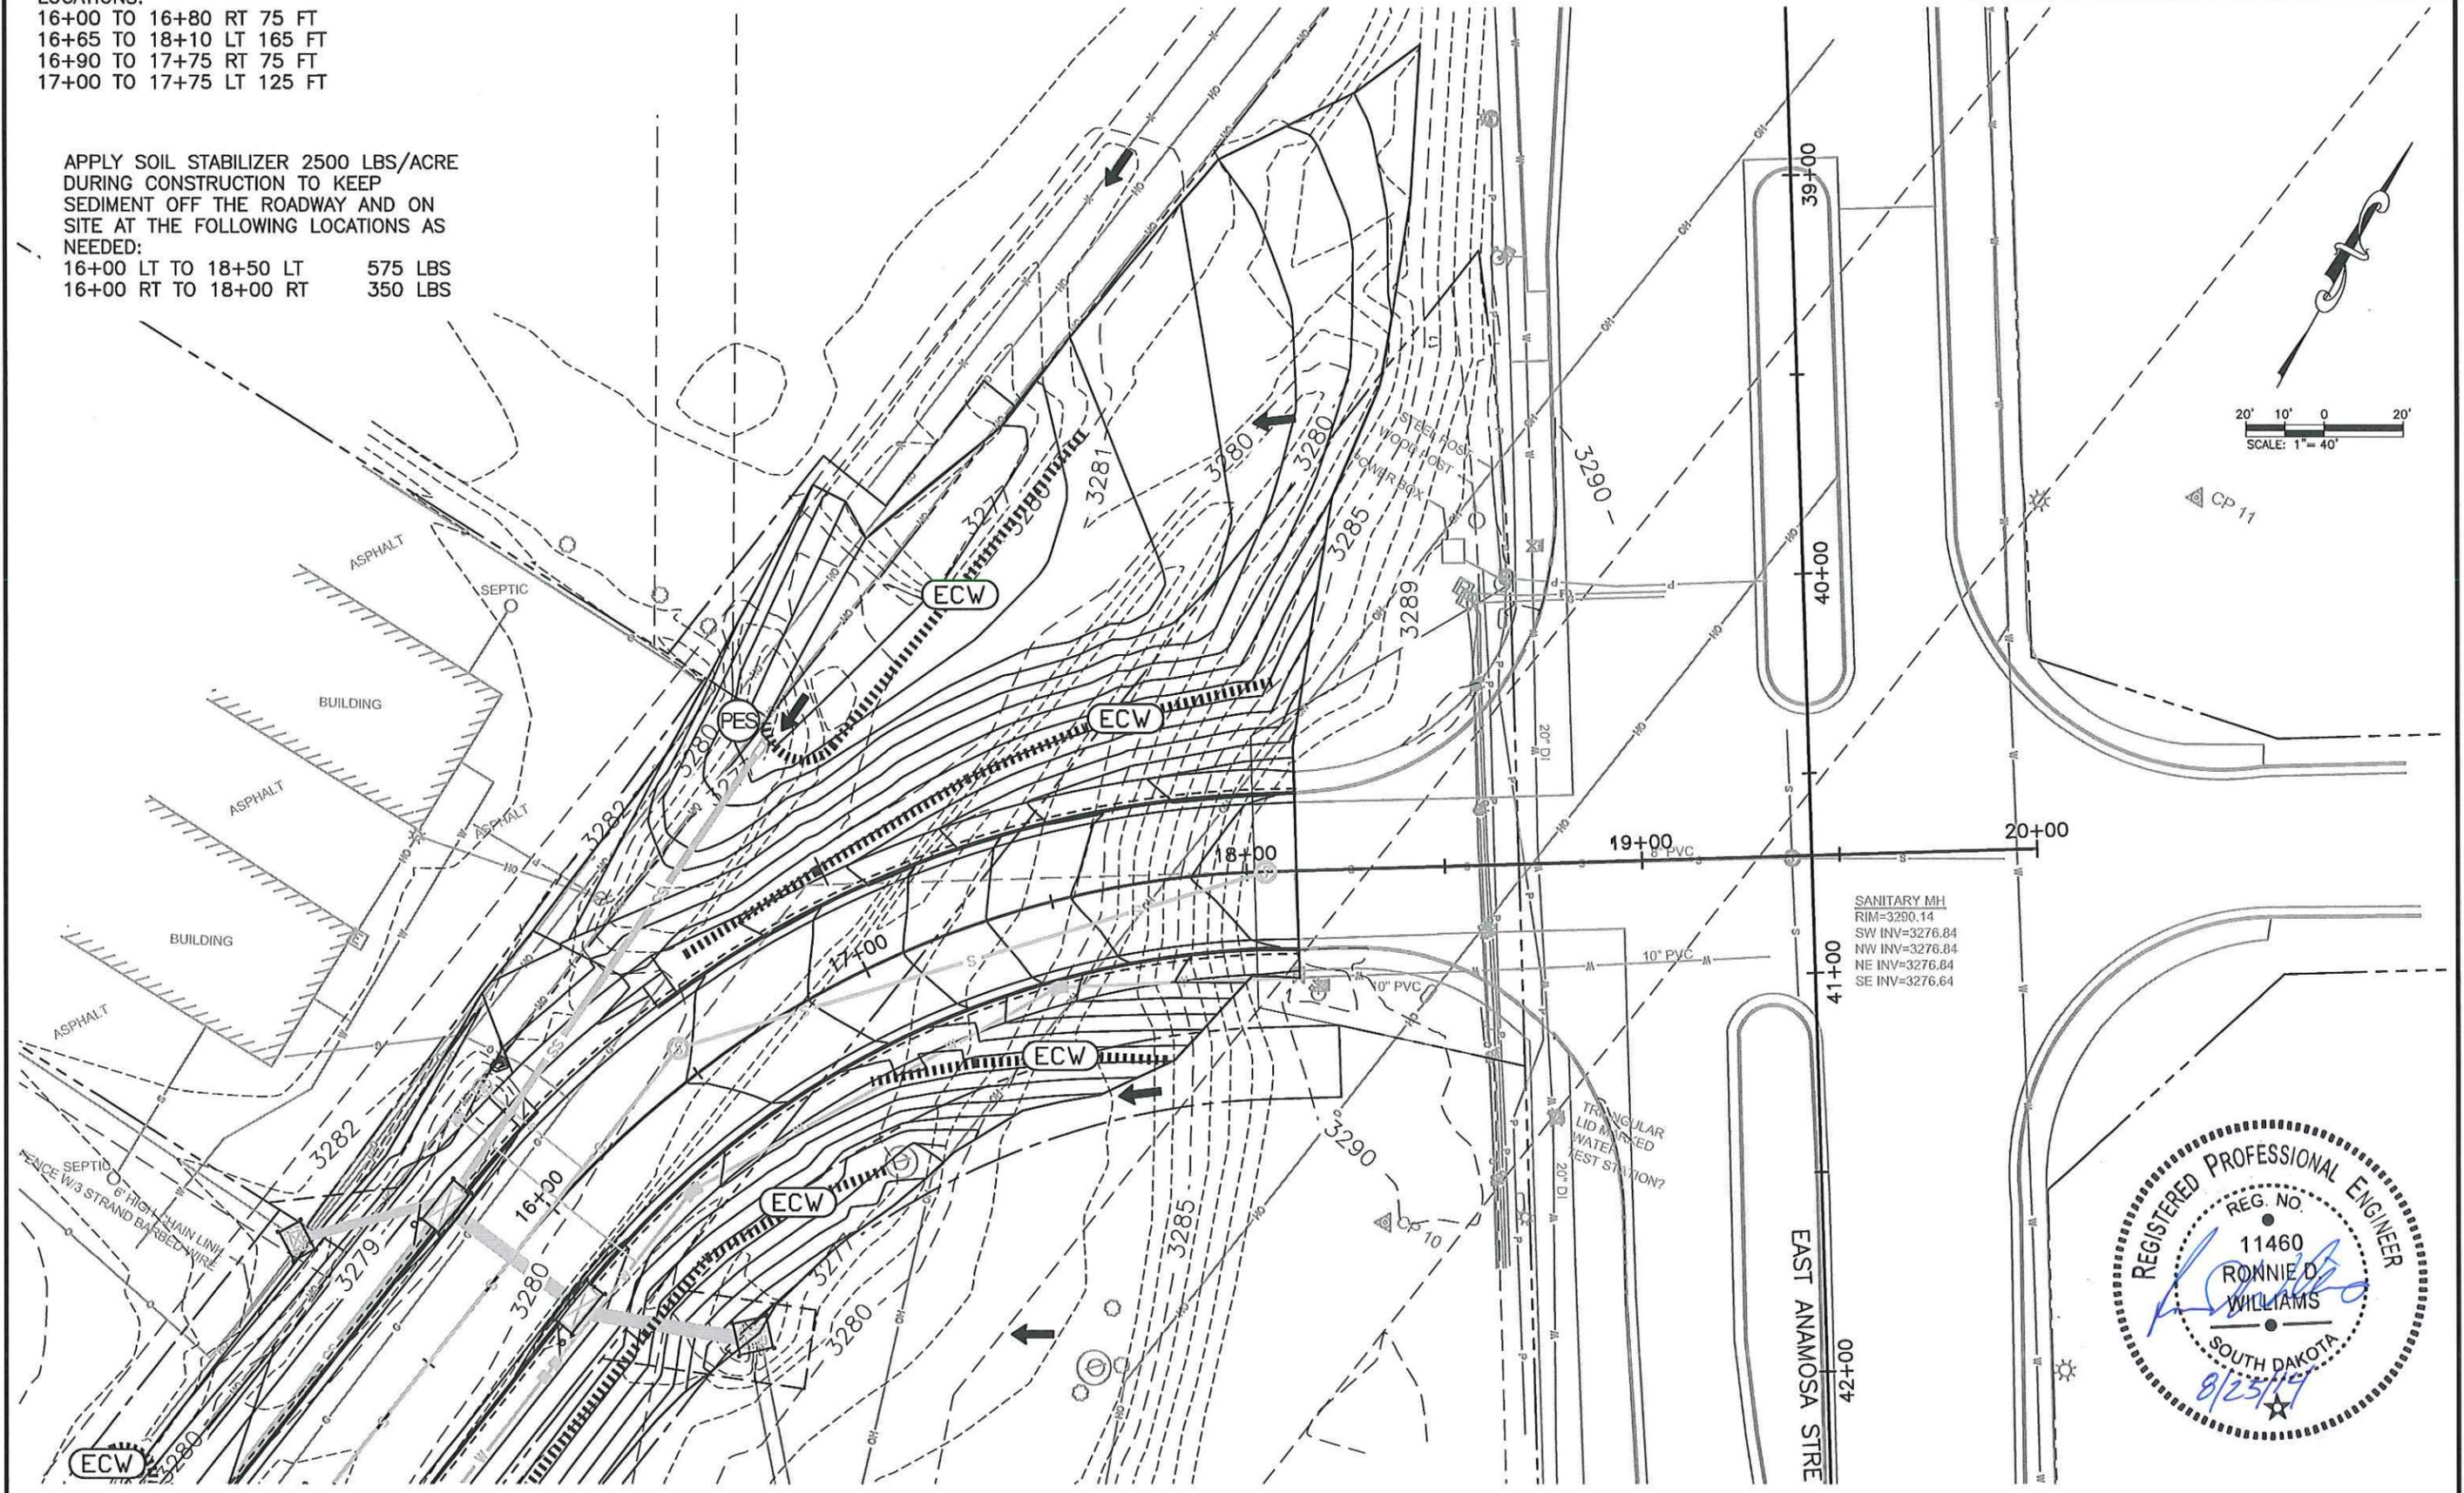

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D12	D16
SDDOT STANDARD PLATES			

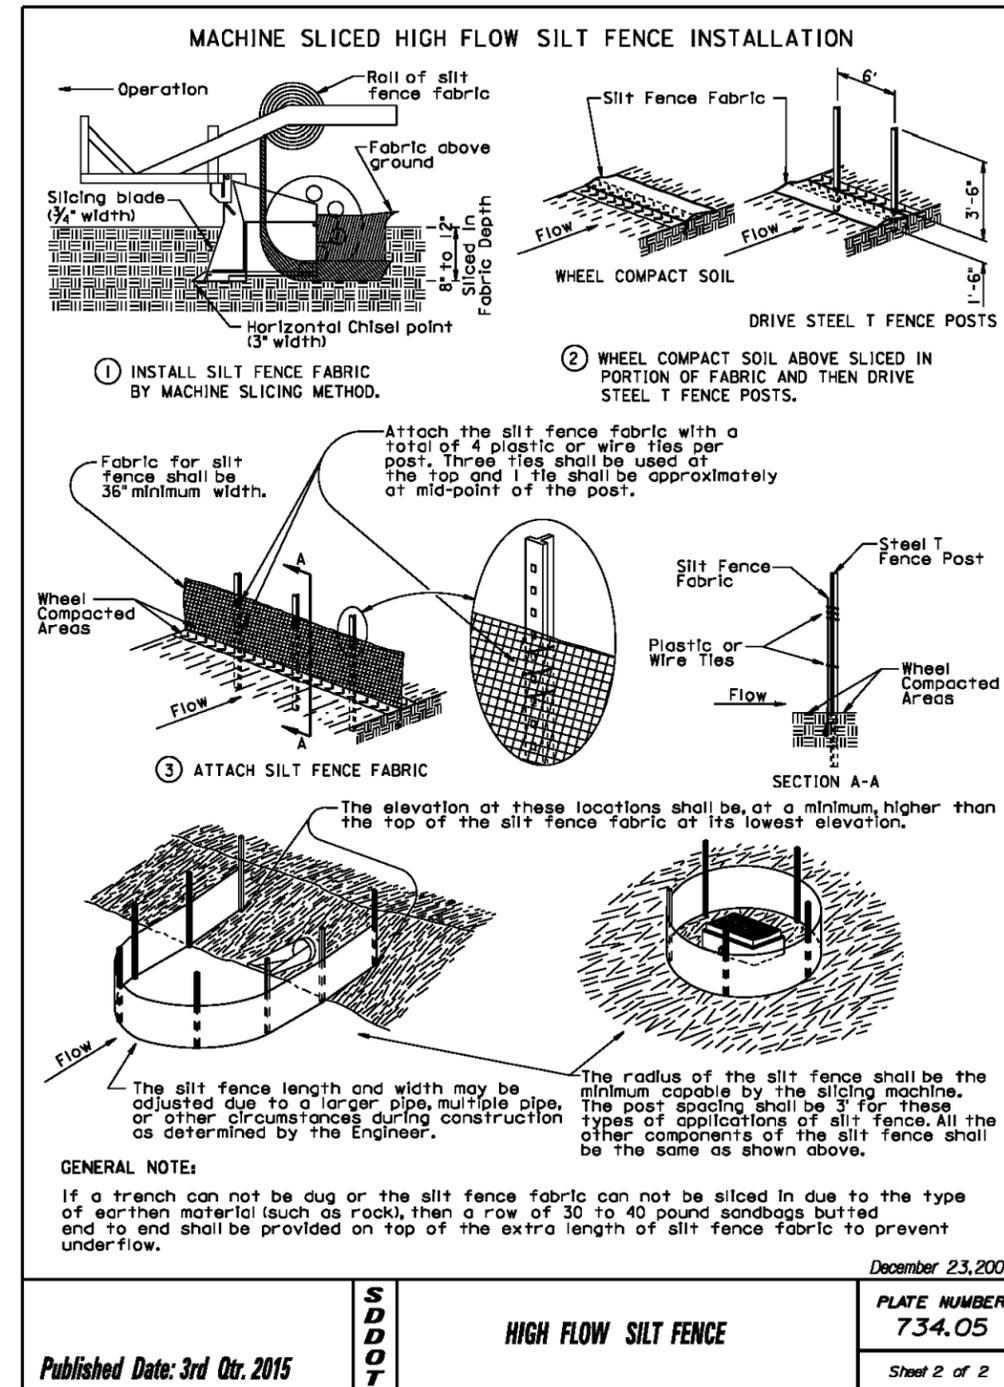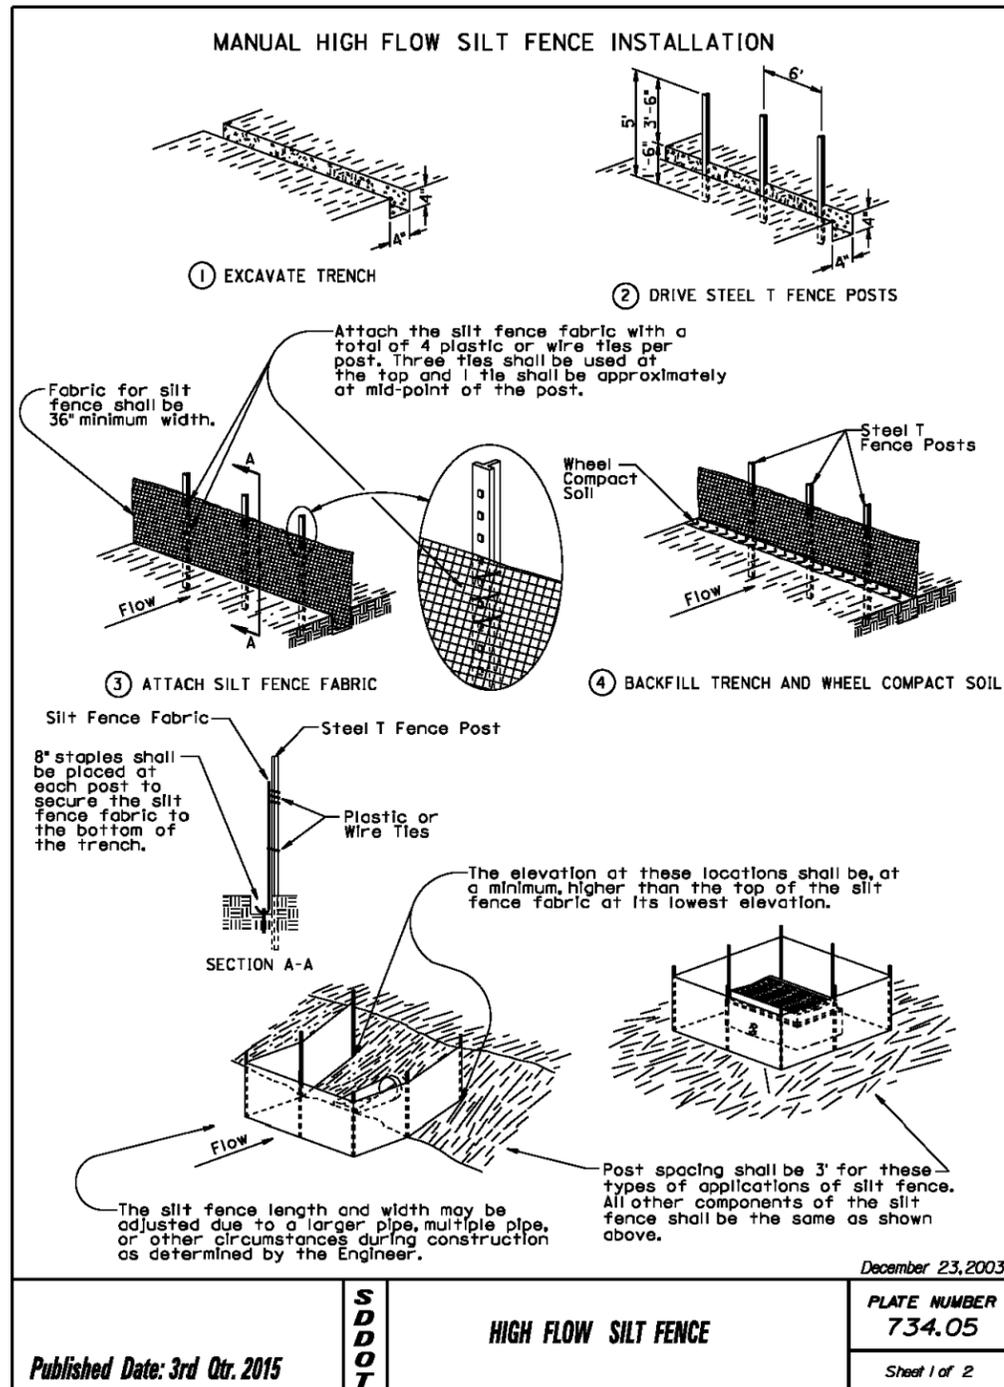

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D13	D16
SDDOT STANDARD PLATES			

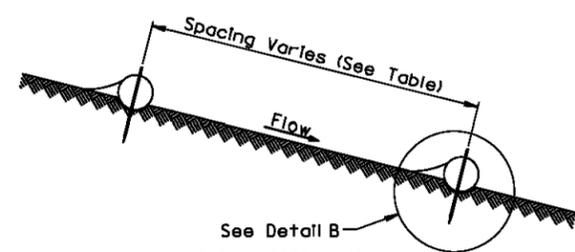


Spacing Varies (See Table)

Flow

See Detail B

**ELEVATION VIEW
CUT OR FILL SLOPE INSTALLATION**

CUT OR FILL SLOPE INSTALLATION	
Slope	Spacing (Ft)
1:1	10
2:1	20
3:1	30
4:1	40

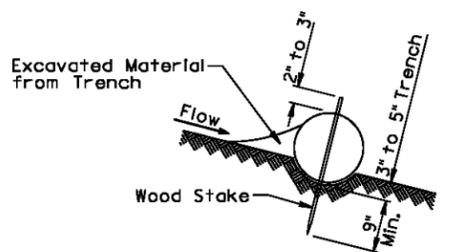

Excavated Material from Trench

Flow


Wood Stake

2" to 3"

3" to 5" Trench

6" Min.


**DETAIL B
(TYPICAL OF ALL INSTALLATIONS)**

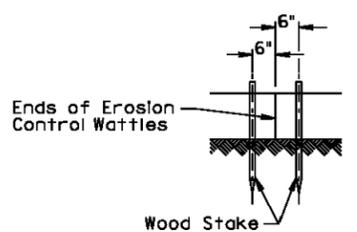

Ends of Erosion Control Wattles

Wood Stake

DETAIL C

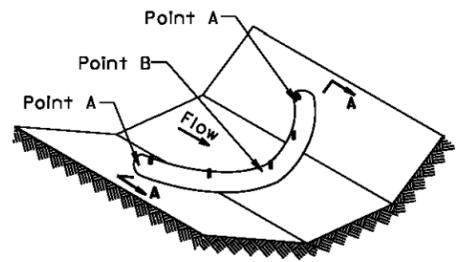


Point A

Point B

Flow

**ISOMETRIC VIEW
DITCH INSTALLATION**

DITCH INSTALLATION	
Grade	Spacing (Ft)
2%	150
3%	100
4%	75
5%	50

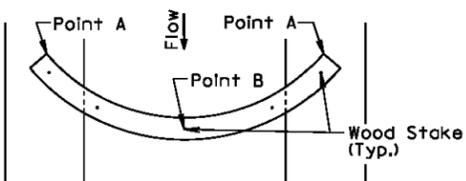


Point A

Flow

Point B

Wood Stake (Typ.)

**PLAN VIEW
DITCH INSTALLATION**

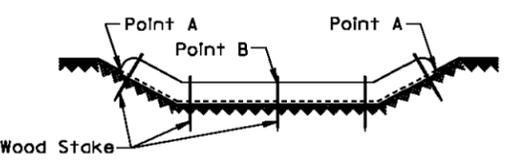

Point A

Point B

Point A

Wood Stake

SECTION A-A

December 23, 2004

S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
		Sheet 1 of 2

Published Date: 3rd Qtr. 2015

GENERAL NOTES:

At cut or fill slope installations, wattles shall be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor shall dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes shall be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes shall be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles shall be 3' to 4'.

When installing running lengths of wattles, the Contractor shall butt the second wattle tightly against the first and shall not overlap the ends. See Detail C.

The Contractor and Engineer shall inspect the erosion control wattles once every week and within 24 hours after every rainfall event greater than 1/2". The Contractor shall remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping shall be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping shall be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials shall be incidental to the contract unit price per foot for the corresponding erosion control wattle bid item.

All costs for removing the erosion control wattle from the project including labor, equipment, and materials shall be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".


December 23, 2004

S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
		Sheet 2 of 2

Published Date: 3rd Qtr. 2015

FOR BIDDING PURPOSES ONLY

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D14	D16
SDDOT STANDARD PLATES			

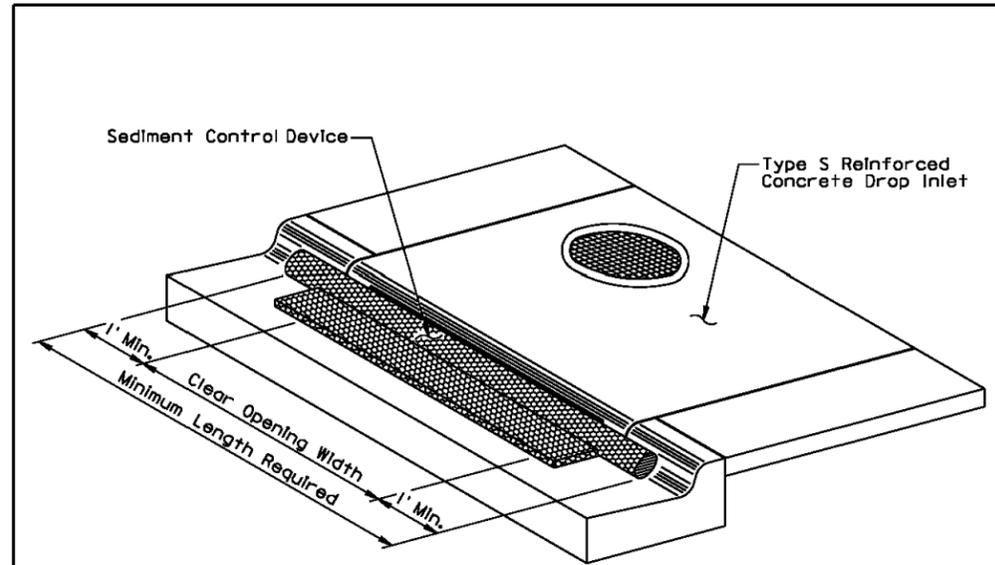

ISOMETRIC VIEW

GENERAL NOTES:


- The type of sediment control device shown is for illustrative purposes only.
- The type of sediment control device used shall be one of the types as specified in the plans.
- The sediment control device shall be placed at the drop inlets according to the manufacturers' installation instructions.
- The sediment control at inlet for type S reinforced concrete drop inlet shall be placed at locations stated in the plans or at locations determined by the Engineer.
- The Contractor shall inspect and maintain the sediment control device once every week and within 24 hours after every rainfall event. The Contractor shall maintain the sediment control device by removing the device, removing accumulated sediment, and resetting the device.
- The removed sediment shall be placed at a location away from the drop inlet where the sediment will not be washed back into the drop inlet or other storm sewer system.
- Payment for the "Sediment Control at Type S Drop Inlet" shall be based on the minimum length required at the drop inlets. Some of the sediment control devices specified in the plans will have to be longer due to available length.
- All costs for furnishing, installing, inspecting, maintaining, removing, and resetting the sediment control device at the drop inlet including labor, equipment, and materials shall be incidental to the contract unit price per foot for "Sediment Control at Type S Reinforced Concrete Drop Inlet".

September 14, 2005

Published Date: 3rd Qtr. 2015	S D D O T	SEDIMENT CONTROL AT INLETS FOR TYPE S REINFORCED CONCRETE DROP INLETS	PLATE NUMBER
			734.11
			Sheet 1 of 1

FOR BIDDING PURPOSES ONLY

STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D15	D16
SDDOT STANDARD PLATES			

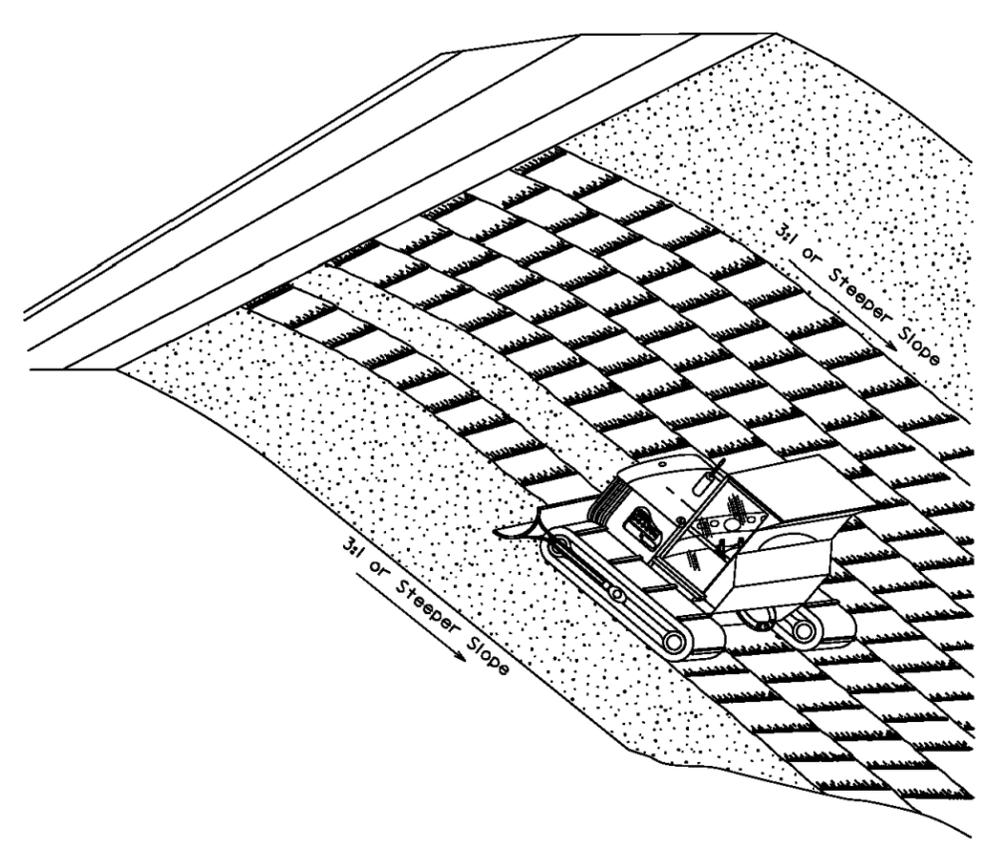

GENERAL NOTES:

Where practical, surface roughening shall be done on slopes 3:1 and steeper and on slopes deemed necessary by the Engineer.

The equipment used for surface roughening shall be equipped with tracks that are capable of creating ridges in the soil that are perpendicular to the slope. The final condition of the surface roughening shall be approved by the Engineer.

Measurement for surface roughening shall be to the nearest tenth of an acre.

All costs associated with surface roughening including labor, equipment, and materials shall be incidental to the contract unit price per acre for "Surface Roughening".


June 26, 2009

S D D O T	SURFACE ROUGHENING	PLATE NUMBER 734.25
		Sheet 1 of 1
Published Date: 3rd Qtr. 2015		

FOR BIDDING PURPOSES ONLY




STATE OF SOUTH DAKOTA	PROJECT NO.	SHEET NUMBER	TOTAL SHEETS
	EM 1648(06)	D16	D16
SDDOT STANDARD PLATES			

CONSTRUCTION ENTRANCE

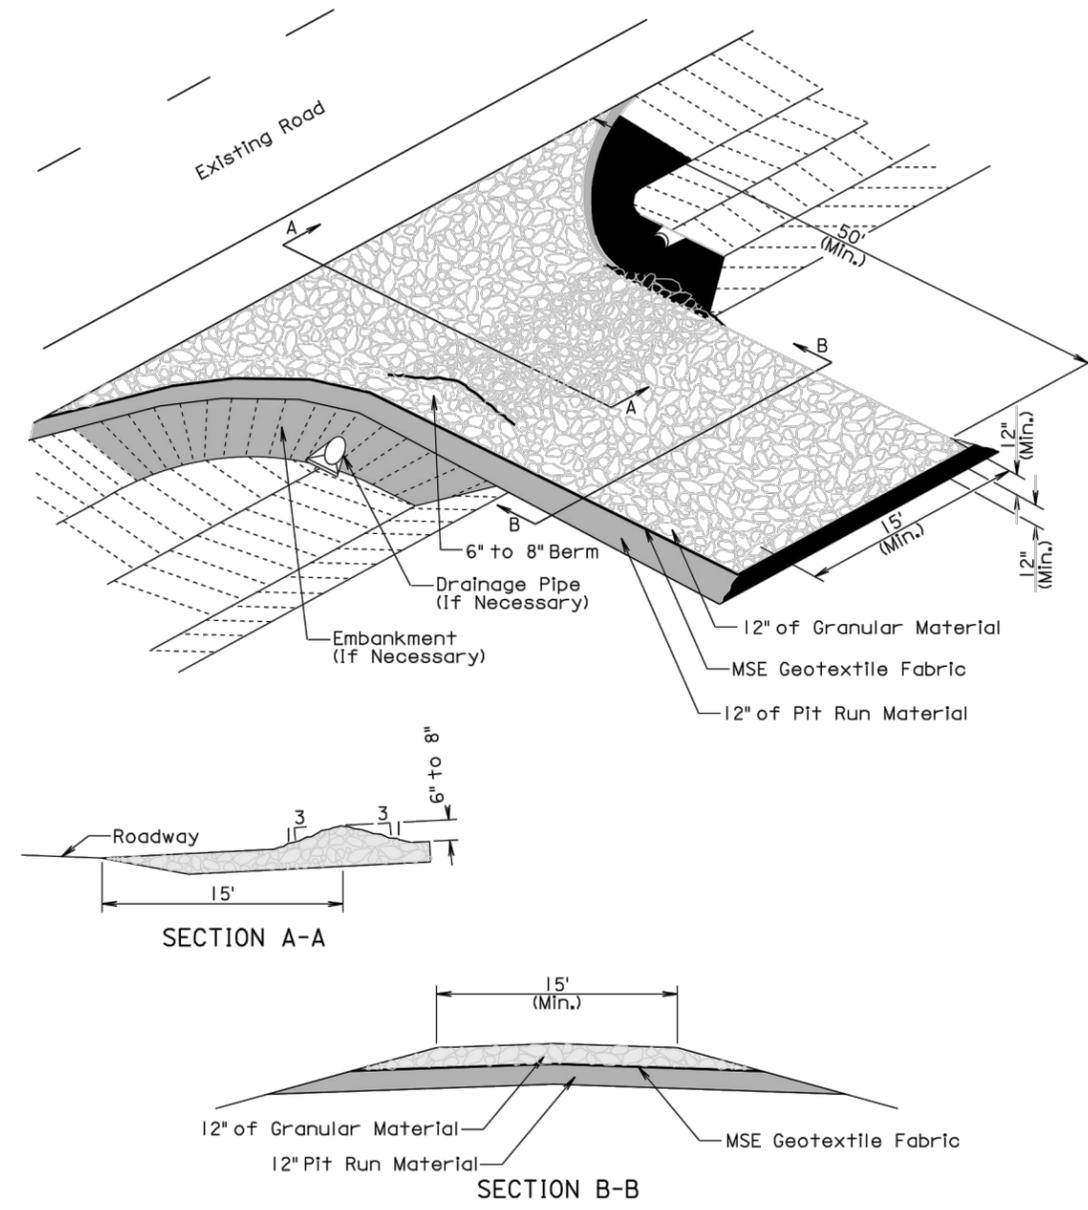

GENERAL NOTES:
 If the grade of the entrance slopes down to the roadway, a berm of extra rock shall be used to prevent sediment or mud from being deposited on the roadway. See SECTION A-A.
 If a drainage pipe is necessary the size and type shall be determined by the Contractor to meet field conditions. All cost shall be incidental to the various bid items.
 If embankment is necessary it shall be pit run material.

TRANSVERSE TO ROADWAY

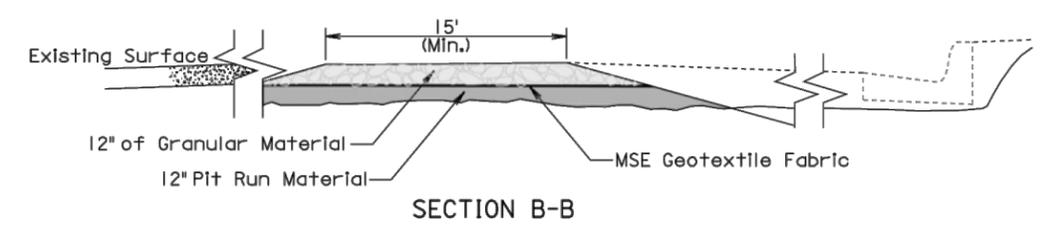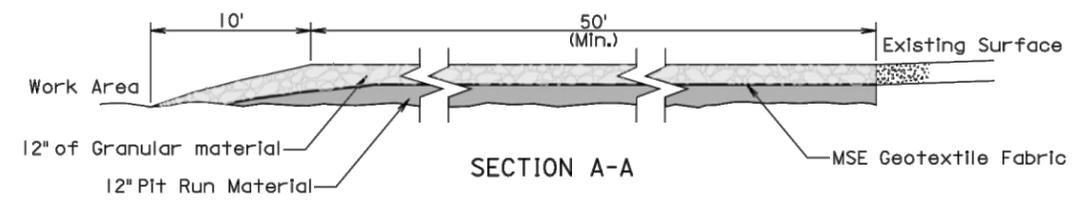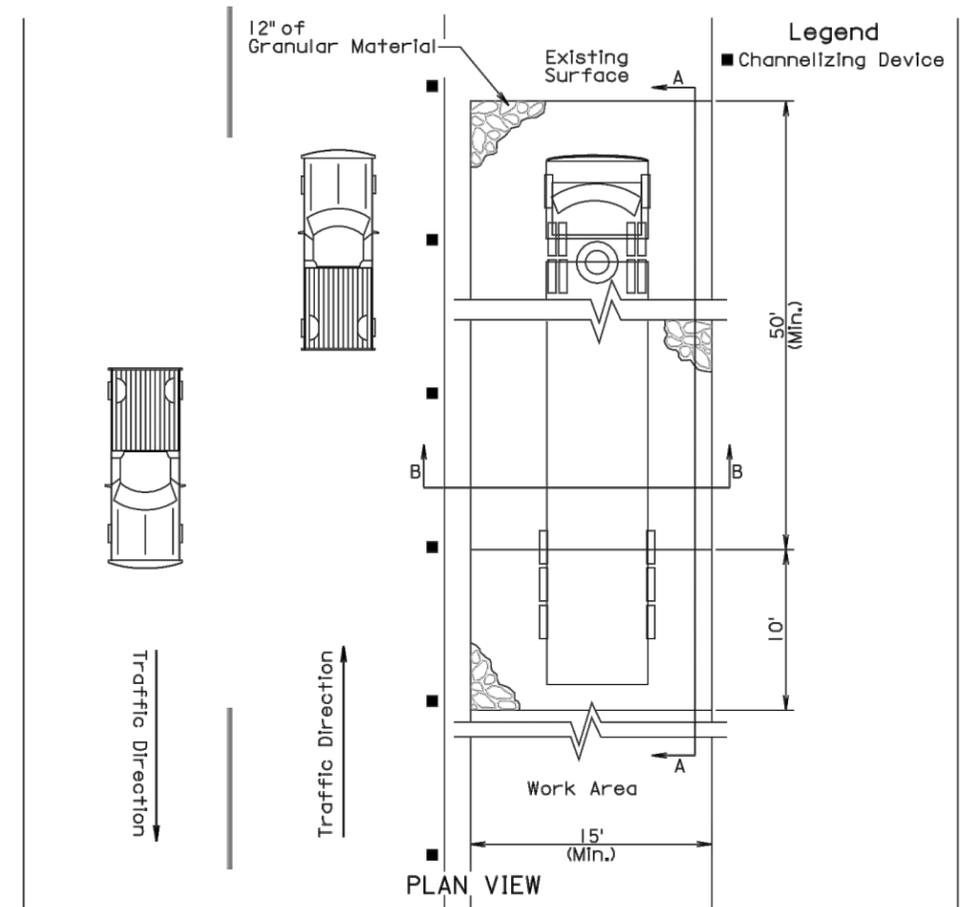

PARALLEL TO ROADWAY