



Planning & Engineering
Office of Project Development
700 E Broadway Avenue
Pierre, South Dakota 57501-2586
O: 605.773.3275 | F: 605.773.2614
dot.sd.gov

July 29, 2026

ADDENDUM NO. 6

RE: Item #1, August 5, 2026 Letting - EM-P 0044(207)290, PCN 05X0, Charles Mix, Gregory County - Structure (5770'-6" Steel Girder) & Approach Grading

TO WHOM IT MAY CONCERN:

The following addenda to the plans shall be inserted and made a part of your proposal for the referenced project.

SPECIAL PROVISIONS: **PEN AND INK CHANGE:** change the FIELD WORK COMPLETION from JUNE 20, 2031 to NOVEMBER 21, 2031 on the NOTICE TO CONTRACTORS.

Please remove the Index of Special Provisions and replace with the attached Index of Special Provisions revised 7/29/26.

Please remove the "Special Provision for Contract Time", dated 7/9/26 and replace with the "Special Provision for Contract Time", dated 7/28/26.

SDEBS BID PROPOSAL: NO CHANGE

PLANS: Please destroy sheets E26 and E74 and replace with the enclosed sheets, dated 7/28/26 & 7/29/26.

Sheet E26: PERMANENT CASING WELDING DETAIL and notes were added.

Sheet E74: Pedestal dimensions on the SIDE ELEVATION – FIXED BENTS detail were revised.

Sincerely,

Sam Weisgram
Engineering Supervisor

SW/gp

CC: Travis Dressen, Mitchell Region Engineer
 Jay Peppel, Mitchell Area Engineer

REV 7/29/26

INDEX OF SPECIAL PROVISIONS

PROJECT NUMBER(S): EM-P 0044(207)290 PCN: 05X0

TYPE OF WORK: STRUCTURE (5770'-6" STEEL GIRDER) & APPROACH GRADING

COUNTIES: CHARLES MIX, GREGORY

The following clauses have been prepared subsequent to the Standard Specifications for Roads and Bridges and refer only to the above described improvement, for which the following Proposal is made.

The Contractor's attention is directed to the need for securing from the Department of Environment & Natural Resources, Foss Building, Pierre, South Dakota, permission to remove water from public sources (lakes, rivers, streams, etc.). The Contractor should make his request as early as possible after receiving his contract, and insofar as possible at least 30 days prior to the date that the water is to be used.

Bobbie Country, Lacey Johnson is the official in charge of the Winner Career Center for Charles Mix, Gregory Counties.

THE FOLLOWING ITEMS ARE INCLUDED IN THIS PROPOSAL FORM:

Special Provision for Contract Time, dated 7/28/26.

Special Provision Regarding Combination Bids, dated 6/1/26.

Special Provision for On-The-Job Training Program, dated 3/10/16.

Special Provision Regarding Section 404 Permit, dated 6/4/26.

Fact Sheet #14

Special Provision for Section 408 Request Number 408-2023-0016, dated 12/20/24.

Special Provision for United States Coast Guard Bridge Permit, dated 4/3/25.

Special Provision for IRI Bridge Smoothness, dated 7/20/26.

Special Provision for Disc Bearing Assembly, dated 9/21/23.

Special Provision for Drilled Shaft Construction, dated 7/9/26.

Special Provision for Modular Expansion Joint Assembly, dated 9/21/23.

Special Provision for Stainless Reinforcing Steel, dated 8/25/25.

Special Provision for Concrete Penetrating Sealer, dated 7/30/24.

Special Provision for Mass Concrete – Protection of Mass Concrete by Controlling Heat of Hydration (Incidental), dated 5/4/26.

Special Provision for Contractor Staking with Machine Control Grading Option, dated 8/25/25.

List of Utilities.

Special Provision for Liability Insurance, dated 7/22/26.

Special Provision for Price Schedule for Miscellaneous Items, dated 2/18/26.

Special Provision for American Security Drone Act, dated 12/15/25.

Special Provision for Steel Beam Guardrail AASHTO M 180 Designation, dated 10/1/25.

Special Provision for Acknowledgment and Certification Regarding Article 3, Section 12 of the South Dakota Constitution, dated 8/24/23.

Fuel Adjustment Affidavit, DOT form 208 dated 11/25.

Standard Title VI Assurance, dated 3/1/16.

Special Provision For EEO Affirmative Action Requirements on Federal and Federal-Aid Construction Contracts, dated 2/5/24.

Special Provision For Required Contract Provisions Federal-Aid Construction Contracts, Form FHWA 1273 (Rev. October 23, 2023), dated 10/18/23.

Required Contract Provisions Federal-Aid Construction Contracts, Form FHWA 1273 (Rev. 10/23/23).

Special Provision Regarding Minimum Wage on Federal-Aid Projects, dated 10/24/19.

Wage and Hour Division US Department of Labor Washington DC. - US Dept. of Labor Decision

Number SD20260001, dated 1/30/26.

Special Provision Regarding Stormwater Discharges to Waters of the State, dated 11/5/25.

General Permit Authorizing Stormwater Discharges Associated with Construction Activities, dated 11/1/23.

<https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/stormwater/StormWaterConstruction.aspx>

**STATE OF SOUTH DAKOTA
DEPARTMENT OF TRANSPORTATION**

**SPECIAL PROVISION
FOR
CONTRACT TIME**

**PROJECT EM-P 0044(207)290, PCN 05X0
CHARLES MIX & GREGORY COUNTY**

JULY 28, 2026

Substantial Completion

The Contractor will substantially complete the project by the June 21, 2030 substantial completion date.

The Department will consider the work substantially complete when the new structure is complete and all lanes associated with the new structure are open to unimpeded traffic with final surfacing.

The Engineer will determine when the project is substantially complete.

If the Contractor does not complete the required work by the substantial completion requirement, the Department will make a disincentive assessment amounting to \$30,000 per calendar day. A contract item for incentive/disincentive pay is included in the bid schedule for the Department's use in assessing disincentives. The Department will use a negative number of days for assessing disincentives. If the Contractor does not substantially complete the required work by June 21, 2030, the Department will count calendar days in accordance with the first paragraph of Section 8.7 C.3 except calendar days rather than working days will be counted. Calendar days are defined as stated in the second and third paragraphs of Section 8.7 C.2.

Field Work Completion




The Contractor will complete the project by the November 21, 2031 field work completion date.

The Contractor will complete all work on the project prior to the field work completion requirement. If the Contractor does not complete all work by the field work completion requirement, the Department will assess liquidated damages in accordance with Section 8.9 Table A for each calendar day the work (project) is late until the Contractor completes all field work.

If the Contractor does not complete all field work by November 21, 2031, the Department will count calendar days in accordance with the first paragraph of Section 8.7 C.3 except calendar days rather than working days will be counted. Calendar days are defined as stated in the second and third paragraphs of Section 8.7 C.2.

* * * * *

STATE OF	PROJECT	SHEET NO.	TOTAL SHEETS
S.D.	P 0044(207)290	E26	E86

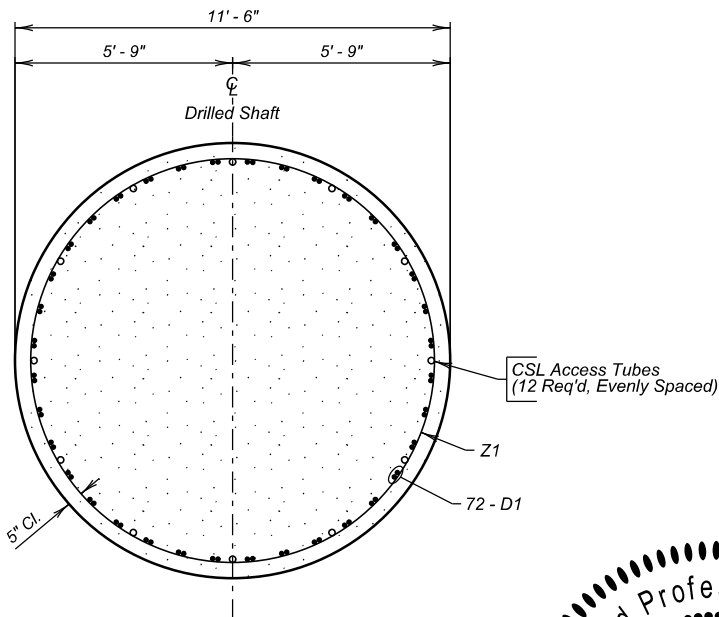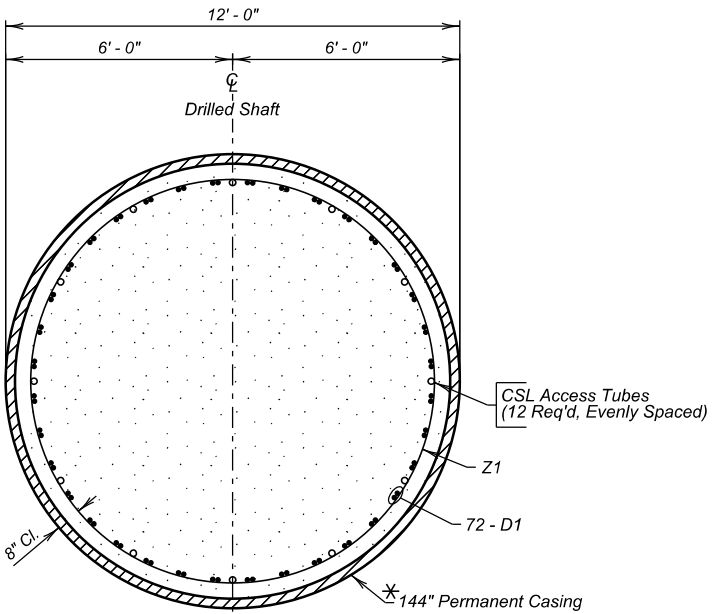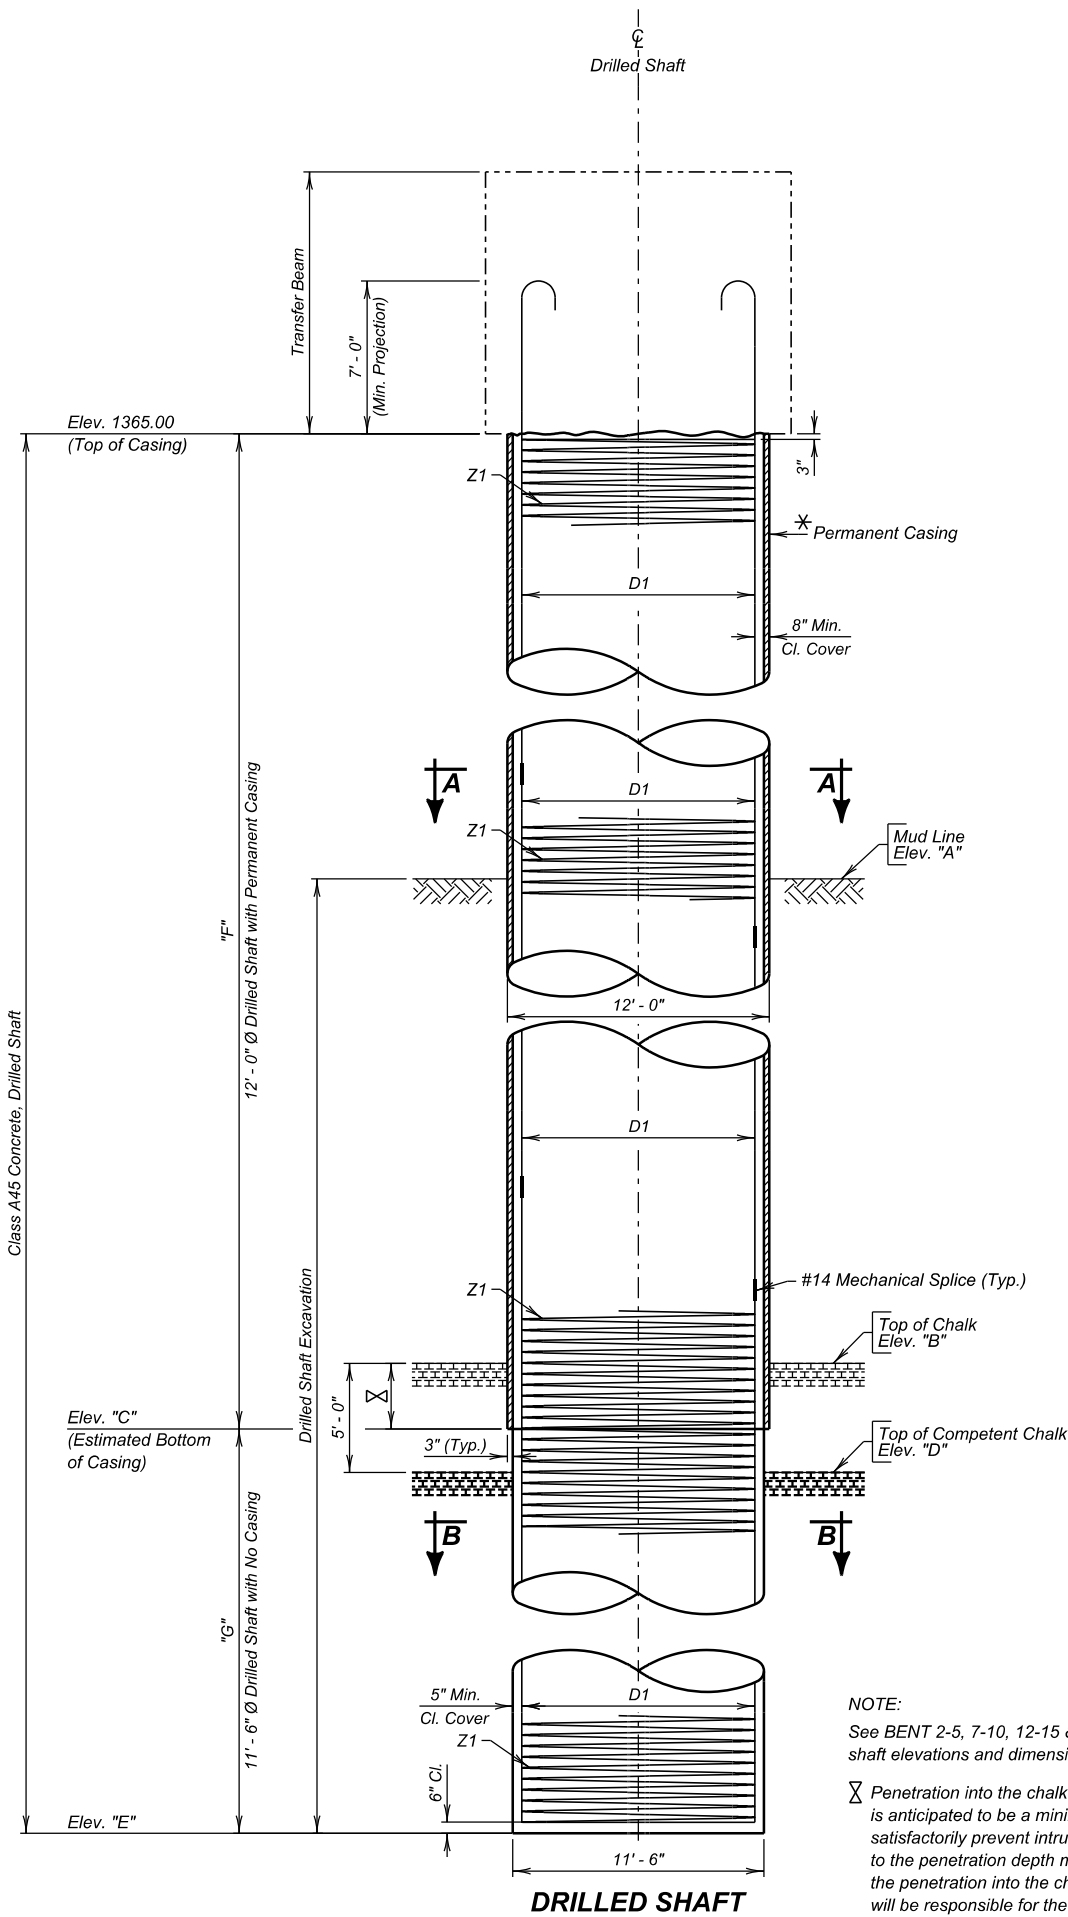

PERMANENT CASING WELDING DETAIL

PERMANENT CASING WELDING NOTES:

- All casing welds must be prequalified CJP groove welds.
- Welds inspection criteria:
 - 100% of welds must be visually inspected.
 - 25% of weld length must be inspected using UT.
 - AWS D1.1 must be utilized for weld and inspection requirements.
 - If more than 5% flaws are detected, then 100% of that weld seam must be inspected using UT.

DRILLED SHAFT DETAILS (A)

FOR

5770' - 6" CONT. COMP. GIRDER BRIDGE

36' - 0" ROADWAY 0° SKEW
OVER MISSOURI RIVER SEC. 16/20/21-T99N-R70W
(LAKE FRANCIS CASE) P 0044(207)290
STA. 875 + 39.75 TO STA. 933 + 10.25 HL-93
STR. NO. 12-089-076

GREGORY & CHARLES MIX COUNTIES

S. D. DEPT. OF TRANSPORTATION

DECEMBER 2023

24 OF 84



DESIGNED BY MJK	CK. DES. BY CJC	DRAFTED BY NTF	BRIDGE ENGINEER
--------------------	--------------------	-------------------	-----------------


BEARING CAPACITY REQUIREMENTS			
BEARING CAPACITY	SERVICE	STRENGTH	EXTREME EVENT
Vertical Load (kip)	1035	1485	860
Resultant Horizontal Load (kip)	70	100	505
Uplift Load (kip)	-	-	-
Longitudinal Displacement (in)	± 0.00		
Rotation (rad)	± 0.02		

ESTIMATED QUANTITES		
ITEM	UNIT	QUANTITY
Disc Bearing	Each	32

BEVELED PLATE SLOPE	
LOCATION	GRADE
Bent No. 3	0.0000%
Bent No. 4	0.0000%
Bent No. 8	0.0000%
Bent No. 9	0.0000%
Bent No. 13	0.0000%
Bent No. 14	0.0000%
Bent No. 18	0.0000%
Bent No. 19	0.0000%

BEARING NOTES:

- The bearing devices supplied will be capable of transmitting the loads and movements shown on these plans.
- Bearings will be disc type, fixed bearings.
- See sheet 69 for additional bearing notes.

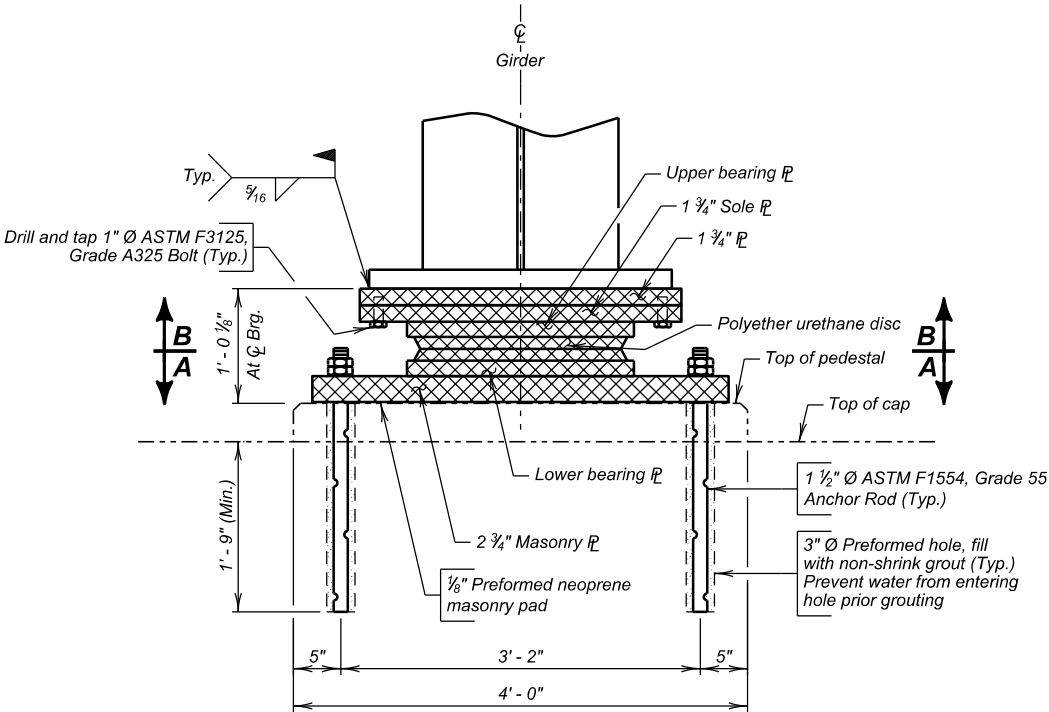


ELEVATION - FIXED BENTS


LEGEND:




Indicates the parts of the bearing assembly to be designed and supplied by the bearing manufacturer within the parameters shown on these plans. Associated dimensions are estimates and subject to change per manufacturer's design.

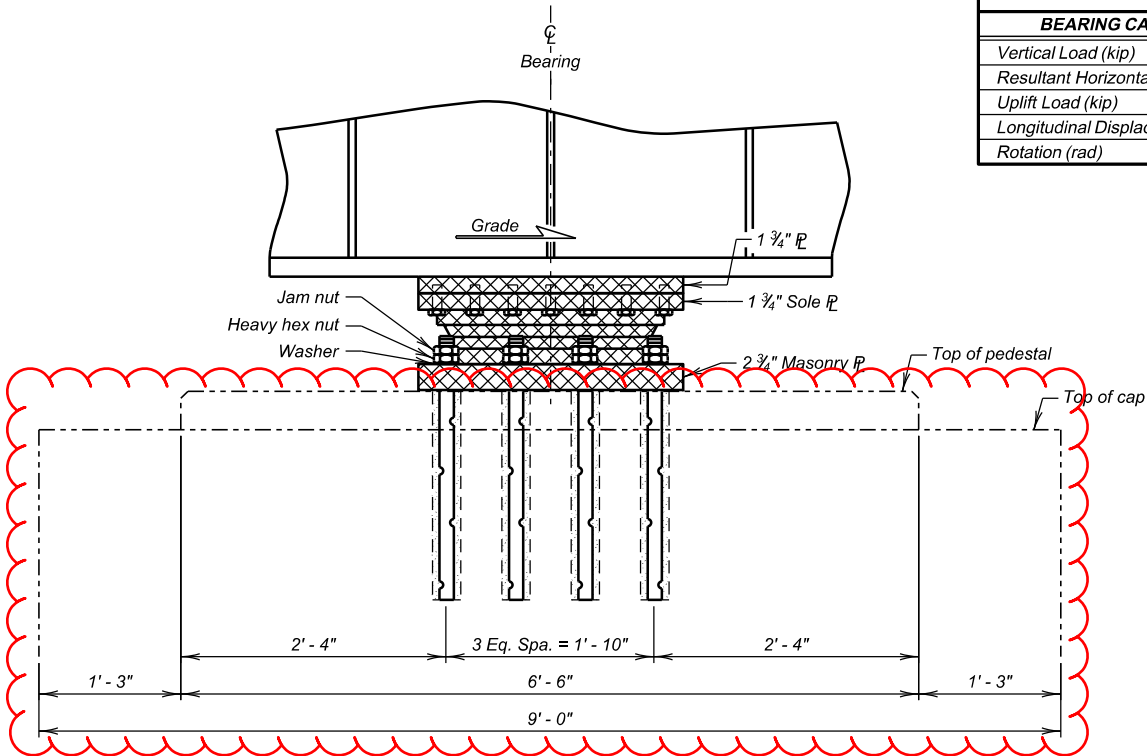

SIDE ELEVATION - FIXED BENTS

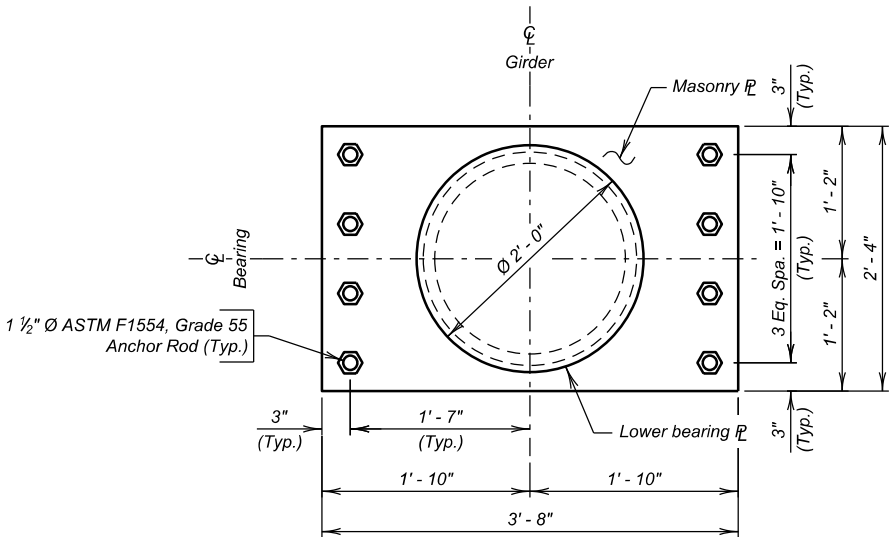

SEC. A - A

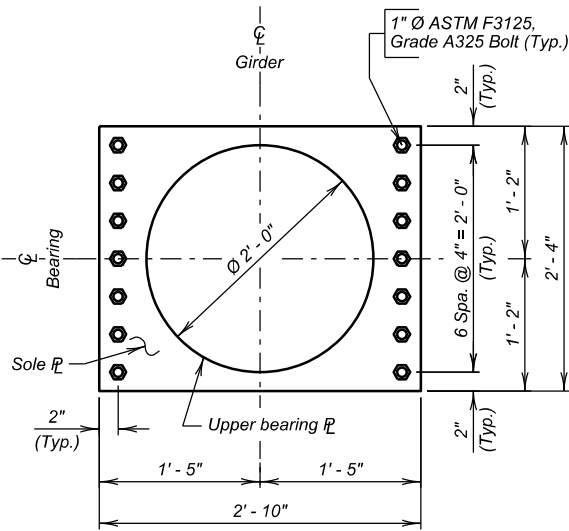

SEC. B - B



BEARING DETAILS (D)

FOR

5770' - 6" CONT. COMP. GIRDER BRIDGE

36' - 0" ROADWAY 0° SKEW
OVER MISSOURI RIVER SEC. 16/20/21-T99N-R70W
(LAKE FRANCIS CASE) P 0044(207)290
STA. 875 + 39.75 TO STA. 933 + 10.25 HL-93
STR. NO. 12-089-076

GREGORY & CHARLES MIX COUNTIES

S. D. DEPT. OF TRANSPORTATION

DECEMBER 2023

72 OF 84

DESIGNED BY KJB	CK. DES. BY JL	DRAFTED BY EM	BRIDGE ENGINEER
--------------------	-------------------	------------------	-----------------