

March 12, 2026

ADDENDUM NO. 1

**RE: Item #4, April 1, 2026 Letting - NH-P 0031(57), PCN 095A, Haakon, Jackson, Stanley County
- Pipe Work**

TO WHOM IT MAY CONCERN:

The following addenda to the plans shall be inserted and made a part of your proposal for the referenced project.

SPECIAL PROVISIONS: NO CHANGE

SDEBS BID PROPOSAL: *The electronic bid proposal for this contract has been revised to include the changes associated with this addendum. Bidders must log in to the SDEBS to retrieve and incorporate these changes into their bid.*

Bid Items were added:

Bid Item 450E9628 "36" Cured in Place Arch Pipe"

Bid Items were removed:

Bid Item 450E9626 "30" Cured in Place Arch Pipe"

PLANS: Please destroy sheets 3 & 57 and replace with the enclosed sheets, dated 3/10/26.

Sheet 3:

Bid Items were added:

Bid Item 450E9628 "36" Cured in Place Arch Pipe"

Bid Items were removed:

Bid Item 450E9626 "30" Cured in Place Arch Pipe"

Sheet 57:

Retain & Install notes for Sta 339+77 were revised.

Sincerely,

Sam Weisgram
Engineering Supervisor

SW/gp

CC: Jason Humphrey, Pierre Region Engineer
Dean VanDeWiele, Pierre Area Engineer

ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
009E0010	Mobilization	Lump Sum	LS
009E4200	Construction Schedule, Category II	Lump Sum	LS
110E0500	Remove Pipe Culvert	113	Ft
110E0510	Remove Pipe End Section	82	Each
110E0600	Remove Fence	3,944	Ft
110E7152	Remove Delineator for Reset	145	Each
110E7500	Remove Pipe for Reset	224	Ft
110E7510	Remove Pipe End Section for Reset	54	Each
120E0600	Contractor Furnished Borrow Excavation	51	CuYd
120E0900	Contaminated Material Excavation	100	CuYd
120E4100	Reprofiling Ditch	4.3	Sta
450E0123	18" RCP Class 3, Furnish	8	Ft
450E0130	18" RCP, Install	8	Ft
450E0143	24" RCP Class 3, Furnish	56	Ft
450E0150	24" RCP, Install	56	Ft
450E0183	36" RCP Class 3, Furnish	8	Ft
450E0190	36" RCP, Install	8	Ft
450E0243	72" RCP Class 3, Furnish	40	Ft
450E0250	72" RCP, Install	40	Ft
450E2008	18" RCP Flared End, Furnish	4	Each
450E2009	18" RCP Flared End, Install	4	Each
450E2016	24" RCP Flared End, Furnish	8	Each
450E2017	24" RCP Flared End, Install	8	Each
450E2024	30" RCP Flared End, Furnish	1	Each
450E2025	30" RCP Flared End, Install	1	Each
450E2040	54" RCP Flared End, Furnish	4	Each
450E2041	54" RCP Flared End, Install	4	Each
450E2044	60" RCP Flared End, Furnish	1	Each
450E2045	60" RCP Flared End, Install	1	Each
450E2052	72" RCP Flared End, Furnish	7	Each
450E2053	72" RCP Flared End, Install	7	Each
450E2200	24" RCP Sloped End, Furnish	2	Each
450E2201	24" RCP Sloped End, Install	2	Each
450E4788	36" CMP 14 Gauge, Furnish	12	Ft
450E4790	36" CMP, Install	12	Ft
450E5215	24" CMP Flared End, Furnish	16	Each
450E5216	24" CMP Flared End, Install	16	Each
450E5219	30" CMP Flared End, Furnish	6	Each
450E5220	30" CMP Flared End, Install	6	Each
450E5223	36" CMP Flared End, Furnish	7	Each
450E5224	36" CMP Flared End, Install	7	Each
450E5227	42" CMP Flared End, Furnish	2	Each
450E5228	42" CMP Flared End, Install	2	Each

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
450E5239	60" CMP Flared End, Furnish	3	Each
450E5240	60" CMP Flared End, Install	3	Each
450E5255	84" CMP Flared End, Furnish	4	Each
450E5256	84" CMP Flared End, Install	4	Each
450E5306	18" CMP Sloped End, Furnish	2	Each
450E5307	18" CMP Sloped End, Install	2	Each
450E5310	24" CMP Sloped End, Furnish	13	Each
450E5311	24" CMP Sloped End, Install	13	Each
450E5314	30" CMP Sloped End, Furnish	2	Each
450E5315	30" CMP Sloped End, Install	2	Each
450E5318	36" CMP Sloped End, Furnish	5	Each
450E5319	36" CMP Sloped End, Install	5	Each
450E5910	30" CMP Arch Sloped End, Furnish	2	Each
450E5911	30" CMP Arch Sloped End, Install	2	Each
450E7624	24" Steel Pipe, Furnish	180	Ft
* 450E8900	Cleanout Pipe Culvert	12	Each
450E8910	Cleanout for Culvert Treatment	27	Each
450E9000	Reset Pipe	224	Ft
450E9001	Reset Pipe End Section	54	Each
450E9518	18" Cured in Place Pipe	81	Ft
450E9524	24" Cured in Place Pipe	1,686	Ft
450E9526	30" Cured in Place Pipe	721	Ft
450E9528	36" Cured in Place Pipe	689	Ft
450E9530	42" Cured in Place Pipe	250	Ft
450E9534	54" Cured in Place Pipe	96	Ft
450E9536	60" Cured in Place Pipe	444	Ft
450E9540	72" Cured in Place Pipe	584	Ft
450E9544	84" Cured in Place Pipe	360	Ft
450E9628	36" Cured in Place Arch Pipe	63	Ft
451E5124	Bore and Jack 24" Pipe	180	Ft
462E0250	Cellular Grout	20.9	CuYd
620E0020	Type 2 Right-of-Way Fence	4,109	Ft
620E0515	Type 1A Temporary Fence	833	Ft
620E0520	Type 2 Temporary Fence	7,596	Ft
620E1020	2 Post Panel	76	Each
620E1030	3 Post Panel	2	Each
632E2100	Reset Delineator	145	Each
632E2510	Type 2 Object Marker Back to Back	4	Each
634E0010	Flagging	600.0	Hour
634E0110	Traffic Control Signs	335.5	SqFt
634E0120	Traffic Control, Miscellaneous	Lump Sum	LS
700E0210	Class B Riprap	10.0	Ton
720E1015	Bank and Channel Protection Gabion	36.5	CuYd

* - Denotes Non-Participating

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
734E0010	Erosion Control	Lump Sum	LS
734E0132	Type 2 Turf Reinforcement Mat	34.0	SqYd
734E0154	12" Diameter Erosion Control Wattle	690	Ft
831E0110	Type B Drainage Fabric	131	SqYd



339+77
Retain 36"-400' CMP

340+74-183' to 340+80-193' L
Take Out 36"-12' CMP
& 1 End Section

338+93-155' R
Take Out 36"-1 End Section

340+74.26-182.74' to 340+79.92-193.32' L
Install 36"-12' CMP

339+77
Cleanout for Culvert Treatment
& Install 36"-400'
Cured In Place Pipe

340+79.92-193.32' L
Install 36"-1 CMP
Sloped End

338+93.46-155.25' R
Install 36"-1 CMP
Sloped End

361+85
Retain 42"-250' CMP

362+26-126' L
Take Out 42"-1 End Section

361+48-110' R
Take Out 42"-1 End Section

361+85
Cleanout for Culvert Treatment
& Install 42"-250'
Cured In Place Pipe

362+26.18-125.81' L
Install 42"-1 CMP
Flared End

361+48.23-110.17' R
Install 42"-1 CMP
Flared End

Revised 3/11/26 pk

SD Hwy 63
MRM 90.00+0.406
Sta. 339+77
Jackson County

SD Hwy 63
MRM 89.00+0.984
Sta. 361+85
Jackson County

Sec 5 - T1S - R25E

Bluestem Land Company, LLC

The E1/2 of Section 5 - Township 1 South -
Range 25 East of the B.H.M.

Parcel 10
0.06 ac, Permanent Easement
(2,427 sq ft), more or less

Sec 9 - T1S - R25E

Bluestem Land Company, LLC

All of Section 9 - Township 1 South -
Range 25 East of the B.H.M.


Parcel 11
0.04 ac, Permanent Easement
(1,577 sq ft), more or less

Sec 8 - T1S - R25E

Triple Creek Land Company, LLC

The N1/2 of Section 8 - Township 1 South -
Range 25 East of the B.H.M.

Parcel 12
0.02 ac, Permanent Easement
(1,066 sq ft), more or less

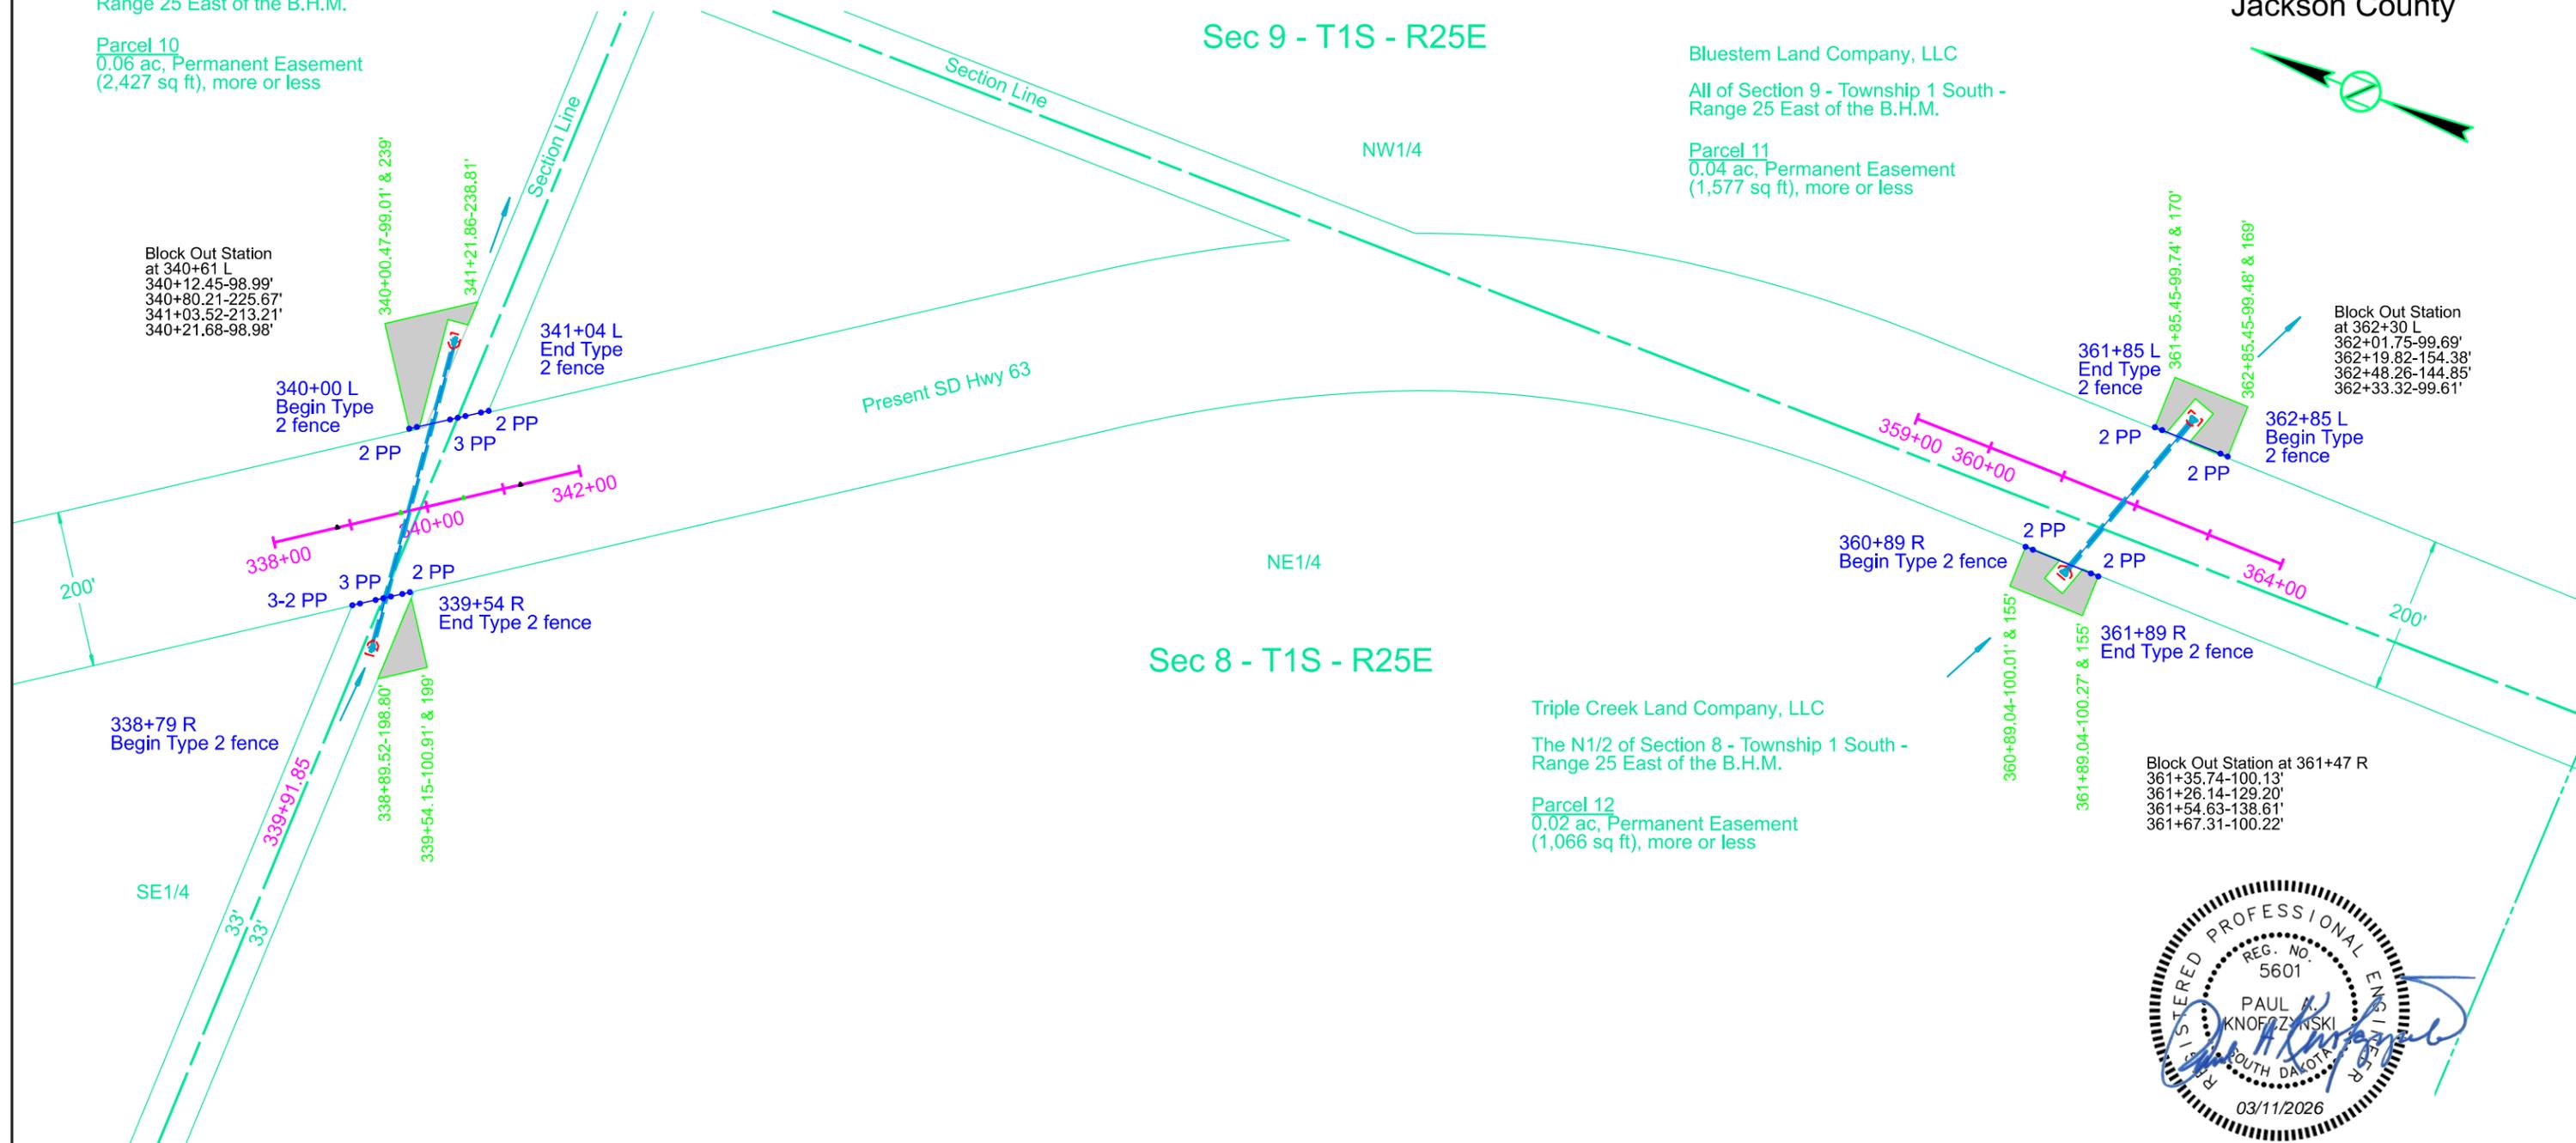

Parcel 12
338+89.52-339+54.15 R
Temporary Easment containing
0.1 ac, more or less

Parcel 10
340+00.47-341+21.86 L
Temporary Easment containing
0.2 ac, more or less

Parcel 12
360+89.04-361+89.04 R
Temporary Easment containing
0.1 ac, more or less

Parcel 11
361+85.45-362+85.45 L
Temporary Easment containing
0.1 ac, more or less