

Plot Scale - 1:358919

Plotted From - TRPR26947

Plot Scale - 1:358919


SECTION D – EROSION AND SEDIMENT CONTROL PLANS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0014(208)230	D1	D17

Plotting Date: 03/22/2021

INDEX OF SHEETS

D1	General Layout with Index
D2-D3	Estimate with General Notes and Tables
D4-D7	Stormwater Pollution Prevention Plan (SWPPP)
D8	Erosion and Sediment Control Legend
D9-D12	Erosion and Sediment Control Plan Sheets
D13-D17	Standard Plates

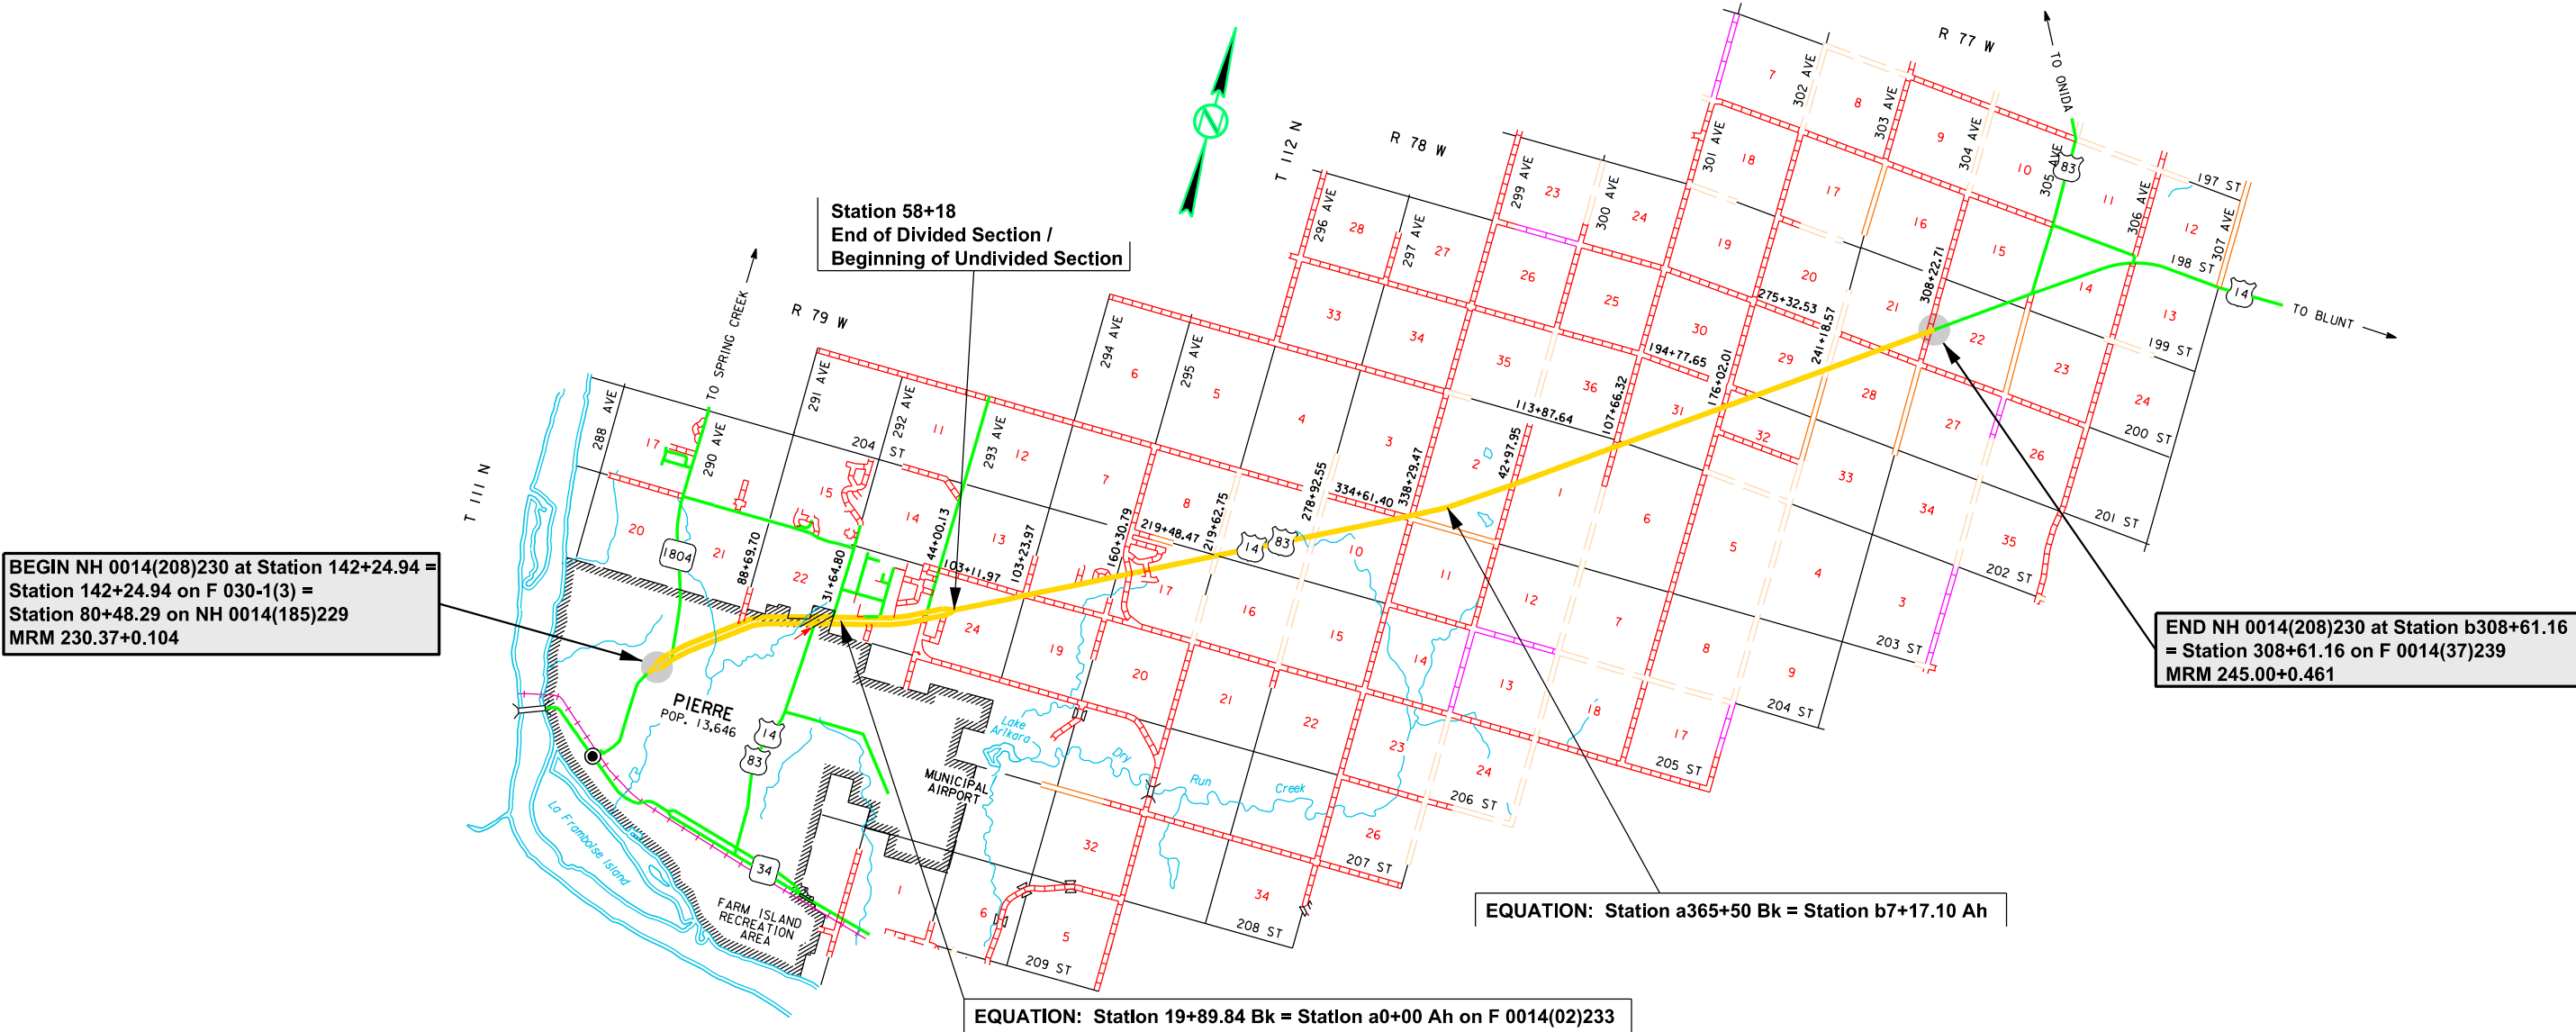

ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E1700	Remove Silt Fence	462	Ft
230E0010	Placing Topsoil	722	CuYd
230E0020	Contractor Furnished Topsoil	527	CuYd
700E0110	Class A Riprap	89.6	Ton
720E1010	PVC Coated Bank and Channel Protection Gabion	27.5	CuYd
730E1200	Hydroseeding	8,246	SqYd
732E0250	Fiber Mulching	3,417	Lb
734E0103	Type 3 Erosion Control Blanket	3,154	SqYd
734E0133	Type 3 Turf Reinforcement Mat	319.8	SqYd
734E0154	12" Diameter Erosion Control Wattle	652	Ft
734E0510	Shaping for Erosion Control Blanket	700	Ft
734E0602	Low Flow Silt Fence	975	Ft
734E0604	High Flow Silt Fence	873	Ft
734E0610	Mucking Silt Fence	128	CuYd
734E0620	Repair Silt Fence	462	Ft
831E0110	Type B Drainage Fabric	228	SqYd

GENERAL NOTES

For further details and locations of various erosion control measures refer to Section F “Table of Mainline Pipe Culvert and Erosion Repair” plan sheet.

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum will consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier will provide certification of the fungal species claimed and the live propagule count. The inoculum will include the following fungal species:

- 25%  
25%  
25%  
25%
- Glomus intraradices*  
*Glomus aggregatum or deserticola*  
*Glomus mosseae*  
*Glomus etunicatum*

All seed will be inoculated by the seed supplier with a minimum of 100,000 live propagules of mycorrhizal fungi per acre. All costs of inoculating the seed will be incidental to the contract unit price per pound for the corresponding permanent seed mixture.

The mycorrhizal inoculum will be as shown below or an approved equal:

Product	Manufacturer
MycoApply	Mycorrhizal Applications, Inc. Grants Pass, OR Phone: 1-866-476-7800 <a href="http://www.mycorrhizae.com">www.mycorrhizae.com</a>
AM 120 Multi Species Blend	Reforestation Technologies Int. Gilroy, CA Phone: 1-800-784-4769 <a href="http://www.reforest.com">www.reforest.com</a>

FERTILIZING

Application of fertilizer will not be required on this project.

FIBER MULCHING

Fiber mulch will be applied in a separate operation following the hydroseeding. Fiber mulch will be applied at the rate of 2,000 pounds per acre.

The Contractor will allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

The fiber mulch provided will be from the approved product list. The approved product list for fiber mulch may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

HYDROSEEDING

Areas to be hydroseeded will consist of all disturbed areas at the pipe culvert repair sites, reprofiling areas, grading areas, and all other areas disturbed as a result of the Contractor's operations.

Type C Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	16
Canada Wildrye	Mandan	2
Total:		18

RIPRAP & DRAINAGE FABRIC

All disturbed areas beyond the riprap placement and other areas disturbed due to construction activities will be restored to the satisfaction of the Engineer.

A factor of 1.4 tons per cubic yard was used to convert cubic yard to Tons.

Table of Riprap and Drainage Fabric

Station / Location	Riprap Class	Riprap Quantity (Ton)	Type B Drainage Fabric (SY)
dc125 – 1+20 to 1+92	A	89.6	152

TABLE OF PVC COATED BANK AND CHANNEL PROTECTION GABIONS AND DRAINAGE FABRIC

Station	L/R	PVC Coated Bank and Channel Protection Gabion (CY)	Type B Drainage Fabric (SY)
a65+05	R	6.0	19
b234+48	R	21.5	57
Totals:		27.5	76

PLACING TOPSOIL & CONTRACTOR FURNISHED TOPSOIL

Finished topsoil thickness will be approximately 6 inches throughout all disturbed areas within the embankment inslope and drainage channel grading from approximate Station 123+20 R to 126+20 R - EBL along with the median ditch channel grading from Station 125+00 to 129+00. This will require the Contractor to furnish and place additional topsoil as a larger volume will be needed for the new graded areas than what can be salvaged from the existing grade (approximately 4 inches). This also will include additional areas as determined by the Engineer during construction. Finished topsoil thickness for all other disturbed areas will be approximately 4 inches.

Contractor furnished topsoil will be free from clay lumps, stones, coarse gravel, or similar objects larger than 1/2 inch in diameter. Brush, stumps, roots, wood, objectionable weeds, litter, or any other material which may be harmful to plant growth will not be allowed. Organic material will be decomposed.

Measurement of topsoil quantities will not be made as plans quantity will be the basis for payment. For informational purposes only, the estimated topsoil replacement and additional topsoil needed is shown in the table below.

All costs to replace the removed topsoil within disturbed areas will be incidental to the contract unit price per cubic yard for “PLACING TOPSOIL”.

All costs to furnish and place the Contractor furnished topsoil will be incidental to the contract unit price per cubic yard for “CONTRACTOR FURNISHED TOPSOIL”.

Table of Placing Topsoil & Contractor Furnished Topsoil

Station / Location	Placing Topsoil (CY)	Contractor Furnished Topsoil (CY)
Station 125+00 to 129+00 (Median Channel Grading)	-	321
Station 123+20 R to 126+20 R - EBL (Embankment Inslope / Ditch Channel)	395	197
Station 124+83 (Median Ditch Block)	19	9
All remaining areas from Pipe & Erosion Repair Table and Mailbox Relocation site	308	-
Total:	722	527

**TURF REINFORCEMENT MAT**

Turf Reinforcement Mat will be installed at locations shown in the table at the widths specified, and at locations determined by the Engineer during construction. The Contractor will use a turf reinforcement mat from the approved products list. The approved product list for turf reinforcement mat may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

Turf Reinforcement Mat will be installed in accordance with the manufacturer's installation instructions.

**Table of Turf Reinforcement Mat**

Station to	Station	L/R	Location	Width (Ft)	Type	Quantity (SY)
dc125 – 1+92 to 3+22			Drainage Channel	16	3	231.0
a119+90		L/R	Inlet & Outlet	16	3	88.8
Total Type 3 Turf Reinforcement Mat:						319.8

**EROSION CONTROL BLANKET**

Erosion control blanket will be installed at the locations and width as noted in the table along with at locations determined by the Engineer during construction.

The erosion control blanket provided will be from the approved product list. The approved product list for erosion control blanket may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

An additional quantity of Type 3 Erosion Control Blanket has been added to the Estimate of Quantities for temporary erosion control at locations determined by the Engineer.

**Table of Erosion Control Blanket**

Station to	Station	L/R	Location	Width (Ft)	Type	Quantity (SY)
125+00	129+00		Entire Median	Varies	3	1,654
b119+57	b121+00	L/R	Ditch Channel	30	3	1,000
Additional Quantity:						500
Total Type 3 Erosion Control Blanket:						3,154

**SHAPING FOR EROSION CONTROL BLANKET**

The ditches will be shaped for the erosion control blanket as specified on Standard Plate 734.01.

**LOW FLOW SILT FENCE**

The low flow silt fence fabric provided will be from the approved product list. The approved product list for low flow silt fence may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

Low flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.04 for details.

An additional quantity of Low Flow Silt Fence has been added to the Estimate of Quantities for temporary sediment control at locations determined by the Engineer during construction.

**Table of Low Flow Silt Fence**

Station to	Station	L/R	Location	Quantity (Ft)
123+20 R to 126+20 R - EBL			Disturbed Area Perimeter	300
41+32 L to 41+82 L – WBL			Disturbed Area Perimeter	50
b119+50 to b121+00 L & R			Disturbed Area Perimeter	300
Additional Quantity:				325
Total:				975

**HIGH FLOW SILT FENCE**

The high flow silt fence fabric provided will be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

High flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.05 for details.

An additional quantity of high flow silt fence has been added to the Estimate of Quantities for temporary sediment control at locations determined by the Engineer.

**Table of High Flow Silt Fence**

Station	Location	Quantity (Ft)
141+50 L – WBL	Pipe Inlet	18
132+00 L – WBL	Pipe Inlet	18
129+17 L – WBL Exit Ramp	Pipe Inlet	18
120+00 L – WBL	Pipe Inlet	18
111+00 R – EBL	Pipe Inlet	18
97+00 L – WBL	Pipe Inlet	18
59+88 R – EBL	Pipe Inlet	18
Other Pipe Repair Sites	Pipe Inlet	72
Around Topsoil Stockpiles		500
Additional Quantity:		175
Total:		873

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0014(208)230	D3	D17

**EROSION CONTROL WATTLE**

Erosion control wattles for restraining the flow of runoff and sediment will be installed at locations noted in the table and at locations determined by the Engineer during construction. Refer to Standard Plate 734.06 for details.

The Contractor will provide certification that the erosion control wattles do not contain noxious weed seeds.

Erosion control wattles will remain on the project to decompose.

An additional quantity of 12" Diameter Erosion Control Wattles has been added to the Estimate of Quantities for temporary erosion and sediment control at locations determined by the Engineer during construction.

The erosion control wattle provided will be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

**Table of Erosion Control Wattle**

Station to	Station	L/R	Location	Diameter (Inch)	Quantity (Ft)
125+50	128+50		Median Channel	12	80
dc125 – 2+00 to 3+00			Outlet Ditch Channel	12	64
Various Pipe Repair Sites			Pipe Outlet	12	378
Additional Quantity:				12	130
Total:					652

STORMWATER POLLUTION PREVENTION PLAN CHECKLIST

(The numbers left of the title headings are **reference numbers** to the **GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES** (Stormwater Permit))

5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION

To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES

- 5.3 (3a): Project Limits (See Title Sheet)
- 5.3 (3a): Project Description (See Title Sheet)
- 5.3 (4): Site Map(s) (See Title Sheet and Plans)
- Major Soil Disturbing Activities (check all that apply)

☐ Clearing and grubbing

☒ Excavation/borrow

☒ Grading and shaping

☒ Filling

☐ Other (describe):
- 5.3 (3b): Total Project Area 404 Acres
- 5.3 (3b): Total Area to be Disturbed 2 Acres
- 5.3 (3c): Maximum Area Disturbed at One Time 1 Acre
- 5.3 (3d): Existing Vegetative Cover (%) 65
- 5.3 (3d): Description of Vegetative CoverCover Grasses (native & introduced)
- 5.3 (3e): Soil Properties: AASHTO Soil Classification A-4, A-6  
USDA-NRCS Soil Series Classification silty clay loam, clay
- 5.3 (3f): Name of Receiving Water Body/Bodies Missouri River and Tributaries
- 5.3 (3g): Location of Construction Support Activity Areas

5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES

- Special sequencing requirements (See Section C: Traffic Control)
- The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date
Install perimeter protection where runoff may exit site.	
Install perimeter protection around stockpiles.	
Install traffic control	
Remove and stockpile topsoil.	
Stabilize disturbed areas with silt fence, temporary grass hay or straw mulch, wattles, etc.	
Final grading.	
Final paving.	
Place topsoil, hydroseeding, apply fiber mulch, install erosion control blanket and turf mat, etc. to finish graded and disturbed areas for final stabilization.	

5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES

All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)	
Description	Estimated Start Date
<input type="checkbox"/> Natural Buffers (within 50 ft of Waters of State)	
<input checked="" type="checkbox"/> Silt Fence	
<input checked="" type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Berm / Windrow	
<input type="checkbox"/> Floating Silt Curtain	
<input type="checkbox"/> Stabilized Construction Entrances	
<input type="checkbox"/> Entrance/Exit Equipment Tire Wash	
<input type="checkbox"/> Other:	

Structural Erosion and Sediment Controls	
Description	Estimated Start Date
<input checked="" type="checkbox"/> Silt Fence	
<input type="checkbox"/> Temporary Berm/Windrow	
<input checked="" type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Sediment Barriers	
<input type="checkbox"/> Erosion Bales	
<input type="checkbox"/> Temporary Slope Drain	
<input checked="" type="checkbox"/> Turf Reinforcement Mat	
<input checked="" type="checkbox"/> Riprap	
<input checked="" type="checkbox"/> Gabions	
<input type="checkbox"/> Rock Check Dams	
<input type="checkbox"/> Sediment Traps/Basins	
<input checked="" type="checkbox"/> Culvert Inlet Protection	
<input type="checkbox"/> Transition Mats	
<input type="checkbox"/> Median/Area Drain Inlet Protection	
<input type="checkbox"/> Curb Inlet Protection	
<input type="checkbox"/> Interceptor Ditch	
<input type="checkbox"/> Concrete Washout Facility	
<input type="checkbox"/> Work Platform	
<input type="checkbox"/> Temporary Water Barrier	
<input type="checkbox"/> Temporary Water Crossing	
<input type="checkbox"/> Permanent Stormwater Ponds	
<input type="checkbox"/> Permanent Open Vegetated Swales	
<input type="checkbox"/> Natural Depressions to allow for Infiltration	
<input type="checkbox"/> Sequential Systems that combine several practices	
<input type="checkbox"/> Other:	

Dust Controls	
Description	Estimated Start Date
<input type="checkbox"/> Tarps & Wind impervious fabrics	
<input type="checkbox"/> Watering	
<input type="checkbox"/> Stockpile location/orientation	
<input type="checkbox"/> Dust Control Chlorides	
<input type="checkbox"/> Other	

Dewatering BMPs	
Description	Estimated Start Date
<input type="checkbox"/> Sediment Basins	
<input type="checkbox"/> Dewatering bags	
<input type="checkbox"/> Weir tanks	
<input type="checkbox"/> Temporary Diversion Channel	
<input type="checkbox"/> Other:	

Stabilization Practices (See Detail Plan Sheets)

(Stabilization measures shall begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization shall be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities (3.18))

Description	Estimated Start Date
<input type="checkbox"/> Vegetation Buffer Strips	
<input type="checkbox"/> Temporary Seeding (Cover Crop Seeding)	
<input checked="" type="checkbox"/> Permanent Seeding	
<input type="checkbox"/> Sodding	
<input type="checkbox"/> Planting (Woody Vegetation for Soil Stabilization)	
<input type="checkbox"/> Mulching (Grass Hay or Straw)	
<input checked="" type="checkbox"/> Fiber Mulching (Wood Fiber Mulch)	
<input type="checkbox"/> Soil Stabilizer	
<input type="checkbox"/> Bonded Fiber Matrix	
<input type="checkbox"/> Fiber Reinforced Matrix	
<input checked="" type="checkbox"/> Erosion Control Blankets	
<input type="checkbox"/> Surface Roughening (e.g. tracking)	
<input type="checkbox"/> Other:	

Wetland Avoidance

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☐ No ☒ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.



5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure’s capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor’s Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in “DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES” above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

- **Material Management**
  - Housekeeping
    - Only needed products will be stored on-site by the Contractor.
    - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
    - Products must be stored in original containers and labeled.
    - Material mixing will be conducted in accordance with the manufacturer’s recommendations.
    - When possible, all products will be completely used before properly disposing of the container off-site.
    - The manufacturer’s directions for disposal of materials and containers will be followed.
    - The Contractor’s site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
    - Dust generated will be controlled in an environmentally safe manner.
  - Hazardous Materials
    - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
    - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
    - If surplus product must be disposed of, manufacturer’s label directions for disposal will be followed.

- Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
- Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
- Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ **Spill Control Practices**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer’s recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor’s site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ **Spill Response**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor’s site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.

- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent’s designee will be responsible for completing the spill reporting form and for reporting the spill to SDDENR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor’s site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

- **Waste Disposal**
  - All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.
- **Hazardous Waste**
  - All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.
- **Sanitary Waste**
  - Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading “POLLUTION PREVENTION PROCEDURES” (check all that apply).

- ☒ Concrete and Portland Cement
- ☐ Detergents
- ☒ Paints
- ☒ Metals
- ☒ Bituminous Materials
- ☒ Petroleum Based Products
- ☐ Diesel Exhaust Fluid
- ☒ Cleaning Solvents
- ☐ Wood
- ☒ Cure
- ☐ Texture
- ☐ Chemical Fertilizers
- ☐ Other:

Product Specific Practices

- **Petroleum Products**  
All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- **Fertilizers**  
Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- **Paints**  
All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer’s instructions and any applicable state and local regulations.
- **Concrete Trucks**  
Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- ☐ Discharges from water line flushing.
- ☐ Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- ☐ Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor’s site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDENR immediately **if any one of the following** conditions exists:
  - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
  - The release or spill causes an immediate danger to human health or safety
  - The release or spill exceeds 25 gallons
  - The release or spill causes a sheen on surface water
  - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
  - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
  - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
  - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDENR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDENR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge shall be sent to SDDENR within 14 days of the discharge.

5.4: SWPPP CERTIFICATIONS

➤ Certification of Compliance with Federal, State, and Local Regulations

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

➤ South Dakota Department of Transportation

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Joanne M. Hight

Authorized Signature (See the General Permit, Section 7.4 (1))

➤ Prime Contractor

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

➤ Contractor Information:

- Prime Contractor Name: \_\_\_\_\_
- Contractor Contact Name: \_\_\_\_\_
- Address: \_\_\_\_\_
- \_\_\_\_\_
- City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
- Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
- Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

➤ Erosion Control Supervisor

- Name: \_\_\_\_\_
- Address: \_\_\_\_\_
- \_\_\_\_\_
- City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
- Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
- Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

➤ SDDOT Project Engineer

- Name: \_\_\_\_\_
- Business Address: \_\_\_\_\_
- Job Office Location: \_\_\_\_\_
- City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
- Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
- Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

➤ SDDENR Contact Spill Reporting

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

➤ SDDENR Contact for Hazardous Materials.

- (605) 773-3153

➤ National Response Center Hotline

- (800) 424-8802.

➤ SDDENR Stormwater Contact Information

- SDDENR Stormwater (800) 737-8676
- Surface Water Quality Program (605) 773-3351

5.5: REQUIRED SWPPP MODIFICATIONS

➤ 5.5 (1): Conditions Requiring SWPPP Modification

The SWPPP must be modified, including the site map(s), in response to any of the following conditions:

- When a new operator responsible for implementation of any part the SWPPP begins work on the site.
- When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
- To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
- If inspections by site staff, local officials, SDDENR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
- To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
- If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.

➤ 5.5 (2): Deadlines for SWPPP Modification

Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.

➤ 5.5 (3): Documentation of Modifications to the Plan

All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.

➤ 5.5 (4): Certification Requirements

All modifications made to the SWPPP must be signed and certified as required in Section 7.4.

➤ 5.5 (5): Required Notice to Other Operators

If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form.

# EROSION AND SEDIMENT CONTROL LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0014(208)230	D8	D17

Plotting Date: 03/22/2021

- Low Flow Silt Fence
- High Flow Silt Fence
- High Flow Silt Fence at Pipe
- Sediment Control at Inlet After Placement of Surfacing
- Sediment Control at Inlet Before Placement of Surfacing
- Temporary Sediment Barrier
- Temporary Water Barrier
- Floating Silt Curtain
- Sediment Filter Bags
- Triangular Silt Barriers
- Erosion Control Wattles on Slopes
- Erosion Control Wattles at Inlets
- Erosion Control Wattles in Ditches
- Erosion Bales
- Surfacing Roughening
- Temporary Grass Hay or Straw Mulch/ Soil Stabilizer
- Cut Interceptor Ditch
- Temporary Slope Drain
- Bonded Fiber Matrix/ Fiber Reinforced Matrix
- Rock Check Dam
- Type 1 Erosion Control Blanket
- Type 2 Erosion Control Blanket
- Type 3 Erosion Control Blanket
- Type 4 Erosion Control Blanket
- Type 1 Turf Reinforcement Mat
- Type 2 Turf Reinforcement Mat
- Type 3 Turf Reinforcement Mat
- Transition Mat
- Silt Trap (See Standard Plate 734.04)

## BEST MANAGEMENT PRACTICES

Best Management Practices (BMPs) are split into three categories and are to be used throughout construction.

### INITIAL PHASE

BMPs from the Legend shown as Orange Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Initial Phase prior to earth disturbing activittles and remain in place for the Intermediate Phase for temporary stabilization and in the Final Phase to achieve final stabilization.

### INTERMEDIATE PHASE

BMPs from the Legend shown as Blue Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Intermediate Phase for temporary stabilization and remain in place in the Final Phase to achieve final stabilization.

### FINAL PHASE

BMPs from the Legend shown as Green Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Final Phase to achieve final stabilization.

If these items are applicable they are to be shown in the updated SWPPP using the Symbols given.

- TS

Topsoil Stockpile
- B

Borrow Area
- CE

Stabilized Construction Entrance
- VB

Vegetated Buffer Strip
- CW

Concrete Washout
- AP

Asphalt Plant Site
- CP

Concrete Plant Site
- V

Vehicle and Equipment Parking, Fueling, and Maintenance Areas
- D

Dumpster or other Trash and Debris Containers
- M


On-Site Construction Material Storage Area
- SK

Spill Kit
- WP

Work Platform
- CC

Cover Crop Seeding





Install Low Flow Silt Fence at the following locations  
or at locations as determined by the Engineer during  
construction:  
123+20 R to 126+20 R - EBL Perimeter control (300 Ft)

Install High Flow Silt Fence at the following locations:  
141+50 L - WBL Inlet end of pipe (18 Ft)  
132+00 L - WBL Inlet end of pipe (18 Ft)  
129+17 L - WBL Exit Ramp Inlet end of pipe (18 Ft)  
120+00 L - WBL Inlet end of pipe (18 Ft)  
Around topsoil stockpiles--quantity and location to be determined

Install 12" Diameter Erosion Control Wattles  
across the highway ditch channel bottom  
at the following locations or at locations as  
determined by the Engineer during construction:  
dc125 - 2+00 to 3+00 -- 16 Ft @ 25' spacings (64 Ft)  
125+50 to 128+50 -- 20 Ft @ 100' spacings (80 Ft)

Install Type 3 Erosion Control Blanket  
in the highway median ditch channel bottom  
at the following locations:  
125+00 to 129+00 (1,654 SY)

Install Type 3 Turf Reinforcement Mat in the  
outlet ditch channel bottom from State ROW  
to the existing pipe inlet at the following location:  
dc125 - 1+92 to 3+26 (231.0 SY)

dc125 - 1+20 to 1+92  
Install Class A Riprap (72' L x 16' W x 1.5' T) (89.6 Tons)  
and Type B Drainage Fabric (152 SY) for outlet drainage  
channel protection from pipe outlet to State ROW

Sec. 28 - T111N - R79W

Present US Hwy. 14 & 83

Station 125+10 (Mainline) =  
Station 0+35 (dc125)

dc125  
PI 1+16.25  
N 748447.179  
E 1966568.480  
Del 68°02'00" L  
DC 31°49'52"  
T 121.49'  
L 213.73'  
R 180.00'



Plot Scale - 1:200


Plotted From - TRPR26947

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0014(208)230	D11	D17

Plotting Date: 03/22/2021




Install High Flow Silt Fence at the following locations:  
59+88 R - EBL Inlet end of pipe (18 Ft)

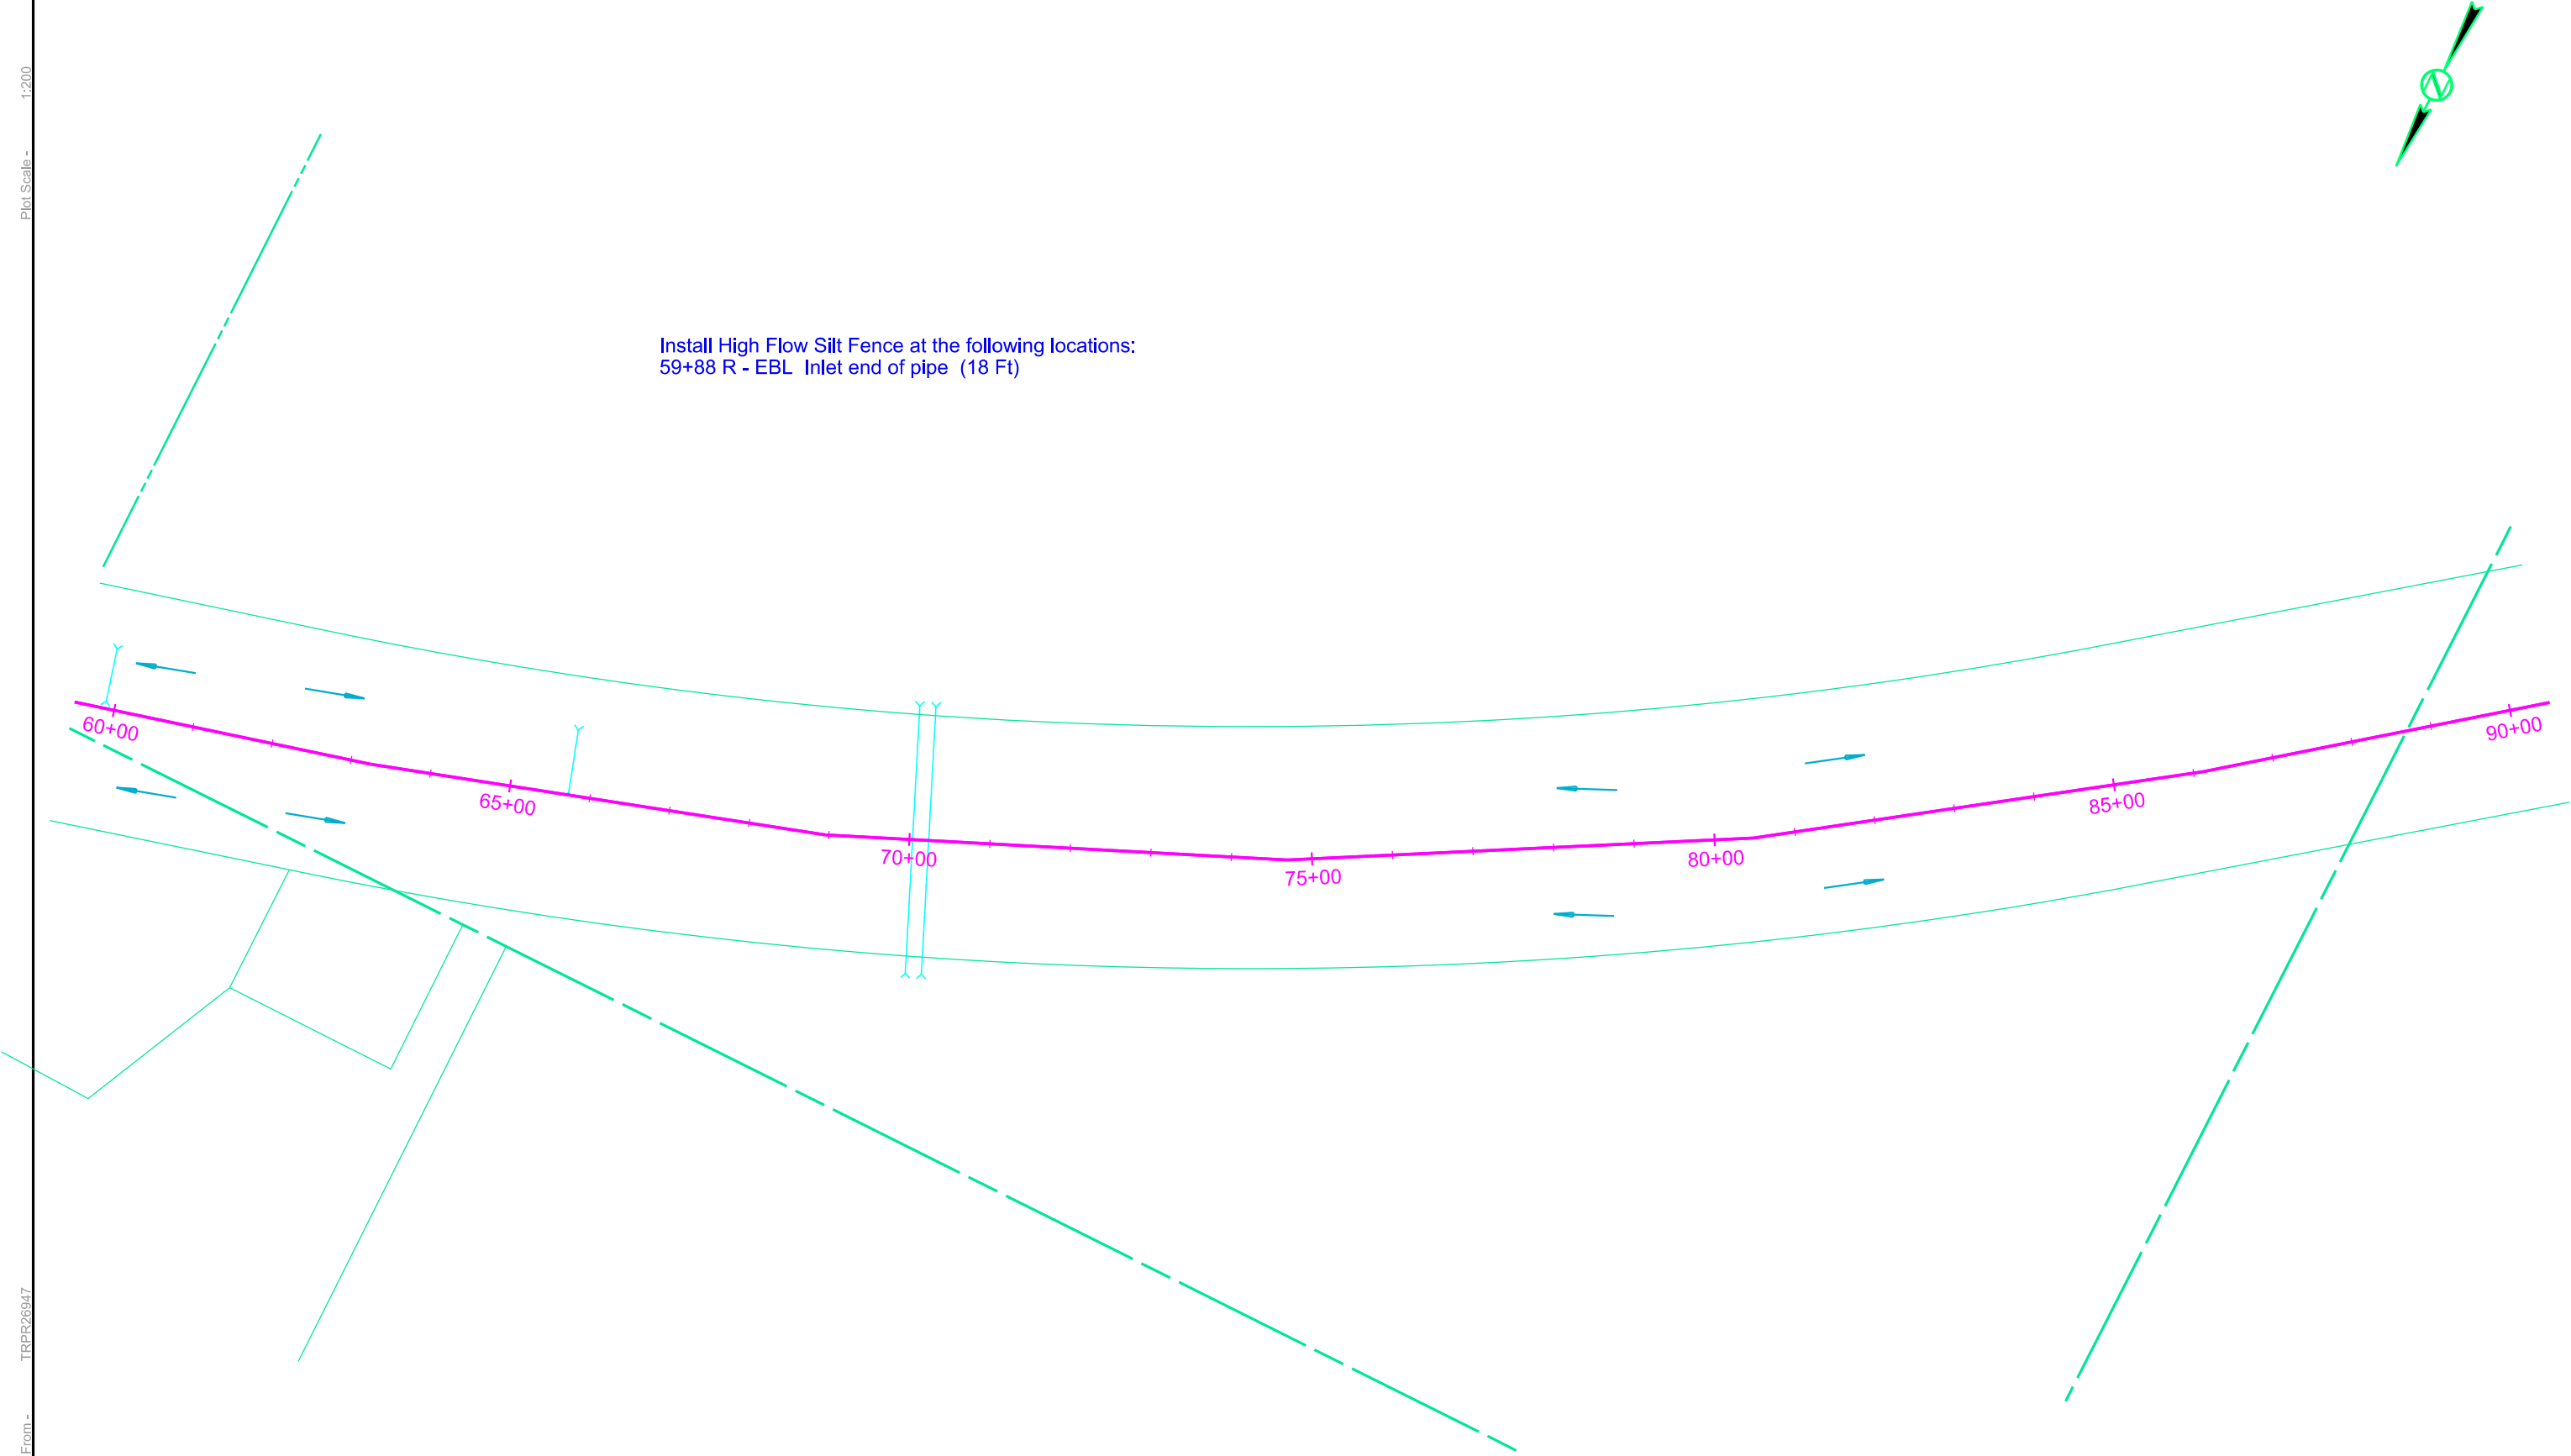





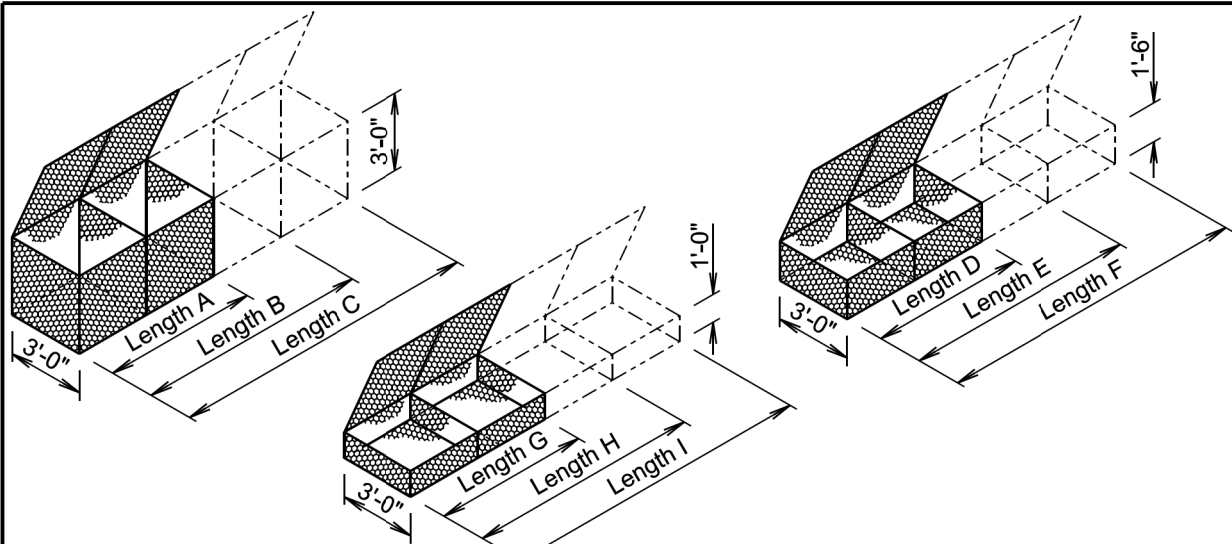

GABION DETAILS

STANDARD SIZES					
SIZE	LENGTH	WIDTH	HEIGHT	NUMBER OF CELLS	CAPACITY (Cu. Yd.)
A	6'-0"	3'-0"	3'-0"	2	2.0
B	9'-0"	3'-0"	3'-0"	3	3.0
C	12'-0"	3'-0"	3'-0"	4	4.0
D	6'-0"	3'-0"	1'-6"	2	1.0
E	9'-0"	3'-0"	1'-6"	3	1.5
F	12'-0"	3'-0"	1'-6"	4	2.0
G	6'-0"	3'-0"	1'-0"	2	0.7
H	9'-0"	3'-0"	1'-0"	3	1.0
I	12'-0"	3'-0"	1'-0"	4	1.3

GENERAL NOTES:

Above dimensions subject to mill tolerances.

Lacing and internal connecting wire will be 0.0866 inch diameter steel wire ASTM A641, Class 3 soft temper measured after galvanizing and for PVC coated gabions will be 0.0866 inch diameter steel wire measured after galvanizing but before PVC coating.

The lacing procedure is as follows:

1. Cut a length of lacing wire approximately 1½ times the distance to be laced but not exceeding 5 feet.
2. Secure the wire terminal at the corner by looping and twisting.
3. Proceed lacing with alternating single and double loops at a spacing not to exceed 6 inches.
4. Securely fasten the other lacing wire terminal.


Wire lacing or interlocking type fasteners will be used for gabion assembly and final construction of gabion structures. Interlocking fasteners for galvanized gabions will be high tensile 0.120 inch diameter galvanized steel wire measured after galvanizing. The galvanizing will conform to ASTM A641-92, Class 3 coating. Fasteners will also be in accordance with ASTM A764, Class II, Type III.

Interlocking fasteners for PVC coated gabions will be high tensile 0.120 inch diameter stainless steel wire conforming to ASTM A313, Type 302, Class 1. The spacing of the interlocking fasteners during all phases of assembly and construction will not exceed 6 inches.

All fasteners will be placed where the mesh weaves around the selvage wire at the vertical and horizontal joints.

February 14, 2020

<i>Published Date: 1st Qtr. 2021</i>	<b>S D D O T</b>	<b>BANK AND CHANNEL PROTECTION GABIONS</b>	PLATE NUMBER 720.01
			Sheet 1 of 1

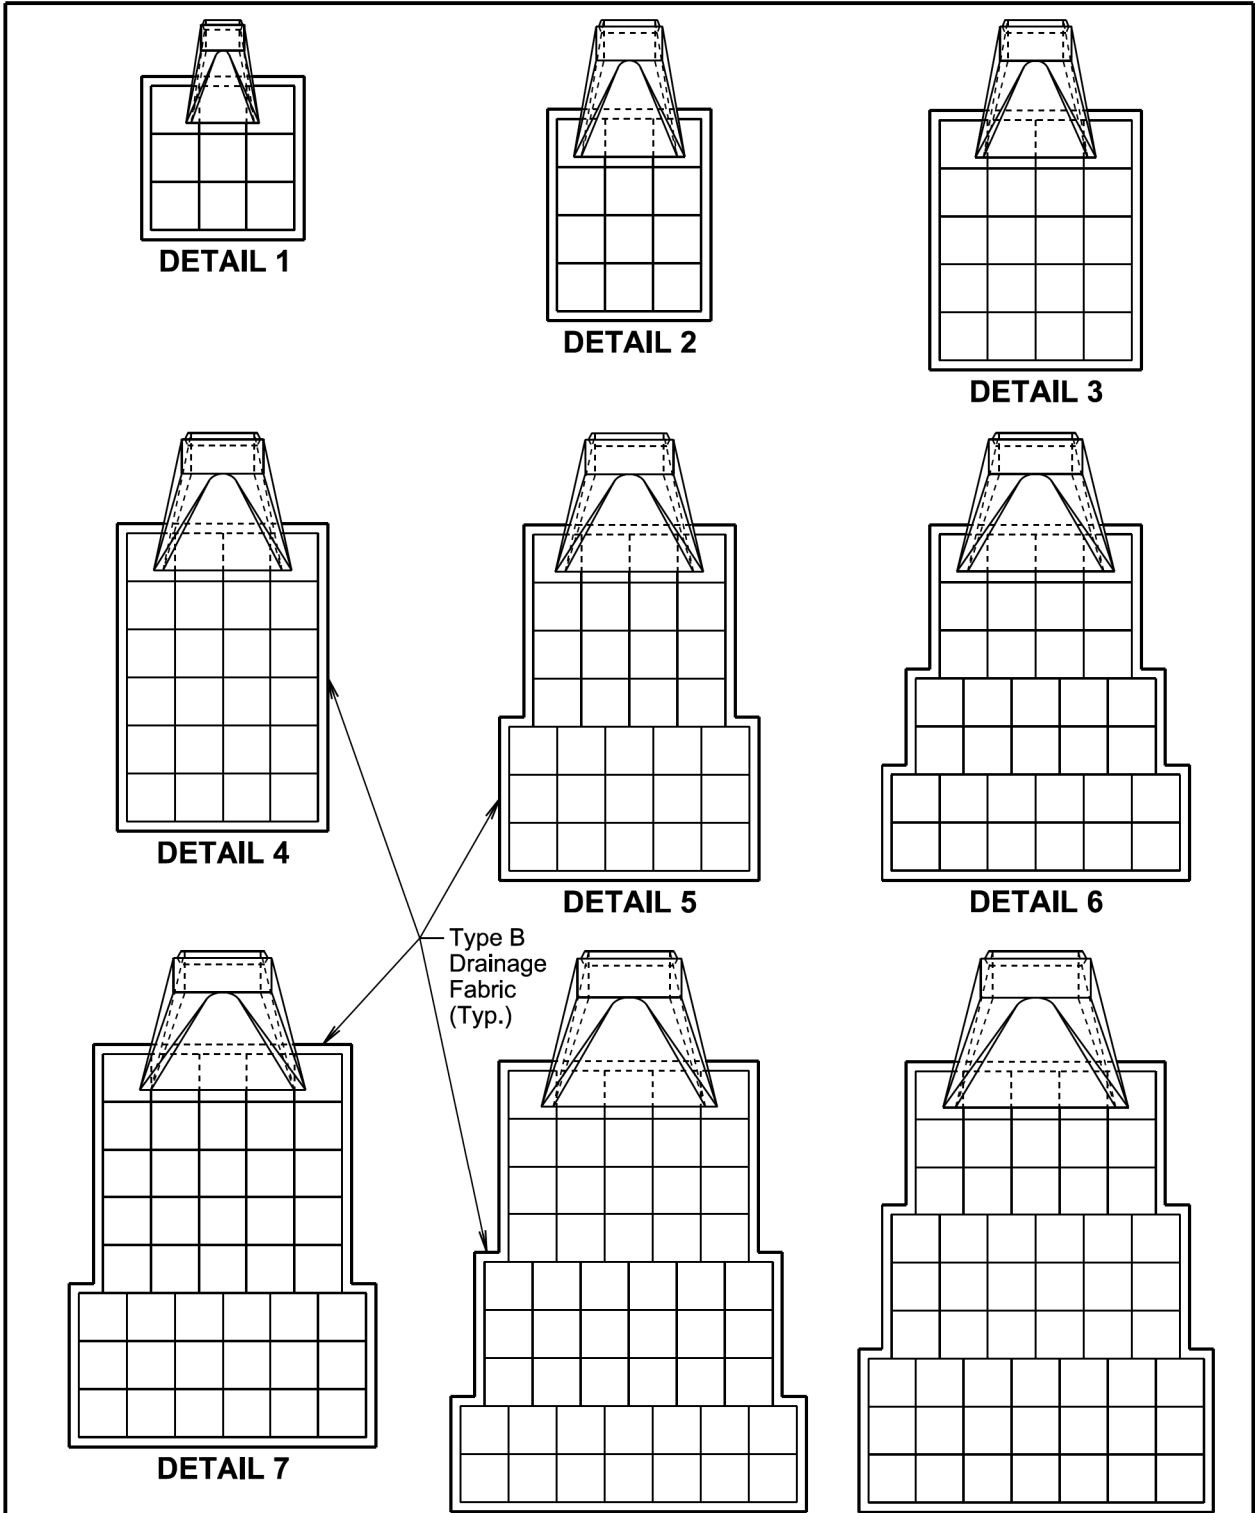

February 14, 2020

<i>Published Date: 1st Qtr. 2021</i>	<b>S D D O T</b>	<b>BANK AND CHANNEL PROTECTION GABION PLACEMENT UNDER PIPE END SECTIONS</b>	PLATE NUMBER 720.03
			Sheet 1 of 2

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0014(208)230	D14	D17

Plotting Date: 03/22/2021

* ESTIMATED QUANTITIES				
RCP, RCP Arch, CMP, and CMP Arch	Detail	Pipe Diameter (Inches)	Gabion (Cu. Yd.)	Type B Drainage Fabric (Sq. Yd.)
	1	12, 18, and 24	4.5	15
	2	30 and 36	6.0	19
	3	42	10.0	29
	4	48 and 54	12.0	34
	5	60	15.5	43
	6	66	17.0	47
	7	72	21.5	57
	8	78	26.0	68
	9	84	27.0	70

GENERAL NOTES:


Gabions at outlets of CMP and RCP will be placed under the end section a distance of 2 feet from the outlet end. For CMP end section installations, the upper fabric of the gabions will be modified to accommodate the metal end section as approved by the Engineer.

\* Gabion and type B drainage fabric quantities on this standard plate are based on standard gabion sizes D, E, and F as depicted on standard plate 720.01.


Type B drainage fabric will be placed under the gabions and around the exterior sides (perimeter) of the gabions as approved by the Engineer. The type B drainage fabric will be in conformance with Section 831 of the Specifications. Measurement and payment of the type B drainage fabric will be in conformance with Section 720 of the Specifications.

February 14, 2020


Published Date: 1st Qtr. 2021	S D D O T	BANK AND CHANNEL PROTECTION GABION PLACEMENT UNDER PIPE END SECTIONS	PLATE NUMBER 720.03
			Sheet 2 of 2



STANDARD DITCH SECTION

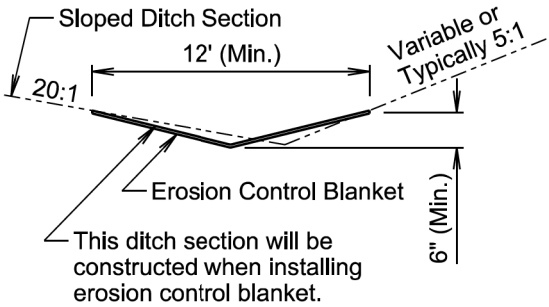

SLOPED DITCH SECTION

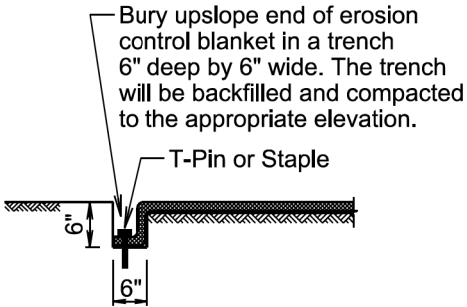

TRENCH DETAIL

GENERAL NOTES:

Prior to placement of the erosion control blanket, the areas will be properly prepared, shaped, seeded, and fertilized.

Erosion control blanket will be unrolled in the direction of the flow of water when placed in ditches and on slopes. The upslope end of the erosion control blanket will be buried in a trench 6" wide by 6" deep. There will be at least a 6" overlap wherever one roll of erosion control blanket ends and another begins, with the upslope erosion control blanket placed on top of the downslope erosion control blanket.


The erosion control blanket will be pinned to the ground according to the manufacturer's installation recommendations.

After the placement of the erosion control blanket, the Contractor will fine grade along all edges of the blanket to maintain a uniform slope adjacent to the blanket and level any low spots which might prevent uniform and unrestricted flow of side drainage directly onto the erosion control blanket.


All ditch sections will be shaped when installing the erosion control blanket. All costs for shaping the ditches will be incidental to the contract unit price per foot for "Shaping for Erosion Control Blanket".

February 14, 2020

Published Date: 1st Qtr. 2021	S D D O T	EROSION CONTROL BLANKET	PLATE NUMBER 734.01
			Sheet 1 of 1

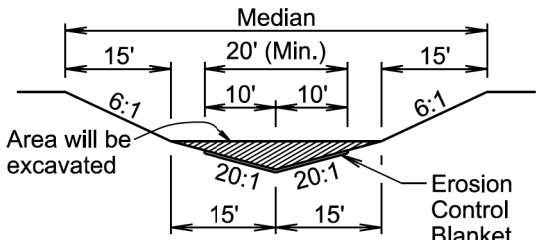


MEDIAN SECTION



\* Use a 6" (Min.) overlap wherever one roll of erosion control blanket ends and another begins.



OVERLAP DETAIL

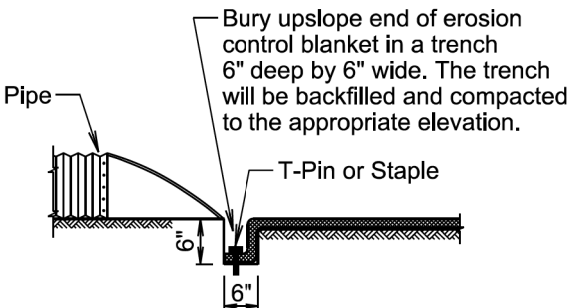

PIPE END DETAIL






MANUAL HIGH FLOW SILT FENCE INSTALLATION

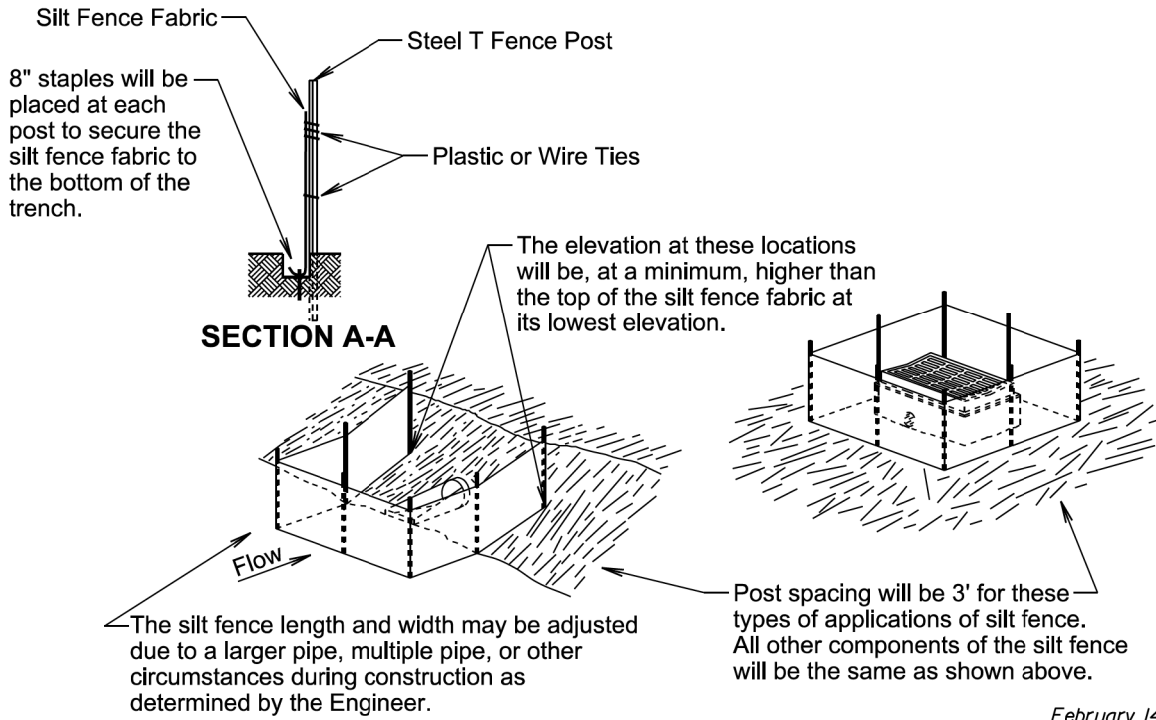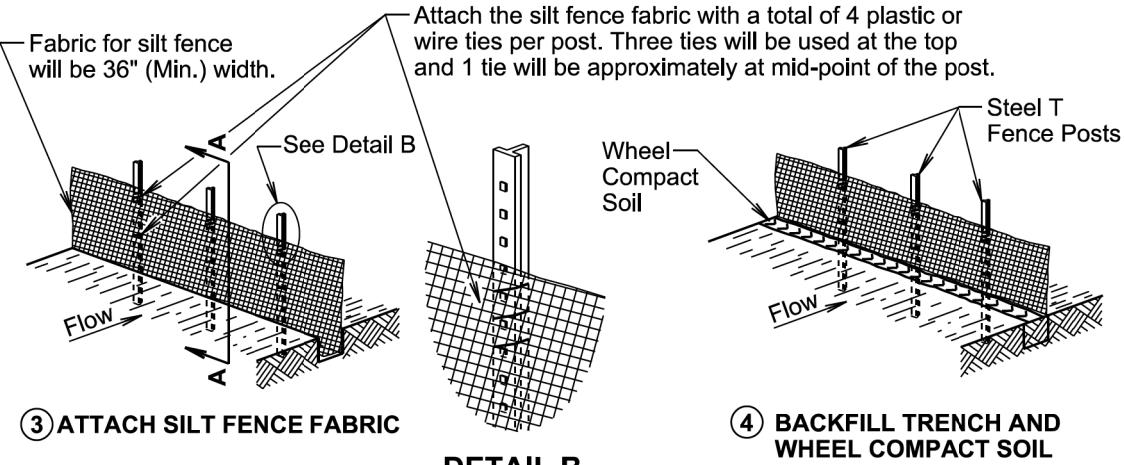

February 14, 2020

Published Date: 1st Qtr. 2021	S D D O T	HIGH FLOW SILT FENCE	PLATE NUMBER
			734.05
			Sheet 1 of 2

MACHINE SLICED HIGH FLOW SILT FENCE INSTALLATION

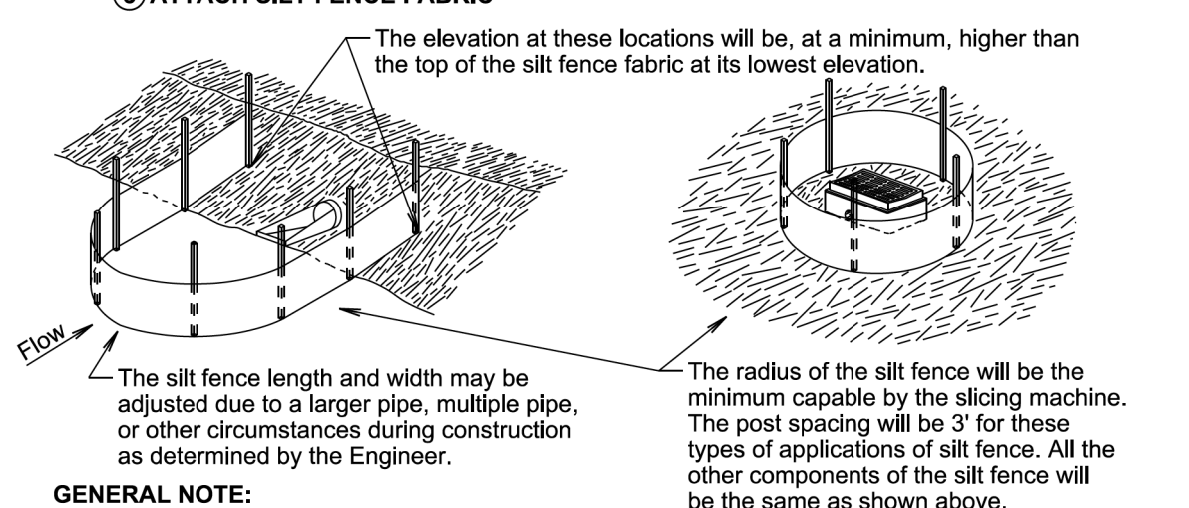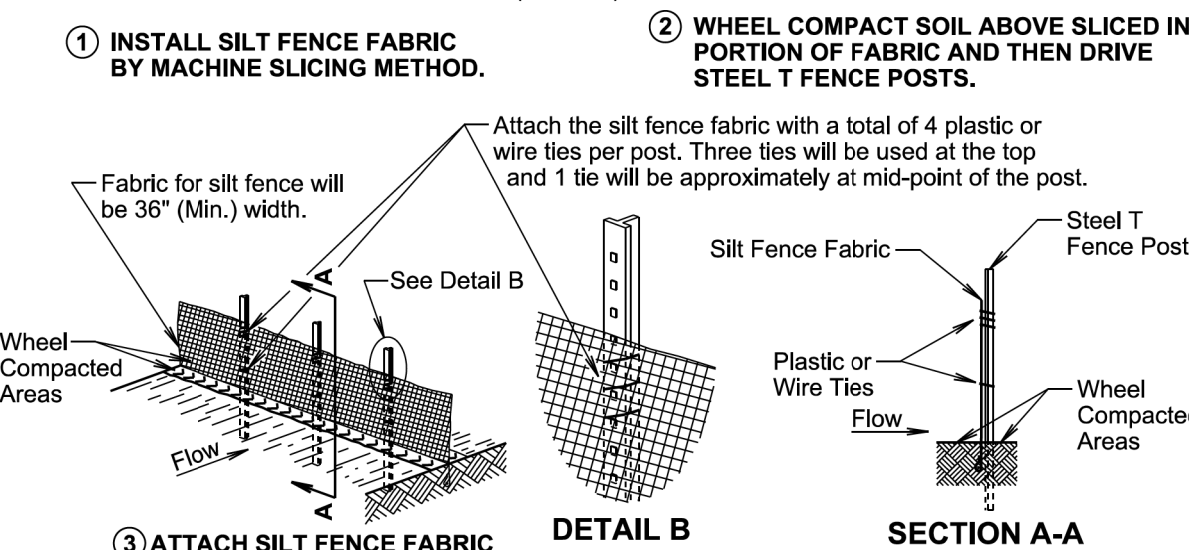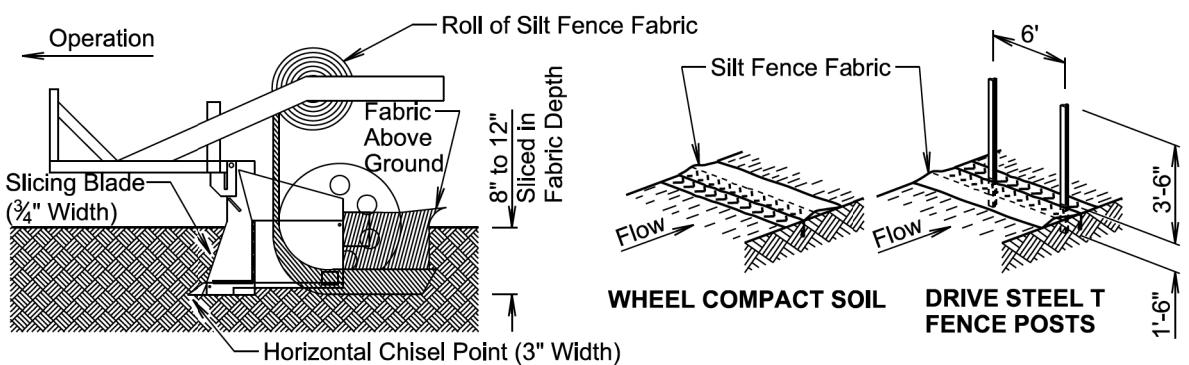

GENERAL NOTE:

If a trench can not be dug or the silt fence fabric can not be sliced in due to the type of earthen material (such as rock), then a row of 30 to 40 pound sandbags butted end to end will be provided on top of the extra length of silt fence fabric to prevent underflow.


February 14, 2020

Published Date: 1st Qtr. 2021	S D D O T	HIGH FLOW SILT FENCE	PLATE NUMBER
			734.05
			Sheet 2 of 2



STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0014(208)230	D17	D17

Plotting Date: 03/22/2021

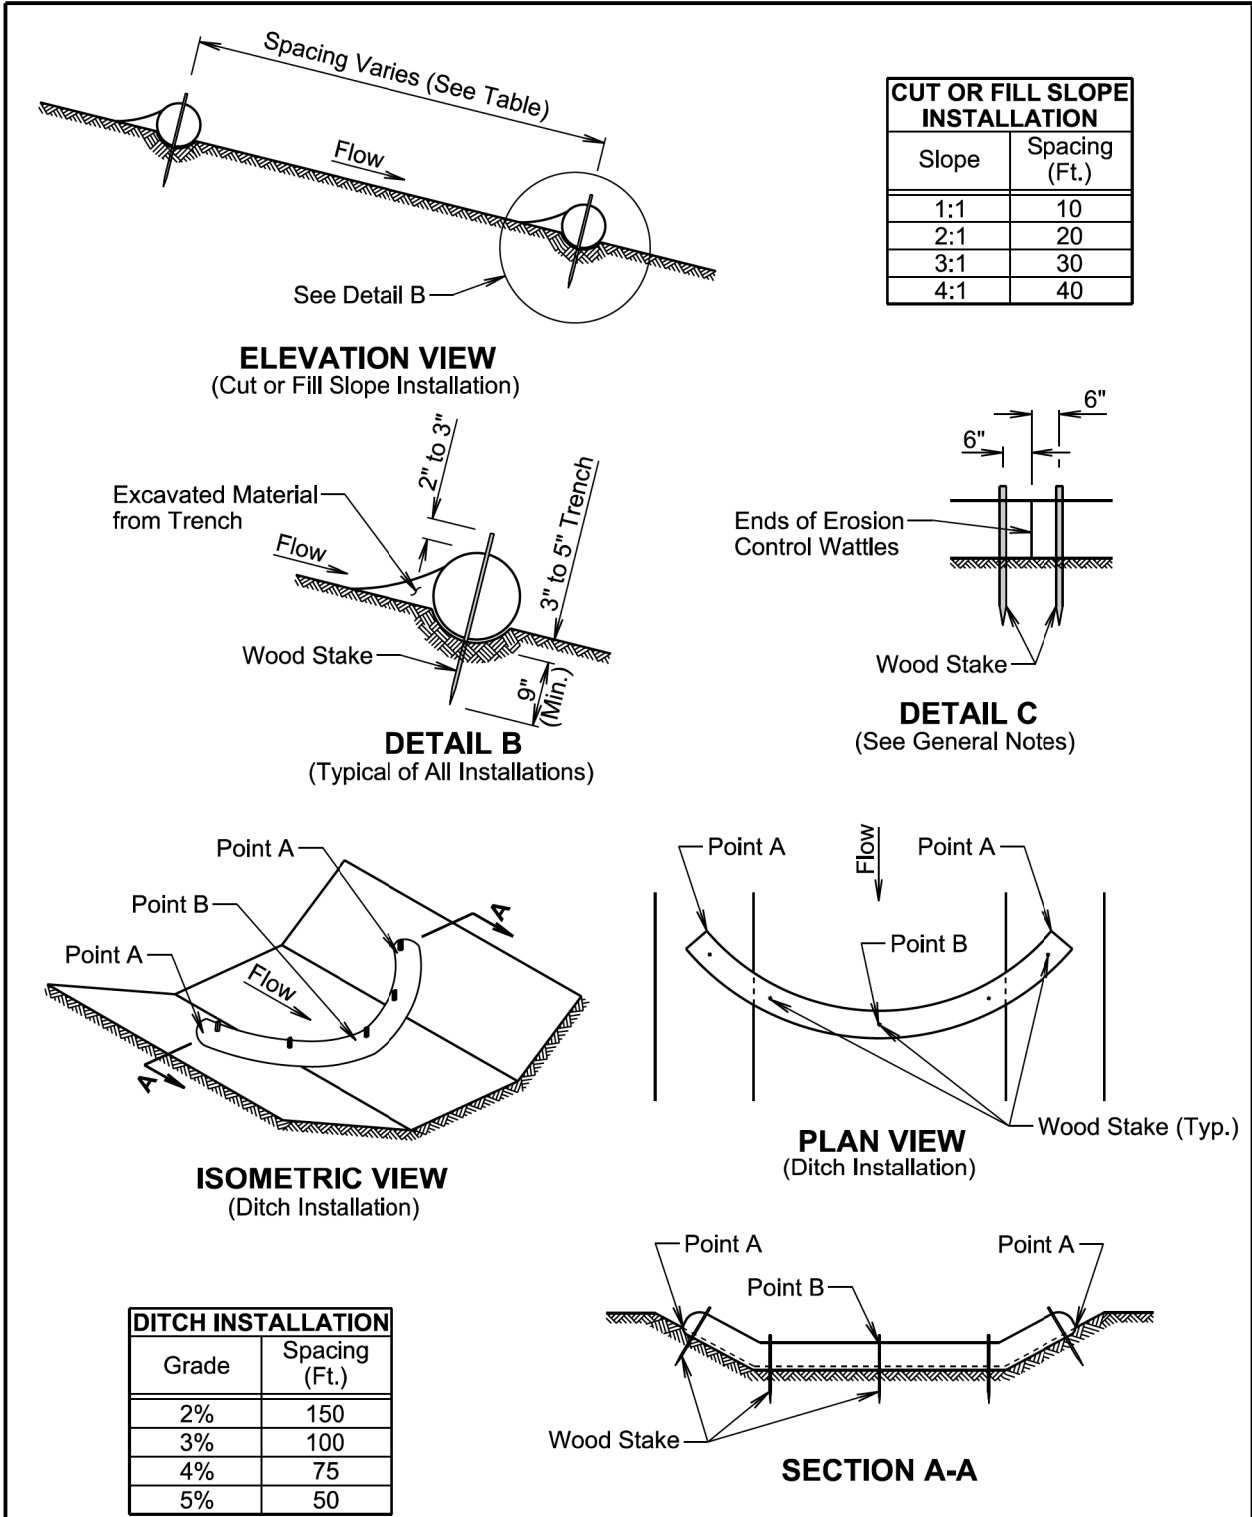

February 14, 2020

<b>Published Date: 1st Qtr. 2021</b>	<b>S D D O T</b>	<b>EROSION CONTROL WATTLE</b>	PLATE NUMBER 734.06
			Sheet 1 of 2

**GENERAL NOTES:**

At cut or fill slope installations, wattles will be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor will dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes will be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes will be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles will be 3' to 4'.

Where installing running lengths of wattles, the Contractor will butt the second wattle tightly against the first and will not overlap the ends. See Detail C.

The Contractor and Engineer will inspect the erosion control wattles in accordance with the storm water permit. The Contractor will remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping will be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping will be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials will be incidental to the contract unit price per foot for the corresponding erosion control wattle contract item.

All costs for removing the erosion control wattle from the project including labor, equipment, and materials will be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".

February 14, 2020

<b>Published Date: 1st Qtr. 2021</b>	<b>S D D O T</b>	<b>EROSION CONTROL WATTLE</b>	PLATE NUMBER 734.06
			Sheet 2 of 2