


# SECTION D: EROSION AND SEDIMENT CONTROL PLANS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D1	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

## INDEX OF SHEETS

- D1 General Layout with Index
- D2-D7 Estimate with General Notes and Tables
- D8-D11 Stormwater Pollution Prevention Plan Checklist
- D12 Erosion and Sediment Control Legend
- D13-D43 Erosion and Sediment Control Plan Sheets
- D44 Dewatering and Sediment Collection System Details
- D45 SDDOT Construction Entrance Details
- D46-D50 Standard Plates

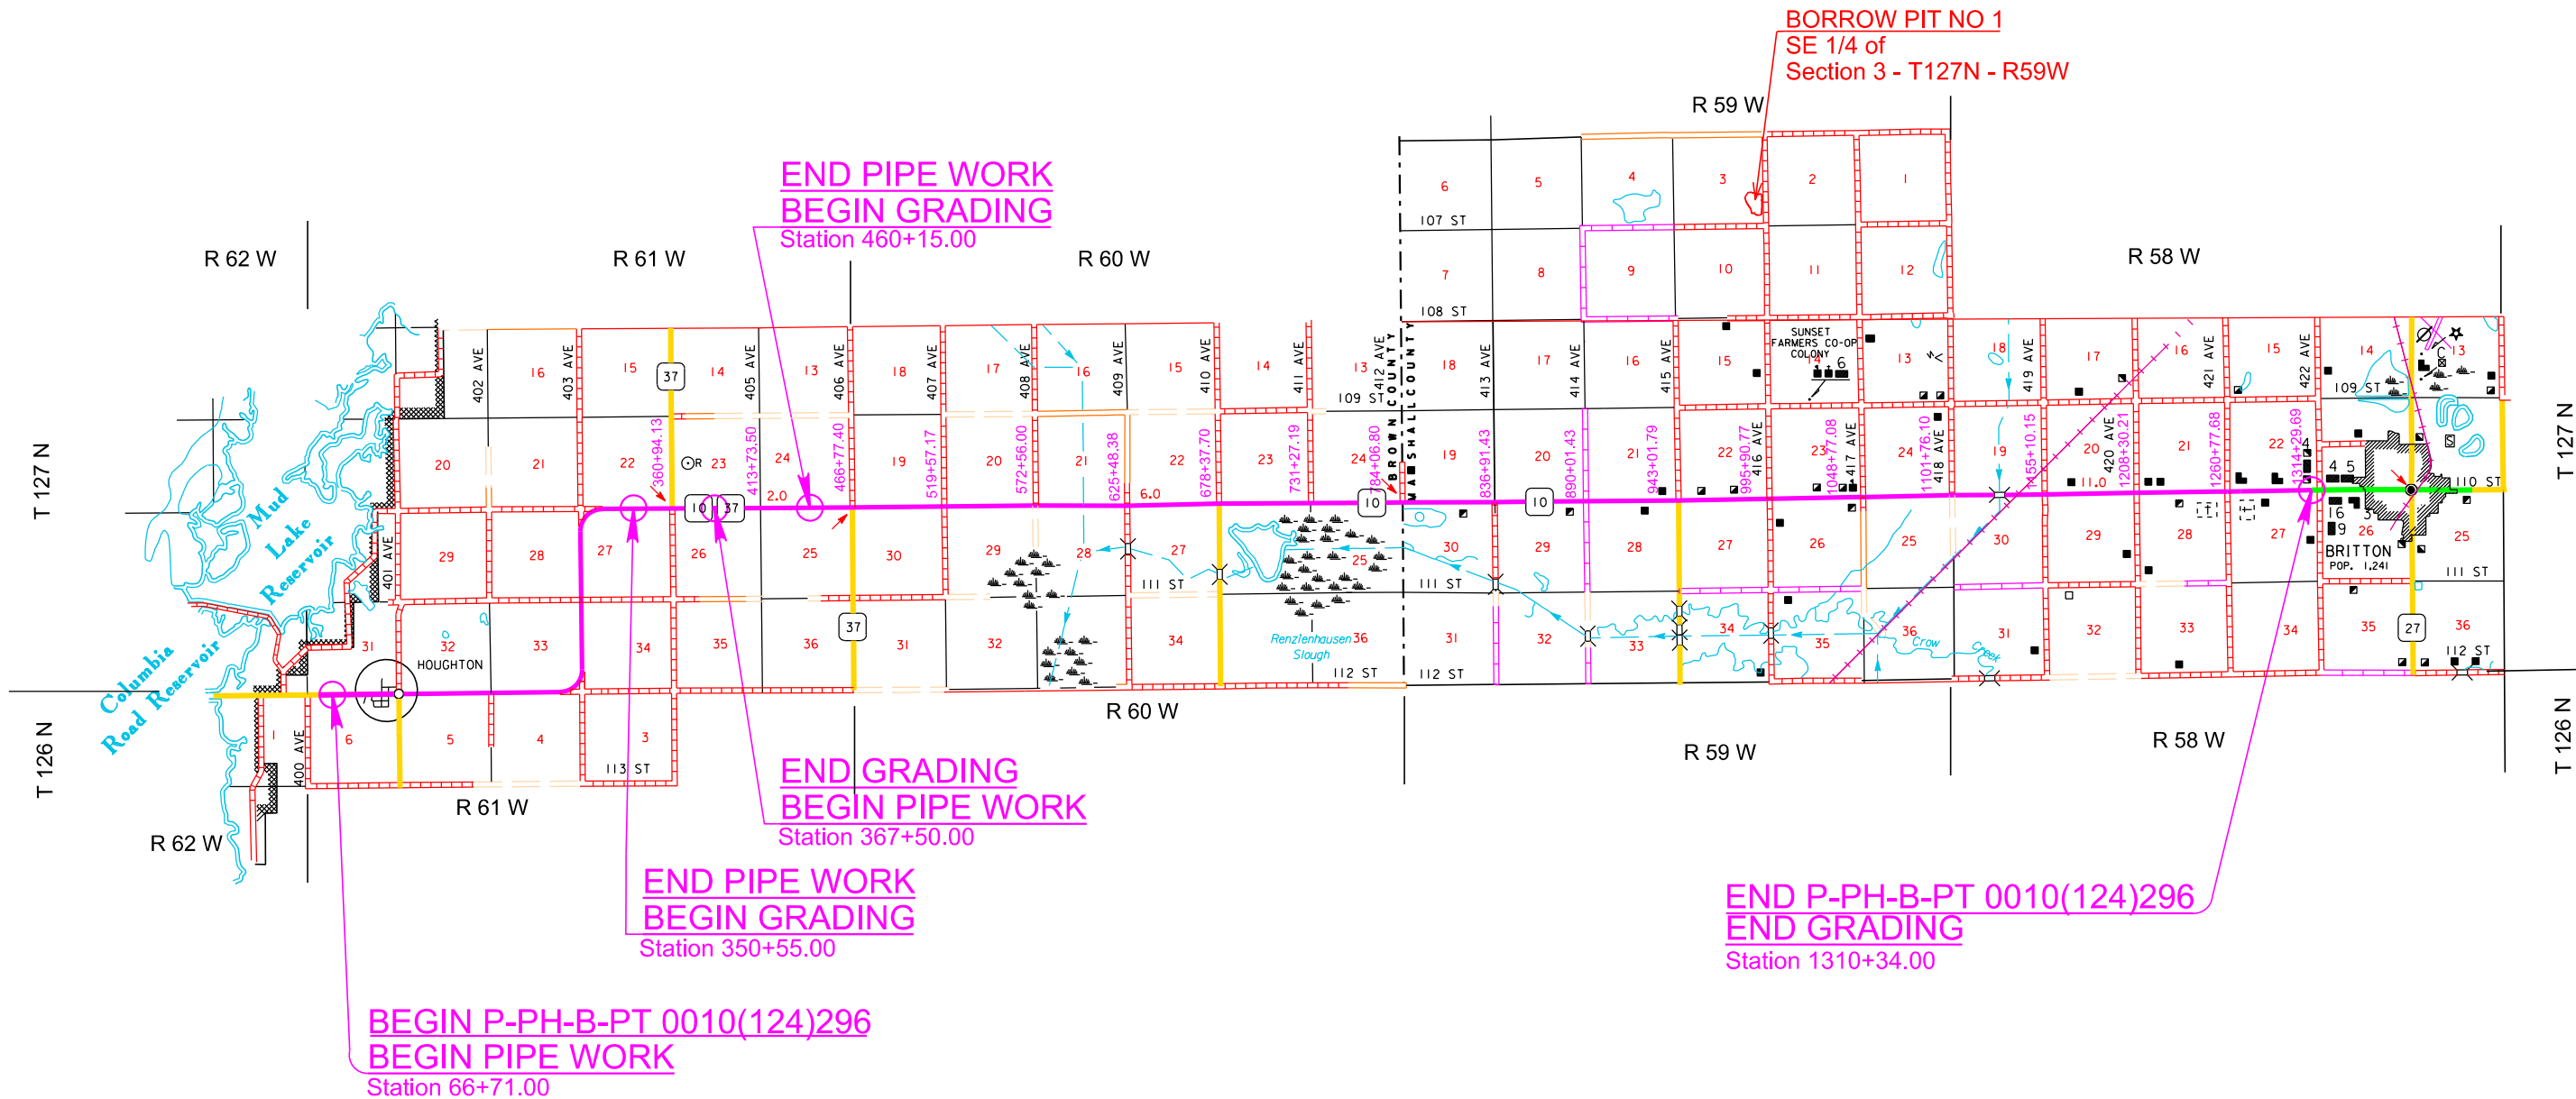

Plot Scale - 1:200

Plotted From - TRPR13525

1:200  
Plot Scale -  
Plotted From -

SECTION D ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E1690	Remove Sediment	7.1	CuYd
110E1700	Remove Silt Fence	11,808	Ft
230E0010	Placing Topsoil	193,849	CuYd
730E0100	Cover Crop Seeding	100.0	Bu
730E0212	Type G Permanent Seed Mixture	4,808	Lb
730E0251	Special Permanent Seed Mixture 1	405	Lb
731E0200	Fertilizing	101.70	Ton
732E0100	Mulching	436.6	Ton
734E0044	Soil Stabilizer	30.0	Acre
734E0103	Type 3 Erosion Control Blanket	8,475	SqYd
734E0154	12" Diameter Erosion Control Wattle	3,100	Ft
734E0165	Remove and Reset Erosion Control Wattle	775	Ft
734E0325	Surface Roughening	40.0	Acre
734E0510	Shaping for Erosion Control Blanket	2,550	Ft
734E0602	Low Flow Silt Fence	41,210	Ft
734E0604	High Flow Silt Fence	6,022	Ft
734E0610	Mucking Silt Fence	3,278	CuYd
734E0620	Repair Silt Fence	11,808	Ft
734E0630	Floating Silt Curtain	3,720	Ft
734E0635	Remove and Reset Floating Silt Curtain	930	Ft
900E1310	Concrete Washout Facility	1	Each
900E1320	Construction Entrance	2	Each

PERMANENT SEEDING

The areas to be seeded consist of all newly graded areas within the project limits except for the top of roadways and temporary easements under cultivation.

The total area to be seeded comes to 203.3 acres.

The total area to be seeded with Type G Permanent Seed Mixture comes to 184.9 acres. Type G Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	7
Switchgrass	Dacotah, Forestburg, Nebraska 28, Pathfinder, Summer, Sunburst, Trailblazer	3
Indiangrass	Holt, Tomahawk, Chief, Nebraska 54	3
Big Bluestem	Bison, Bonilla, Champ, Sunnyview, Rountree, Bonanza	3
Oats or Spring Wheat: April through May; Winter Wheat: August through November		10
Total:		26

Special Permanent Seed Mixture 1 is to be used on and adjacent to Renziehausen Game Production Area and private lands enrolled in the Conservation Reserve Enhancement Program. The total area to be seeded with Special Permanent Seed Mixture 1 comes to 18.4 acres. Special Permanent Seed Mixture 1 will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	6.0
Green Needlegrass	Lodorm, AC Mallard Ecovar	4.0
Switchgrass	Dacotah, Forestburg, Nebraska 28, Pathfinder, Summer, Sunburst, Trailblazer	3.0
Big Bluestem	Bison, Bonilla, Champ, Sunnyview, Rountree, Bonanza	3.0
Canada Wildrye	Mandan	2.0
Wildflowers		
Common Yarrow ( <i>Achillea millefolium</i> )		0.5
Plains Coreopsis ( <i>Aquilegia canadensis</i> )		0.5
Partridge Pea ( <i>Cassia fasciculata</i> )		0.5
White Prairie Clover ( <i>Dalea candida</i> )		0.5
Purple Prairie Clover ( <i>Dalea purpurea</i> )		0.5
Pale Purple Coneflower ( <i>Echinacea angustifolia</i> )		0.5
Bergamot Beebalm ( <i>Monarda fistulosa</i> )		0.5
Black-eyed Susan ( <i>Rudbeckia hirta</i> )		0.5
Total:		22.0

SURFACE ROUGHENING

Surface roughening will be done after topsoil placement and before permanent seeding, fertilizing, and mulching applications. Refer to Standard Plate 734.25 for details.

An additional quantity of Surface Roughening has been added to the Estimate of Quantities for temporary erosion control on areas determined by the Engineer during construction. All areas that receive Surface Roughening for temporary stabilization are to be ripped and loosened thoroughly before permanent seeding takes place.

COVER CROP SEEDING

Cover crop seeding may be used on this project as a temporary erosion control measure. The actual limits and use of cover crop seeding will be determined by the Engineer during construction.

Cover crop seeding may be used as a temporary erosion control measure on topsoil stockpiles at the Schneider Borrow Site, as well as other topsoil stockpiles throughout the length of the project.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D2	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

PLACING TOPSOIL

The thickness will be approximately 6 inches within both the right-of-way and on temporary easements. The topsoil thickness for the option borrow pits will be as stated on the option borrow pit sheets.

The estimated amount of topsoil to be placed is as follows:

Station	to	Station	Topsoil (CuYd)
350+55		367+50	1,706
460+15		490+00	3,412
490+00		520+00	3,458
520+00		550+00	2,815
550+00		580+00	2,963
580+00		610+00	4,244
610+00		640+00	6,336
640+00		670+00	5,127
670+00		700+00	5,728
700+00		730+00	6,594
730+00		760+00	4,163
760+00		790+00	3,076
790+00		820+00	6,196
820+00		850+00	7,592
850+00		880+00	4,322
880+00		910+00	6,859
910+00		940+00	6,091
940+00		970+00	5,201
970+00		1000+00	5,412
1000+00		1030+00	7,736
1030+00		1060+00	7,149
1060+00		1090+00	8,546
1090+00		1120+00	4,841
1120+00		1150+00	5,453
1150+00		1180+00	6,016
1180+00		1210+00	6,156
1210+00		1240+00	9,214
1240+00		1270+00	6,835
1270+00		1300+00	7,924
1300+00		1310+34	2,832
Subtotal:			163,997
Schneider Borrow Site Subtotal:			29,852
Project Total:			193,849

1:200  
Plotted From -  
TRPR13525  
File - ...lpj\turn0514\NotesSectionD.dgn

MULCHING (GRASS HAY OR STRAW)

An additional 30 tons of Grass Hay or Straw Mulch has been added to the Estimate of Quantities for temporary erosion control on areas determined by the Engineer during construction.

If the Contractor uses a no-till drill, mulch may be applied prior to seeding and the mulch can then be punched into the soil by the no-till drill. If the Contractor uses this process, the no-till drill seeding will be completed immediately following the mulch application and the mulch will be punched into the soil at a 3-inch depth.

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum will consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier will provide certification of the fungal species claimed and the live propagule count. The inoculum will include a minimum 25% the fungal species *Rhizophagus intraradices*. The remaining 75% may include other endomycorrhizal fungal species.

All seed will be inoculated by the seed supplier with a minimum of 100,000 live propagules of mycorrhizal fungi per acre. All costs of inoculating the seed will be incidental to the contract unit price per pound for the corresponding permanent seed mixture.

The mycorrhizal inoculum will be as shown below or an approved equal:

Product	Manufacturer
MycoApply	Mycorrhizal Applications, Inc. Grants Pass, OR Phone: 1-866-476-7800 <a href="http://www.mycorrhizae.com">www.mycorrhizae.com</a>
AM 120 Multi Species Blend	Reforestation Technologies Int. Gilroy, CA Phone: 1-800-784-4769 <a href="http://www.reforest.com">www.reforest.com</a>
LALRISE Prime and Max WP	Lallemand Specialties Inc. Milwaukee, WI Phone: 1-844-590-7781 <a href="http://www.lallemandplantcare.com">www.lallemandplantcare.com</a>

FERTILIZING

The Contractor will apply an all-natural slow release fertilizer prior to seeding or placing sod. The all-natural fertilizer will have a minimum guaranteed analysis of 4-4-4 and be USDA Certified BioBased. It should provide a minimum of 4% (N) nitrogen with a minimum water insoluble nitrogen (WIN) fraction of 2.07%, a minimum of 4% (P2O5) available phosphate, a minimum of 4% (K2O) soluble potash, and a maximum carbon to nitrogen ratio (C:N ratio) of 5:1. The all-natural fertilizer will be free of weed-seed and pathogens accomplished through thermophilic composting, and not mechanical or chemical sterilization, to assure presence of beneficial soil microbiology. The fertilizer will have a near neutral pH, a low salt index, a low biological oxygen demand, contain organic humic and fulvic acids, and have high aerobic organism counts. The fertilizer will also be stable, free of bad odors, and be unattractive as a food source for animals. It should also be in a granular form that is easily spread.

The fertilizer will be applied at a rate of 1,000 pounds per acre and in accordance with the manufacturer's recommended method of application.

The all-natural slow release fertilizer will be as shown below or an approved equal:

Product	Manufacturer
Sustane	Sustane Corporate Headquarters Cannon Falls, Minnesota Phone: 1-800-352-9245 <a href="http://www.sustane.com">www.sustane.com</a>
Perfect Blend	Perfect Blend, LLC Bellevue, WA Phone: 1-866-456-8890 <a href="http://www.perfect-blend.com">www.perfect-blend.com</a>
Nature Safe	Nature Safe Fertilizers Irving, TX Phone: 1-605-759-5622 <a href="http://www.naturesafe.com">www.naturesafe.com</a>

LOW FLOW SILT FENCE

The low flow silt fence fabric provided will be from the approved product list. The approved product list for low flow silt fence may be viewed at the following internet site:

< <http://apps.sd.gov/HC60ApprovedProducts/main.aspx> >

Low flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.04 for details.

An additional quantity of Low Flow Silt Fence has been added to the Estimate of Quantities for temporary sediment control.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D3	D50

Plotting Date: 02/29/2024

TABLE OF LOW FLOW SILT FENCE

Station	Location	Quantity (Ft)
350+25 to 366+25 L	Protect Wetland	1,600
350+25 to 367+75 R	Protect Wetland	1,750
510+50 to 520+00 R	Protect Wetland	950
521+00 to 528+00 L	Protect Wetland	700
578+00 to 580+00 L	Protect Wetland	200
597+50 to 599+50 R	Protect Wetland	200
611+50 to 613+00 L	Protect Wetland	250
674+50 to 678+00 R	Protect Wetland	475
680+50 to 683+00 R	Protect Wetland	250
684+00 to 685+50 R	Protect Wetland	150
691+00 to 695+50 L	Protect Wetland	450
691+00 to 696+00 R	Protect Wetland	500
701+50 to 707+50 L	Protect Wetland	600
702+50 to 715+00 R	Protect Wetland	1,250
709+50 to 713+50 R	Protect Wetland	400
722+50 to 726+00 R	Protect Wetland	350
729+00 to 730+00 R	Protect Wetland	100
730+00 to 731+00 R	Protect Wetland	100
738+50 to 742+50 L	Protect Wetland	400
741+00 to 750+00 R	Protect Wetland	900
745+00 to 760+00 L	Protect Wetland	1,500
760+00 to 783+50 L	Protect Wetland	2,350
760+00 to 777+00 R	Protect Wetland	1,700
779+20 to 783+50 R	Protect Wetland	430
784+75 to 787+00 R	Protect Wetland	225
794+00 to 798+50 R	Protect Wetland	450
827+50 to 830+75 L	Protect Wetland	325
827+50 to 830+75 R	Protect Wetland	325
861+50 to 879+00 L	Protect Wetland	1,750
861+50 to 878+50 R	Protect Wetland	1,700
881+50 to 883+00 R	Protect Wetland	150
881+75 to 883+00 L	Protect Wetland	125
885+50 to 889+50 L	Protect Wetland	400
885+50 to 889+50 R	Protect Wetland	400
929+00 to 932+50 L	Protect Wetland	350
929+50 to 933+00 R	Protect Wetland	350
950+50 to 952+50 R	Protect Wetland	200
967+50 to 969+50 R	Protect Wetland	200
978+00 to 985+00 L	Protect Wetland	700
978+00 to 985+00 R	Protect Wetland	700
990+00 to 992+00 R	Protect Wetland	200
990+25 to 995+50 L	Protect Wetland	525
1017+75 to 1021+75 R	Protect Wetland	400
1031+00 to 1033+50 R	Protect Wetland	250
1096+50 to 1101+25 L	Protect Wetland	475
1096+50 to 1101+25 R	Protect Wetland	475
1102+20 to 1120+00 L	Protect Wetland	1,780

(continued)

1102+20 to 1120+00 R	Protect Wetland	1,780
1120+00 to 1125+00 L	Protect Wetland	500
1120+00 to 1126+20 R	Protect Wetland	620
1129+50 to 1138+00 R	Protect Wetland	850
1133+00 to 1139+00 L	Protect Wetland	600
1142+00 to 1150+00 L	Protect Wetland	800
1142+00 to 1150+00 R	Protect Wetland	800
1150+00 to 1154+50 L	Protect Wetland	450
1150+00 to 1154+50 R	Protect Wetland	450
1155+50 to 1160+50 L	Protect Wetland	500
1155+50 to 1159+50 R	Protect Wetland	400
Additional Quantity:		3,000
Schneider Borrow Site:		450
Total:		41,210

**HIGH FLOW SILT FENCE**

The high flow silt fence fabric provided will be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

< <http://apps.sd.gov/HC60ApprovedProducts/main.aspx> >

High flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.05 for details.

An additional quantity of high flow silt fence has been added to the Estimate of Quantities for temporary sediment control.

**TABLE OF HIGH FLOW SILT FENCE**

Station	Location	Quantity (Ft)
358+38 R	Inlet end of pipe	18
360+94 – 59' L	Inlet end of pipe	18
360+93 – 53' R	Inlet end of pipe	18
464+79 – 57' L	Inlet end of pipe	18
481+87 R	Inlet end of pipe	18
484+75 – 51' R	Inlet end of pipe	18
509+98 – 52' R	Inlet end of pipe	18
510+17 – 131' R	Inlet end of pipe	18
514+18 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
522+31 L	Inlet end of pipe	18
522+91 L	Inlet end of pipe	18
559+55 R	Inlet end of pipe	18
572+53 – 59' R	Inlet end of pipe	18
572+90 – 200' L	Inlet end of pipe	18
578+86 R	Inlet end of pipe	18
599+03 – 56' R	Inlet end of pipe	18
599+84 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120

607+76 – 50' L	Inlet end of pipe	18
611+80 R	Inlet end of pipe	18
618+97 – 51' L	Inlet end of pipe	18
622+44 – 51' R	Inlet end of pipe	18
624+98 L	Inlet end of pipe	18
626+06 L	Inlet end of pipe	18
640+33 L	Inlet end of pipe	18
650+42 – 45' R	Inlet end of pipe	18
651+89 – 51' R	Inlet end of pipe	18
652+08 – 46' L	Inlet end of pipe	18
659+07 L	Inlet end of pipe	18
676+34 L	Inlet end of pipe	18
678+97 L	Inlet end of pipe	18
693+34 L	Inlet end of pipe	18
698+15 – 52' R	Inlet end of pipe	18
705+35 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
710+66 L/R	Inlet and outlet end of pipe (60 Ft each end)	120
730+67 L	Inlet end of pipe	18
731+87 L	Inlet end of pipe	18
742+73 L	Inlet end of pipe	18
743+33 L	Inlet end of pipe	18
765+33 L	Inlet end of pipe	18
765+83 L	Inlet end of pipe	18
778+33 L	Inlet end of pipe	18
791+16 L	Inlet end of pipe	18
810+46 – 51' L	Inlet end of pipe	18
810+46 – 51' R	Inlet end of pipe	18
818+07 – 49' R	Inlet end of pipe	18
820+28 – 51' L	Inlet end of pipe	18
829+09 L	Inlet end of pipe	18
829+49 L	Inlet end of pipe	18
836+92 – 51' L	Inlet end of pipe	18
836+92 – 48' R	Inlet end of pipe	18
862+74 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
884+19 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
890+01 – 48' L	Inlet end of pipe	18
890+01 – 46' R	Inlet end of pipe	18
919+21 L	Inlet end of pipe	18
931+63 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
939+39 R	Inlet end of pipe	18
943+02 – 54' L	Inlet end of pipe	18
957+49 – 49' L	Inlet end of pipe	18
965+27 – 50' R	Inlet end of pipe	18
968+04 L	Inlet end of pipe	18
980+03 L	Inlet end of pipe	18
987+04 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
995+92 – 51' R	Inlet end of pipe	18
1020+59 – 47' L	Inlet end of pipe	18

1032+27 L	Inlet end of pipe	18
1034+80 – 54' R	Inlet end of pipe	18
1046+32 – 53 R	Inlet end of pipe	18
1046+88 – 52' L	Inlet end of pipe	18
1048+77 – 51' R	Inlet end of pipe	18
1049+39 – 90' R	Inlet end of pipe	18
1051+32 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
1075+25 – 51' L	Inlet end of pipe	18
1085+55 L/R	Box Culvert (200 Ft each end)	400
1101+76 – 51' L	Across ditch at inlet end of pipe	30
1109+01 L/R	Inlet and outlet ends of pipe (60 Ft each end)	120
1126+66 – 116" R	Across ditch at inlet end of pipe	30
1127+72 – 154' R	Inlet end of pipe	18
1128+64 L/R	Box Culvert (200 Ft each end)	400
1144+05 L/R	Inlet and Outlet ends of pipe (60 Ft each end)	120
1158+15 R	Across ditch at inlet end of pipe (30 Ft each end)	60
1169+83 – 50' L	Inlet end of pipe	18
1169+83 – 51' R	Inlet end of pipe	18
1192+42 R	Inlet end of pipe	18
1206+66 L/R	Box Culvert (200 Ft each end)	400
1208+28 – 49' L	Inlet end of pipe	18
1210+68 – 44' L	Inlet end of pipe	18
1217+01 L/R	Box Culvert (200 Ft each end)	400
1222+83 – 51' L	Inlet end of pipe	18
1230+13 – 51' R	Across ditch at inlet end of pipe	30
1232+21 – 51' R	Across ditch at inlet end of pipe	30
1234+77 – 51' L	Inlet end of pipe	18
1234+78 – 51' R	Across ditch at inlet end of pipe	30
1256+16 – 41' R	Inlet end of pipe	18
1257+46 – 38' R	Inlet end of pipe	18
1260+79 – 51' L	Inlet end of pipe	18
1260+77 – 38' R	Inlet end of pipe	18
1266+82 – 49' R	Inlet end of pipe	18
1277+51 R	Inlet end of pipe	18
1295+80 L	Across ditch at inlet end of pipe (30 Ft each end)	60
1301+19 – 46' L	Inlet end of pipe	18
1307+14 – 47' L	Inlet end of pipe	18
Additional Quantity:		1,500
Total:		6,022

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D4	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

1:200  
Plotted From -  
TRPR13525  
File - ...\\pjt\\town0514\\Notes\\SectionD.dgn

EROSION CONTROL WATTLE

Erosion control wattles for restraining the flow of runoff and sediment will be installed at locations noted in the table and at locations determined by the Engineer during construction. Refer to Standard Plate 734.06 for details.

The Contractor will provide certification that the erosion control wattles do not contain noxious weed seeds.

Erosion control wattles will remain on the project to decompose.

An additional quantity of 12" Diameter Erosion Control Wattles has been added to the Estimate of Quantities for temporary erosion and sediment control in highway ditch channels and as an alternative to low flow or high flow silt fence at wetland areas adjacent to the highway.

The erosion control wattle provided will be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

< <http://apps.sd.gov/HC60ApprovedProducts/main.aspx> >

TABLE OF EROSION CONTROL WATTLE

Station	Location	Diameter (Inch)	Quantity (Ft)
996+34 – 133' L	Inlet end of pipe	12	20
1048 + 53 – 135' L	Inlet end of pipe	12	20
1048+75 – 105' R	Inlet end of pipe	12	20
1085+55 L/R	Box Culvert (200 Ft each end)	12	400
1128+64 L/R	Box Culvert (200 Ft each end)	12	400
1140+35 L/R	Protect Railroad	12	400
1155+09 – 105' R	Inlet end of pipe	12	20
1206+66 L/R	Box Culvert (200 Ft each end)	12	400
1217+01 L/R	Box Culvert (200 Ft each end)	12	400
	Additional Quantity:	12	1,020
	Total:		3,100

EROSION CONTROL BLANKET

Erosion control blanket will be installed 16 feet wide at the locations noted in the table and at locations determined by the Engineer during construction.

The erosion control blanket provided will be from the approved product list. The approved product list for erosion control blanket may be viewed at the following internet site:

< <http://apps.sd.gov/HC60ApprovedProducts/main.aspx> >

An additional quantity of Type 3 Erosion Control Blanket has been added to the Estimate of Quantities for temporary erosion control.

TABLE OF TYPE 3 EROSION CONTROL BLANKET

Station	Location	Quantity (SqYd)
358+38 L	Outlet end of pipe	89
360+94 L	Outlet end of pipe	89
360+93 R	Outlet end of pipe	89
464+79 L	Outlet end of pipe	89
481+87 L	Outlet end of pipe	89
484+75 R	Outlet end of pipe	89
509+98 R	Outlet end of pipe	89
510+17 R	Outlet end of pipe	89
514+18 L	Outlet end of pipe	89
522+31 L	Outlet end of pipe	89
522+91 L	Outlet end of pipe	89
559+55 L	Outlet end of pipe	89
572+53 R	Outlet end of pipe	89
572+90 L	Outlet end of pipe	89
578+86 L	Outlet end of pipe	89
607+76 L	Outlet end of pipe	89
611+80 L	Outlet end of pipe	89
618+97 L	Outlet end of pipe	89
622+44 R	Outlet end of pipe	89
624+98 R	Outlet end of pipe	89
626+06 R	Outlet end of pipe	89
640+33 R	Outlet end of pipe	89
650+42 L	Outlet end of pipe	89
651+89 R	Outlet end of pipe	89
652+08 L	Outlet end of pipe	89
659+07 R	Outlet end of pipe	89
676+34 R	Outlet end of pipe	89
678+97 R	Outlet end of pipe	89
693+34 R	Outlet end of pipe	89
698+15 R	Outlet end of pipe	89
705+35 R	Outlet end of pipe	89
710+66 R	Outlet end of pipe	89
810+46 L	Outlet end of pipe	89
810+46 R	Outlet end of pipe	89
818+07 R	Outlet end of pipe	89
820+28 L	Outlet end of pipe	89
836+92 L	Outlet end of pipe	89

836+92 R	Outlet end of pipe	89
890+01 L	Outlet end of pipe	89
890+01 R	Outlet end of pipe	89
919+21 R	Outlet end of pipe	89
943+02 L	Outlet end of pipe	89
957+79 L	Outlet end of pipe	89
965+27 R	Outlet end of pipe	89
995+92 R	Outlet end of pipe	89
1020+59 L	Outlet end of pipe	89
1032+27 R	Outlet end of pipe	89
1034+80 R	Outlet end of pipe	89
1046+32 R	Outlet end of pipe	89
1046+88 L	Outlet end of pipe	89
1051+32 L	Outlet end of pipe	89
1075+25 L	Outlet end of pipe	89
1101+76 L	Outlet end of pipe	89
1109+01 R	Outlet end of pipe	89
1144+05 L	Outlet end of pipe	178
1158+15 L	Outlet end of pipe	89
1169+83 R	Outlet end of pipe	89
1169+83 L	Outlet end of pipe	89
1192+42 L	Outlet end of pipe	89
1208+28 L	Outlet end of pipe	89
1210+68 L	Outlet end of pipe	89
1222+83 L	Outlet end of pipe	89
1230+13 R	Outlet end of pipe	89
1232+21 R	Outlet end of pipe	89
1234+77 L	Outlet end of pipe	89
1234+78 R	Outlet end of pipe	89
1250+00 to 1254+00 R	Ditch bottom	711
1256+16 L	Outlet end of pipe	89
1257+46 R	Outlet end of pipe	89
1260+77 R	Outlet end of pipe	89
1260+79 L	Outlet end of pipe	89
1266+82 L	Outlet end of pipe	89
1277+51 L	Outlet end of pipe	89
1295+80 R	Outlet end of pipe	89
1301+19 L	Outlet end of pipe	89
1307+14 L	Outlet end of pipe	89
Additional Quantity:		1,000

Total Type 3 Erosion Control Blanket: 8,475

SHAPING FOR EROSION CONTROL BLANKET

The ditches will be shaped for the erosion control blanket as specified on Standard Plate 734.01.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D5	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

1:200  
Plot Scale -

Plotted From -  
TRPR13525

FLOATING SILT CURTAIN

Floating silt curtains will be installed at locations noted in the table and at locations determined by the Engineer during construction.

The Contractor will determine the water depth and other waterway characteristics such as stream flow velocity and seek technical advice from the manufacturer before ordering the floating silt curtain so that the floating silt curtain installed is the correct type for the individual sites.

The Contractor will install the floating silt curtain in accordance with the manufacturer's installation instructions or as directed by the Engineer.

The Contractor will maintain the floating silt curtains for the duration of the project to ensure continuous protection of the waterway.

Payment for the floating silt curtain will be full compensation for materials, labor, and equipment necessary to install and remove the floating silt curtain.

A list of known manufacturers of floating silt curtain is shown below for informational purpose. Contractors may also use Engineer approved floating silt curtain from manufacturers that are not included in the list.

Product	Manufacturer
ABASCO, LLC Humble, TX Phone: 1-281-466-1500 <a href="http://www.abasco.net">www.abasco.net</a>	Aer-Flo, Inc. Bradenton, FL Phone: 1-800-823-7356 <a href="http://www.aerflo.com">www.aerflo.com</a>
ACME Environmental Tulsa, OK Phone: 1-855-563-2666 <a href="http://www.acmeboom.com">www.acmeboom.com</a>	ENVIRO-USA, LLC Cap Canaveral, FL Phone: 1-321-222-9551 <a href="http://www.enviro-usa.com">www.enviro-usa.com</a>
Elastec/American Marine, Inc. Carmi, IL Phone: 1-618-382-2525 <a href="http://www.turbiditycurtains.com">www.turbiditycurtains.com</a>	Geo-Synthetics, LLC (GSI) Waukesha, WI Phone: 1-800-444-5523 <a href="http://www.geosynthetics.com">www.geosynthetics.com</a>
Parker Systems, Inc. Chesapeake, VA Phone: 1-866-472-7537 <a href="http://www.parkersystemsinc.com">www.parkersystemsinc.com</a>	

TABLE OF FLOATING SILT CURTAIN

Station	Location	Quantity (Ft)
599+84 L/R	Along Bank	200
777+00 to 779+20 R	Along Bank	220
787+00 to 794+00 R	Along Bank	700
883+00 to 885+50 L	Along Bank	250
883+00 to 885+50 R	Along Bank	250
985+00 to 990+00 L	Along Bank	500
985+00 to 990+00 R	Along Bank	500
1128+64 L/R	Along Bank	500
	Additional Quantity:	600
	Total:	3,720

SOIL STABILIZER

An estimated quantity of 30 acres of soil stabilizer has been included in the Estimate of Quantities. The soil stabilizer will be applied at locations deemed necessary by the Engineer.

Soil Stabilizer may also be used for dust control at or near the Schneider Borrow Site.

The Contractor will apply soil stabilizer in accordance with the manufacturer's application instructions and at the rate specified in the list of approved soil stabilizers.

Wood fiber mulch that contains a green dye will be mixed with the soil stabilizer to be used as a tracer when the soil stabilizer is applied hydraulically. Wood fiber mulch will be added at a rate of 300 pounds per acre to all of the approved soil stabilizers listed in the table except for the Pam-12 Plus product. The wood fiber mulch will be a 100% wood fiber product and does not need to contain a tackifier.

All costs for furnishing and applying the soil stabilizer including wood fiber mulch, hauling, materials, equipment, labor, and incidentals necessary will be paid for at the contract unit price per Acre for "Soil Stabilizer".

The soil stabilizer will be from the list below or an approved equal:

Product	Manufacturer
StarTak 600 Applied at a rate of 150 Lb/Acre	Chemstar Products Company Minneapolis, MN Phone: 1-800-328-5037 <a href="http://www.chemstar.com">www.chemstar.com</a>
Pam-12 Plus Applied at a rate of: Slope None to 4:1 1000 Lb/Acre 4:1 to 3:1 1000 to 2000 Lb/Acre 3:1 to 2:1 2000 to 3000 Lb/Acre	ENCAP, LLC Green Bay, WI Phone: 1-920-406-5050 <a href="https://encappro.com/">https://encappro.com/</a>
M-Binder Applied at a rate of 150 Lb/Acre	Ecology Controls Carpinteria, CA Phone: 1-805-684-0436 <a href="http://www.ssseeds.com">www.ssseeds.com</a>
FiberRX Applied at a rate of: Slope None to 4:1 50 Lb/Acre 3:1 60 Lb/Acre 2:1 70 Lb/Acre 1:1 or steeper 80 Lb/Acre	HydroStraw, LLC Manteno, IL Phone: 1-800-545-1755 <a href="http://www.hydrostraw.com">http://www.hydrostraw.com</a>
Enviropam Applied at a rate of 9 Lb/Acre	Innovative Turf Solutions, LLC Lebanon, OH Phone: 1-513-317-8311 <a href="http://www.innovativeturfsolutions.com">www.innovativeturfsolutions.com</a>
HydraTack, Tack Plus, Tack-P, or Tack-P Plus Applied at a rate of 30 Lb/Acre	Innovative Turf Solutions, LLC Lebanon, OH Phone: 1-513-317-8311 <a href="http://www.innovativeturfsolutions.com">www.innovativeturfsolutions.com</a>

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D6	D50

Plotting Date: 02/29/2024

FI-1045 Hydrobond or  
FI-1046 Hydrobond  
Applied at a rate of 15 Lb/Acre

JRM Chemical, Inc.  
Cleveland, OH  
Phone: 1-216-475-8488  
[www.soilmoist.com](http://www.soilmoist.com)

HF5000 Tack  
Applied at a rate of 60 Lb/Acre

Rantec Corporation  
Ranchester, WY  
Phone: 1-307-655-9565  
[www.ranteccorp.com](http://www.ranteccorp.com)

R-Tack  
Applied at a rate of 150 Lb/Acre

Rantec Corporation  
Ranchester, WY  
Phone: 1-307-655-9565  
[www.ranteccorp.com](http://www.ranteccorp.com)

SpecTack  
Applied at a rate of:  
Slope  
None 30 to 80 Lb/Acre  
4:1 50 to 100 Lb/Acre  
3:1 80 to 120 Lb/Acre  
2:1 100 to 170 Lb/Acre

Rantec Corporation  
Ranchester, WY  
Phone: 1-307-655-9565  
[www.ranteccorp.com](http://www.ranteccorp.com)

Super Tack  
Applied at a rate of 60 Lb/Acre

Rantec Corporation  
Ranchester, WY  
Phone: 1-307-655-9565  
[www.ranteccorp.com](http://www.ranteccorp.com)

EarthGuard SFM  
Applied at a rate of 60 LB/Acre  
(approx. 6 Gallons/Acre)

Terra Novo Inc.  
Bakersfield, CA  
Phone: 1-888-843-1029  
[www.terranovo.com](http://www.terranovo.com)

EDGE  
Hydraulically applied at a rate of:  
Slope  
≤4:1 1,500 Lb/Acre  
3:1 1,800 Lb/Acre  
2:1 2,000 Lb/Acre  
≥1:1 3,000 Lb/Acre

LSC Environmental Products, LLC  
Apalachin, NY  
Phone: 1-800-800-7671  
[www.lscenv.com](http://www.lscenv.com)

Dry applied at a rate of:  
Slope  
≤4:1 3,000 Lb/Acre  
3:1 3,500 Lb/Acre  
≥2:1 4,500 Lb/Acre

File - ...lpj\dwg\0514\NotesSectionD.dgn

1:200  
Plot Scale -  
Plotted From -  
TRPR13525

DEWATERING AND SEDIMENT COLLECTING

Dewatering and Sediment Collection is expected to be necessary on this project as requested by the Geotechnical Office in the Final Geology Recommendations.

The Contactor has the option to treat sediment laden water trapped within the project limits or the Contractor may elect to transport sediment laden water off the project. Refer to the OPTIONS FOR DEWATERING AND SEDIMENT COLLECTING detail sheet for more information.

Water transported off the project limits will not be disposed of in an area where it can enter a waterway. The disposal site must be approved by the Engineer.

CONCRETE WASHOUT AREA

A concrete washout area will be installed on the project site at a location approved by the Engineer if concrete trucks deliver concrete to the site. No washout area is necessary if all concrete trucks are going to wash out at approved site constructed by the concrete supplier.

VEGETATED BUFFER STRIPS

Vegetated Buffer Strips are sections of existing undisturbed vegetation adjacent to disturbed areas and are meant to convey sheet flow runoff from disturbed areas, resulting in the trapping of sediment and other pollutants as the runoff passes through vegetation and infiltration occurs.

Vegetated Buffer Strips should be utilized along existing floodplains, wetlands, channels, and other bodies of water, whenever possible. They are also useful at any areas where runoff may leave the site. Where there is adequate room, Vegetated Buffer Strips should be a minimum of 15' wide and perpendicular to flow.

Separate payment will not be made for Vegetated Buffer Strips.

Vegetated Buffer Strips will be installed at locations determined by the Engineer during construction.

CONSTRUCTION ENTRANCE

The Contractor will install a Construction Entrance at locations where there is a potential for mud tracking and sediment flow from the construction site and work area onto a paved public roadway.

It is the Contractor's option to use the SDDOT Construction Entrance (See SDDOT Construction Entrance notes and details), a product from the list provided in these notes, or other products or processes as approved by the Engineer during construction.

If the Contractor elects to use one of the products listed in the table, then the Contractor will install the construction entrance product in accordance with the manufacturer's installation instructions or as directed by the Engineer.

The Contractor will maintain the construction entrance such that mud tracking and sediment flow will not enter the roadway or adjacent drainage areas. The construction entrance will be routinely inspected, and the Contractor will repair or replace material as deemed necessary by the Engineer.

All costs for furnishing, installing, maintaining, and removal of the construction entrance including equipment, labor, materials, and incidentals will be included in the contract unit price per each for "Construction Entrance".

The following table is a list of known construction entrance products available for use:

Product	Manufacturer
Grizzly Rumble Grate (10' width and 24' length required)	Trackout Control, LLC Tempe, AZ Phone: 1-800-761-0056 <a href="http://www.trackoutcontrol.com">www.trackoutcontrol.com</a>
Pro Grid (12' width and 24' length including combination of grids and ramps required)	Pro-Tec Equipment, Inc. Charlotte, MI Phone: 1-800-292-1225 <a href="http://www.pro-tecequipment.com">www.pro-tecequipment.com</a>
Tracking Pad (12' width and 24' length (2 – 12'x12' pads) and 2 – 4'x4' turning flares)	Tracking Pads LLC Commerce City, CO Phone: 1-303-501-5640 <a href="http://www.trackingpads.com">www.trackingpads.com</a>
FODS Trackout Control Mat (12' width and 5 mats to get a 35' length)	FODS, LLC Denver, CO Phone: 1-844-200-3637 <a href="http://www.getfods.com">http://www.getfods.com</a>
DuraDeck and MegaDeck HD An adequate quantity is needed to prevent tires from becoming muddy (does not remove mud)	Signature Systems Group, LLC Flower Mound, TX Phone: 1-800-931-7301 <a href="https://www.signature-systems.com/">https://www.signature-systems.com/</a>
Track-Out Control Mat (10' width and 24' length required)	RubberForm Recycled Products, LLC Lockport, NY Phone: 1-716-478-0408 <a href="http://www.rubberform.com">www.rubberform.com</a>

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D7	D50

Plotting Date: 02/29/2024

SDDOT CONSTRUCTION ENTRANCE

If the SDDOT Construction Entrance is utilized, then the Contractor will install the SDDOT Construction Entrance in accordance with these notes and the detail drawings.

Pit run material will be obtained from a granular source and will conform to the following gradation:

Sieve Size	Percent Passing
6"	100%
#4	0-60%
#200	0-20%

The pit run material will be compacted to the satisfaction of the Engineer.

The aggregate for the granular material will conform to the following gradation requirements:

Sieve Size	Percent Passing
3"	100%
2 1/2"	90-100%
1 1/2"	25-60%
3/4"	0-10%
1/2"	0-5%

The granular material will be placed in 6" maximum lifts.

It is anticipated that the granular material will need to be periodically removed and replaced as it becomes inundated with mud and sediment.

The Reinforcement Fabric (MSE) will be in conformance with Section 831 of the Specifications. The Reinforcement Fabric (MSE) will be on the Approved Products List for this material or will be certified by the supplier to meet this specification prior to installation.

The Reinforcement Fabric (MSE) should be kept as taut as possible prior to placing.

Equipment will not be allowed on the Reinforcement Fabric (MSE) until the first lift of granular material is in place.

All seams in the Reinforcement Fabric (MSE) will be overlapped at least 2' and shingled.

File - ...lpj\tdm0514\Notes\SectionD.dgn

1:200  
Plot Scale -  
Plotted From -

**STORMWATER POLLUTION PREVENTION PLAN CHECKLIST**  
*(The numbers left of the title headings are **reference numbers** to the **GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES** (Stormwater Permit))*

**5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION**

To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

**5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES**

- **5.3 (3a): Project Limits** (See Title Sheet)
- **5.3 (3a): Project Description** (See Title Sheet)
- **5.3 (4): Site Map(s)** (See Title Sheet and Plans)
- **Major Soil Disturbing Activities** (check all that apply)
  - ☒ Clearing and grubbing
  - ☒ Excavation/borrow
  - ☒ Grading and shaping
  - ☐ Filling
  - ☐ Other (describe):
- **5.3 (3b): Total Project Area** 268 Acres
- **5.3 (3b): Total Area to be Disturbed** 135 Acres
- **5.3 (3c): Maximum Area Disturbed at One Time**
- **5.3 (3d): Existing Vegetative Cover** 90%
- **5.3 (3d): Description of Vegetative Cover** Typical Northeast South Dakota native and introduced vegetation
- **5.3 (3e): Soil Properties:** Clay silt, silt clay, sandy clay, silty sand
- **5.3 (3f): Name of Receiving Water Body/Bodies** James River/Sand Lake Reservoir, Crow Creek
- **5.3 (3g): Location of Construction Support Activity Areas**

**5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES**

- **Special sequencing requirements** (see Section C).
- The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date
Install stabilized construction entrance(s).	
Install perimeter protection where runoff may exit site.	
Install perimeter protection around stockpiles.	
Install channel and ditch bottom protection.	
Clearing and grubbing.	
Remove and stockpile topsoil.	
Stabilize disturbed areas.	
Install utilities, storm sewers, curb and gutter.	
Install inlet and culvert protection after completing storm drainage and other utility installations.	
Final grading.	
Final paving.	
Removal of protection devices.	
Reseed areas disturbed by removal activities.	

**5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES**

All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)	
Description	Estimated Start Date
<input checked="" type="checkbox"/> Natural Buffers (within 50 ft of Waters of State)	
<input checked="" type="checkbox"/> Silt Fence	
<input type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Berm / Windrow	
<input checked="" type="checkbox"/> Floating Silt Curtain	
<input checked="" type="checkbox"/> Stabilized Construction Entrances	
<input type="checkbox"/> Entrance/Exit Equipment Tire Wash	
<input type="checkbox"/> Other:	

Structural Erosion and Sediment Controls	
Description	Estimated Start Date
<input checked="" type="checkbox"/> Silt Fence	
<input type="checkbox"/> Temporary Berm/Windrow	
<input checked="" type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Sediment Barriers	
<input type="checkbox"/> Erosion Bales	
<input type="checkbox"/> Temporary Slope Drain	
<input type="checkbox"/> Turf Reinforcement Mat	
<input checked="" type="checkbox"/> Riprap	
<input type="checkbox"/> Gabions	
<input type="checkbox"/> Rock Check Dams	
<input type="checkbox"/> Sediment Traps/Basins	
<input checked="" type="checkbox"/> Culvert Inlet Protection	
<input type="checkbox"/> Transition Mats	
<input type="checkbox"/> Median/Area Drain Inlet Protection	
<input type="checkbox"/> Curb Inlet Protection	
<input type="checkbox"/> Interceptor Ditch	
<input type="checkbox"/> Concrete Washout Facility	
<input type="checkbox"/> Work Platform	
<input type="checkbox"/> Temporary Water Barrier	
<input type="checkbox"/> Temporary Water Crossing	
<input type="checkbox"/> Permanent Stormwater Ponds	
<input type="checkbox"/> Permanent Open Vegetated Swales	
<input type="checkbox"/> Natural Depressions to allow for Infiltration	
<input type="checkbox"/> Sequential Systems that combine several practices	
<input type="checkbox"/> Other:	

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D8	D50

Plotting Date: 02/29/2024

Dust Controls	
Description	Estimated Start Date
<input type="checkbox"/> Tarps & Wind impervious fabrics	
<input type="checkbox"/> Watering	
<input type="checkbox"/> Stockpile location/orientation	
<input type="checkbox"/> Dust Control Chlorides	
<input type="checkbox"/> Other	

Dewatering BMPs	
Description	Estimated Start Date
<input type="checkbox"/> Sediment Basins	
<input type="checkbox"/> Dewatering bags	
<input type="checkbox"/> Weir tanks	
<input type="checkbox"/> Temporary Diversion Channel	
<input type="checkbox"/> Other:	

**Stabilization Practices (See Detail Plan Sheets)**

(Stabilization measures shall begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization shall be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities **(3.18)**)

Description	Estimated Start Date
<input checked="" type="checkbox"/> Vegetation Buffer Strips	
<input type="checkbox"/> Temporary Seeding (Cover Crop Seeding)	
<input checked="" type="checkbox"/> Permanent Seeding	
<input type="checkbox"/> Sodding	
<input type="checkbox"/> Planting (Woody Vegetation for Soil Stabilization)	
<input checked="" type="checkbox"/> Mulching (Grass Hay or Straw)	
<input type="checkbox"/> Fiber Mulching (Wood Fiber Mulch)	
<input checked="" type="checkbox"/> Soil Stabilizer	
<input type="checkbox"/> Bonded Fiber Matrix	
<input type="checkbox"/> Fiber Reinforced Matrix	
<input checked="" type="checkbox"/> Erosion Control Blankets	
<input type="checkbox"/> Surface Roughening (e.g. tracking)	
<input type="checkbox"/> Other:	

**Wetland Avoidance**

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☒ No ☐ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure’s capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor’s Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in “DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES” above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

- **Material Management**
  - Housekeeping
    - Only needed products will be stored on-site by the Contractor.
    - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
    - Products must be stored in original containers and labeled.
    - Material mixing will be conducted in accordance with the manufacturer’s recommendations.
    - When possible, all products will be completely used before properly disposing of the container off-site.
    - The manufacturer’s directions for disposal of materials and containers will be followed.
    - The Contractor’s site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
    - Dust generated will be controlled in an environmentally safe manner.
  - Hazardous Materials
    - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
    - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
    - If surplus product must be disposed of, manufacturer’s label directions for disposal will be followed.

- Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
- Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
- Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ **Spill Control Practices**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer’s recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor’s site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ **Spill Response**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor’s site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.

- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent’s designee will be responsible for completing the spill reporting form and for reporting the spill to SDDANR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor’s site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

➤ **Waste Disposal**

- All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.

➤ **Hazardous Waste**

- All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.

➤ **Sanitary Waste**

- Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D9	D50

Plotting Date: 02/29/2024

1:200  
Plot Scale -  
Plotted From -  
TRPR13525

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading “POLLUTION PREVENTION PROCEDURES” (check all that apply).

- ☒ Concrete and Portland Cement
- ☐ Detergents
- ☒ Paints
- ☒ Metals
- ☒ Bituminous Materials
- ☒ Petroleum Based Products
- ☒ Diesel Exhaust Fluid
- ☐ Cleaning Solvents
- ☒ Wood
- ☐ Cure
- ☐ Texture
- ☐ Chemical Fertilizers
- ☐ Other:

Product Specific Practices

- **Petroleum Products**  
All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- **Fertilizers**  
Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- **Paints**  
All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer's instructions and any applicable state and local regulations.
- **Concrete Trucks**  
Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- ☐ Discharges from water line flushing.
- ☐ Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- ☐ Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor's site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDANR immediately **if any one of the following** conditions exists:
  - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
  - The release or spill causes an immediate danger to human health or safety
  - The release or spill exceeds 25 gallons
  - The release or spill causes a sheen on surface water
  - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
  - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
  - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
  - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDANR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDANR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge shall be sent to SDDANR within 14 days of the discharge.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D10	D50

Plotting Date: 02/29/2024

1:200  
Plot Scale -

Plotted From -  
TRPR13525

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D11	D50

Plotting Date: 02/29/2024

5.4: SWPPP CERTIFICATIONS

➤ Certification of Compliance with Federal, State, and Local Regulations

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

➤ South Dakota Department of Transportation

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Authorized Signature (See the General Permit, Section 7.4 (1))

➤ Prime Contractor

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

➤ Contractor Information:

- Prime Contractor Name: \_\_\_\_\_
- Contractor Contact Name: \_\_\_\_\_
- Address: \_\_\_\_\_
- \_\_\_\_\_
- City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
- Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
- Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

➤ Erosion Control Supervisor

- Name: \_\_\_\_\_
- Address: \_\_\_\_\_
- \_\_\_\_\_
- City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
- Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
- Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

➤ SDDOT Project Engineer

- Name: \_\_\_\_\_
- Business Address: \_\_\_\_\_
- Job Office Location: \_\_\_\_\_
- City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
- Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
- Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

➤ SDDANR Contact Spill Reporting

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

➤ SDDANR Contact for Hazardous Materials.

- (605) 773-3153

➤ National Response Center Hotline

- (800) 424-8802.

➤ SDDANR Stormwater Contact Information

- SDDANR Stormwater (800) 737-8676
- Surface Water Quality Program (605) 773-3351

5.5: REQUIRED SWPPP MODIFICATIONS

➤ 5.5 (1): Conditions Requiring SWPPP Modification

The SWPPP must be modified, including the site map(s), in response to any of the following conditions:

- When a new operator responsible for implementation of any part the SWPPP begins work on the site.
- When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
- To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
- If inspections by site staff, local officials, SDDANR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
- To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
- If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.

➤ 5.5 (2): Deadlines for SWPPP Modification

Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.

➤ 5.5 (3): Documentation of Modifications to the Plan

All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.

➤ 5.5 (4): Certification Requirements

All modifications made to the SWPPP must be signed and certified as required in Section 7.4.

➤ 5.5 (5): Required Notice to Other Operators

































If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form.

# EROSION AND SEDIMENT CONTROL LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D12	D50

Plotting Date: 02/29/2024

-  Silt Fence J-Hooks
-  Low Flow Silt Fence
-  High Flow Silt Fence
-  High Flow Silt Fence at Pipe
-  Sediment Control at Inlet After Placement of Surfacing
-  Sediment Control at Inlet Before Placement of Surfacing
-  Temporary Sediment Barrier
-  Temporary Water Barrier
-  Floating Silt Curtain
-  Sediment Filter Bags
-  Triangular Silt Barriers
-  Erosion Control Wattles on Slopes
-  Erosion Control Wattles at Inlets
-  Erosion Control Wattles in Ditches
-  Erosion Bales
-  Surfacing Roughening
-  Temporary Grass Hay or Straw Mulch/ Soil Stabilizer
-  Cut Interceptor Ditch
-  Temporary Slope Drain
-  Bonded Fiber Matrix/ Fiber Reinforced Matrix
-  Rock Check Dam
-  Type 1 Erosion Control Blanket
-  Type 2 Erosion Control Blanket
-  Type 3 Erosion Control Blanket
-  Type 4 Erosion Control Blanket
-  Type 1 Turf Reinforcement Mat
-  Type 2 Turf Reinforcement Mat
-  Type 3 Turf Reinforcement Mat
-  Transition Mat
-  Articulated Concrete Matress
-  Silt Trap (See Standard Plate 734.04)
-  Area to be Seeded with Special Permanent Seed Mixture 1

## BEST MANAGEMENT PRACTICES

Best Management Practices (BMPs) are split into three categories and are to be used throughout construction.

### INITIAL PHASE

BMPs from the Legend shown as Orange Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Initial Phase prior to earth disturbing activities and remain in place for the Intermediate Phase for temporary stabilization and in the Final Phase to achieve final stabilization.















### INTERMEDIATE PHASE

BMPs from the Legend shown as Blue Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Intermediate Phase for temporary stabilization and remain in place in the Final Phase to achieve final stabilization.

### FINAL PHASE

BMPs from the Legend shown as Green Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Final Phase to achieve final stabilization.

If these items are applicable they are to be shown in the updated SWPPP using the Symbols given.

- |  |   |  |  |
|--|---|--|--|
|  TS   | Topsoil Stockpile   |  M    | On-Site Construction Material Storage Area |
|  B   | Borrow Area   |  SK  | Spill Kit                                  |
|  CE | Stabilized Construction Entrance                                      |  WP | Work Platform                              |
|  VB | Vegetated Buffer Strip  |  CC | Cover Crop Seeding                         |
|  CW | Concrete Washout  |  PT | Portable Toilet                            |
|  AP | Asphalt Plant Site  |  |  |
|  CP | Concrete Plant Site   |  |  |
|  V  | Vehicle and Equipment Parking Area, Fueling Area, or Maintenance Area |  |  |
|  D  | Dumpster or other Trash and Debris Containers                         |  |  |

Install Low Flow Silt Fence at the following locations:  
350+25 to 366+25 L Protect Wetland 1,600 Ft  
350+25 to 367+75 R Protect Wetland 1,750 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
358+38 R Inlet end of pipe 18 Ft  
360+94 - 59' L Inlet end of pipe 18 Ft  
360+93 - 53' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
358+38 L Outlet end of pipe 89 SqYd  
360+94 L Outlet end of pipe 89 SqYd  
360+93 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D13	D50

Plotting Date: 02/29/2024

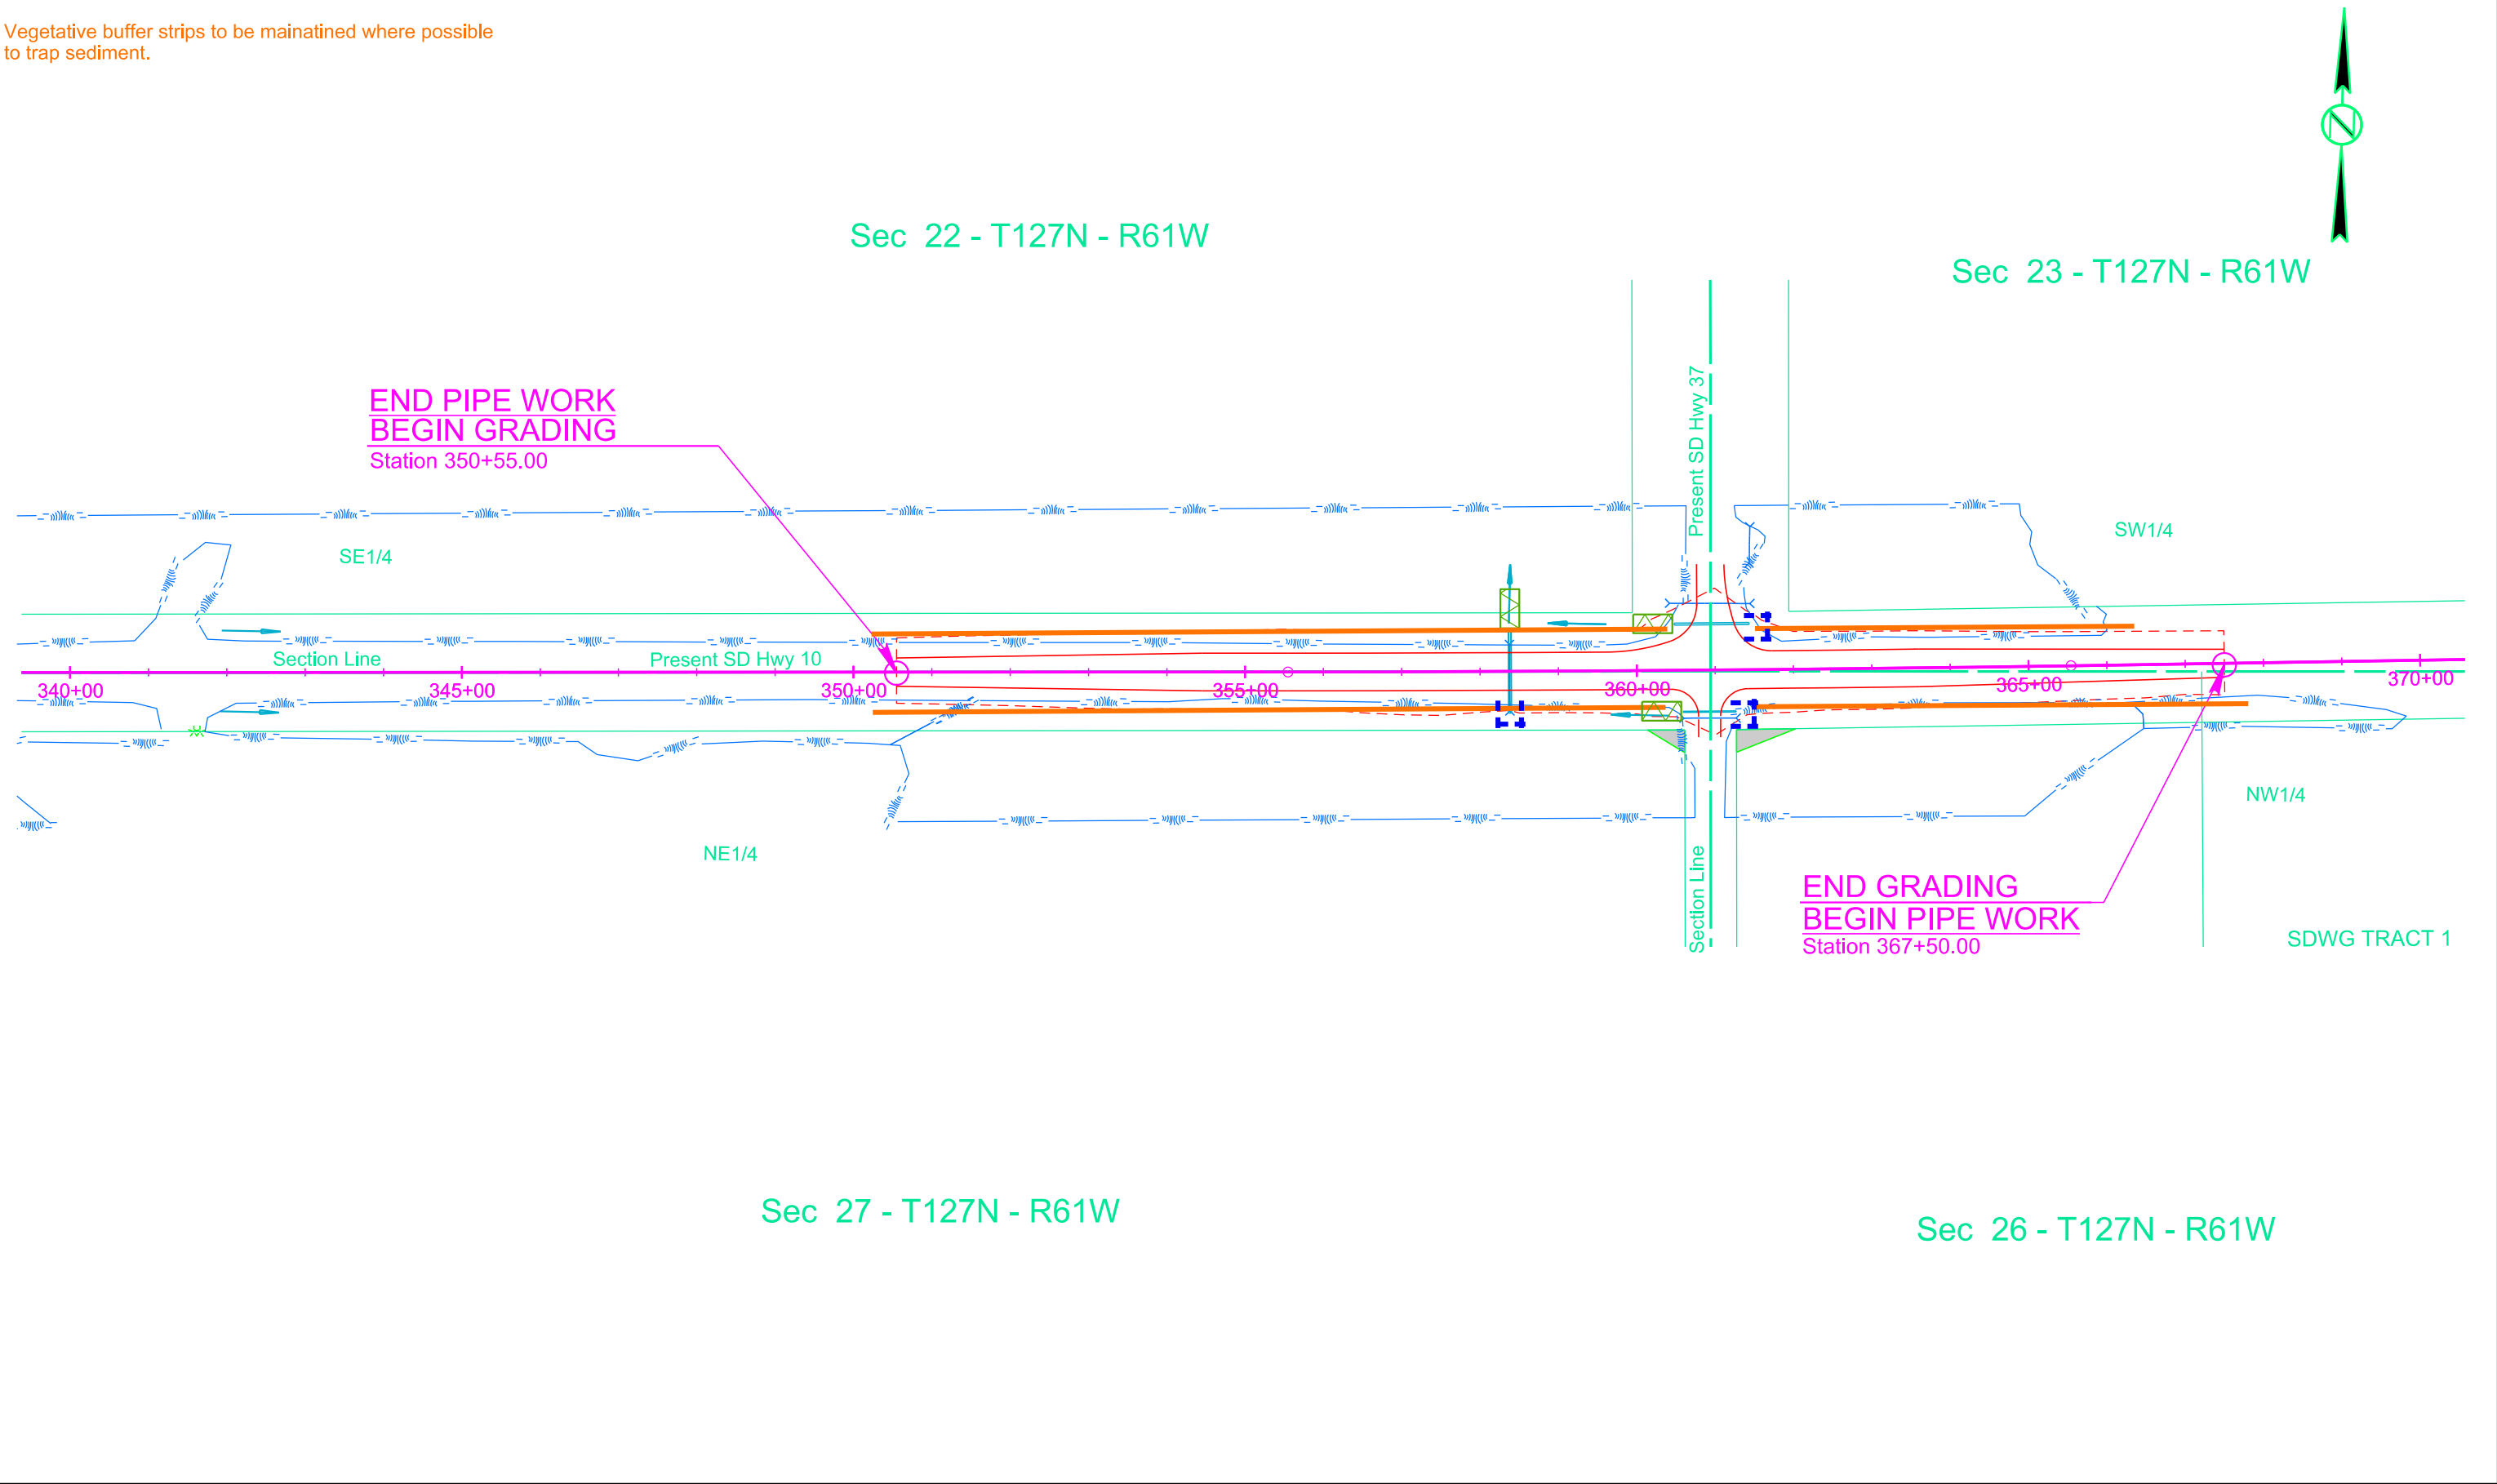

1:200  
Plot Scale -

Plotted From -  
TRPR13525

File - U:\trp\jbnwn05\F4\340ec.dgn


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D14	D50

Plotting Date: 02/29/2024



Sec 24 - T127N - R61W

Sec 25 - T127N - R61W

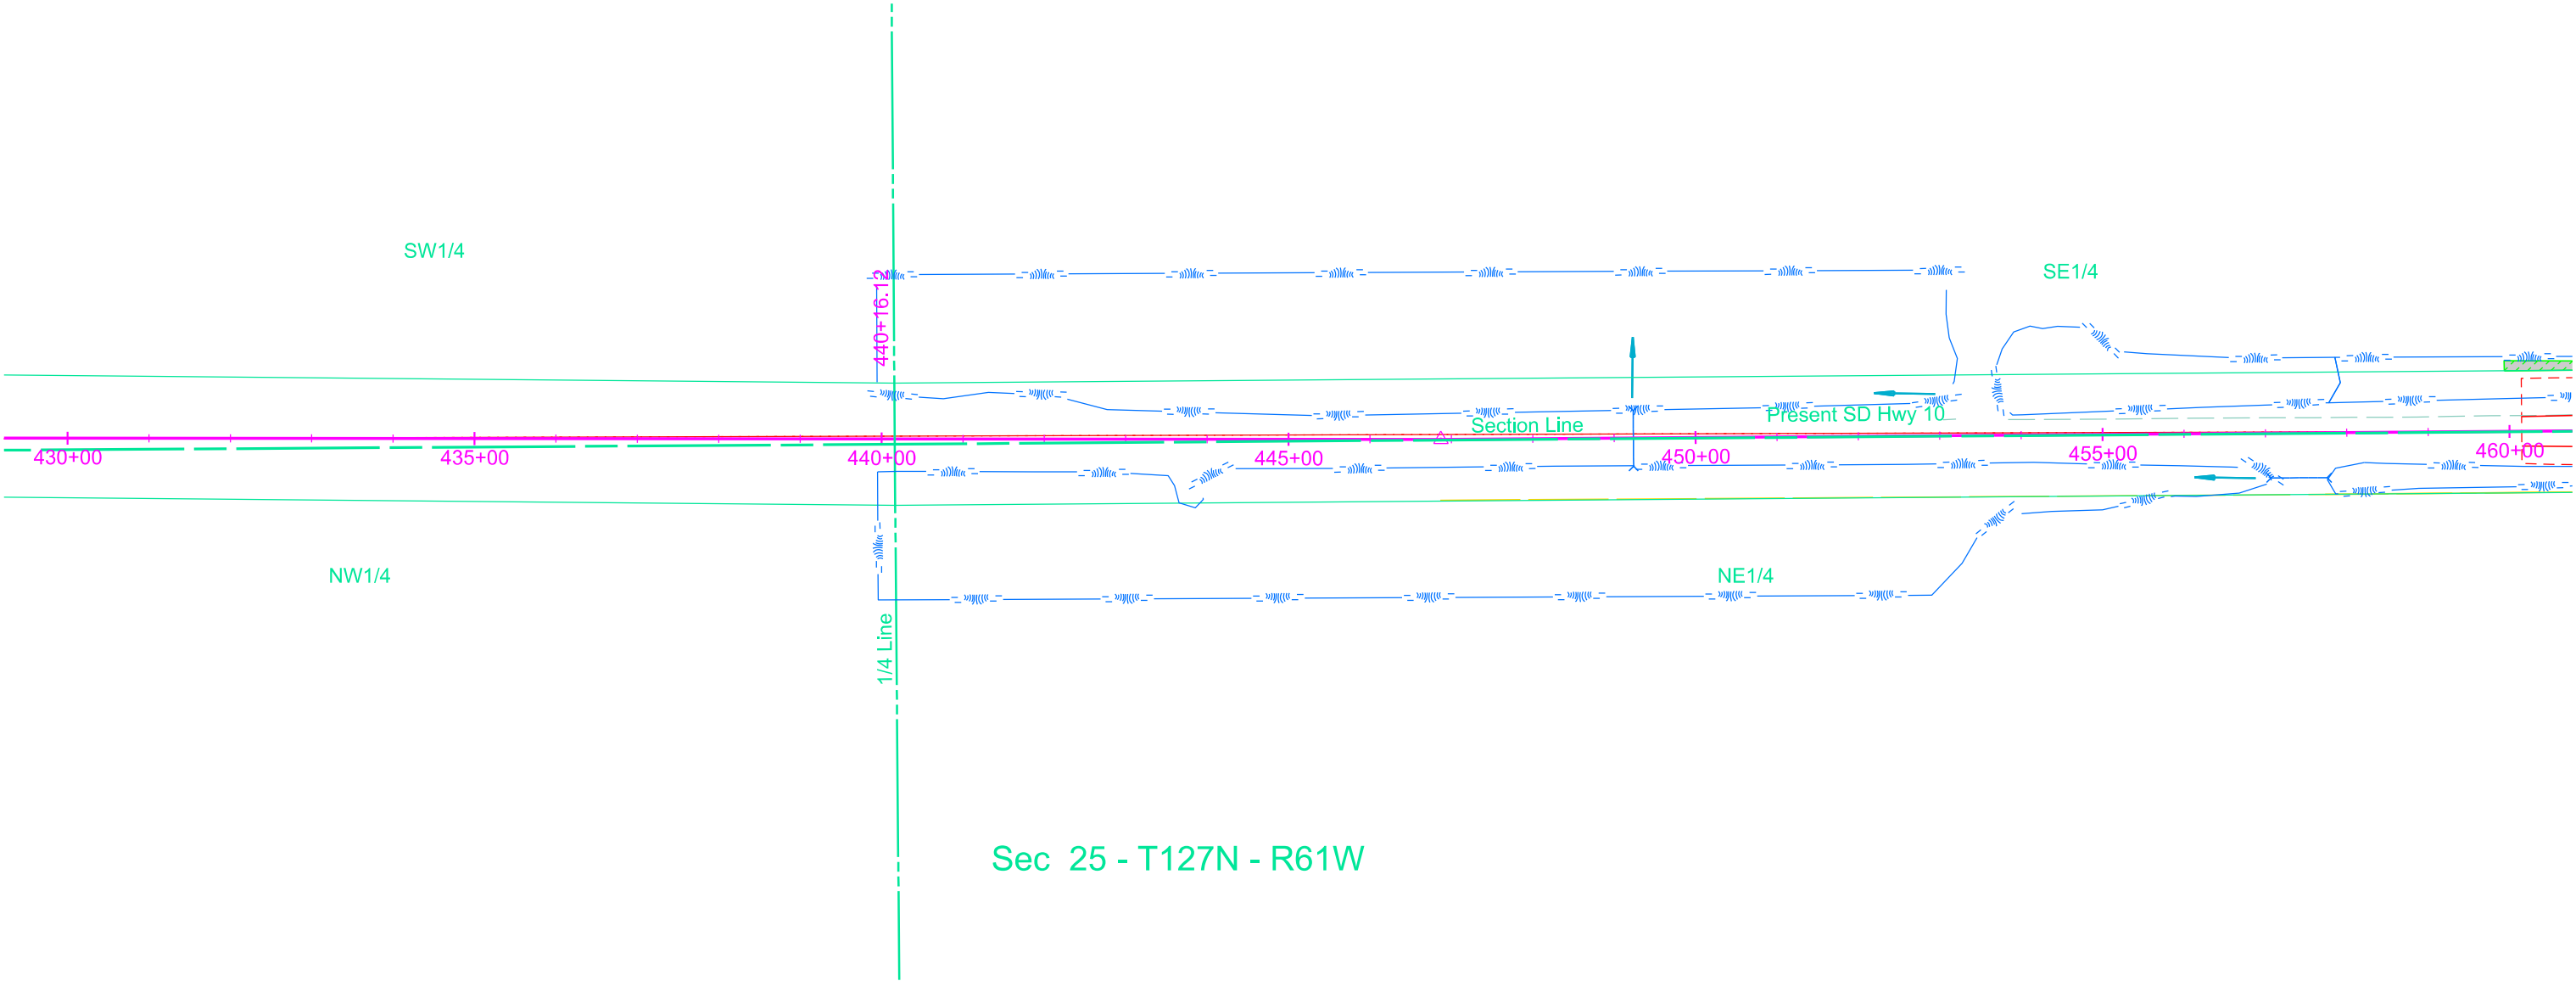

Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
464+79 - 57' L Inlet end of pipe 18 Ft  
481+87 R Inlet end of pipe 18 Ft  
484+75 - 51' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
464+79 L Outlet end of pipe 89 SqYd  
481+87 L Outlet end of pipe 89 SqYd  
484+75 R Outlet end of pipe 89 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D15	D50

Plotting Date: 02/29/2024



Plot Scale - 1:200

Plotted From - TRPR13525

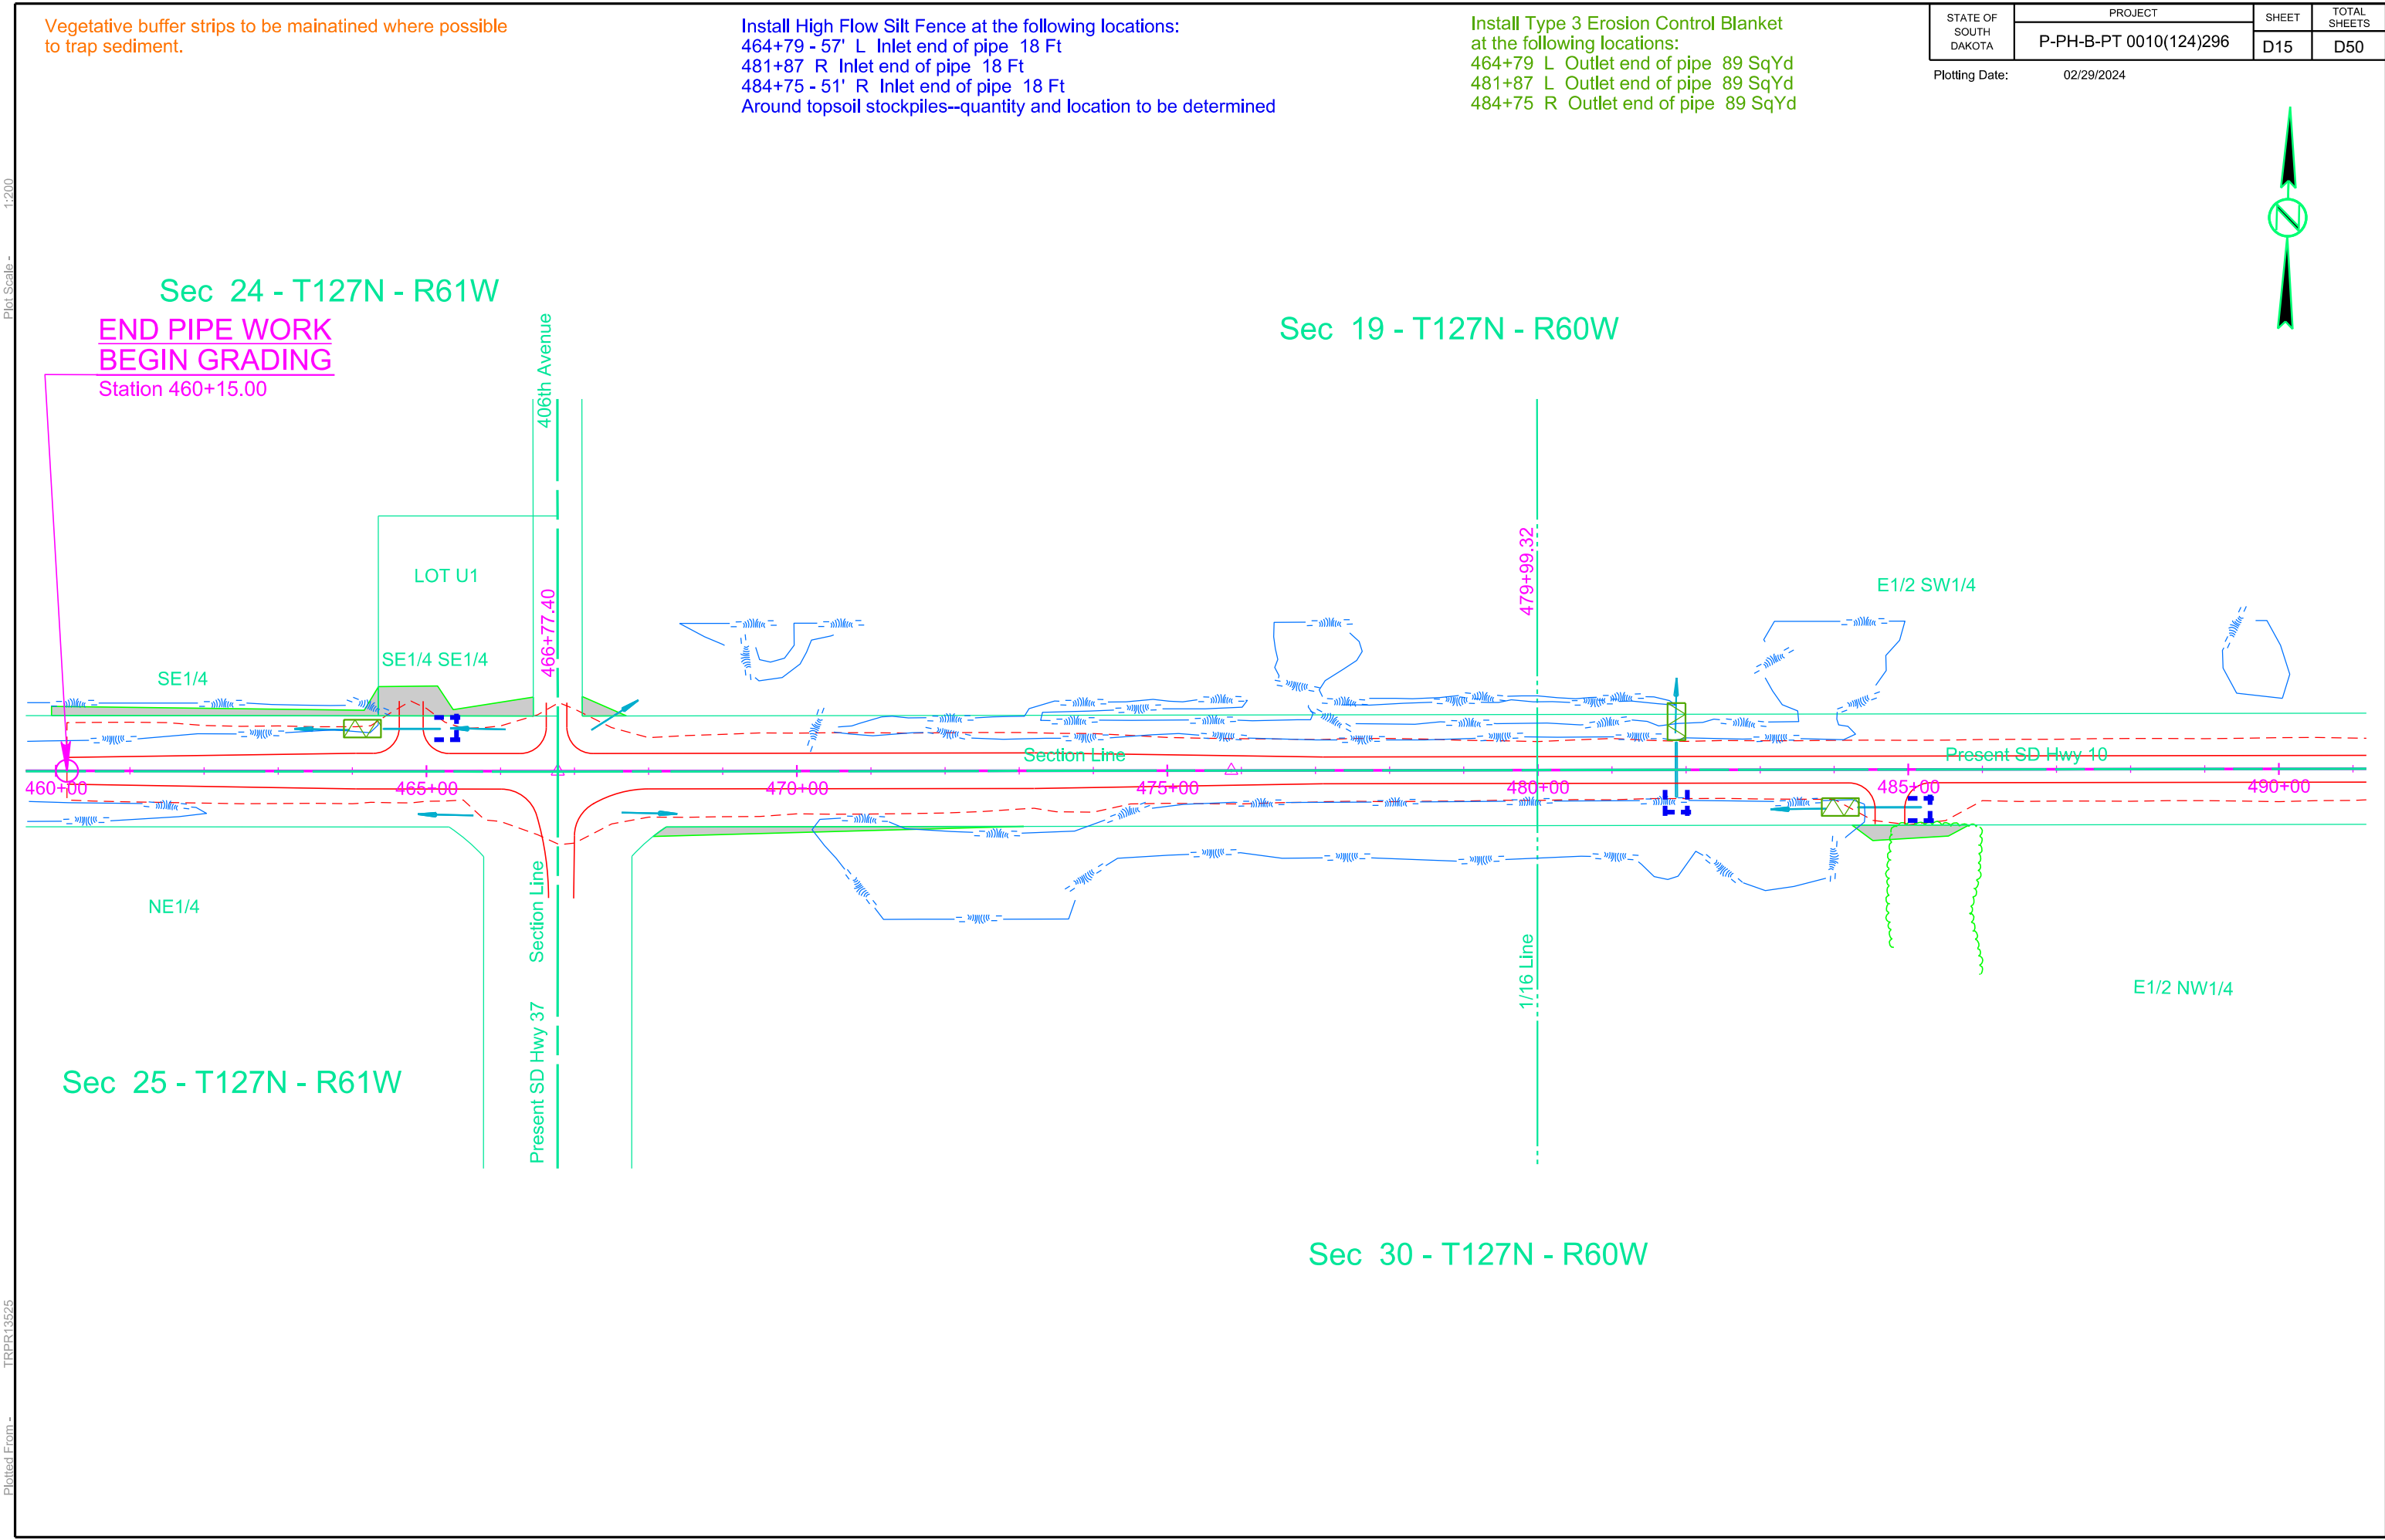

File - U:\trp\jbnwn\05F4\460ec.dgn

Install Low Flow Silt Fence at the following locations:  
510+50 to 520+00 R Protect Wetland 950 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
509+98 - 52' R Inlet end of pipe 18 Ft  
510+17 - 131' R Inlet end of pipe 18 Ft  
514+18 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
509+98 R Outlet end of pipe 89 SqYd  
510+17 R Outlet end of pipe 89 SqYd  
514+18 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D16	D50

Plotting Date: 02/29/2024

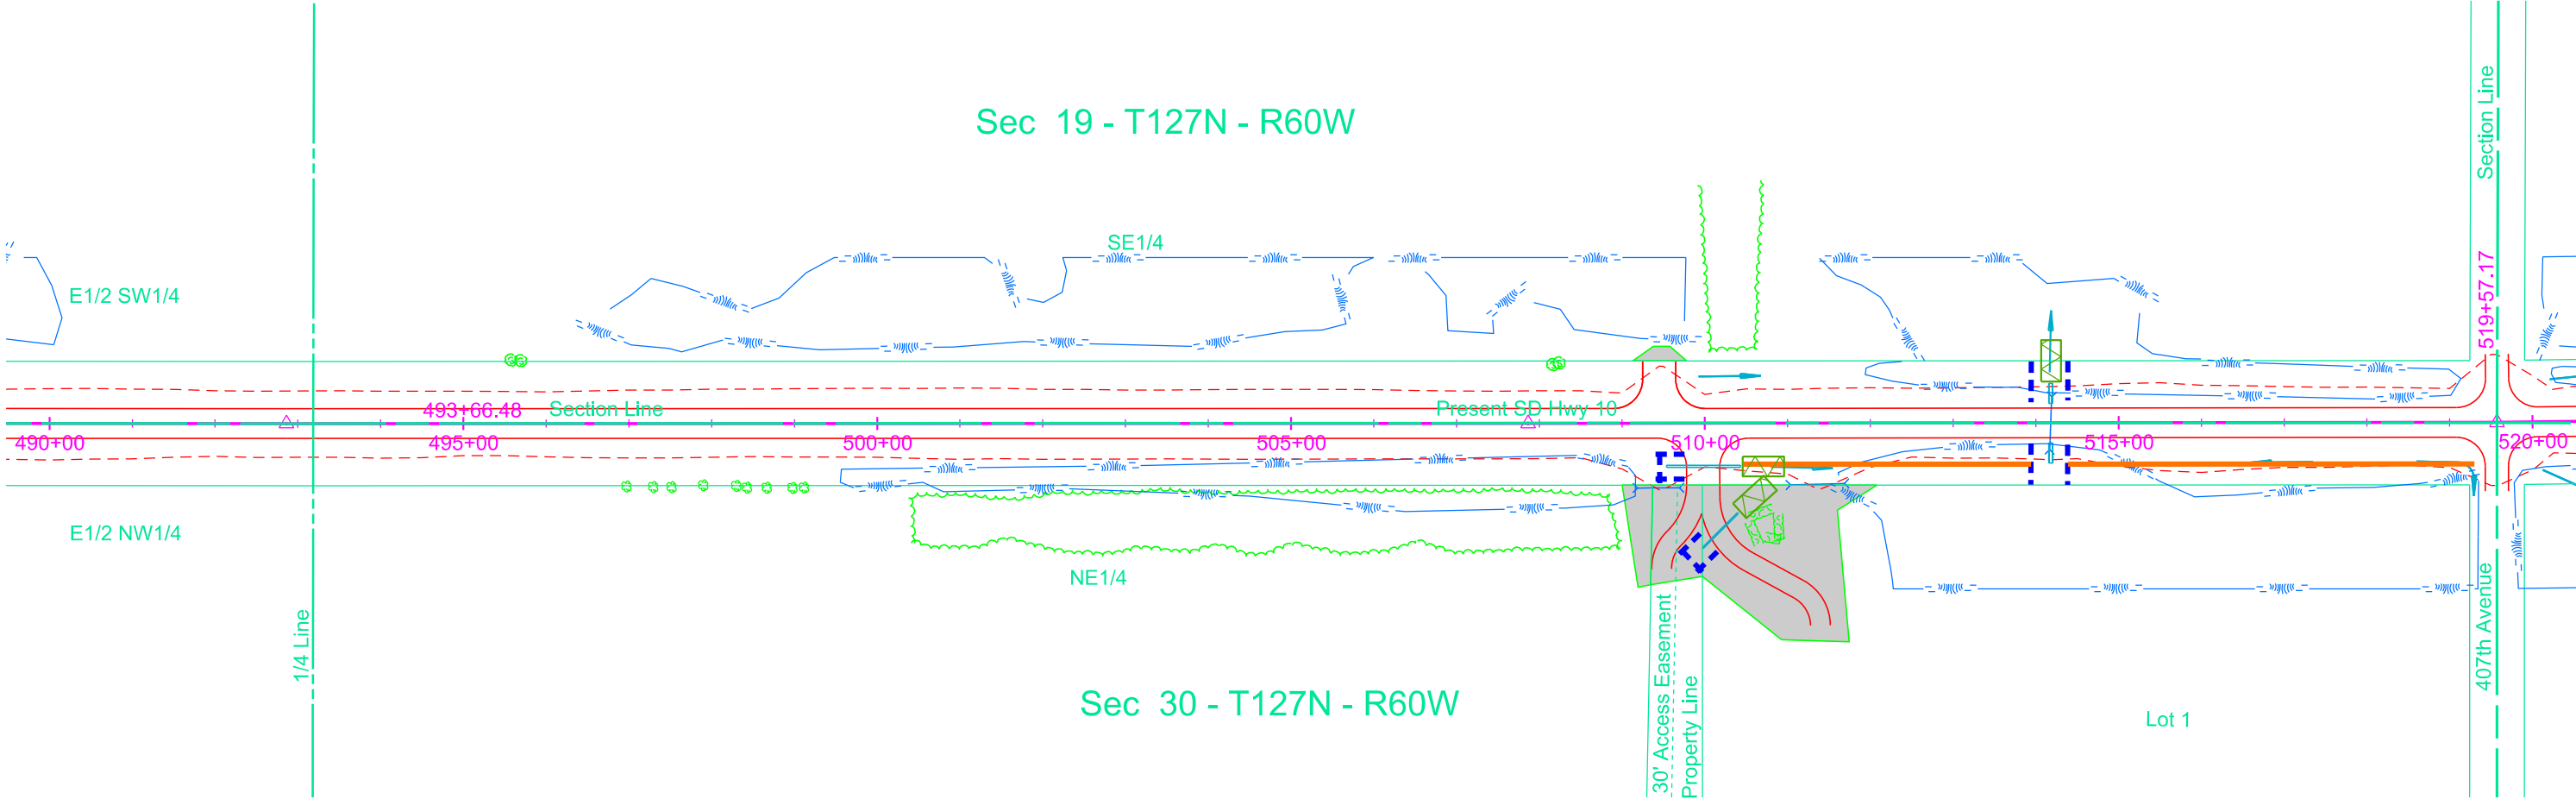

1:200  
Plot Scale -

Plotted From -  
TRPR13525

1:200  
Plot Scale -

Plotted From -  
TRPR13525

Section Line  
407th Avenue  
519+57.17

Install Low Flow Silt Fence at the following locations:  
521+00 to 528+00 L Protect wetland 700 Ft  
\*Continuous runs of Low Flow Silt Fence should not  
exceed 200 Ft. Ends of runs to be turned up-slope  
as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible  
to trap sediment.

Install High Flow Silt Fence at the following locations:  
522+31 L Inlet end of pipe 18 Ft  
522+91 L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type3 Erosion Control Blanket  
at the following locations:  
522+31 L Outlet end of pipe 89 SqYd  
522+91 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D17	D50

Plotting Date: 02/29/2024

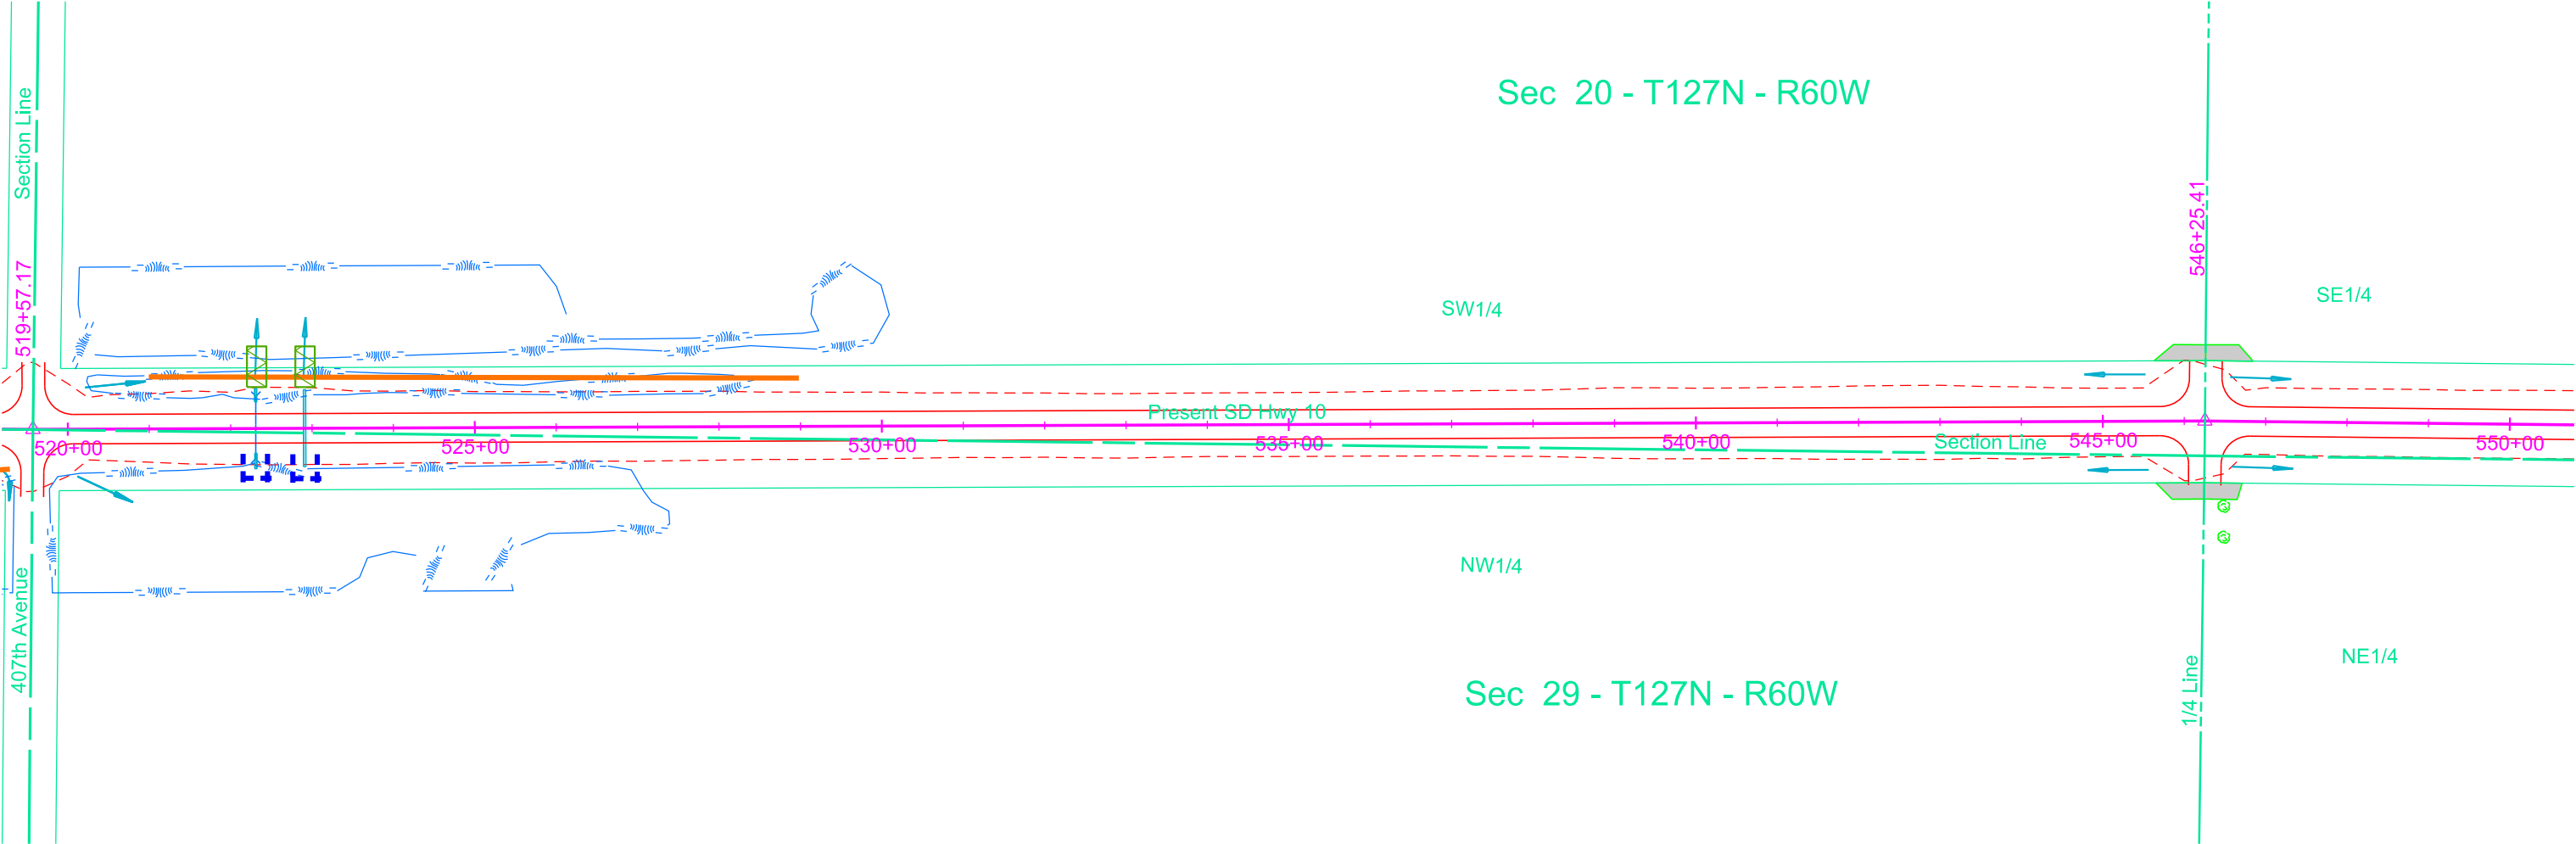

File - U:\trp\proj\bnwn05\F4\520ec.dgn

Plotted From - TRPR13525 Plot Scale - 1:200

Install Low Flow Silt Fence at the following locations:  
578+00 to 580+00 L Protect Wetland 200 Ft  
\*Continious runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
559+55 R Inet end of pipe 18 Ft  
572+53 - 59' R Inlet end of pipe 18 Ft  
572+90 - 200' L Inlet end of pipe 18 Ft  
578+86 R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
559+55 L Outlet end of pipe 89 SqYd  
572+53 R Outlet end of pipe 89 SqYd  
572+90 L Outlet end of pipe 89 SqYd  
578+86 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D18	D50

Plotting Date: 02/29/2024



Sec 20 - T127N - R60W

Sec 21 - T127N - R60W

SW1/4

NW1/4

NE1/4

Sec 28 - T127N - R60W

Sec 29 - T127N - R60W

Plot Scale - 1:200

Plotted From - TRPR13525

Plotted From -

Plotted From -

Plotted From -

Plotted From -

Plotted From -



Plotted From -

Plotted From - TRPR13525 Plot Scale - 1:200

Install Low Flow Silt Fence at the following locations:  
611+50 to 613+00 L Protect wetland 250 Ft  
\*Continious runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
611+80 R Inlet end of pipe 18 Ft  
618+97 - 51' L Inlet end of pipe 18 Ft  
622+44 - 51' R Inlet end of pipe 18 Ft  
624+98 L Inlet end of pipe 18 Ft  
626+06 L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
611+80 L Outlet end of pipe 89 SqYd  
618+97 L Outlet end of pipe 89 SqYd  
622+44 R Outlet end of pipe 89 SqYd  
624+98 R Outlet end of pipe 89 SqYd  
626+06 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D20	D50

Plotting Date: 02/29/2024

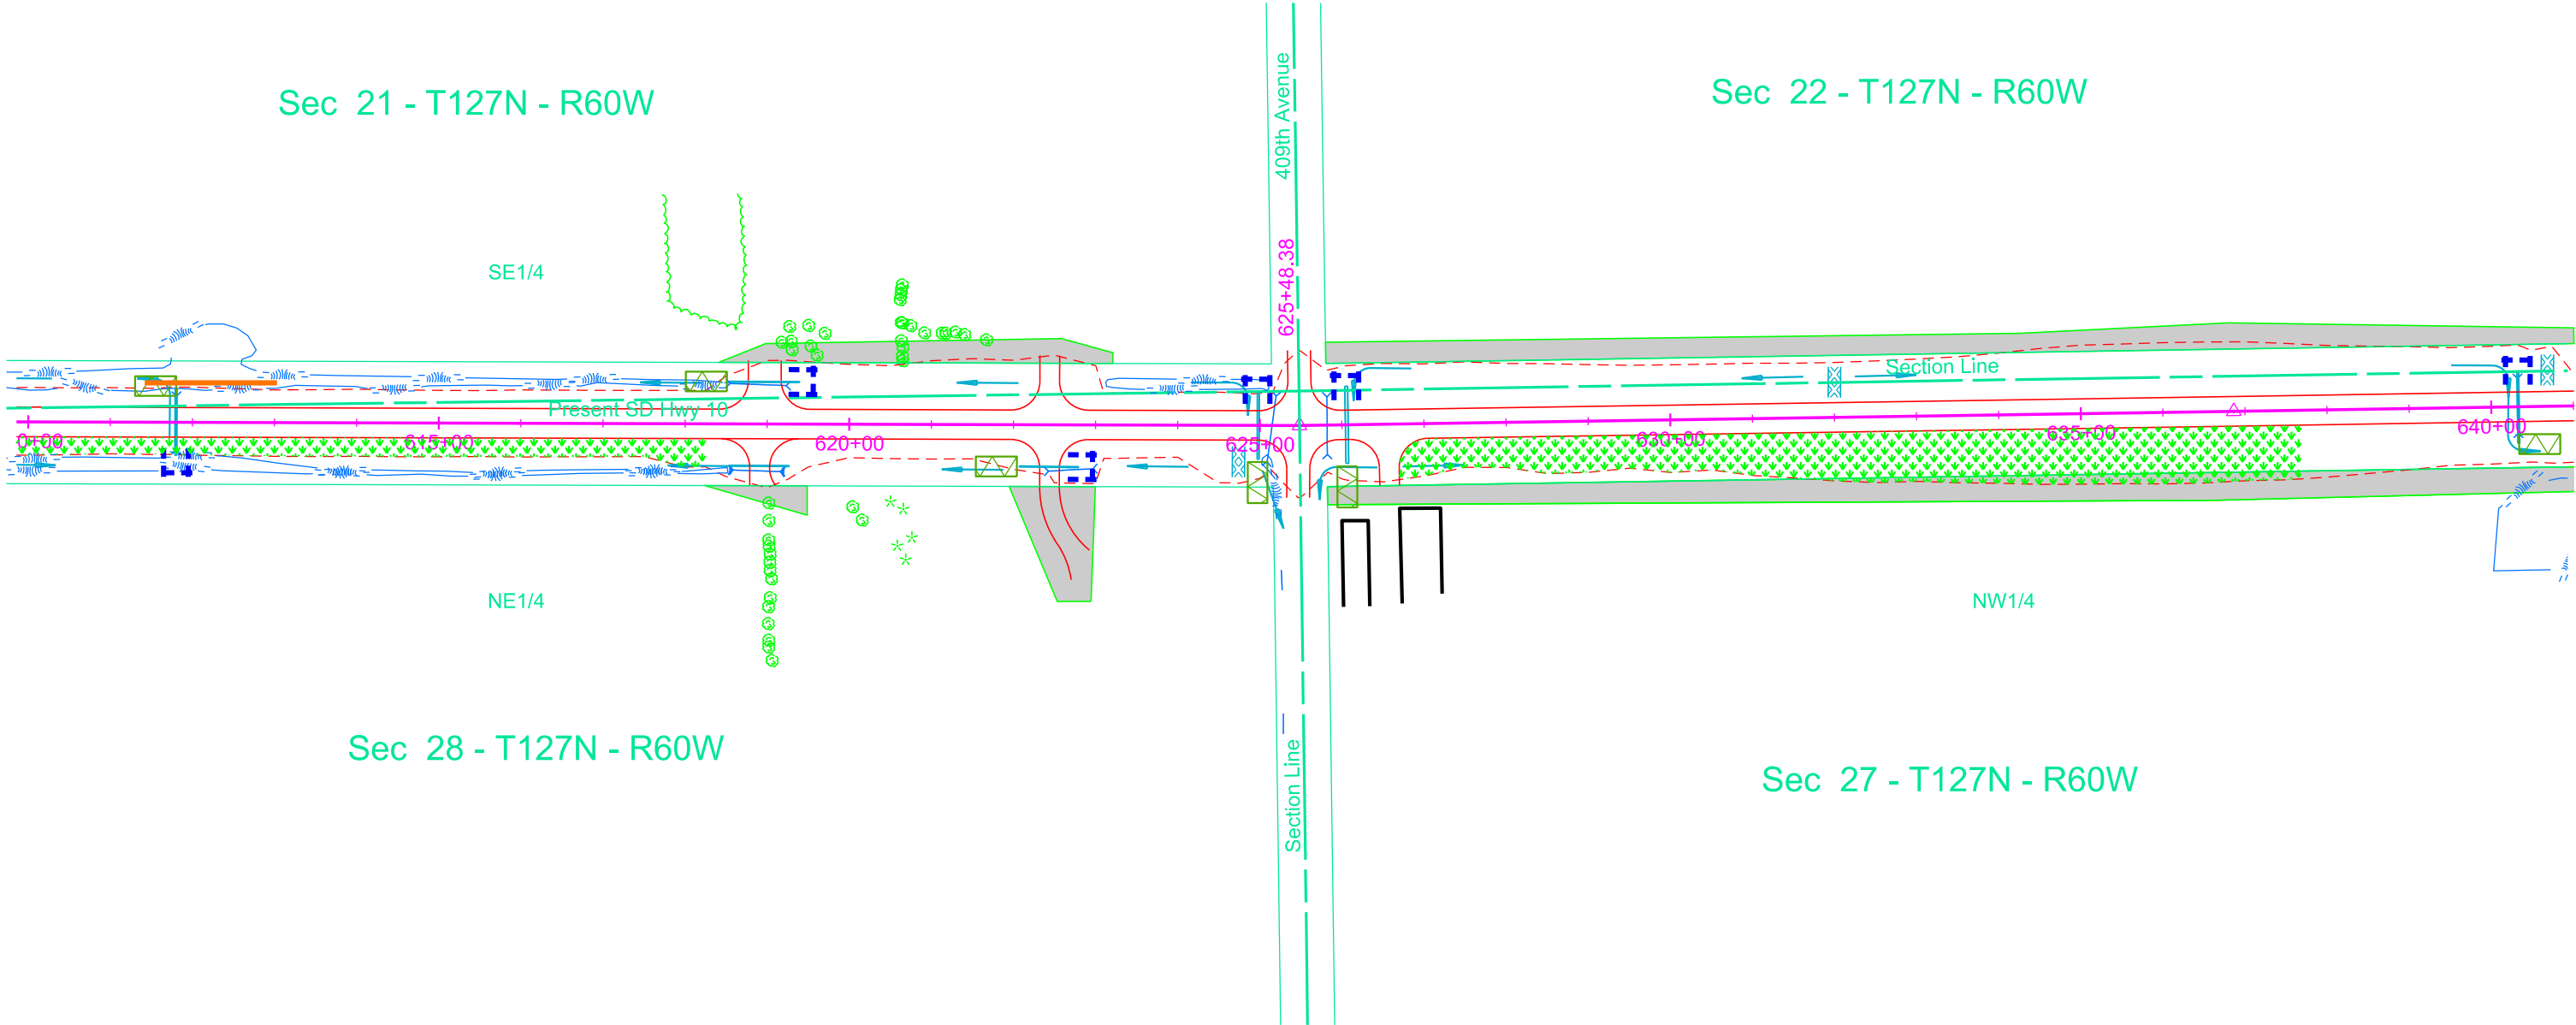

Vegetative buffer strips to be maintained where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
640+33 L Inlet end of pipe 18 Ft  
650+42 - 45' L Inlet end of pipe 18 Ft  
651+89 - 51' R Inlet end of pipe 18 Ft  
652+08 - 46' L Inlet end of pipe 18 Ft  
659+07 L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined


Install Type 3 Erosion Control Blanket at the following locations:  
640+33 R Outlet end of pipe 89 SqYd  
650+42 L Outlet end of pipe 89 SqYd  
651+89 R Outlet end of pipe 89 SqYd  
652+08 L Outlet end of pipe 89 SqYd  
659+07 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D21	D50

Plotting Date: 02/29/2024



Sec 22 - T127N - R60W

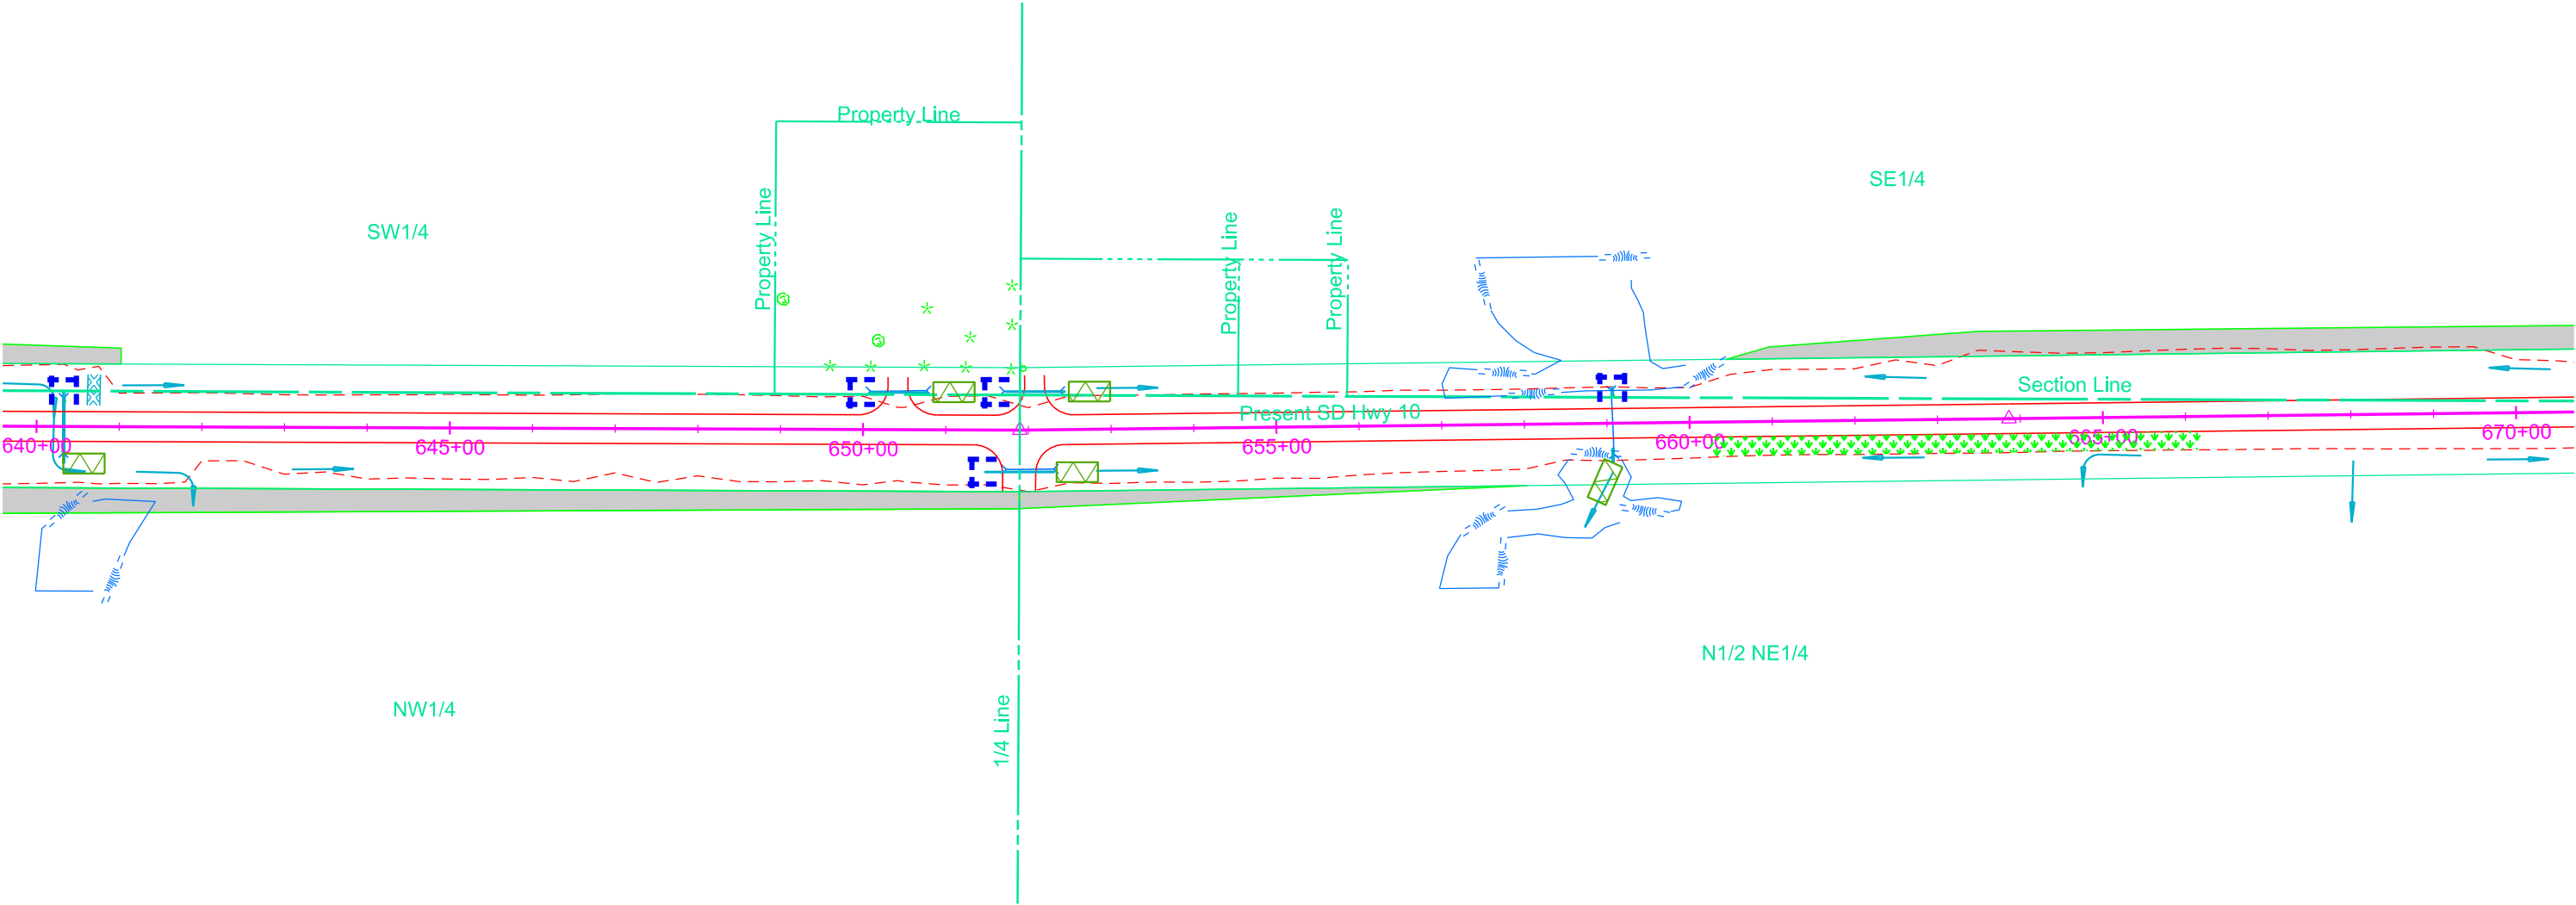

Sec 27 - T127N - R60W

Install Low Flow Silt Fence at the following locations:  
674+50 to 678+00 R Protect Wetland 475 Ft  
680+50 to 683+00 R Protect Wetland 250 Ft  
684+00 to 685+50 R Protect Wetland 150 Ft  
691+00 to 695+50 L Protect Wetland 450 Ft  
691+00 to 696+00 R Protect Wetland 500 Ft  
\*Continious runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
676+34 L Inlet end of pipe 18 Ft  
678+97 L Inlet end of pipe 18 Ft  
693+34 L Inlet end of pipe 18 Ft  
698+15 - 52' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
676+34 R Outlet end of pipe 89 SqYd  
678+97 R Outlet end of pipe 89 SqYd  
693+34 R Outlet end of pipe 89 SqYd  
698+15 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D22	D50

Plotting Date: 02/29/2024 REV 02-29-24 BS

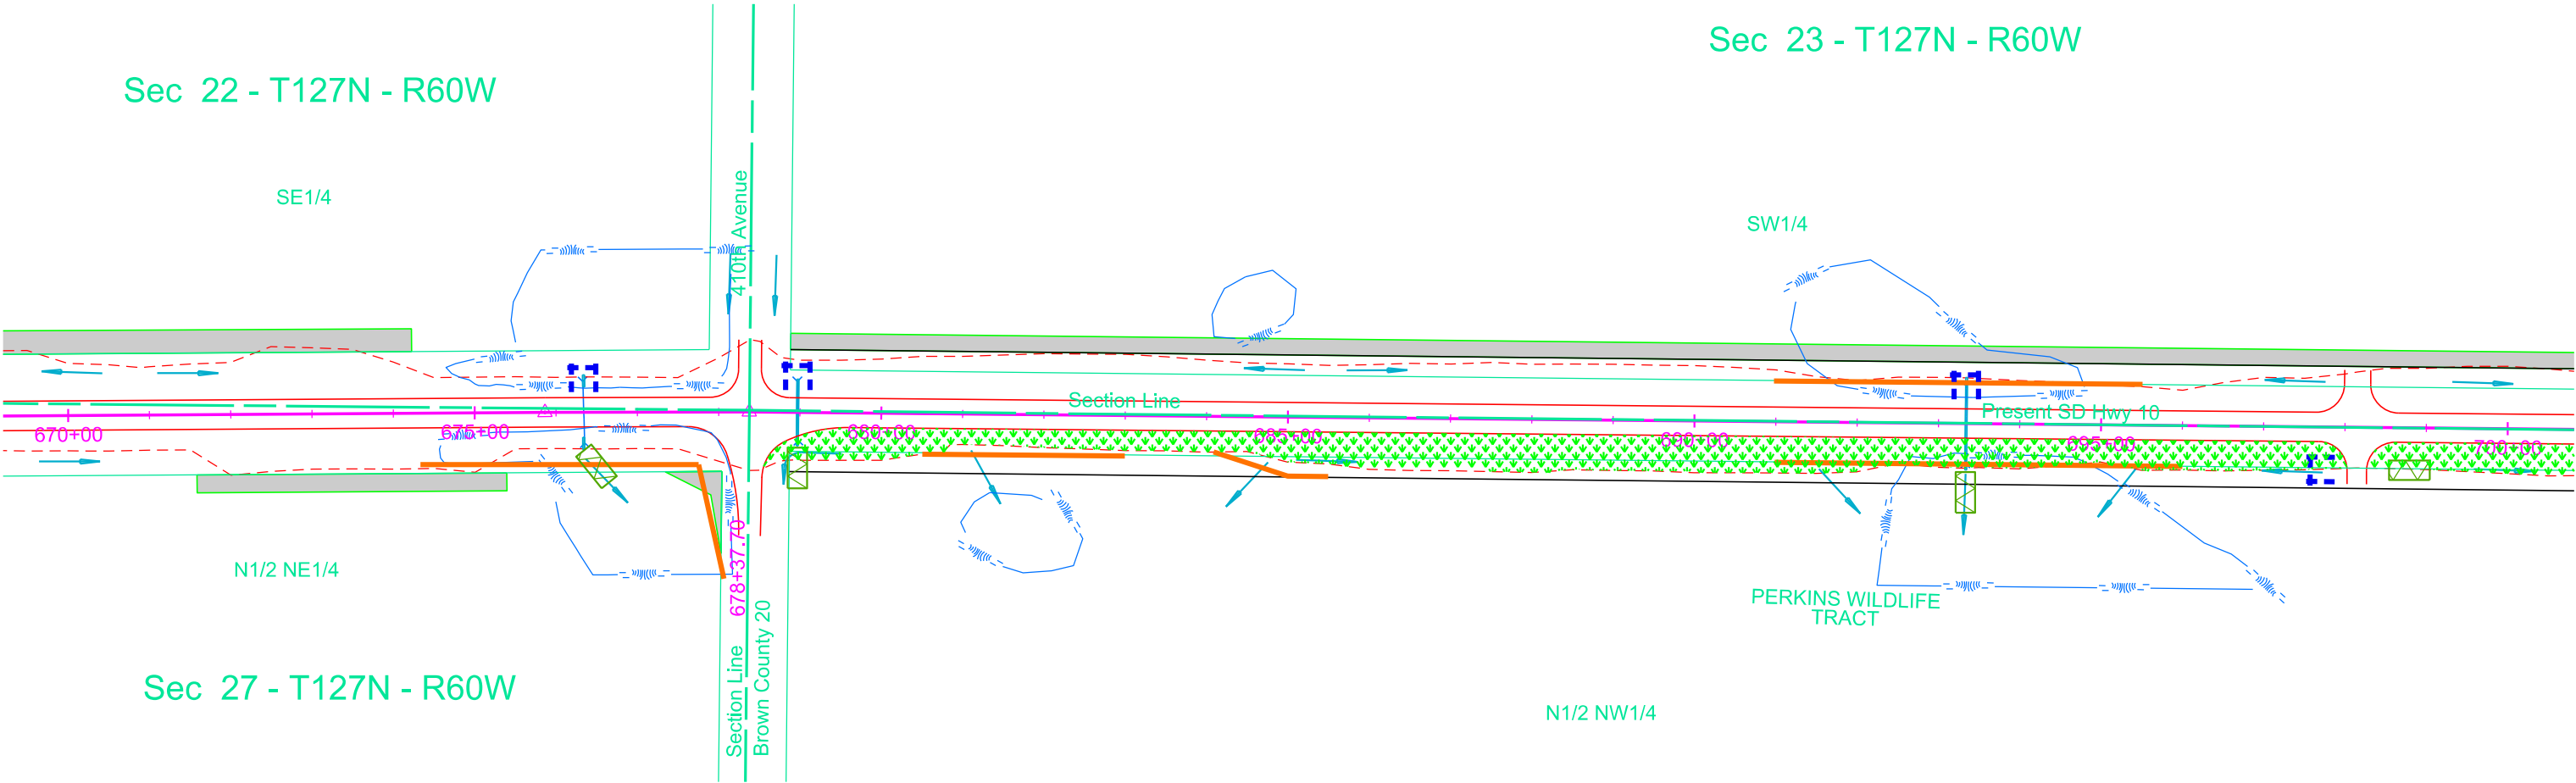

Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trp\jbnwn05\F4\670ec.dgn

1:200  
Plot Scale -

Plotted From -  
TRPR13525

Install Low Flow Silt Fence at the following locations:  
701+50 to 707+50 L Protect Wetland 600 Ft  
702+50 to 715+00 R Protect Wetland 1,250 Ft  
709+50 to 713+50 R Protect Wetland 400 Ft  
722+50 to 726+00 R Protect Wetland 350 Ft  
729+00 to 730+00 R Protect Wetland 100 Ft  
\*Continuous runs of Low Flow Silt Fence should not  
exceed 200 Ft. Ends of runs to be turned up-slope  
as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be mainatined where possible  
to trap sediment.

Install High Flow Silt Fence at the following locations:  
705+35 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
710+66 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
Around topsoil stockpiles--quantity and location to be determined


Install Type 3 Erosion Control Blanket  
at the following locations:  
705+35 R Outlet end of pipe 89 SqYd  
710+66 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D23	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS



Sec 23 - T127N - R60W

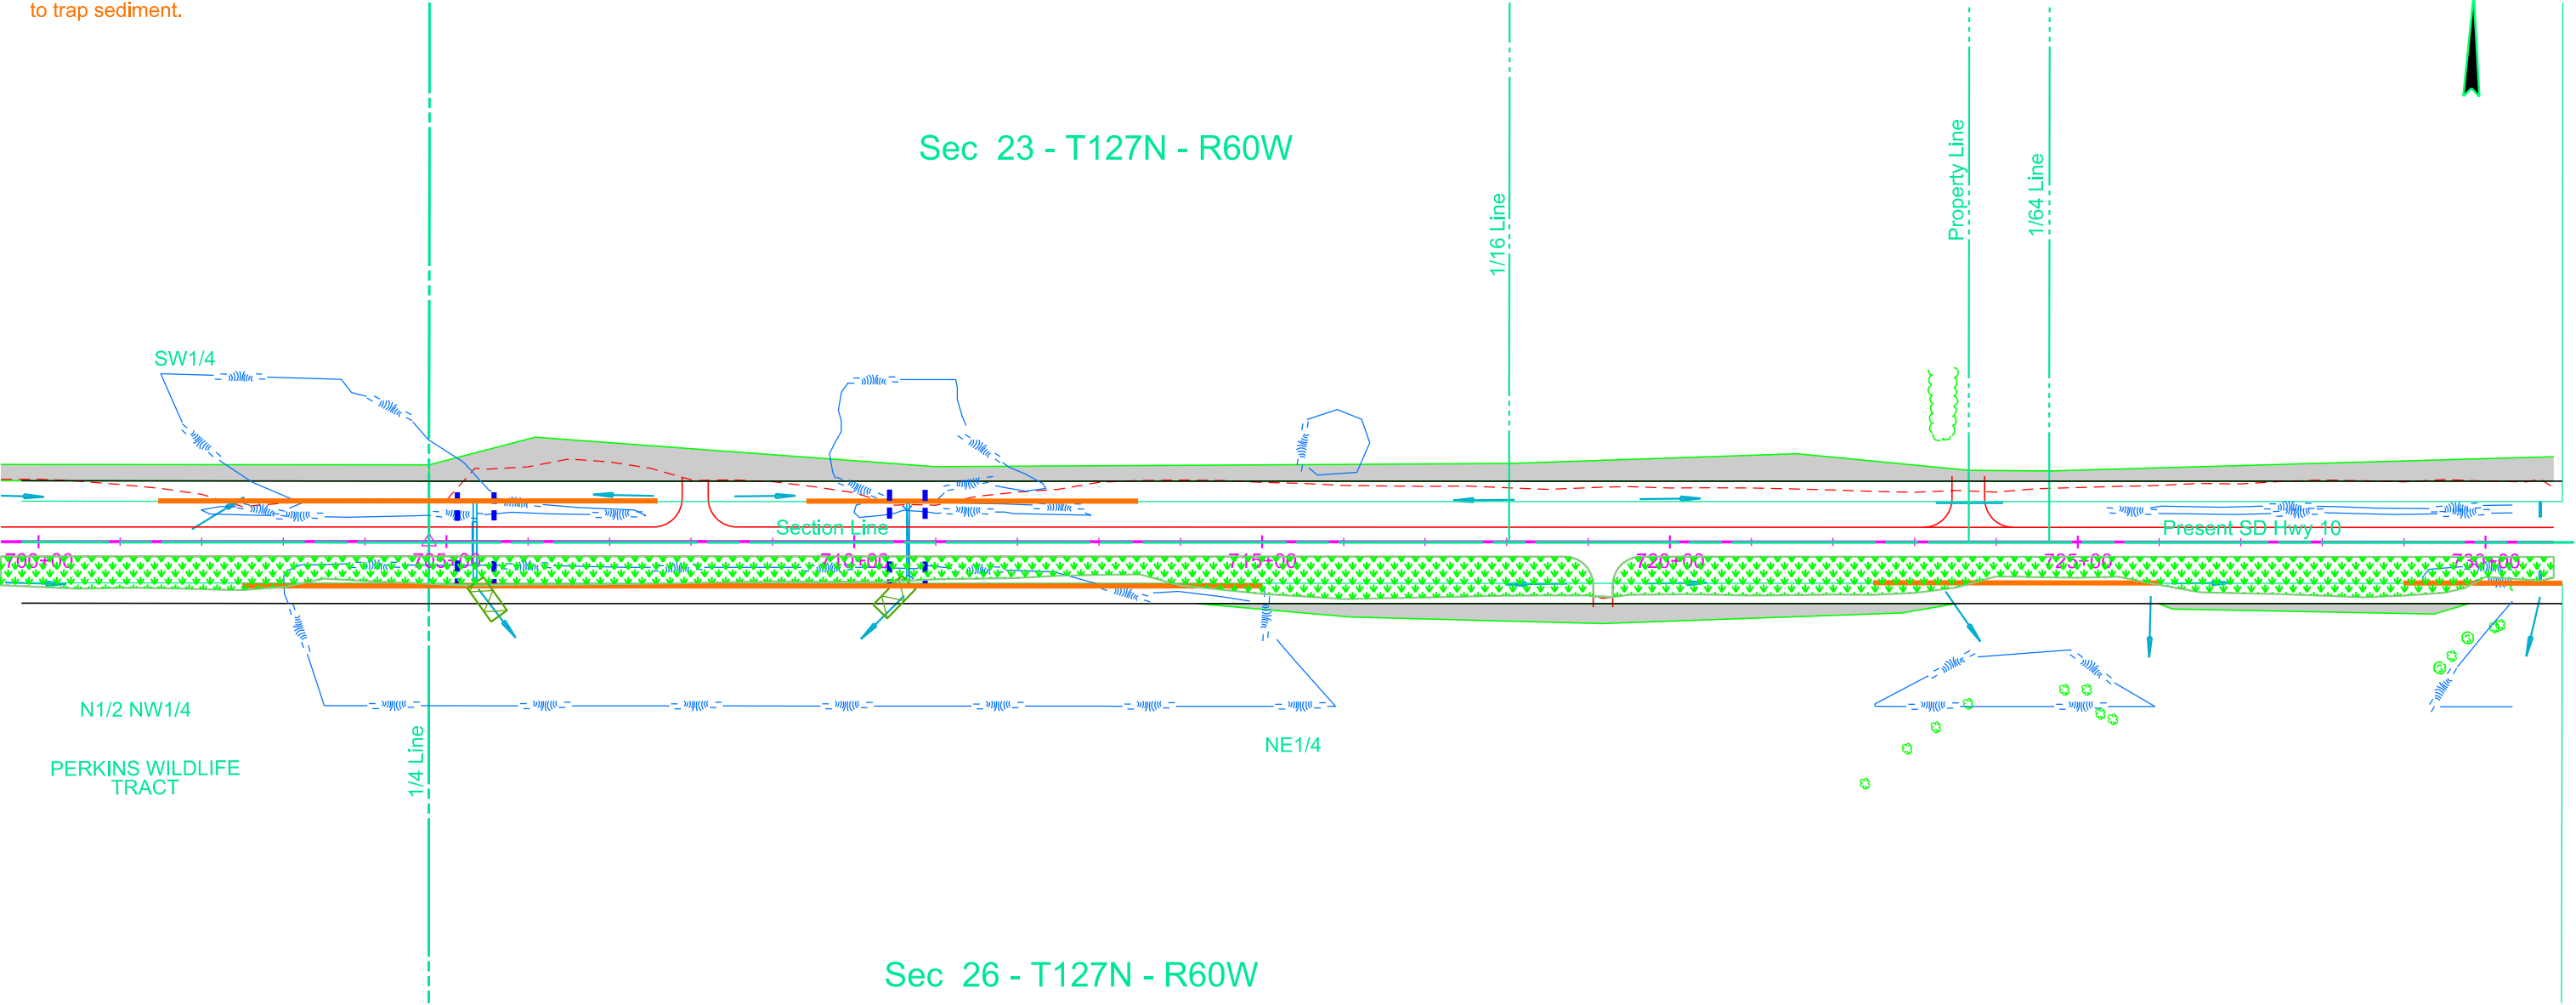

Sec 26 - T127N - R60W

Install Low Flow Silt Fence at the following locations:  
730+00 to 731+00 R Protect Wetland 100 Ft  
738+50 to 742+50 L Protect Wetland 400 Ft  
741+00 to 750+00 R Protect Wetland 900 Ft  
745+00 to 760+00 L Protect Wetland 1,500 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
730+67 L Inlet end of pipe 18 Ft  
731+87 L Inlet end of pipe 18 Ft  
742+73 L Inlet end of pipe 18 Ft  
743+33 L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D24	D50

Plotting Date: 02/29/2024



1:200  
Plot Scale -

Plotted From -  
TRPR13525

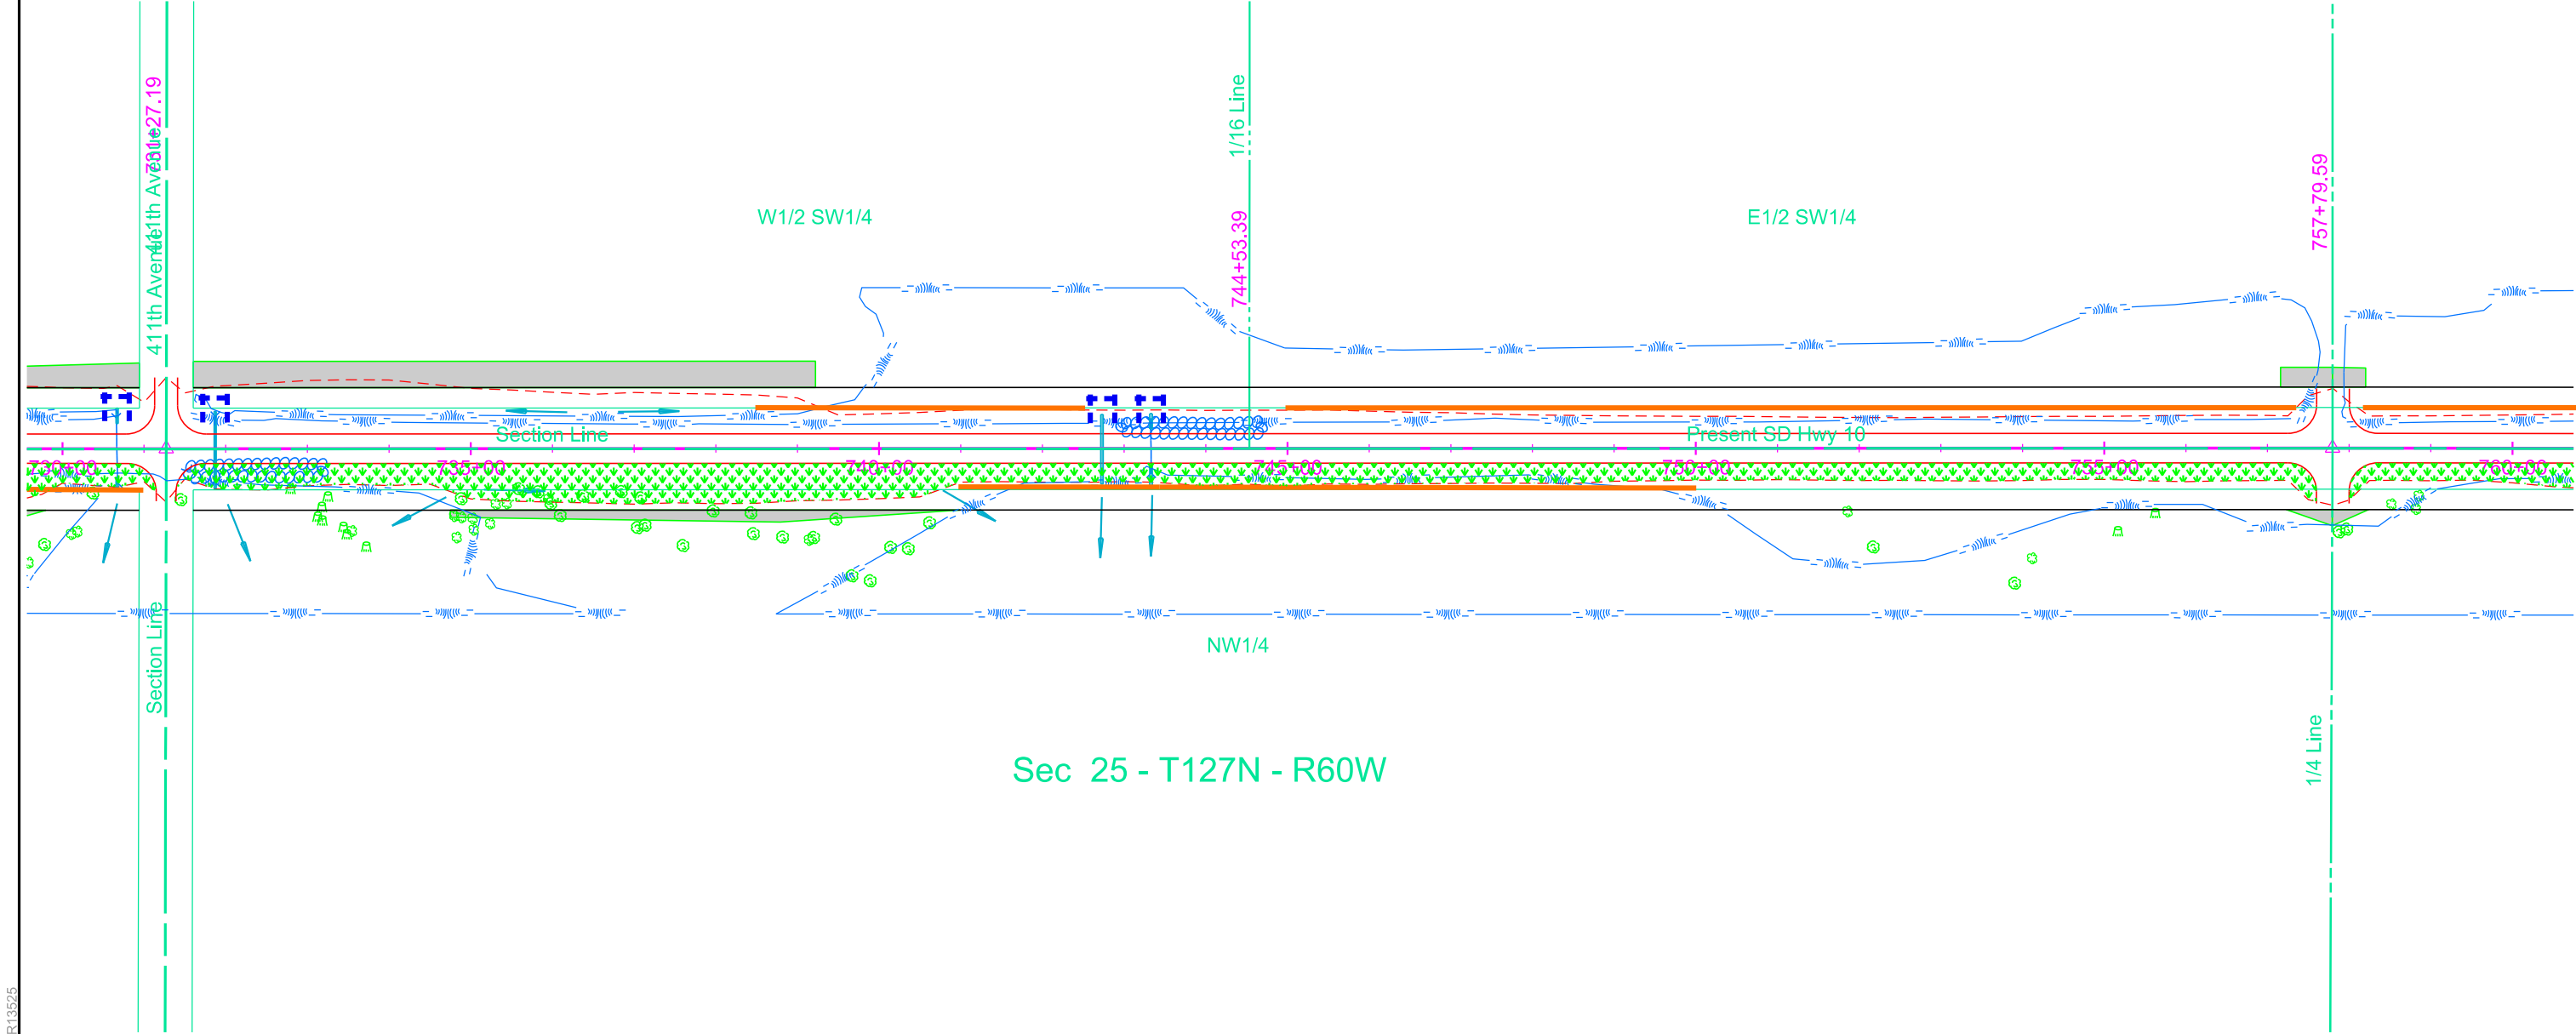

1:200  
Plot Scale -

Plotted From -  
TRPR13525

Install Low Flow Silt Fence at the following locations:  
760+00 to 783+50 L Protect Wetland 2,350 Ft  
760+00 to 777+00 R Protect Wetland 1,700 Ft  
779+20 to 783+50 R Protect Wetland 430 Ft  
784+75 to 787+00 R Protect Wetland 225 Ft  
\*Continious runs of Low Flow Silt Fence should not  
exceed 200 Ft. Ends of runs to be turned up-slope  
as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible  
to trap sediment.

Install Floating Silt Curtain at the following locations:  
777+00 to 779+20 R Along Bank 220 Ft  
787+00 to 794+00 R Along Bank 700 Ft

Install High Flow Silt Fence at the following locations:  
765+33 L Inlet end of pipe 18 Ft  
765+83 L Inlet end of pipe 18 Ft  
778+33 L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D25	D50

Plotting Date: 02/29/2024

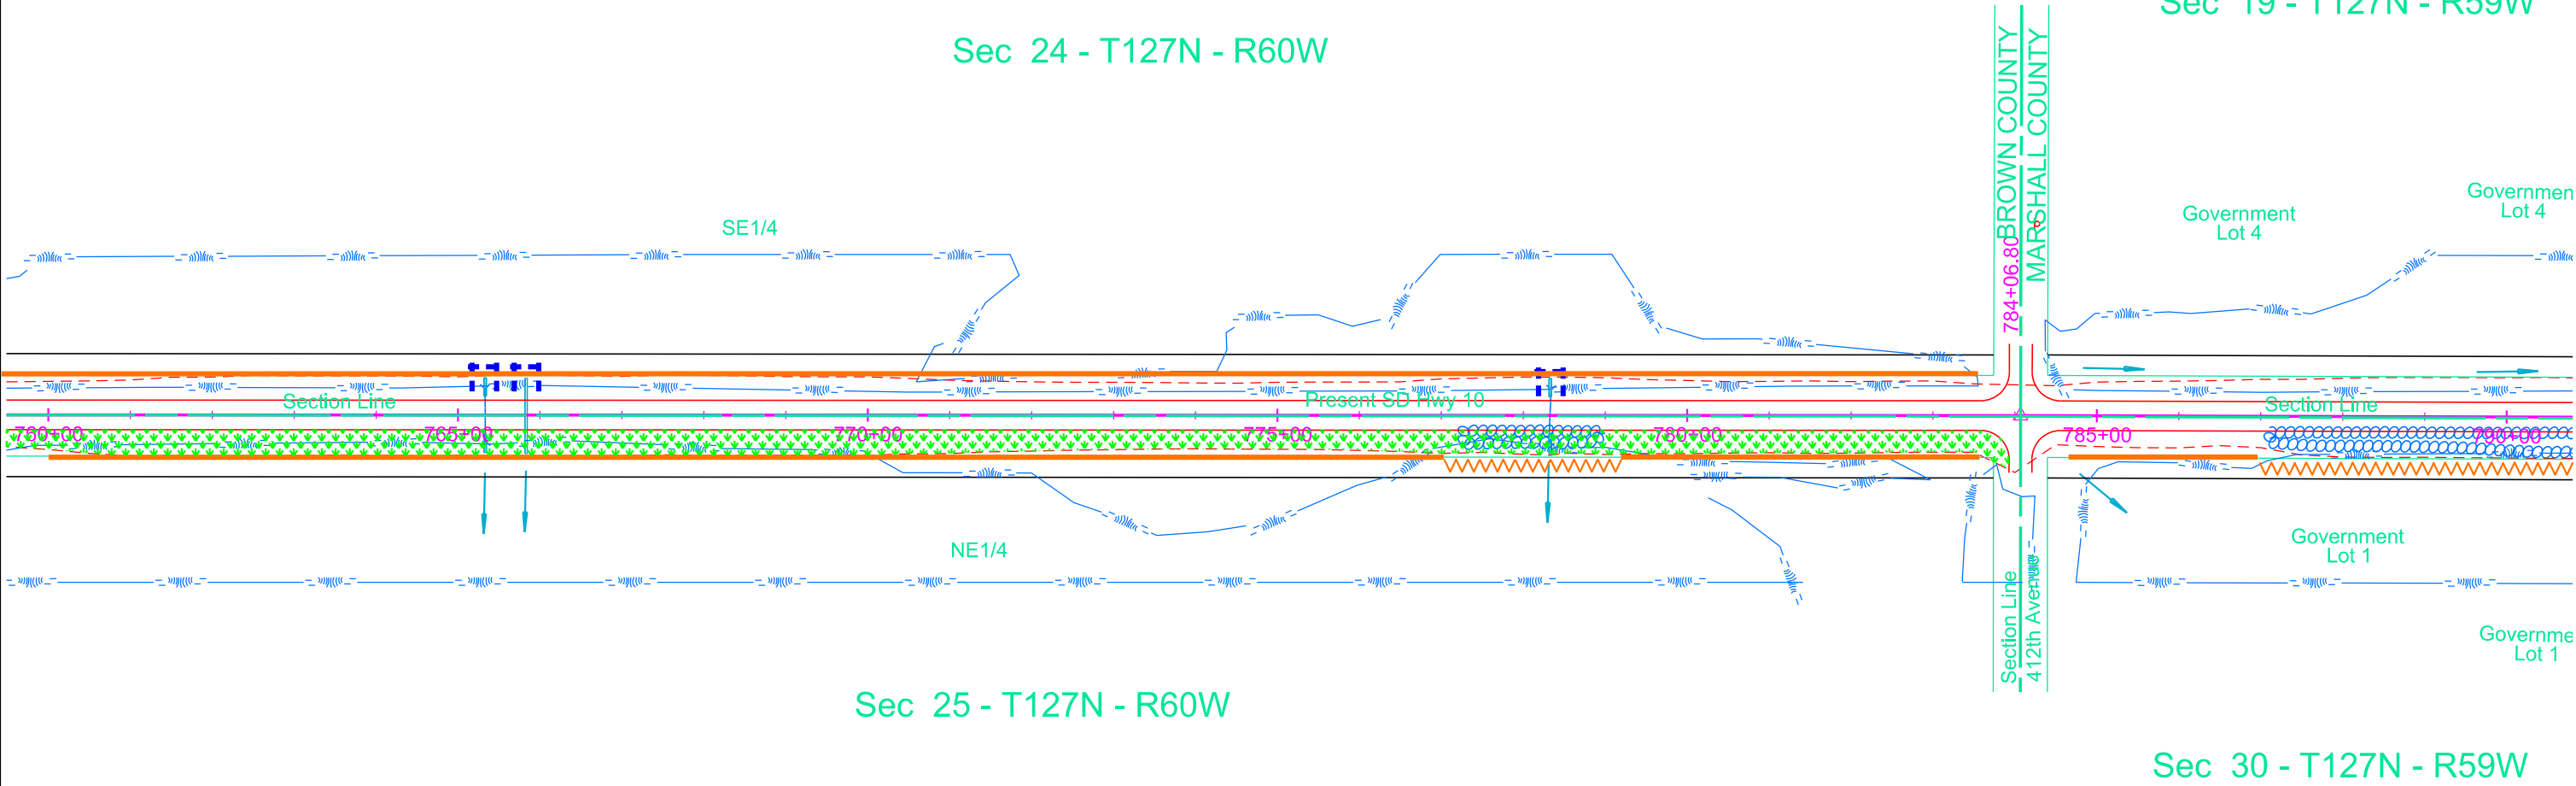

1:200  
Plot Scale -

Plotted From -  
TRPR13525

Install Low Flow Silt Fence at the following locations:  
794+00 to 798+50 R Protect Wetland 450 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be maintained where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
791+16 L Inlet end of pipe 18 Ft  
810+46 - 51' L Inlet end of pipe 18 Ft  
810+46 - 51' L Inlet end of pipe 18 Ft  
818+07 - 49' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined


Install Type 3 Erosion Control Blanket at the following locations:  
810+46 L Outlet end of pipe 89 SqYd  
810+46 R Outlet end of pipe 89 SqYd  
818+07 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D26	D50

Plotting Date: 02/29/2024



Sec 19 - T127N - R59W

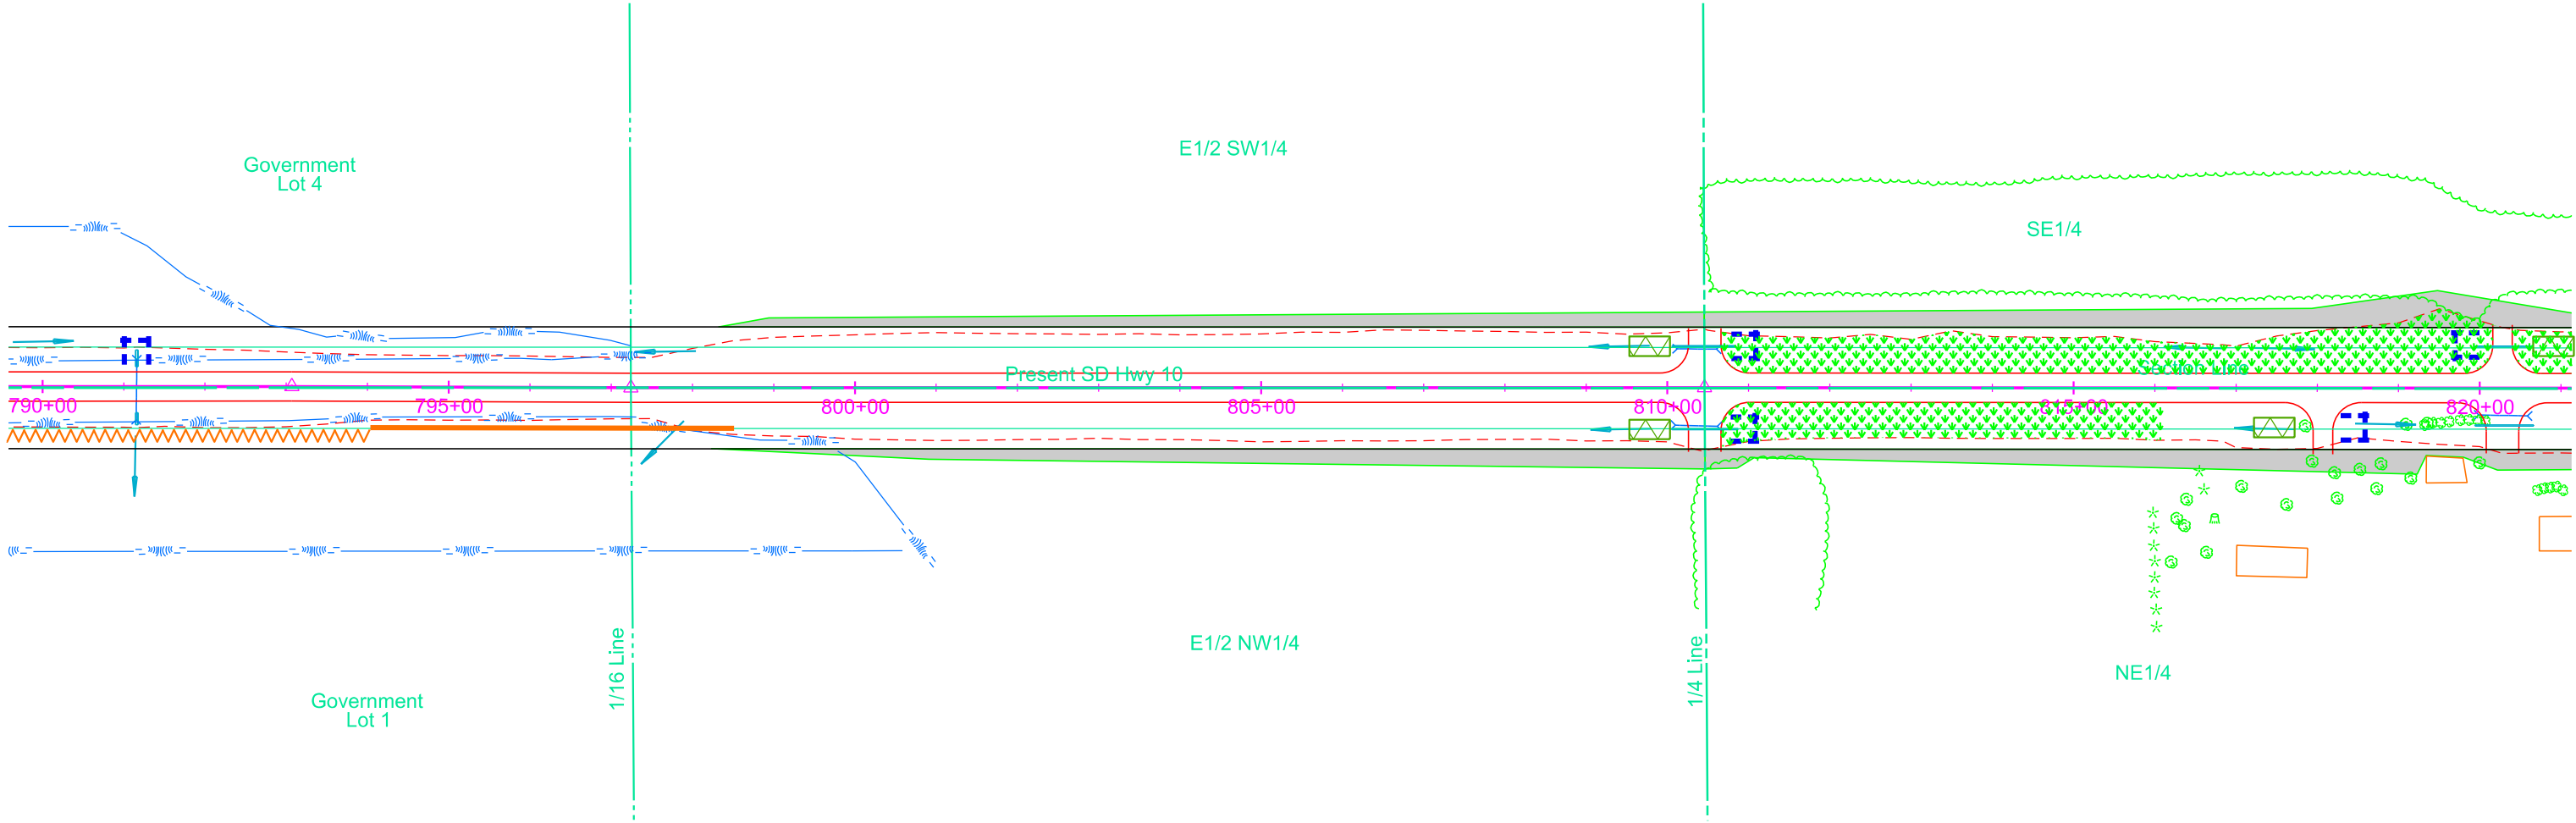

Sec 30 - T127N - R59W

Plotted From: TRPR13525 Plot Scale: 1:200


Install Low Flow Silt Fence at the following locations:  
827+50 to 830+75 L Protect Wetland 325 Ft  
827+50 to 830+75 R Protect Wetland 325 Ft  
\*Continious runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.  
  
Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
820+28 - 51' L Inlet end of pipe 18 Ft  
829+09 L Inlet end of pipe 18 Ft  
829+49 L Inlet end of pipe 18 Ft  
836+92 - 51' L Inlet end of pipe 18 Ft  
836+92 - 48' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
820+28 L Outlet end of pipe 89 SqYd  
836+92 L Outlet end of pipe 89 SqYd  
836+92 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D27	D50

Plotting Date: 02/29/2024

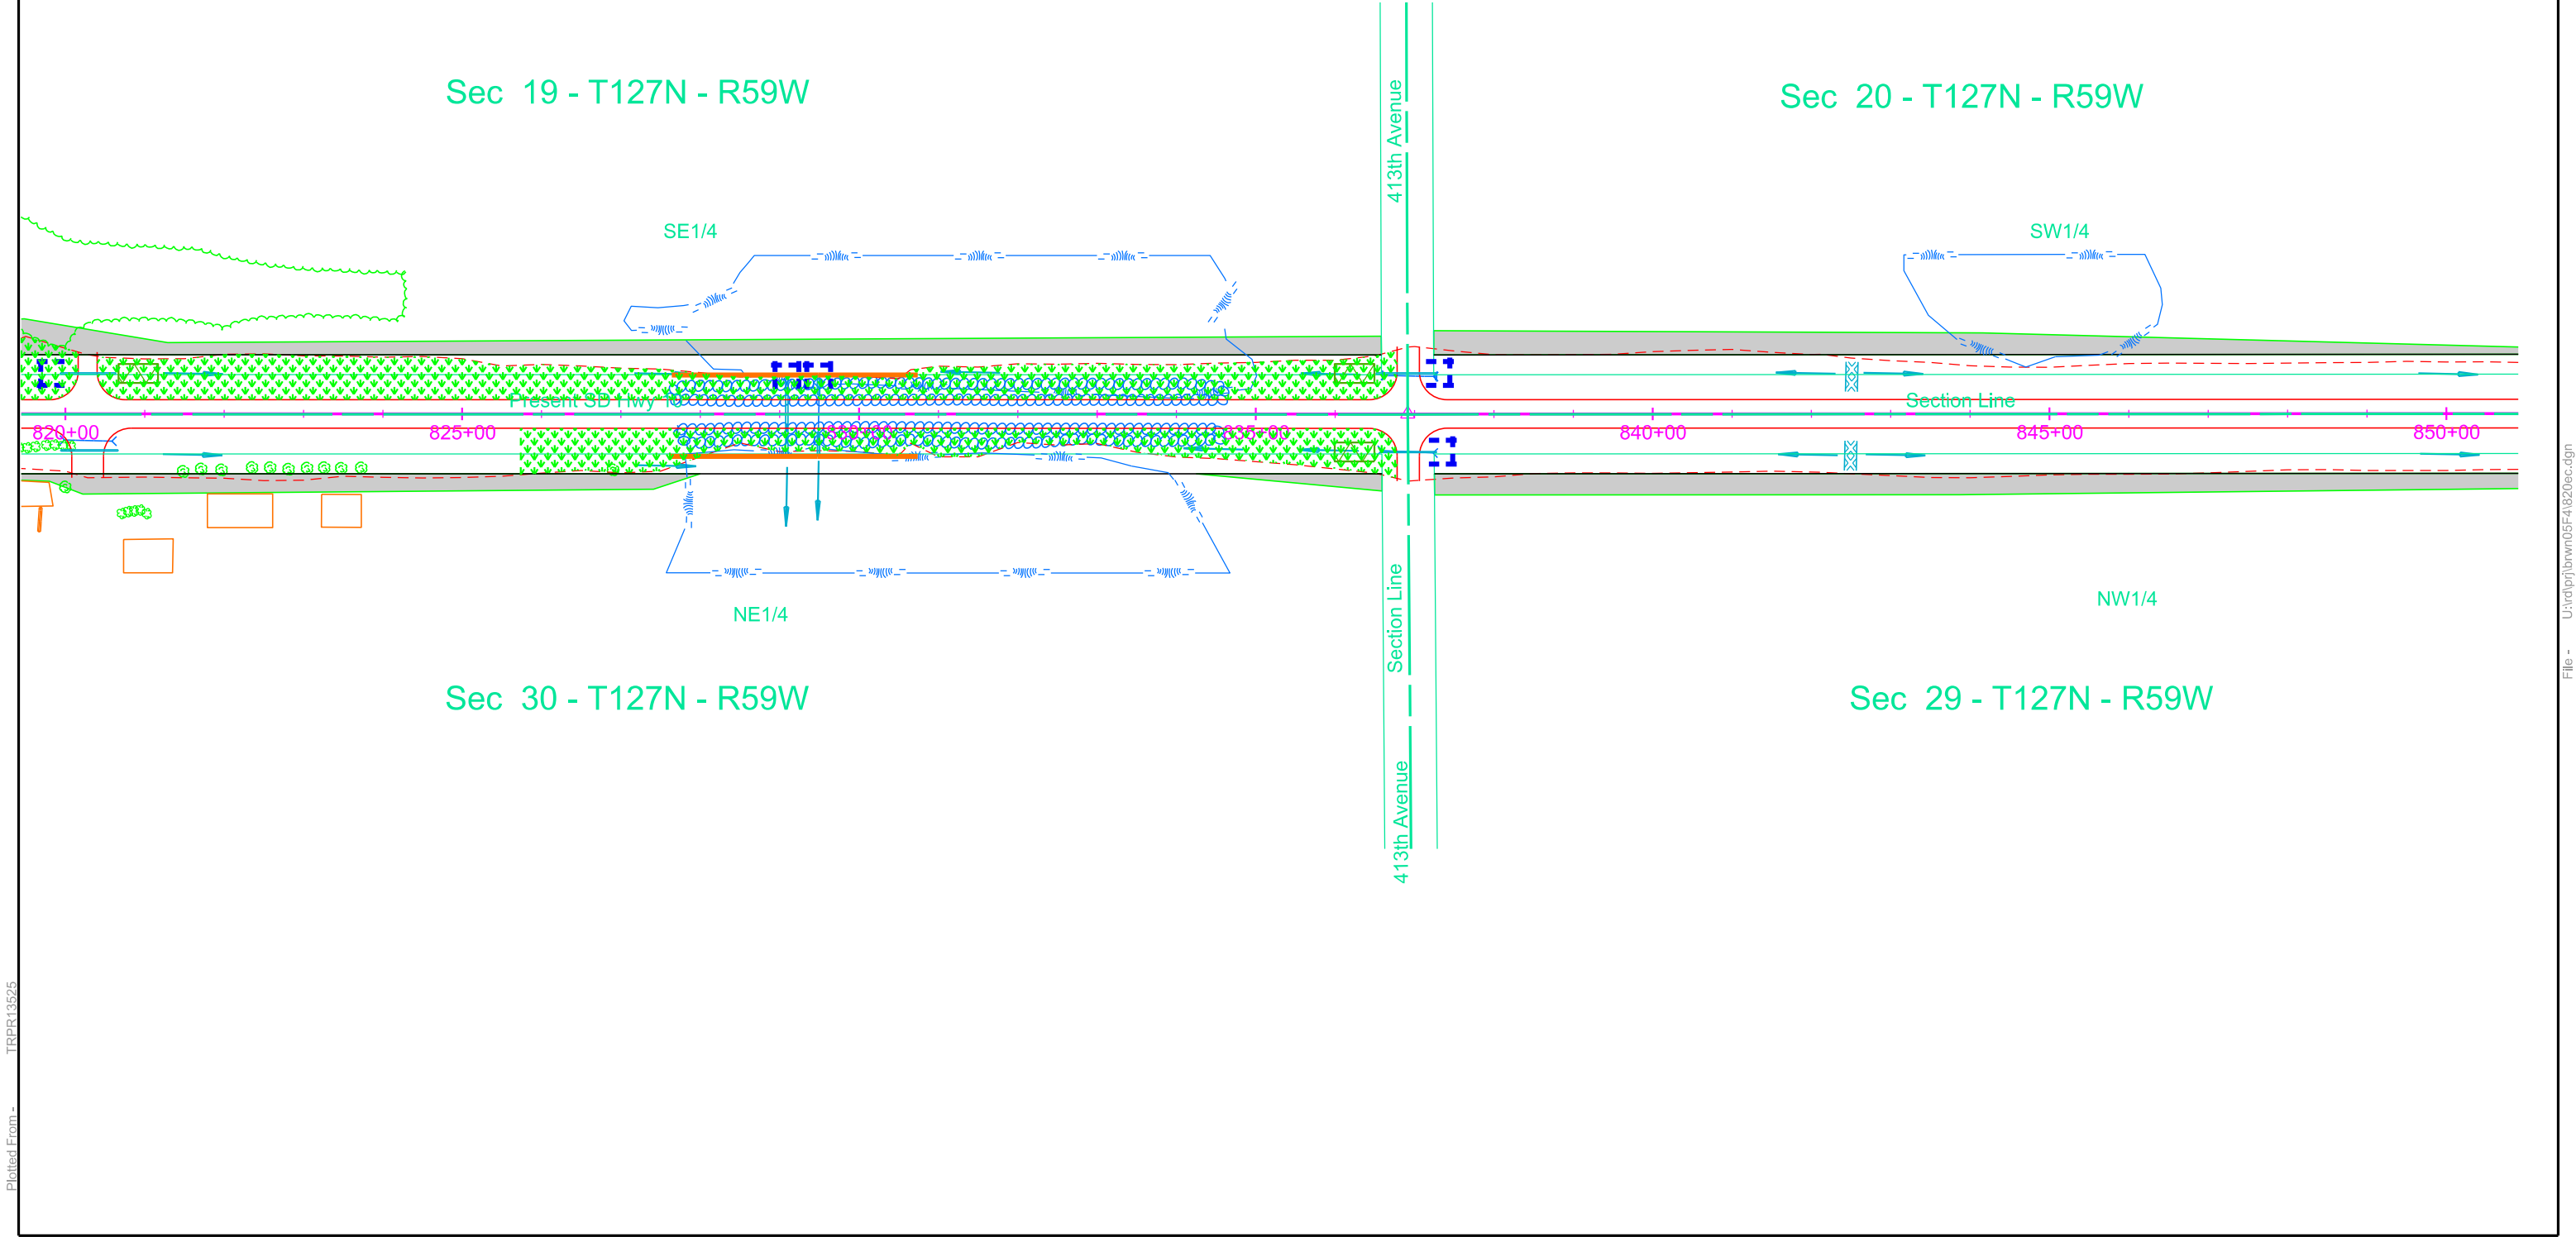


**Install Low Flow Silt Fence at the following locations:**  
 861+50 to 879+00 L Protect Wetland 1,750 Ft  
 861+50 to 878+50 R Protect Wetland 1,700 Ft  
 \*Continuous runs of Low Flow Silt Fence should not  
 exceed 200 Ft. Ends of runs to be turned up-slope  
 as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be maintained where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
862+84 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
Around topsoil stockpiles--quantity and location to be determined

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D28	D50

Plotting Date: 02/29/2024

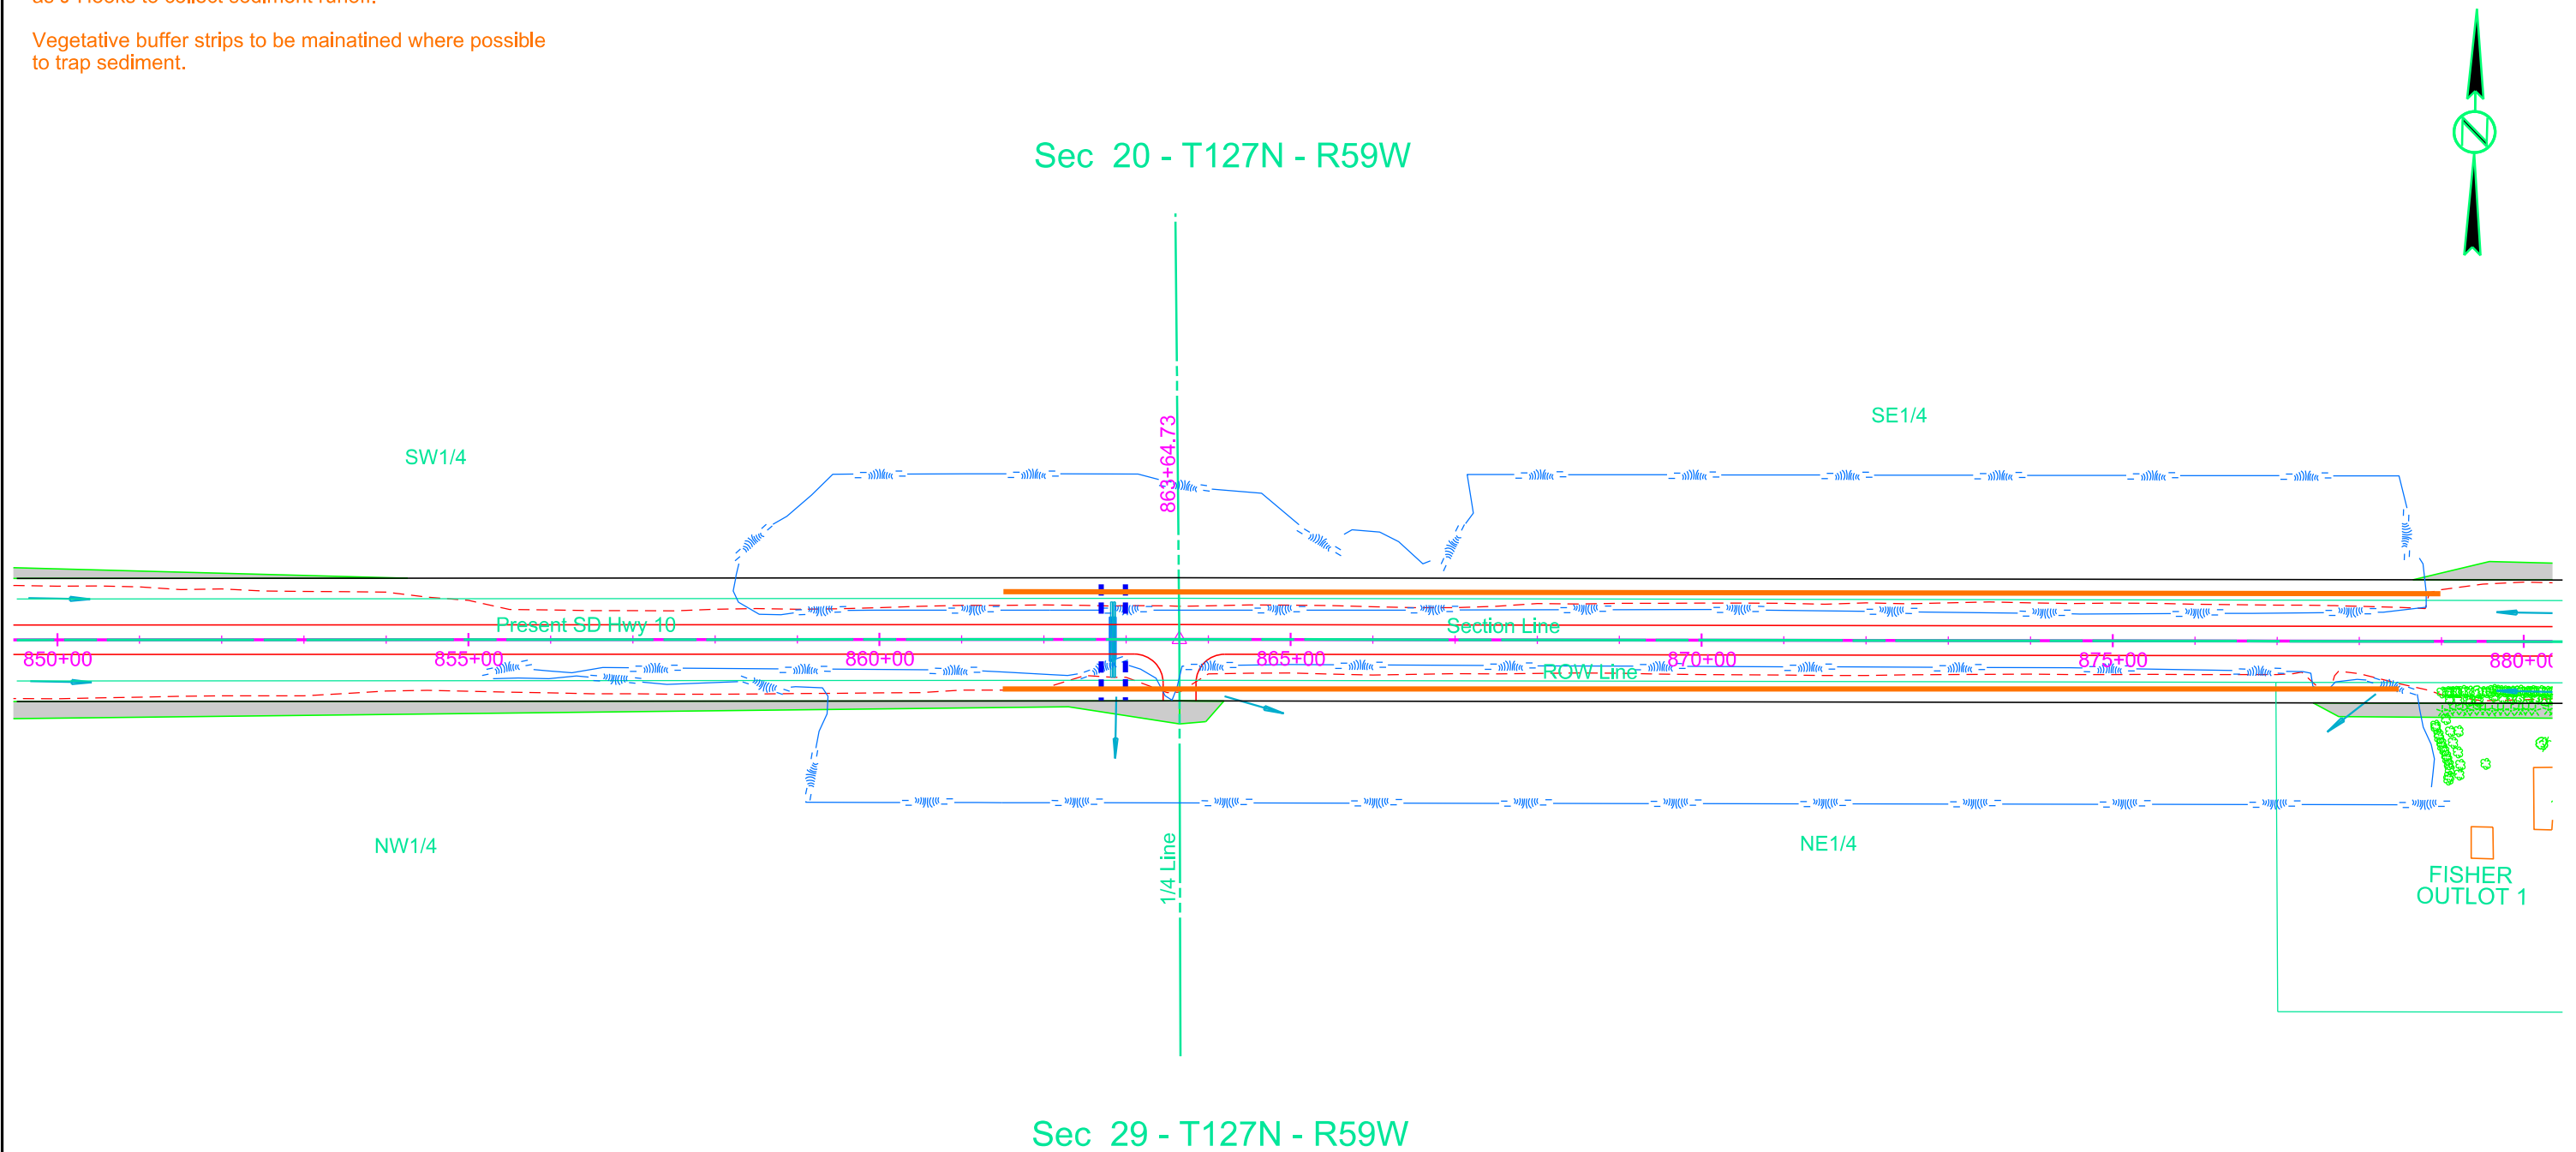

File - U:\rd\prj\brwn05F4\850ec.dgn

Plot Scale - 1:200

Plotted From - TRPR13525

Install Low Flow Silt Fence at the following locations:  
881+50 to 883+00 R Protect Wetland 150 Ft  
881+75 to 883+00 L Protect Wetland 125 Ft  
885+50 to 889+50 L Protect Wetland 400 Ft  
885+50 to 889+50 R Protect Wetland 400 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.

Install Floating Silt Curtain at the following locations:  
883+00 to 885+50 L Along Bank 250 Ft  
883+00 to 885+50 R Along Bank 250 Ft


Vegetative buffer strips to be maintained where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
884+19 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
890+01 - 48' L Inlet end of pipe 18 Ft  
890+01 - 49' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
890+01 L Outlet end of pipe 89 SqYd  
890+01 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D29	D50

Plotting Date: 02/29/2024

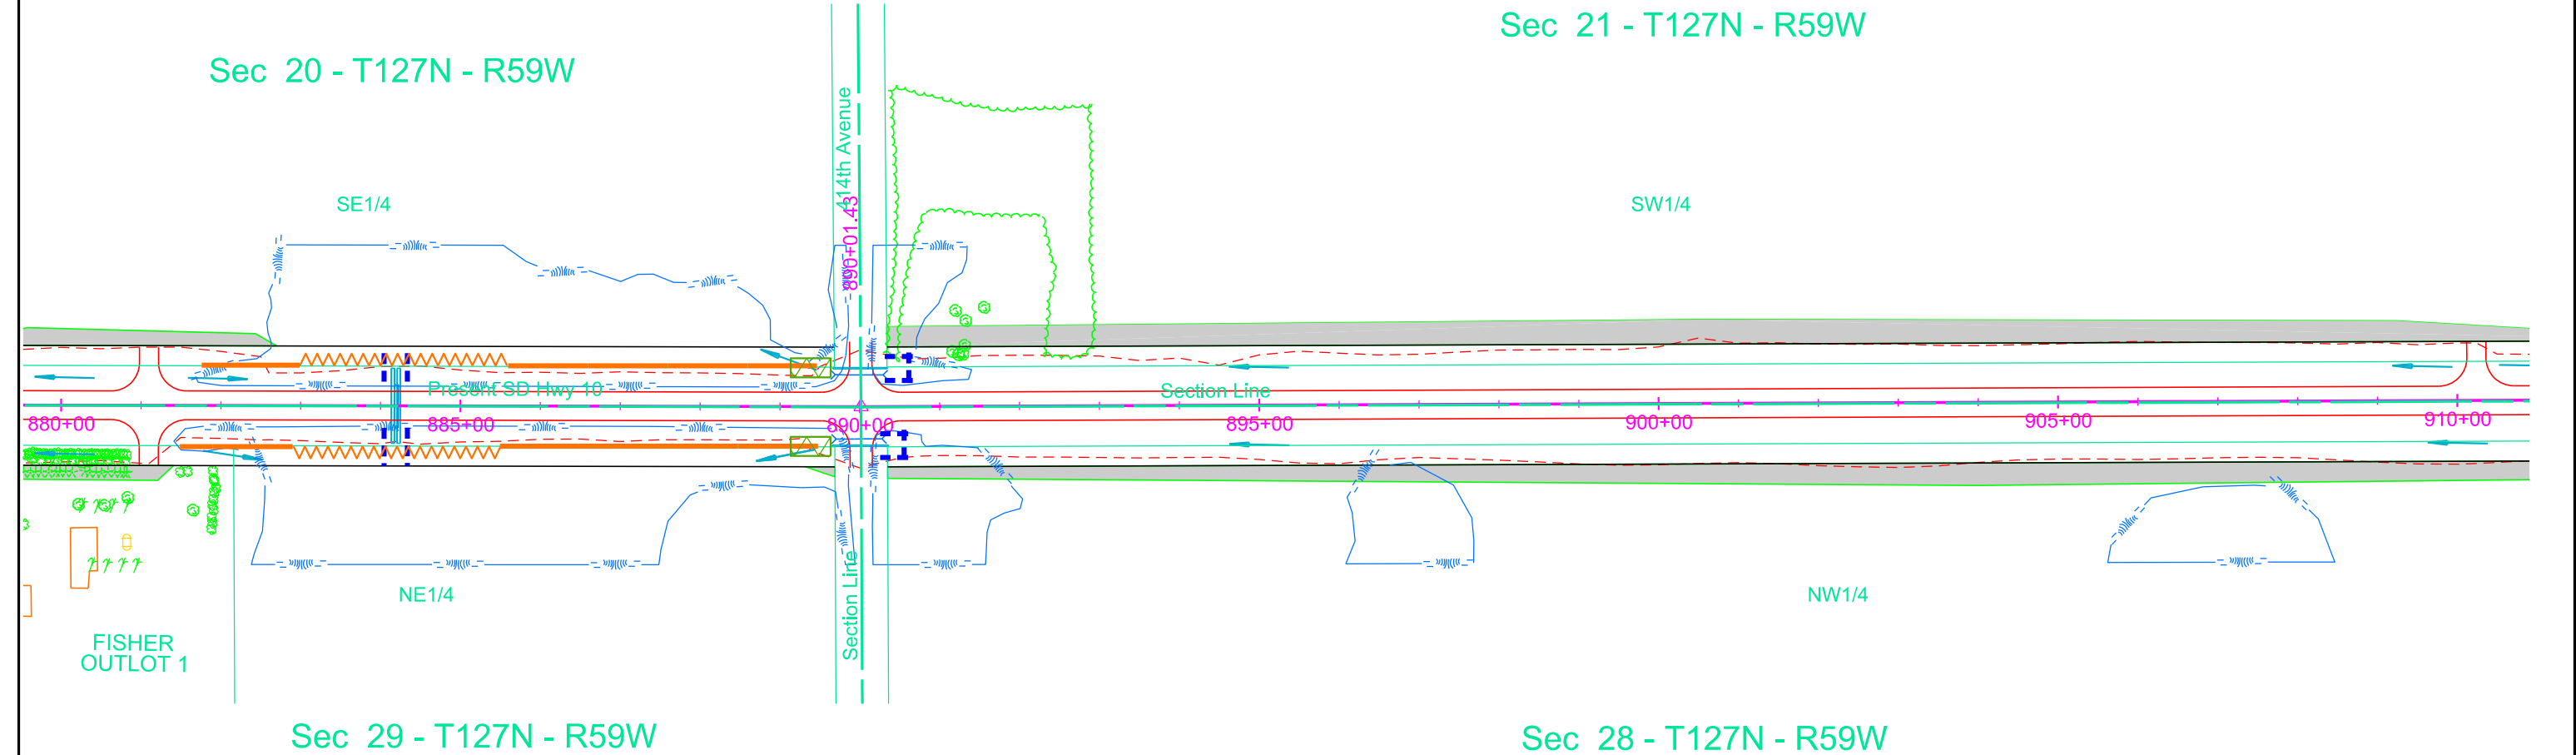

Plotted From: - TRPR13525 Plot Scale: - 1:200


Install Low Flow Silt Fence at the following locations:  
929+00 to 932+50 L Protect Wetland 350 Ft  
929+50 to 933+00 R Protect Wetland 350 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.

Install High Flow Silt Fence at the following locations:  
919+21 L Inlet end of pipe 18 Ft  
931+63 L/R Inlet and outlet ends of pipe (60 Ft each end) 120 Ft  
939+39 R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
919+21 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D30	D50

Plotting Date: 02/29/2024

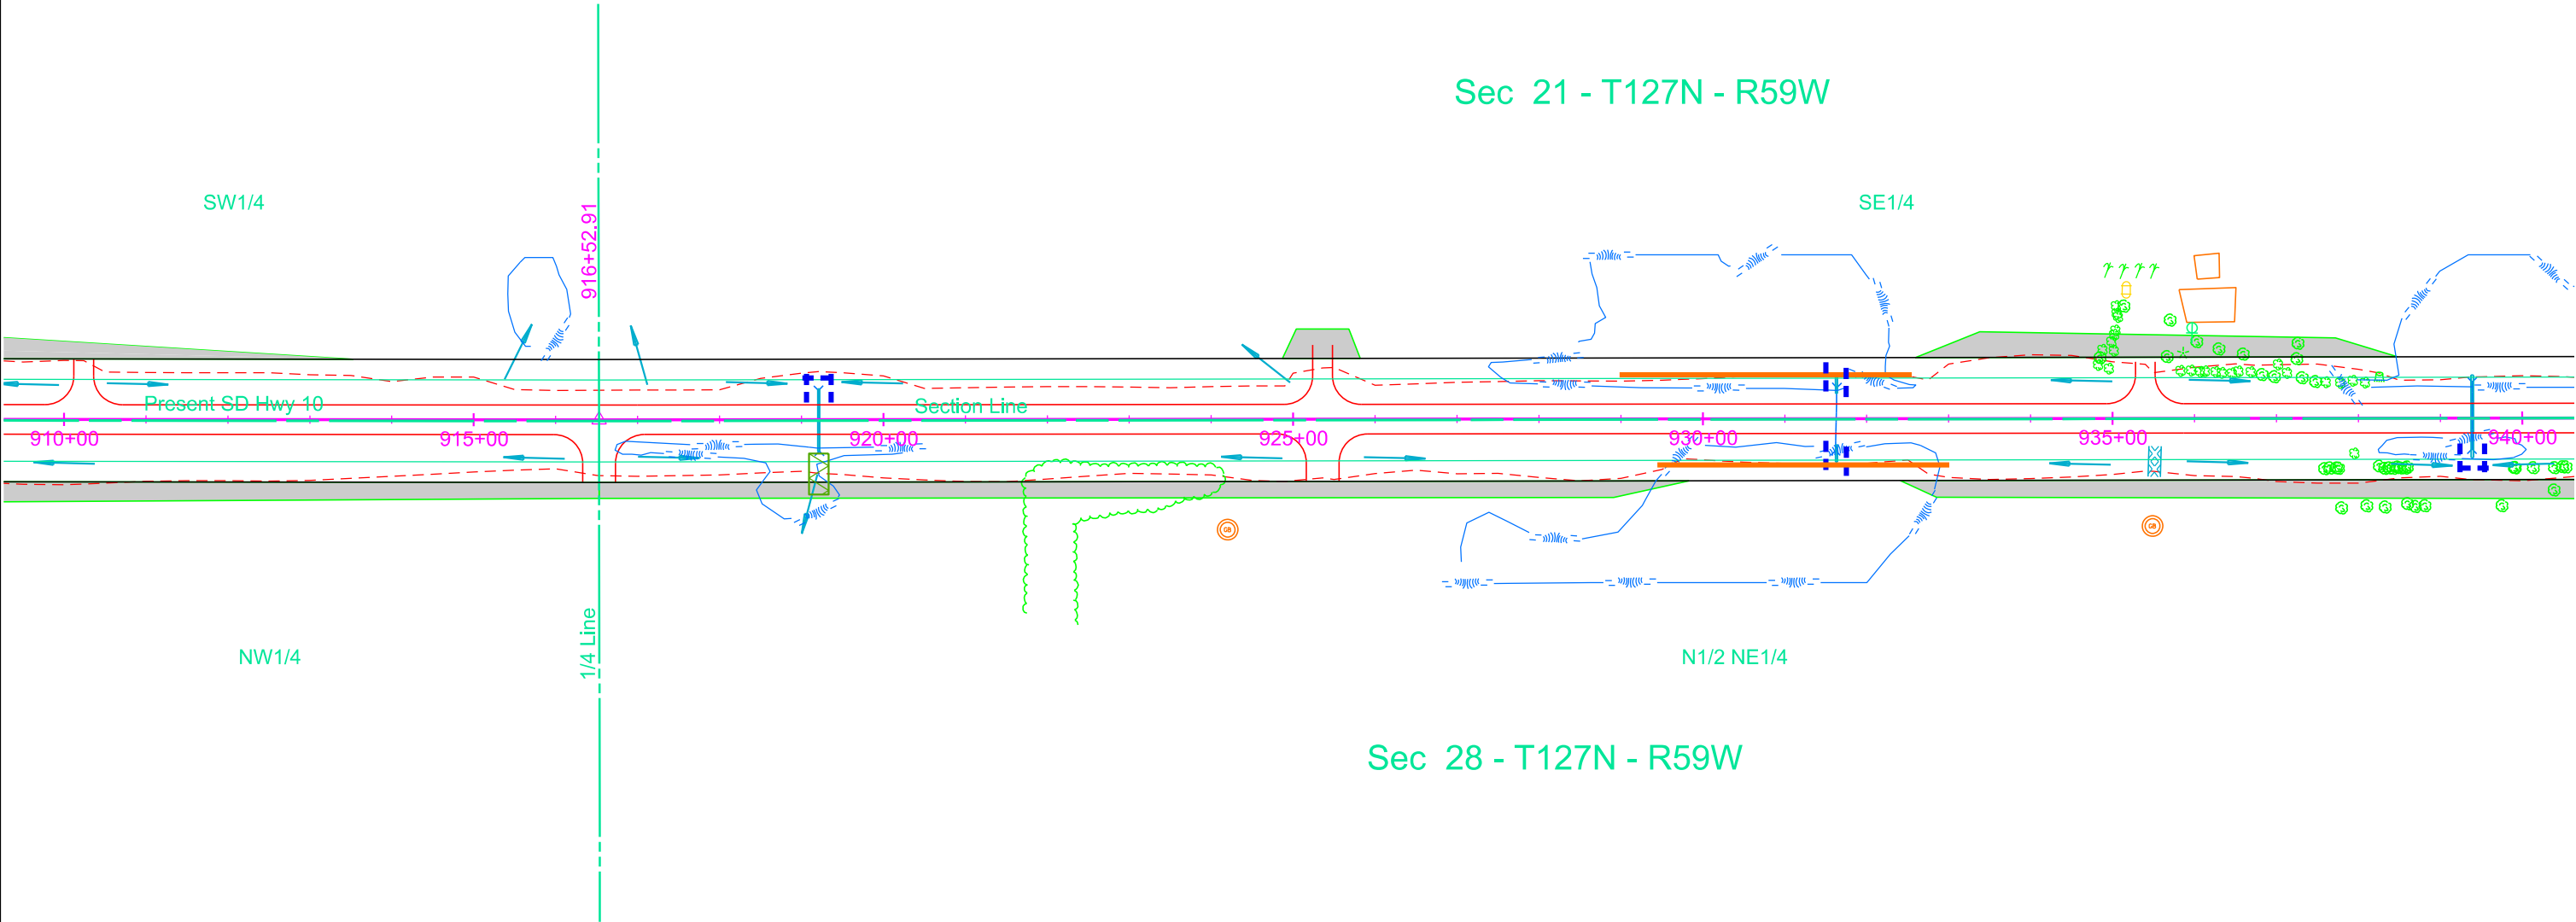

Install Low Flow Silt Fence at the following locations:  
950+50 to 952+50 R Protect Wetland 200 Ft  
967+50 to 969+50 R Protect Wetland 200 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
943+02 - 54' L Inlet end of pipe 18 Ft  
957+79 - 49' L Inlet end of pipe 18 Ft  
965+27 - 50' R Inlet end of pipe 18 Ft  
968+04 L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined


Install Type 3 Erosion Control Blanket at the following locations:  
943+02 L Outlet end of pipe 89 SqYd  
957+79 L Outlet end of pipe 89 SqYd  
965+27 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D31	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

1:200  
Plot Scale -

Plotted From - TRPR13525

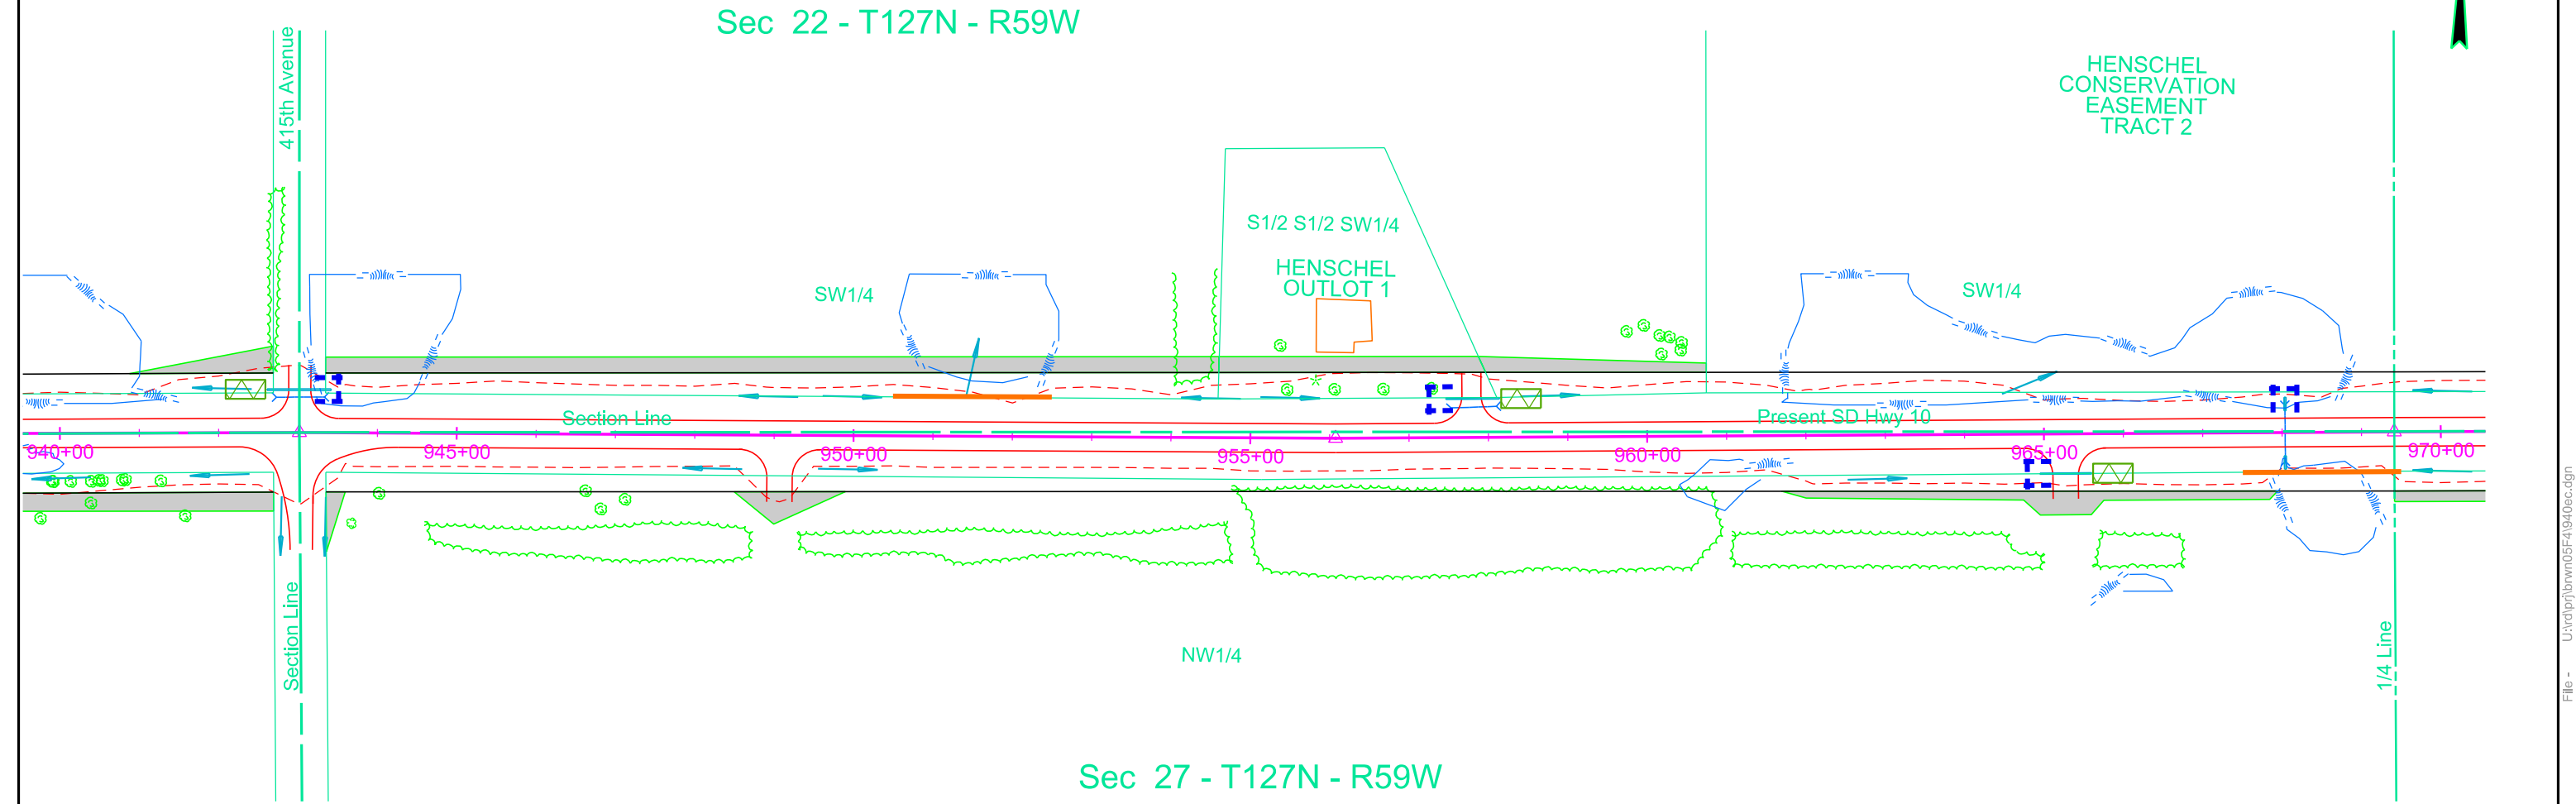

1:200  
Plot Scale -  
Plotted From -  
TRPR13525

Install 12" Diameter Erosion Control  
Wattles\* around median drains and  
pipe inlets at the following locations:  
996+34 - 133' L 20 Ft  
\*Remove and Reset Wattles as needed.

Install Floating Silt Curtain at the following locations:  
985+00 to 990+00 L Along Bank 500 Ft  
985+00 to 990+00 R Along Bank 500 Ft

Install Low Flow Silt Fence at the following locations:  
978+00 to 985+00 L Protect Wetland 700 Ft  
978+00 to 985+00 R Protect Wetland 700 Ft  
990+00 to 992+00 R Protect Wetland 200 Ft  
990+25 to 995+50 L Protect Wetland 525 Ft  
\*Continuous runs of Low Flow Silt Fence should not  
exceed 200 Ft. Ends of runs to be turned up-slope  
as J-Hooks to collect sediment runoff.

Vegetative buffer strips to be mainatined where possible  
to trap sediment.

Install High Flow Silt Fence at the following locations:  
980+03 L Inlet end of pipe 18 Ft  
987+04 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
995+92 - 51' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined


Install Type 3 Erosion Control Blanket  
at the following locations:  
995+92 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D32	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

Sec 22 - T127N - R59W


Sec 27 - T127N - R59W

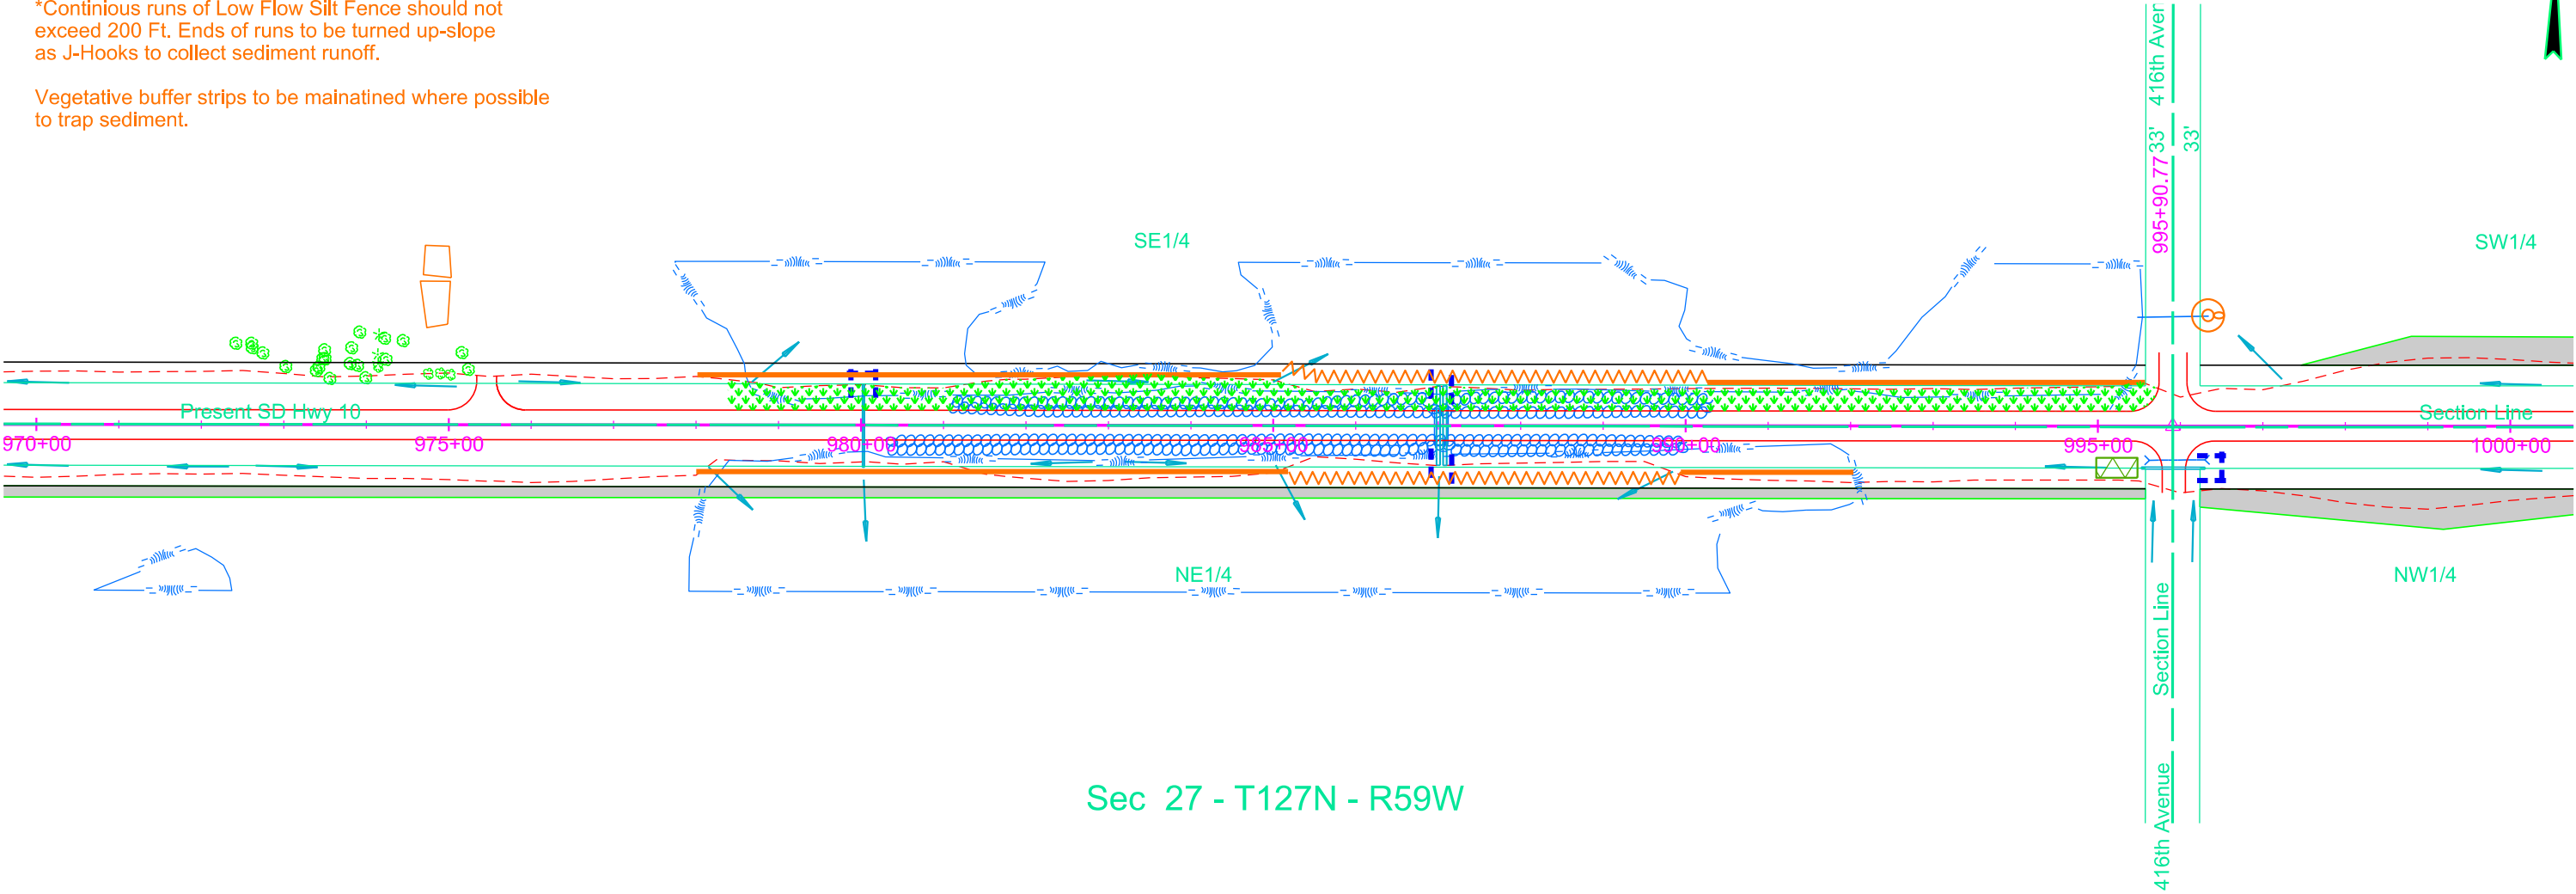

Plot Scale - 1:200

Plotted From - TRPR13525

**Install Type 3 Erosion Control Blanket**  
at the following locations:  
1020+59 L Outlet end of pipe 89 SqYd

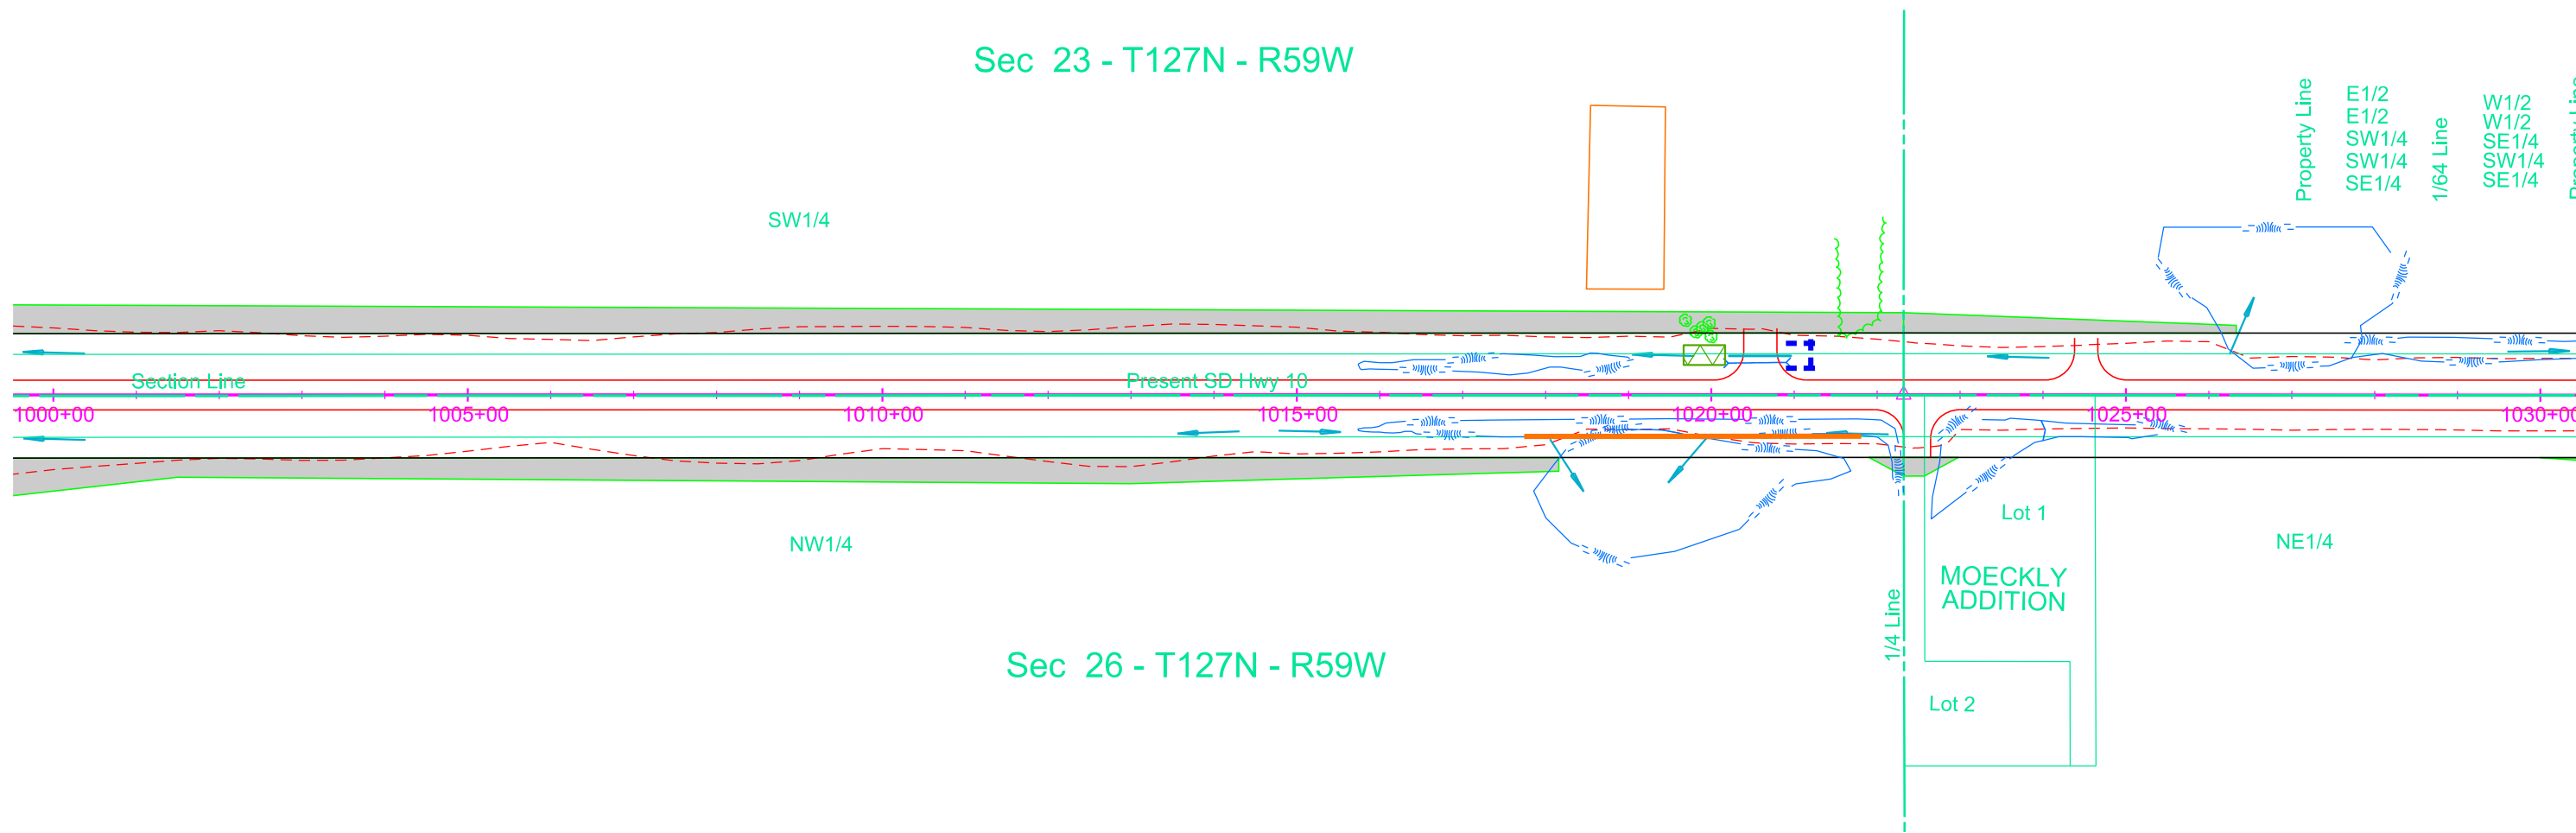Plotting Date: 02/29/2024

Plotted From: - TRPR13525  
Plot Scale - 1:200  
File - U:\trp\jbnwn05\F41030ec.dgn

Install 12" Diameter Erosion Control  
Wattles\* around median drains and  
pipe inlets at the following locations:  
1048+53 - 135' L 20 Ft  
1048+75 - 105' R 20 Ft  
\*Remove and Reset Wattles as needed.

Install Low Flow Silt Fence at the following locations:  
1031+00 to 1033+50 R Protect Wetland 250 Ft  
\*Continuous runs of Low Flow Silt Fence should not  
exceed 200 Ft. Ends of runs to be turned up-slope  
as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible  
to trap sediment..

Install High Flow Silt Fence at the following locations:  
1032+27 L Inlet end of pipe 18 Ft  
1034+80 - 54' R Inlet end of pipe 18 Ft  
1046+32 - 53' R Inlet end of pipe 18 Ft  
1046+88 - 52' L Inlet end of pipe 18 Ft  
1048+77 - 51' R Inlet end of pipe 18 Ft  
1049+39 - 90' R Inlet end of pipe 18 Ft  
1051+32 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket  
at the following locations:  
1032+27 R Outlet end of pipe 89 SqYd  
1034+80 R Outlet end of pipe 89 SqYd  
1046+32 R Outlet end of pipe 89 SqYd  
1046+88 L Outlet end of pipe 89 SqYd  
1051+32 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D34	D50

Plotting Date: 02/29/2024

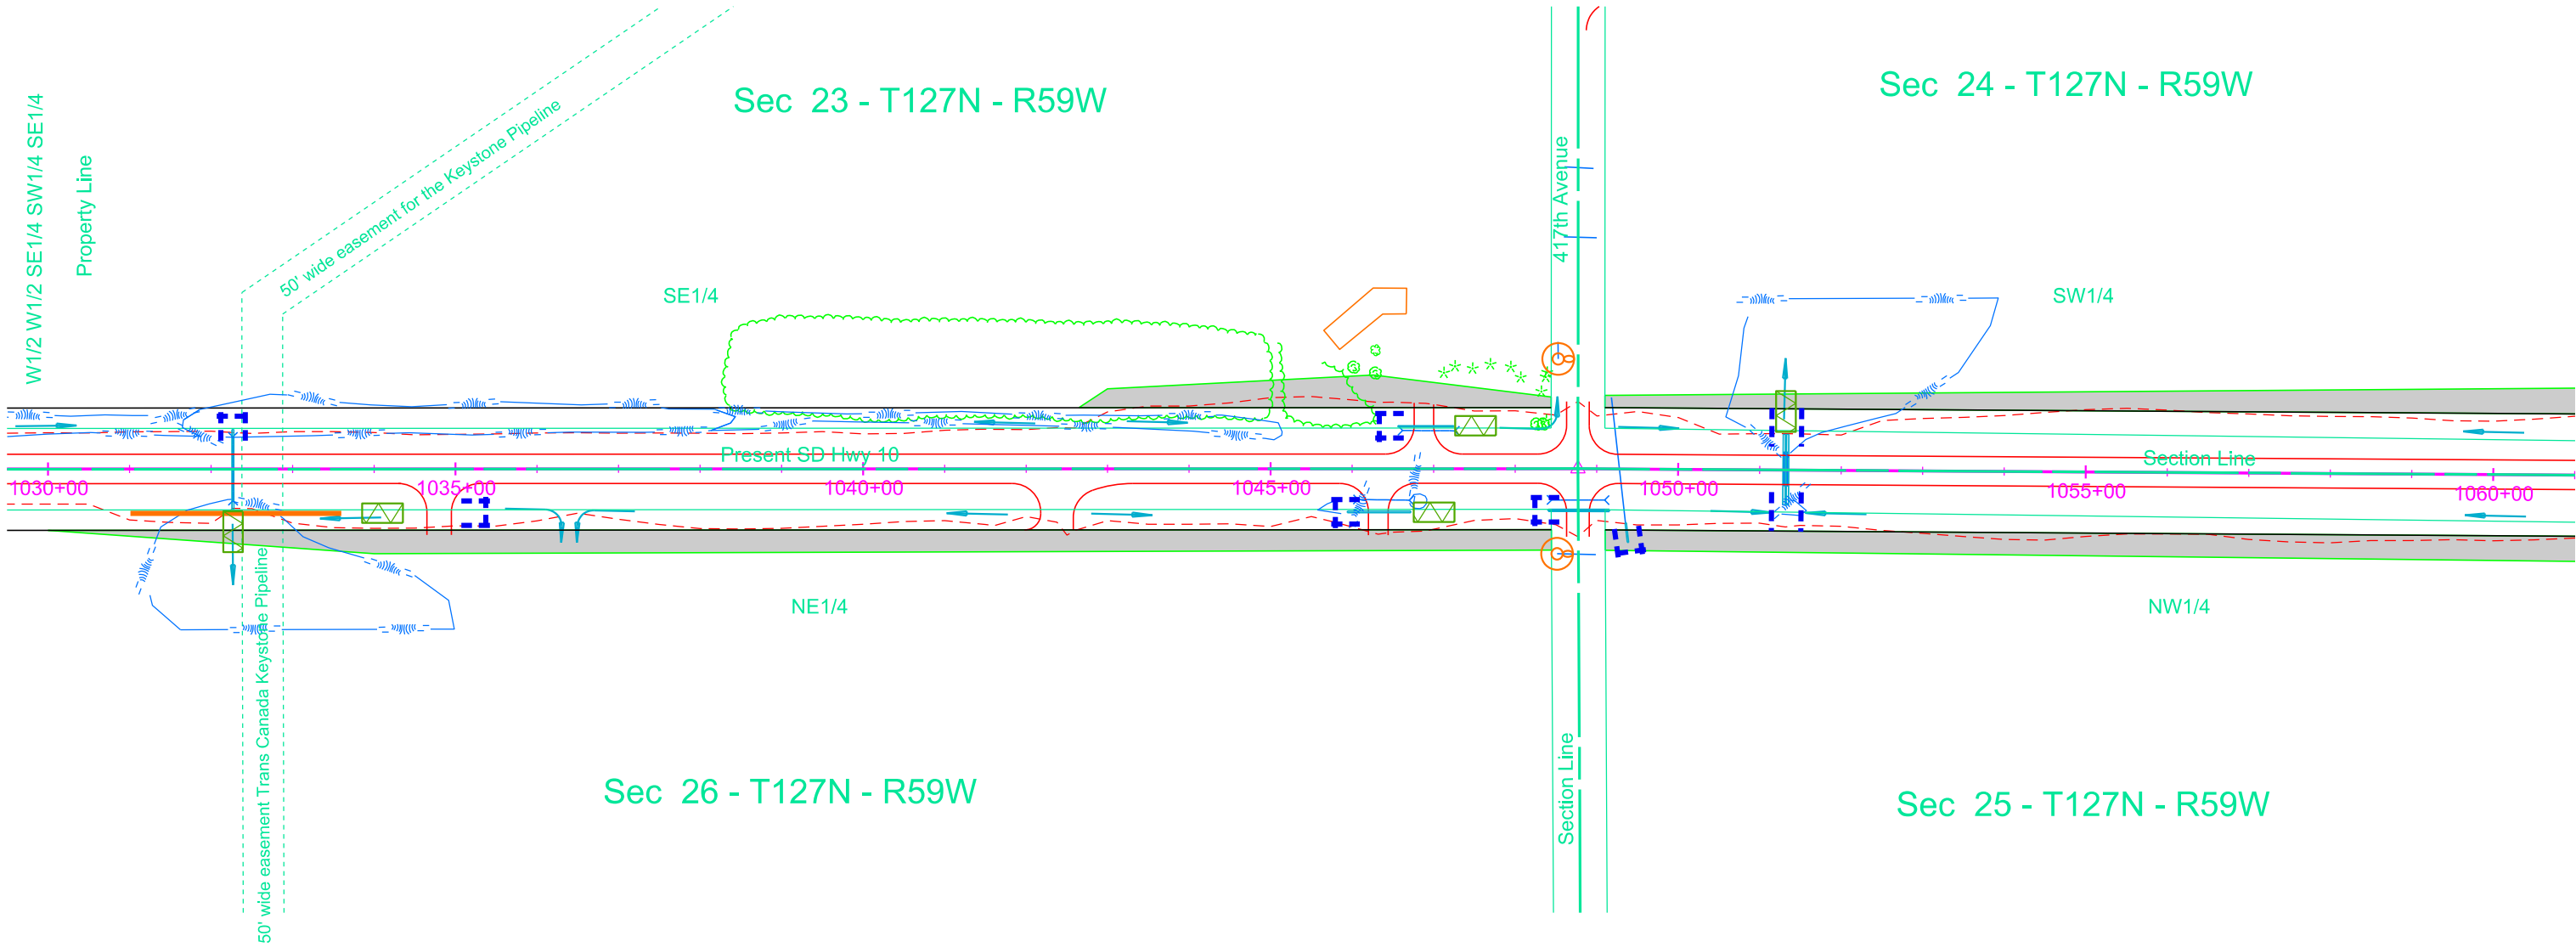

1:200  
Plot Scale -

Plotted From -  
TRPR13525

Install High Flow Silt Fence at the following locations:  
1085+55 L/R Box Culvert (200 Ft each end) 400 Ft  
Around topsoil stockpiles--quantity and location to be determined.

Vegetative buffer strips to be mainatined where possible  
to trap sediment.


Install 12" Diameter Erosion Control Wattles  
at the following locations:  
1085+55 L/R Box Culvert (200 Ft each end) 400 Ft

Install High Flow Silt Fence at the following locations:  
1075+25 - 51' L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket  
at the following locations:  
1075+25 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D35	D50

Plotting Date: 02/29/2024

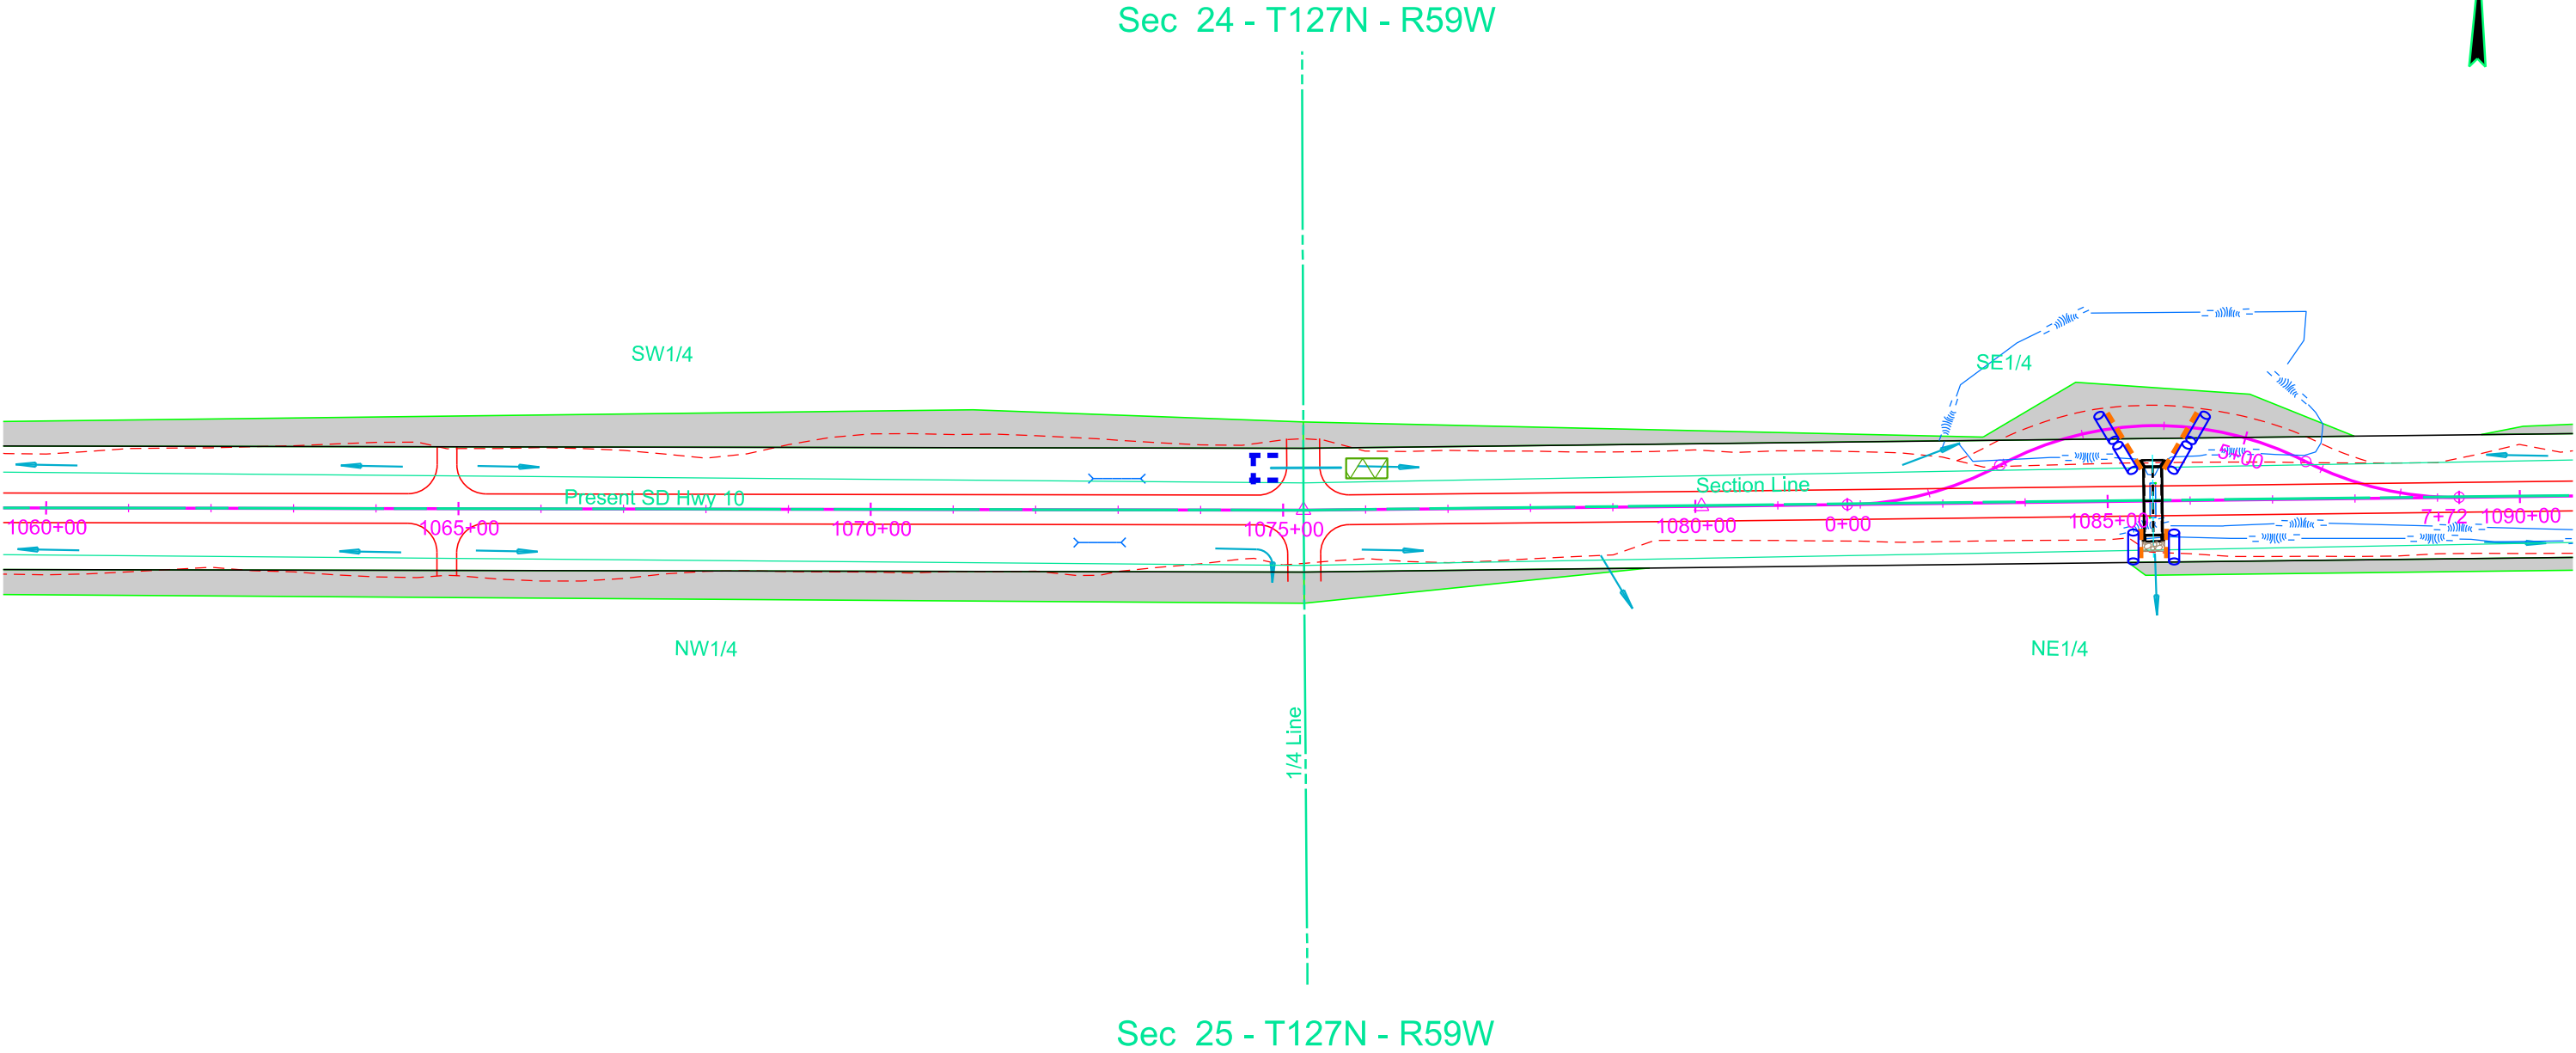

Plotted From - TRPR13525  
Plot Scale - 1:200

Install Low Flow Silt Fence at the following locations:  
1096+50 to 1101+25 L Protect Wetland 475 Ft  
1096+50 to 1101+25 R Protect Wetland 475 Ft  
1102+20 to 1120+00 L Protect Wetland 1,780 Ft  
1102+20 to 1120+00 R Protect Wetland 1,780 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
1101+76 - 51' L Across ditch at inlet end of pipe 30 Ft  
1109+01 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
1101+76 L Outlet end of pipe 89 SqYd  
1109+01 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D36	D50

Plotting Date: 02/29/2024

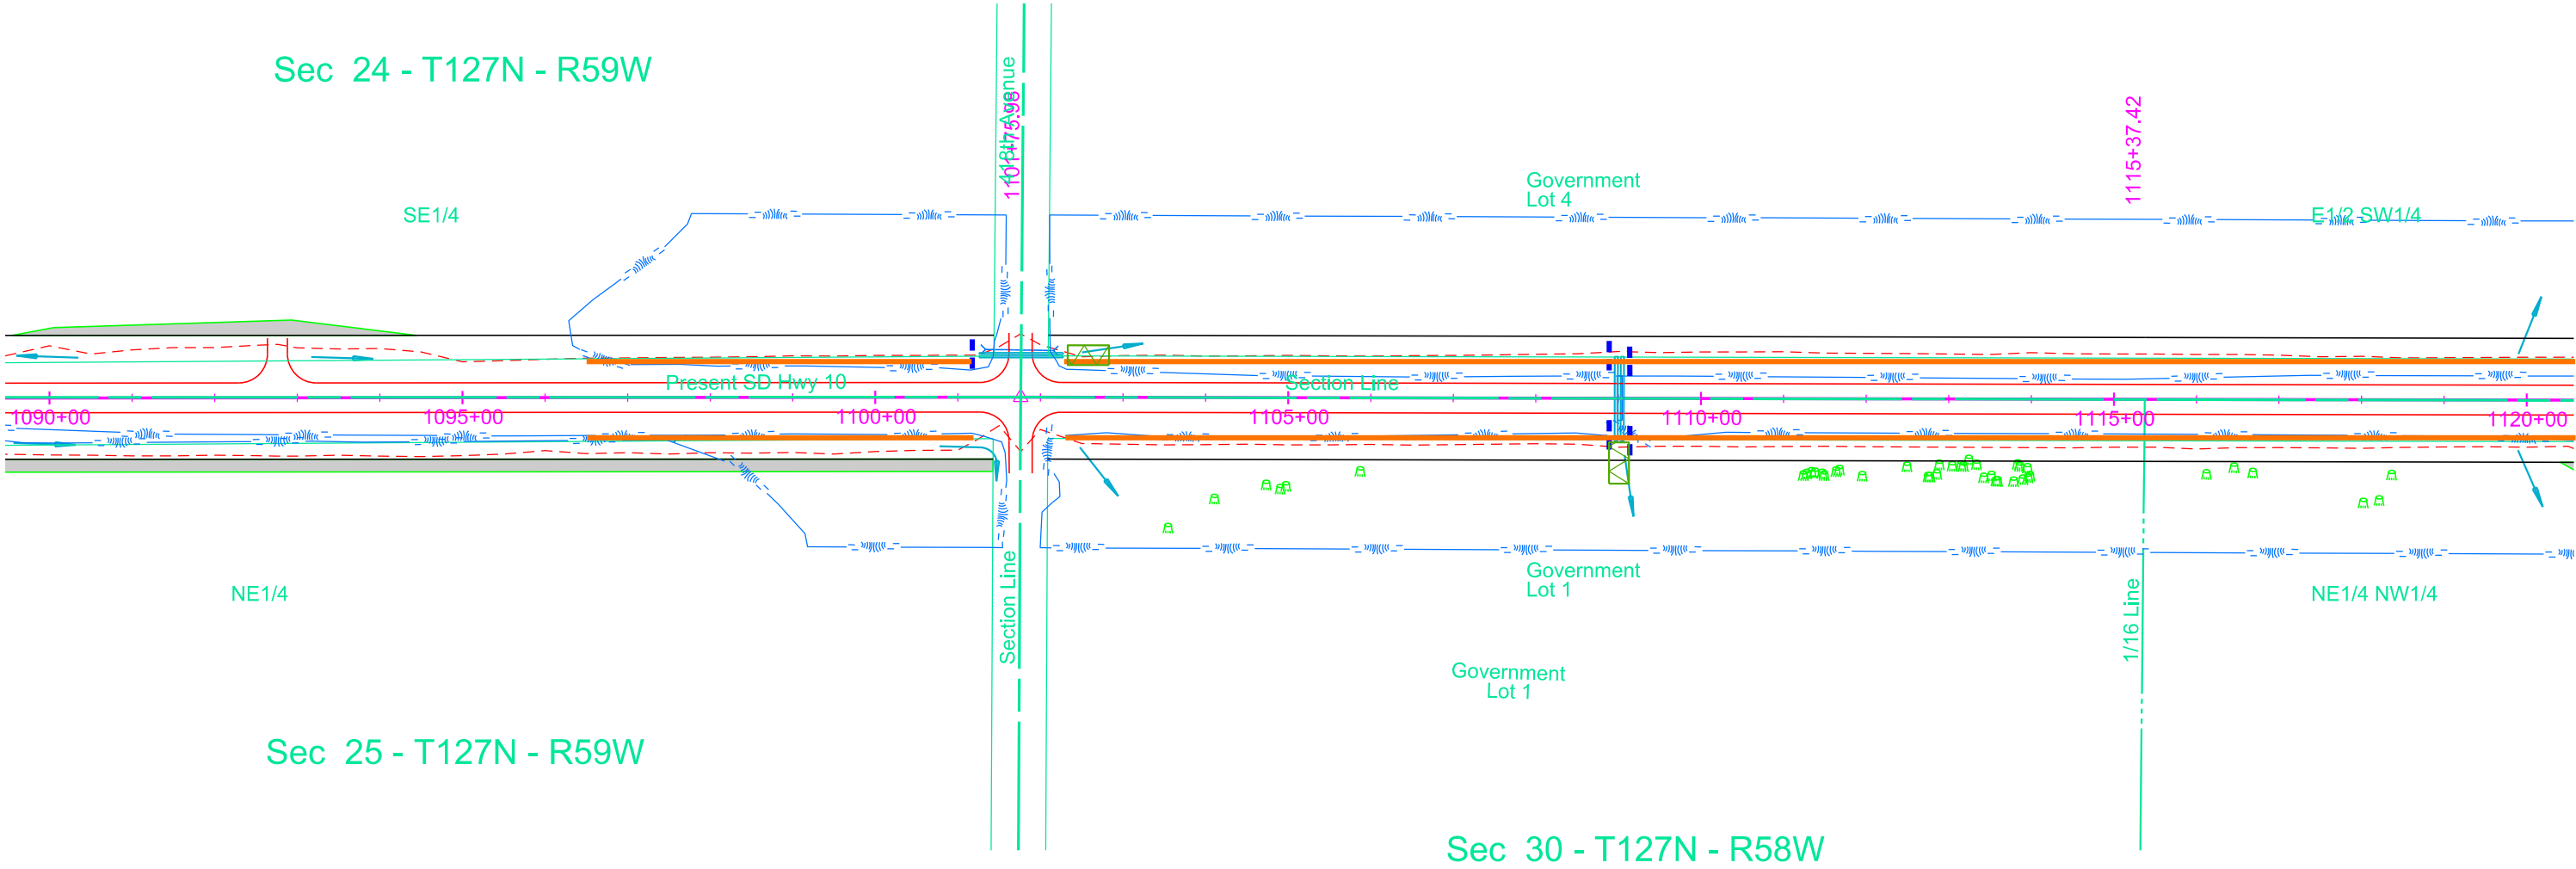

1:200  
Plot Scale -  
Plotted From -

Install High Flow Silt Fence at the following locations:  
1128+64 L/R Box Culvert (200 Ft each end) 400 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Floating Silt Curtain at the following locations:  
1128+64 L/R Along Bank 500 Ft

Install 12" Diameter Erosion Control Wattles at the following locations:  
1140+35 L/R Protect Railroad 400 Ft

Install Low Flow Silt Fence at the following locations:  
1120+00 to 1125+00 L Protect Wetland 500 Ft  
1120+00 to 1126+20 R Protect Wetland 620 Ft  
1129+50 to 1138+00 R Protect Wetland 850 Ft  
1133+00 to 1139+00 L Protect Wetland 600 Ft  
1142+00 to 1150+00 L Protect Wetland 800 Ft  
1142+00 to 1150+00 R Protect Wetland 800 Ft  
\*Continuous runs of Low Flow Silt Fence should not exceed 200 Ft. Ends of runs to be turned up-slope as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible to trap sediment.

Install 12" Diameter Erosion Control Wattles at the following locations:  
1128+64 L/R Inlet and Outlet Box Culvert (200 Ft each end) 400 Ft

Install High Flow Silt Fence at the following locations:  
1126+66 - 116' R Across ditch at inlet end of pipe 30 Ft  
1127+72 - 154' R Inlet end of pipe 18  
1144+05 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft  
Around topsoil stockpiles--quantity and location to be determined

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D37	D50

Plotting Date: 02/29/2024 REV. 02-29-24 BS

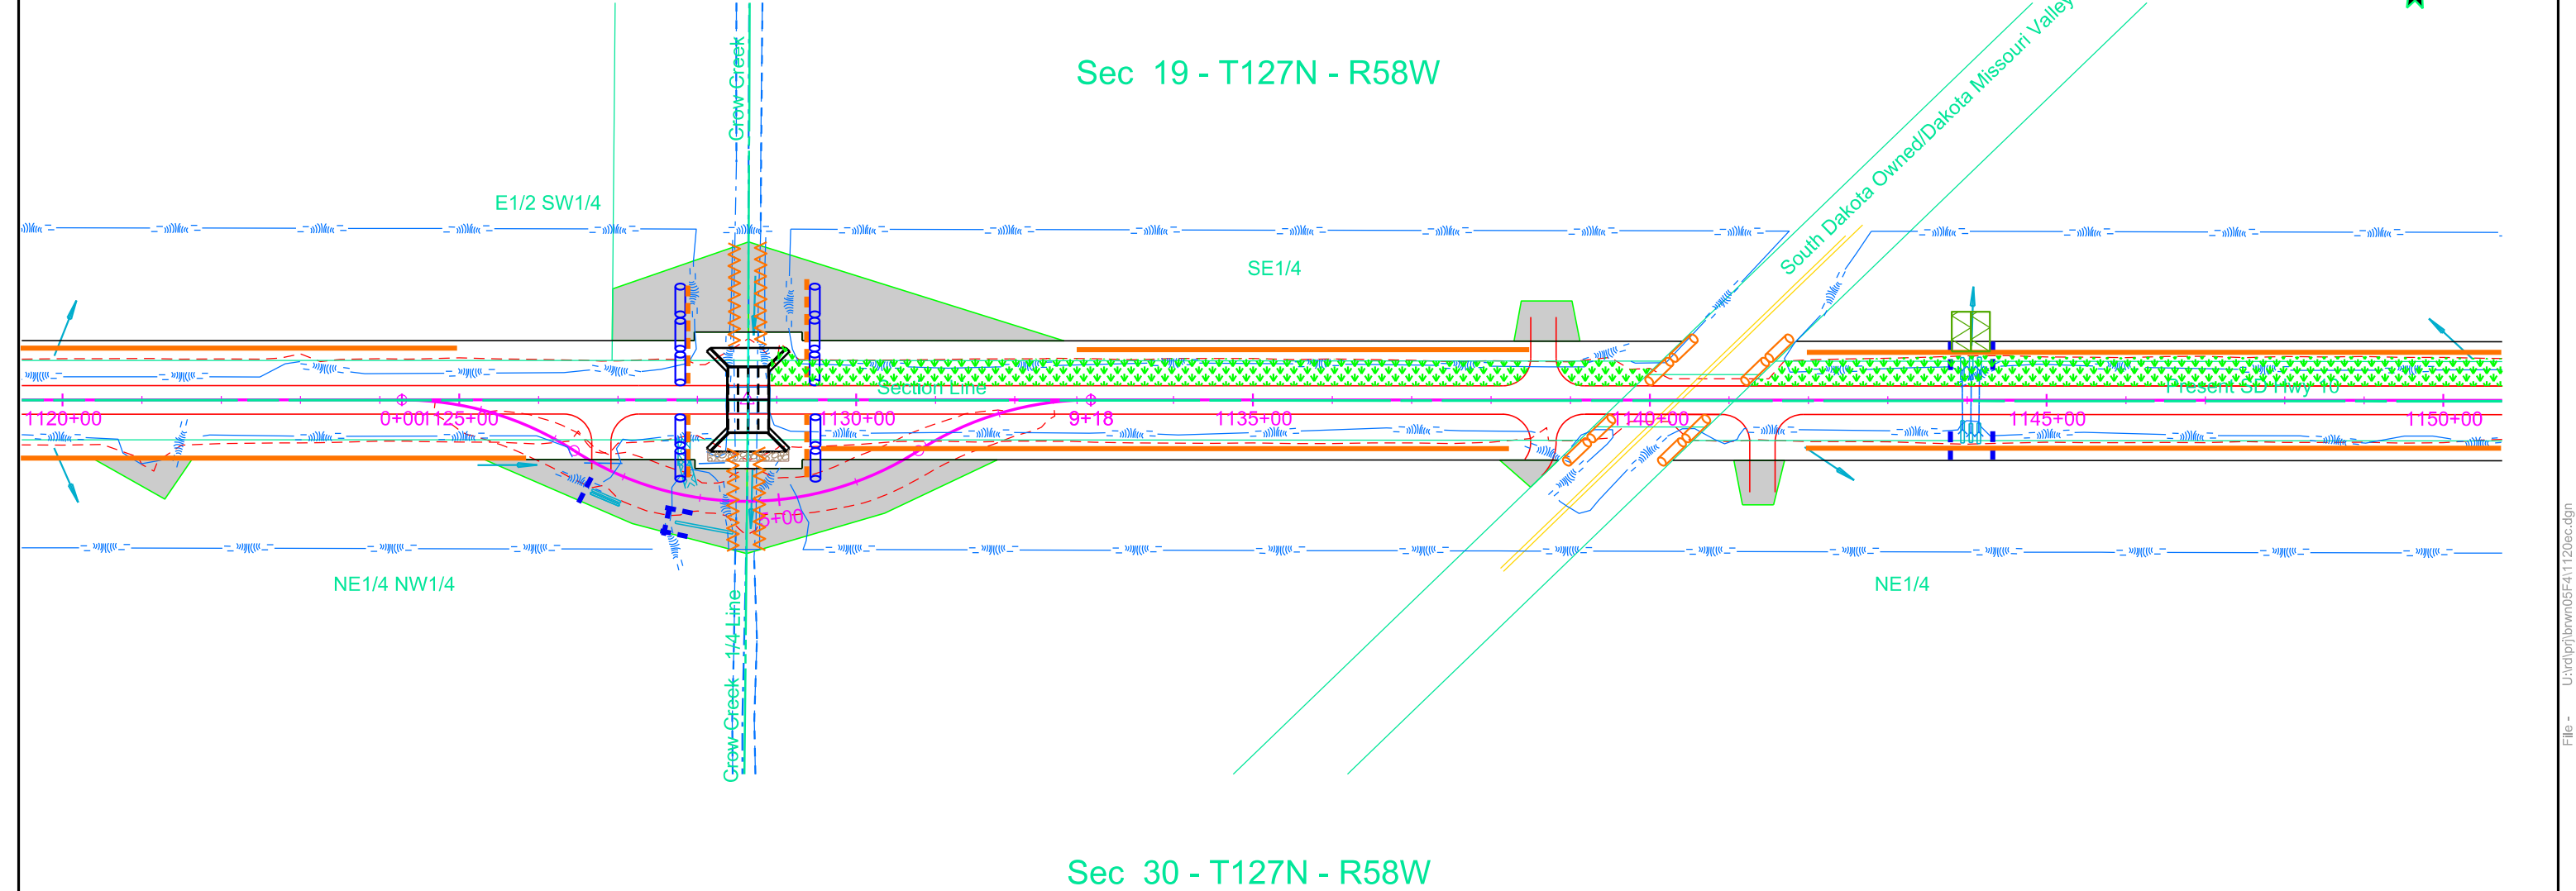

Install Type 3 Erosion Control Blanket at the following locations:  
1144+05 L Outlet end of pipe 178 SqYd

Install 12" Diameter Erosion Control  
Wattles\* around median drains and  
pipe inlets at the following locations:  
1155+09 - 105' R 20 Ft  
\*Remove and Reset Wattles as needed.

Install Low Flow Silt Fence at the following locations:  
1150+00 to 1154+50 L Protect Wetland 450 Ft  
1150+00 to 1154+50 R Protect Wetland 450 Ft  
1155+50 to 1160+50 L Protect Wetland 500 Ft  
1155+50 to 1159+50 R Protect Wetland 400 Ft  
\*Continuous runs of Low Flow Silt Fence should not  
exceed 200 Ft. Ends of runs to be turned up-slope  
as J-Hooks to collect sediment runoff.


Vegetative buffer strips to be mainatined where possible  
to trap sediment.

Install High Flow Silt Fence at the following locations:  
1158+15 R Across ditch at inlet end of pipe (30 Ft each end) 60 Ft  
1169+83 - 50' L Inlet end of pipe 18 Ft  
1169+83 - 51' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket  
at the following locations:  
1158+15 L Outlet end of pipe 89 SqYd  
1169+83 R Outlet end of pipe 89 SqYd  
1169+83 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D38	D50

Plotting Date: 02/29/2024

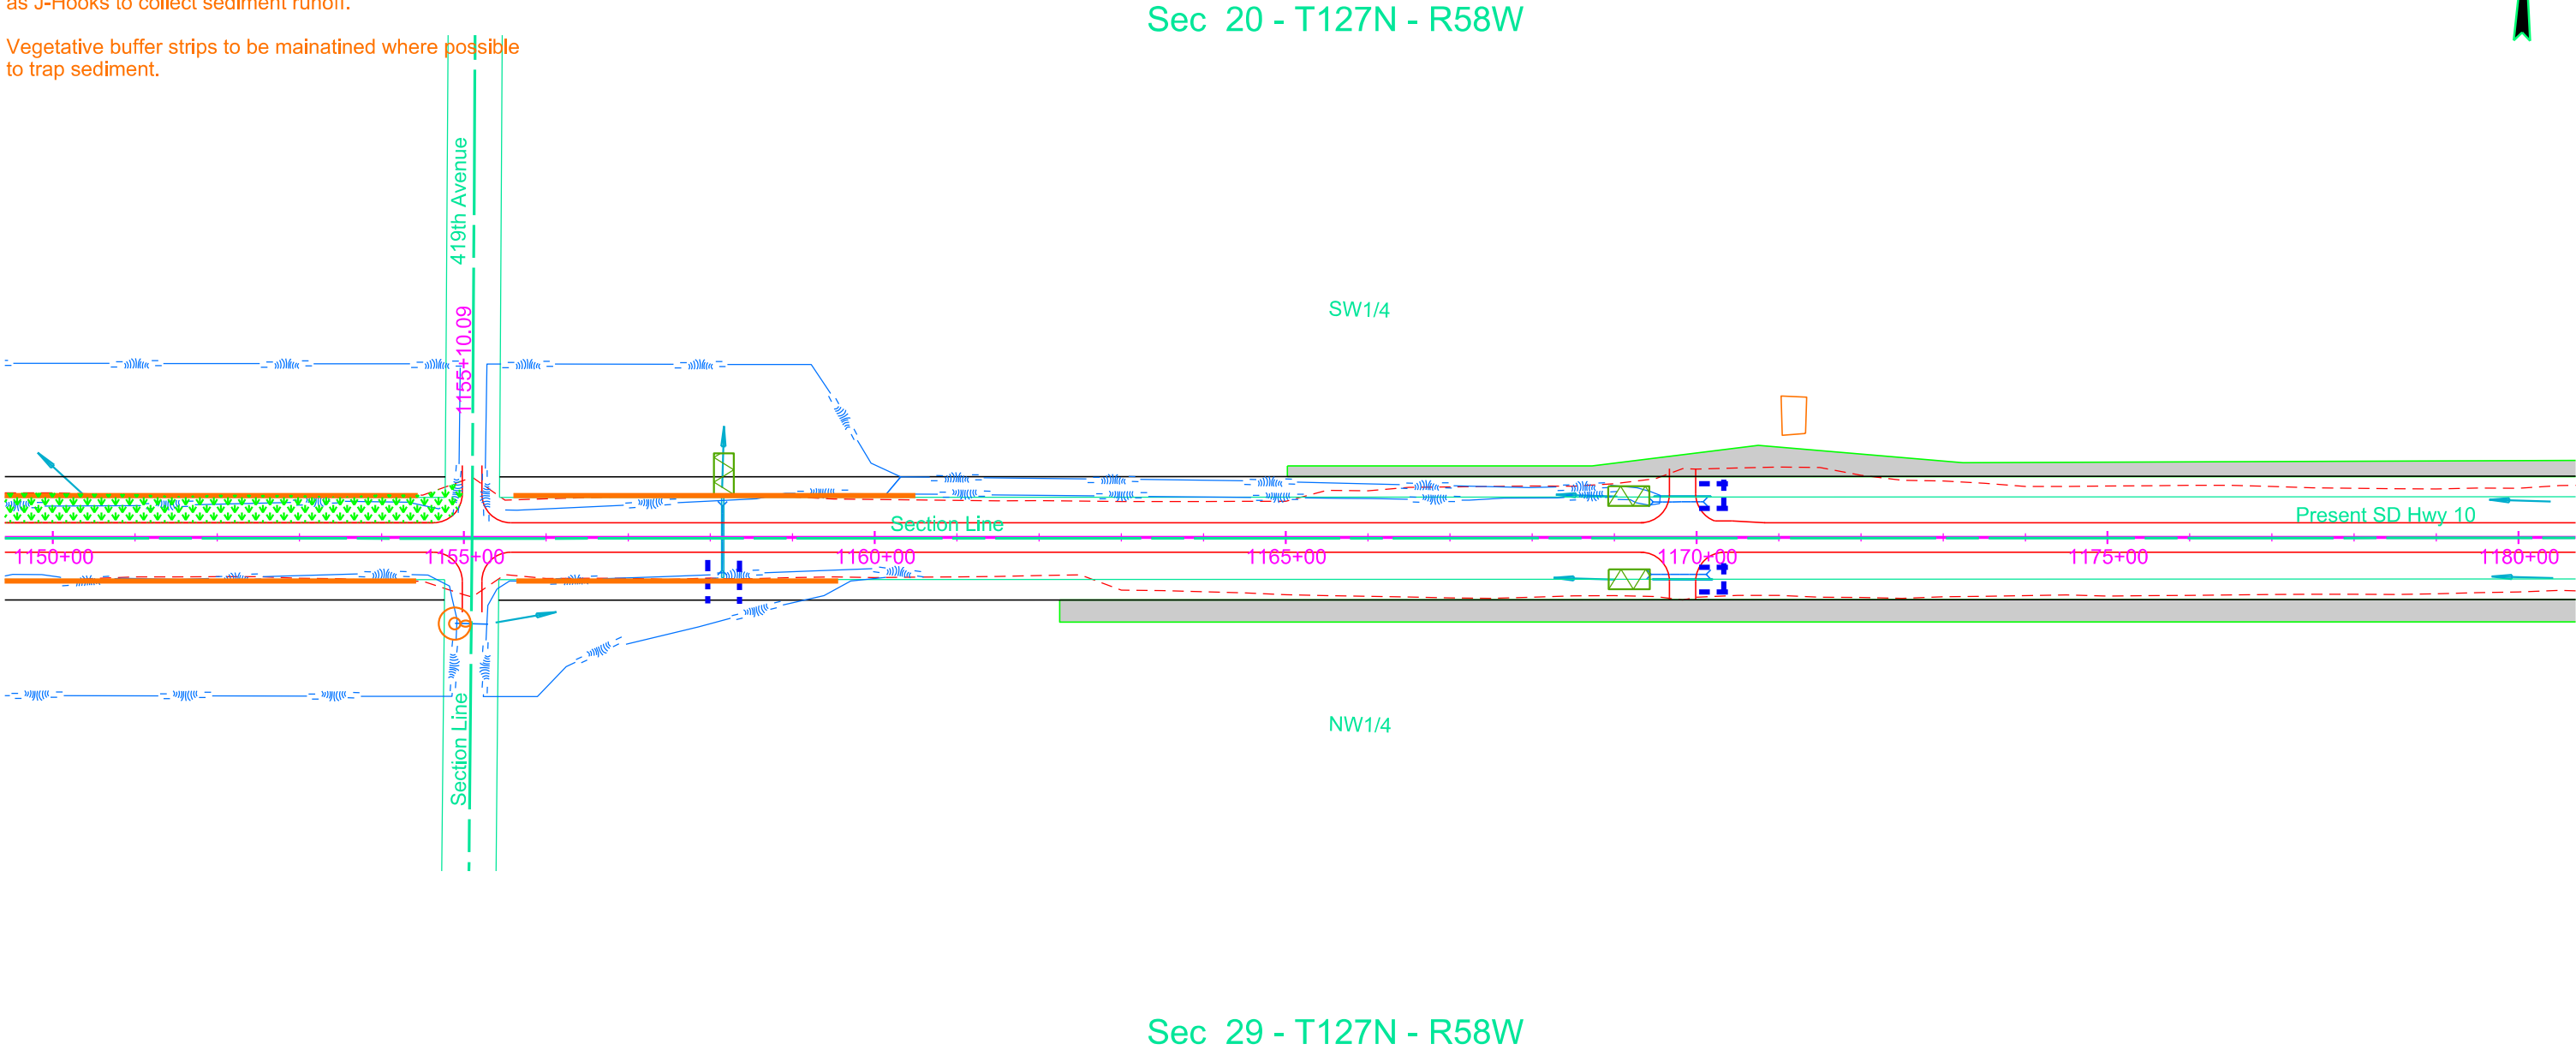

1:200

Plot Scale -

Plotted From -

TRPR13525

1:200  
Plot Scale -

Plotted From - TRPR13525


Install High Flow Silt Fence at the following locations:  
1206+66 L/R Box Culvert (200 Ft each side) 400 Ft  
  
Vegetative buffer strips to be mainatined where possible  
to trap sediment.

Install High Flow Silt Fence at the following locations:  
1192+42 R Inlet end of pipe 18 Ft  
1208+28 - 49' L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined  
  
Install 12" Diameter Erosion Control Wattles  
at the following locations:  
1206+66 L/R Box Culvert (200 Ft each side) 400 Ft

Install Type 3 Erosion Control Blanket  
at the following locations:  
1192+42 L Outlet end of pipe 89 SqYd  
1208+28 L Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D39	D50

Plotting Date: 02/29/2024

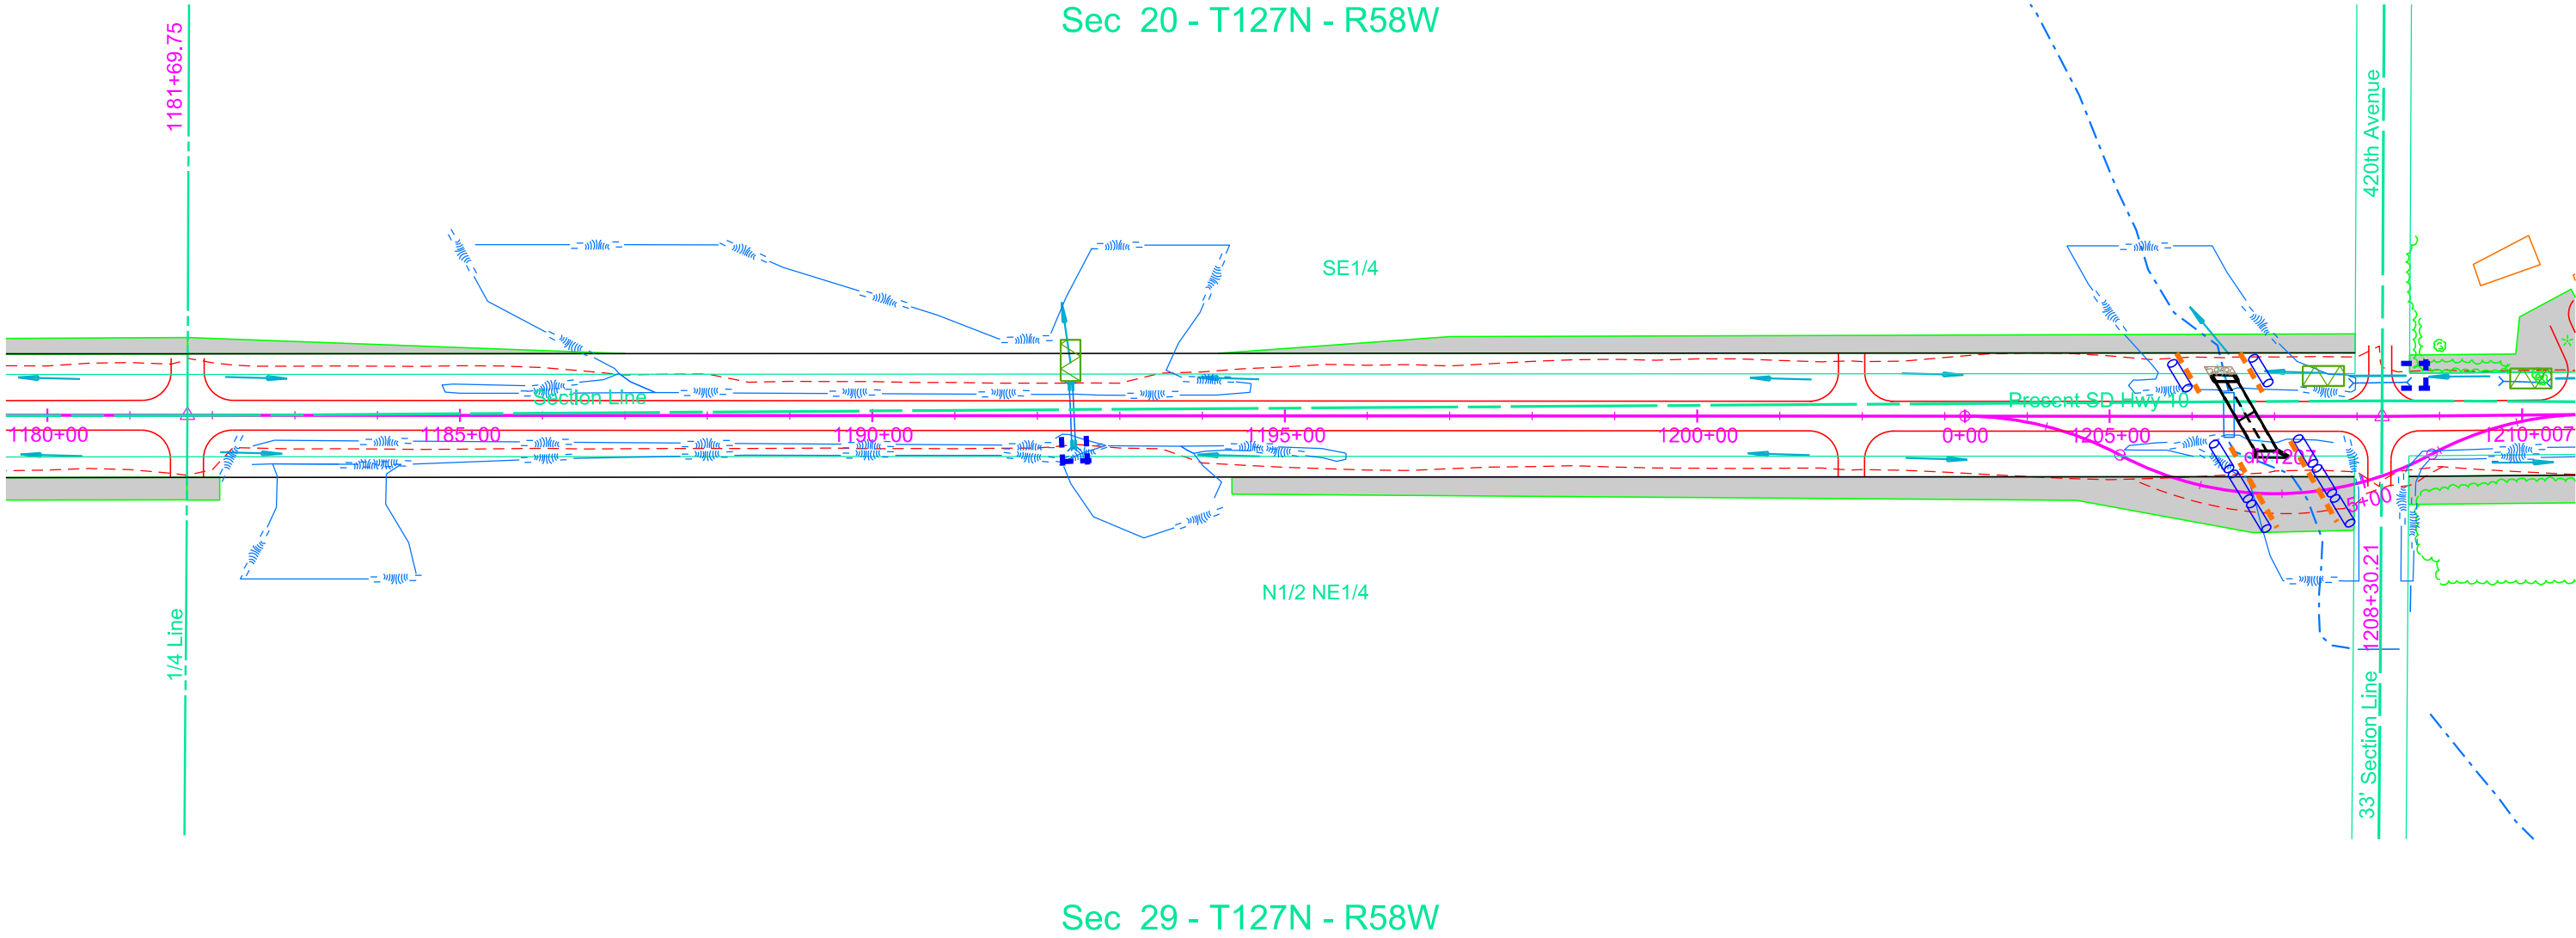

1:200  
Plot Scale -

Plotted From - TRPR13525

Install High Flow Silt Fence at the following locations:  
1217+01 L/R Box Culvert (200 Ft each side) 400 Ft

Vegetative buffer strips to be maintained where possible to trap sediment.


Install High Flow Silt Fence at the following locations:  
1210+68 - 44' L Inlet end of pipe 18 Ft  
1222+83 - 51' L Inlet end of pipe 18 Ft  
1230+13 - 51' R Across ditch at inlet end of pipe 30 Ft  
1232+21 - 51' R Across ditch at inlet end of pipe 30 Ft  
1234+77 - 51' L Inlet end of pipe 18 Ft  
1234+78 - 51' R Across ditch at inlet end of pipe 30 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install 12" Diameter Erosion Control Wattles  
at the following locations:  
1217+01 L/R Box Culvert (200 Ft each end) 400 Ft

Install Type 3 Erosion Control Blanket  
at the following locations:  
1210+68 L Outlet end of pipe 89 SqYd  
1222+83 L Outlet end of pipe 89 SqYd  
1230+13 R Outlet end of pipe 89 SqYd  
1232+21 R Outlet end of pipe 89 SqYd  
1234+77 L Outlet end of pipe 89 SqYd  
1234+78 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D40	D50

Plotting Date: 02/29/2024

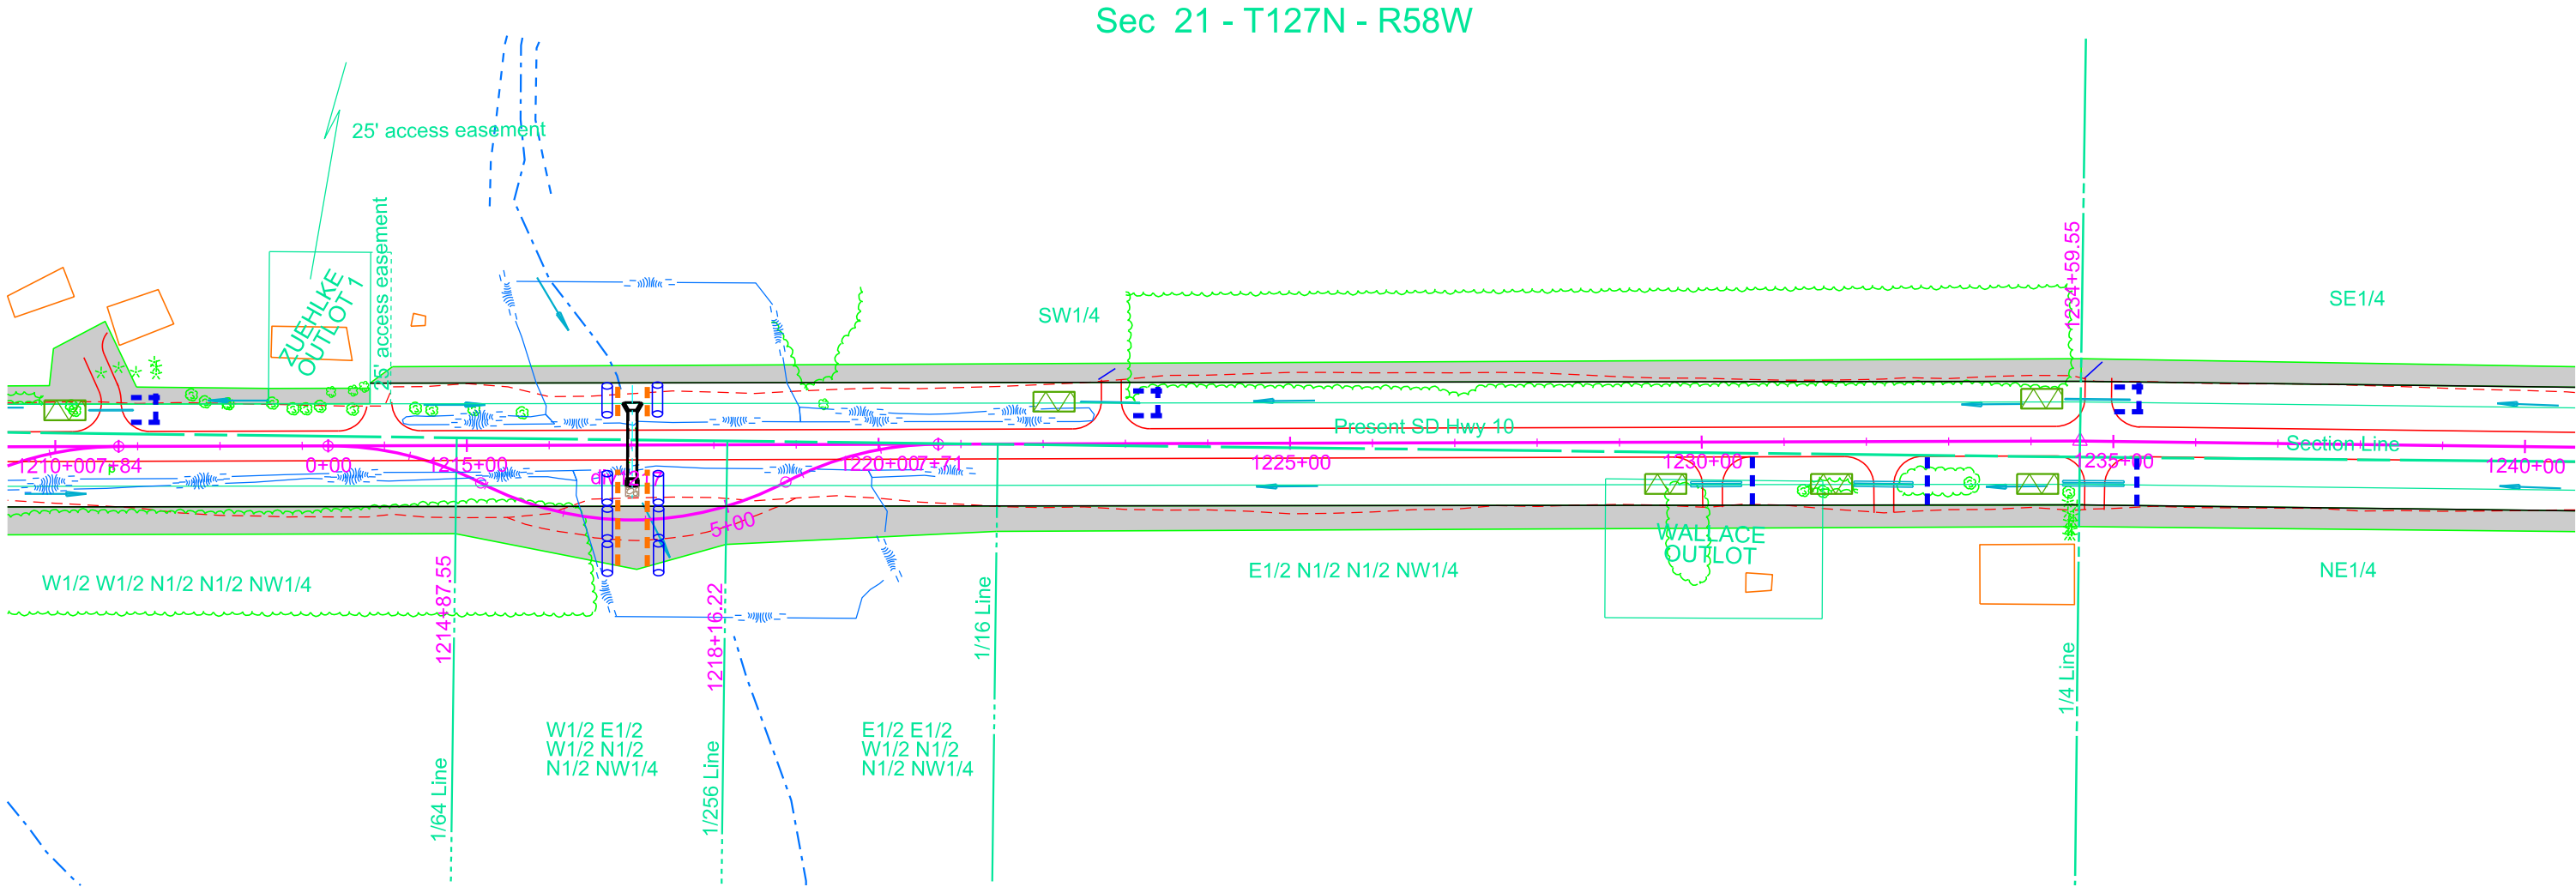

Vegetative buffer strips to be maintained where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
1256+16 - 41' R Inlet end of pipe 18 Ft  
1257+46 - 38' R Inlet end of pipe 18 Ft  
1260+77 - 38' R Inlet end of pipe 18 Ft  
1260+79 - 51' L Inlet end of pipe 18 Ft  
1266+82 - 49' R Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:  
1250+00 to 1254+00 R Ditch bottoms 711 SqYd  
1256+16 L Outlet end of pipe 89 SqYd  
1257+46 R Outlet end of pipe 89 SqYd  
1260+77 R Outlet end of pipe 89 SqYd  
1260+79 L Outlet end of pipe 89 SqYd  
1266+82 L Outlet end of pipe 89 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D41	D50

Plotting Date: 02/29/2024



Sec 21 - T127N - R58W

Sec 22 - T127N - R58W

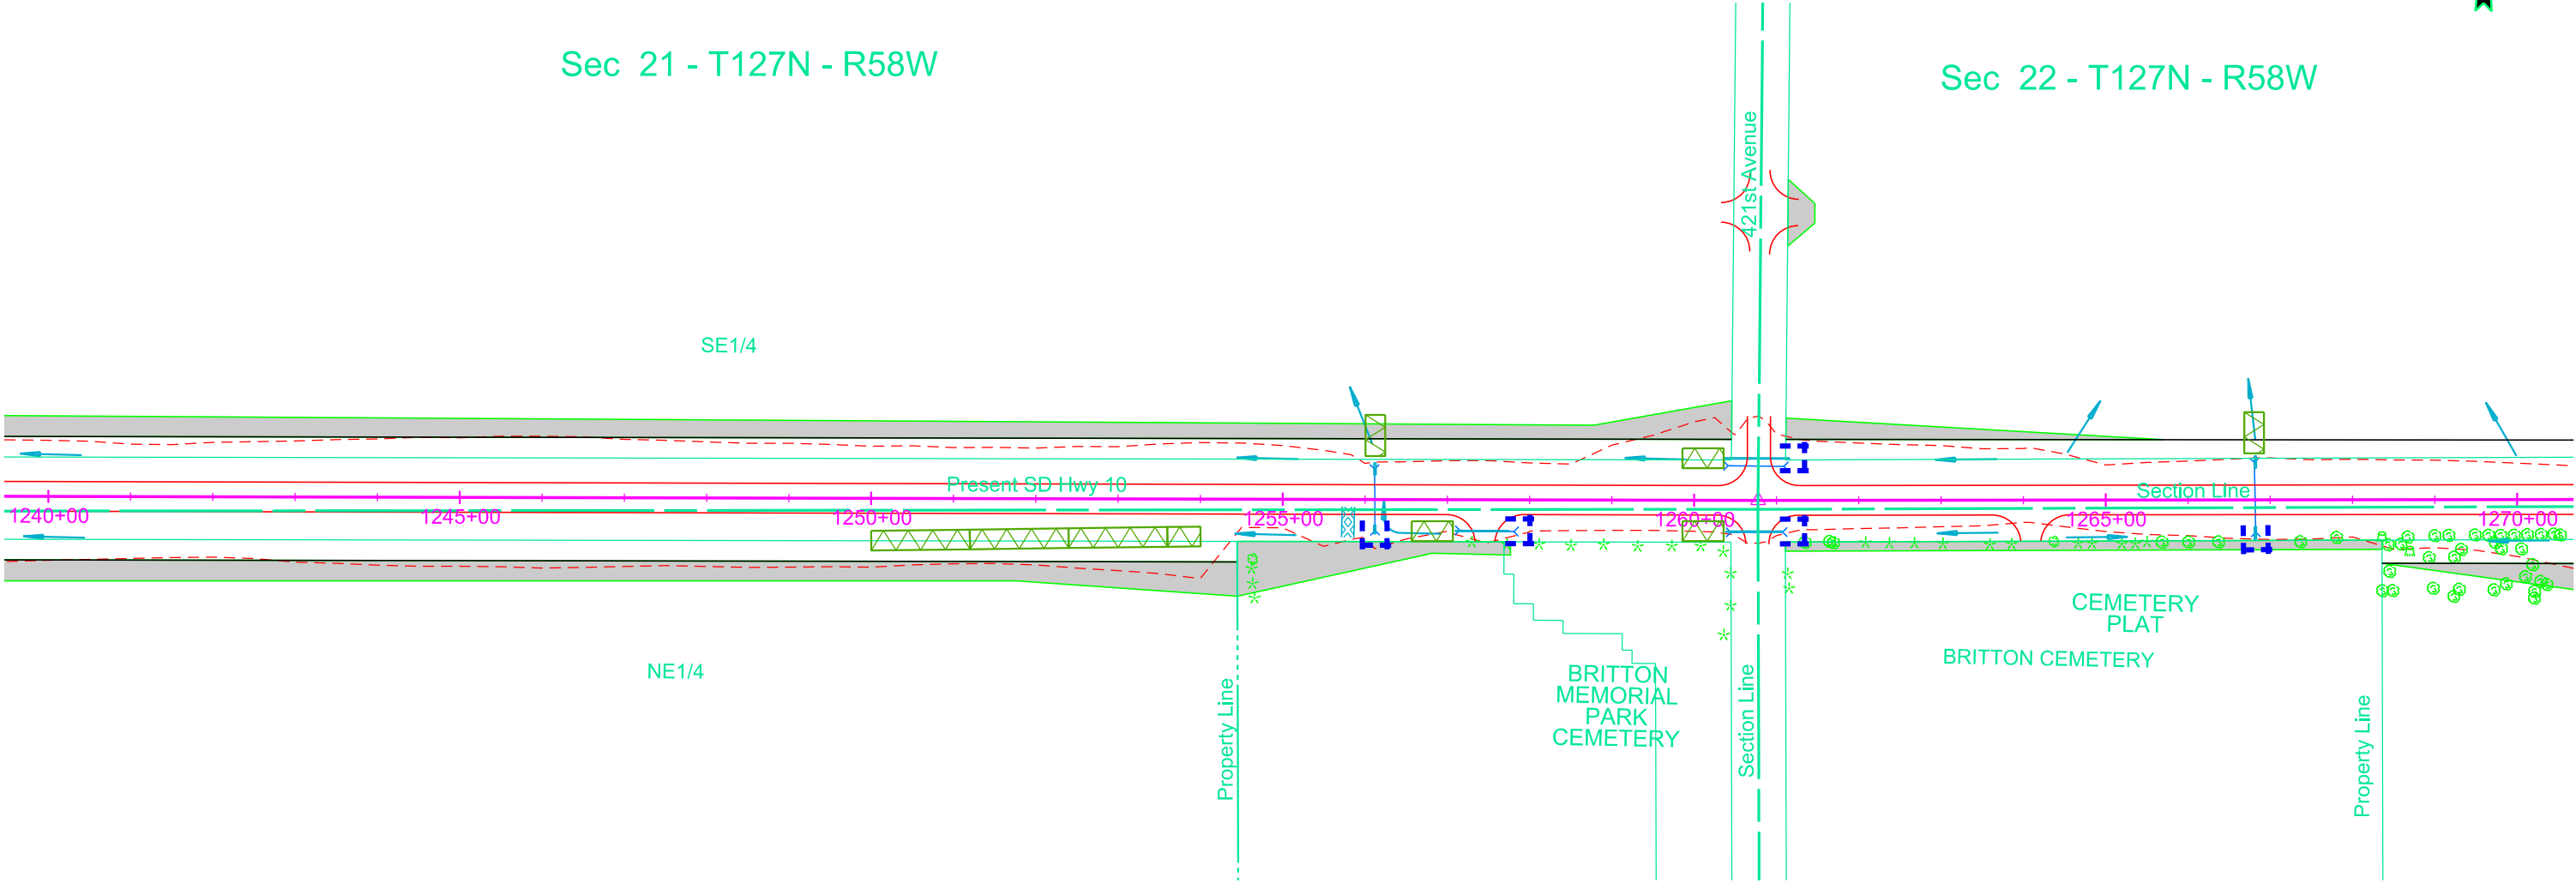

Sec 28 - T127N - R58W

Sec 27 - T127N - R58W

Plot Scale - 1:200

Plotted From - TRPR13525

Vegetative buffer strips to be mainatined where possible to trap sediment.

Install High Flow Silt Fence at the following locations:  
1277+51 R Inlet end of pipe 18 Ft  
1295+80 L Across ditch at inlet end of pipe (30 Ft each side) 60 Ft  
Around topsoil stockpiles--quantity and location to be determined


Install Type 3 Erosion Control Blanket at the following locations:  
1277+51 L Outlet end of pipe 89 SqYd  
1295+80 R Outlet end of pipe 89 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D42	D50

Plotting Date: 02/29/2024

Plot Scale - 1:200

Plotted From - TRPR13525

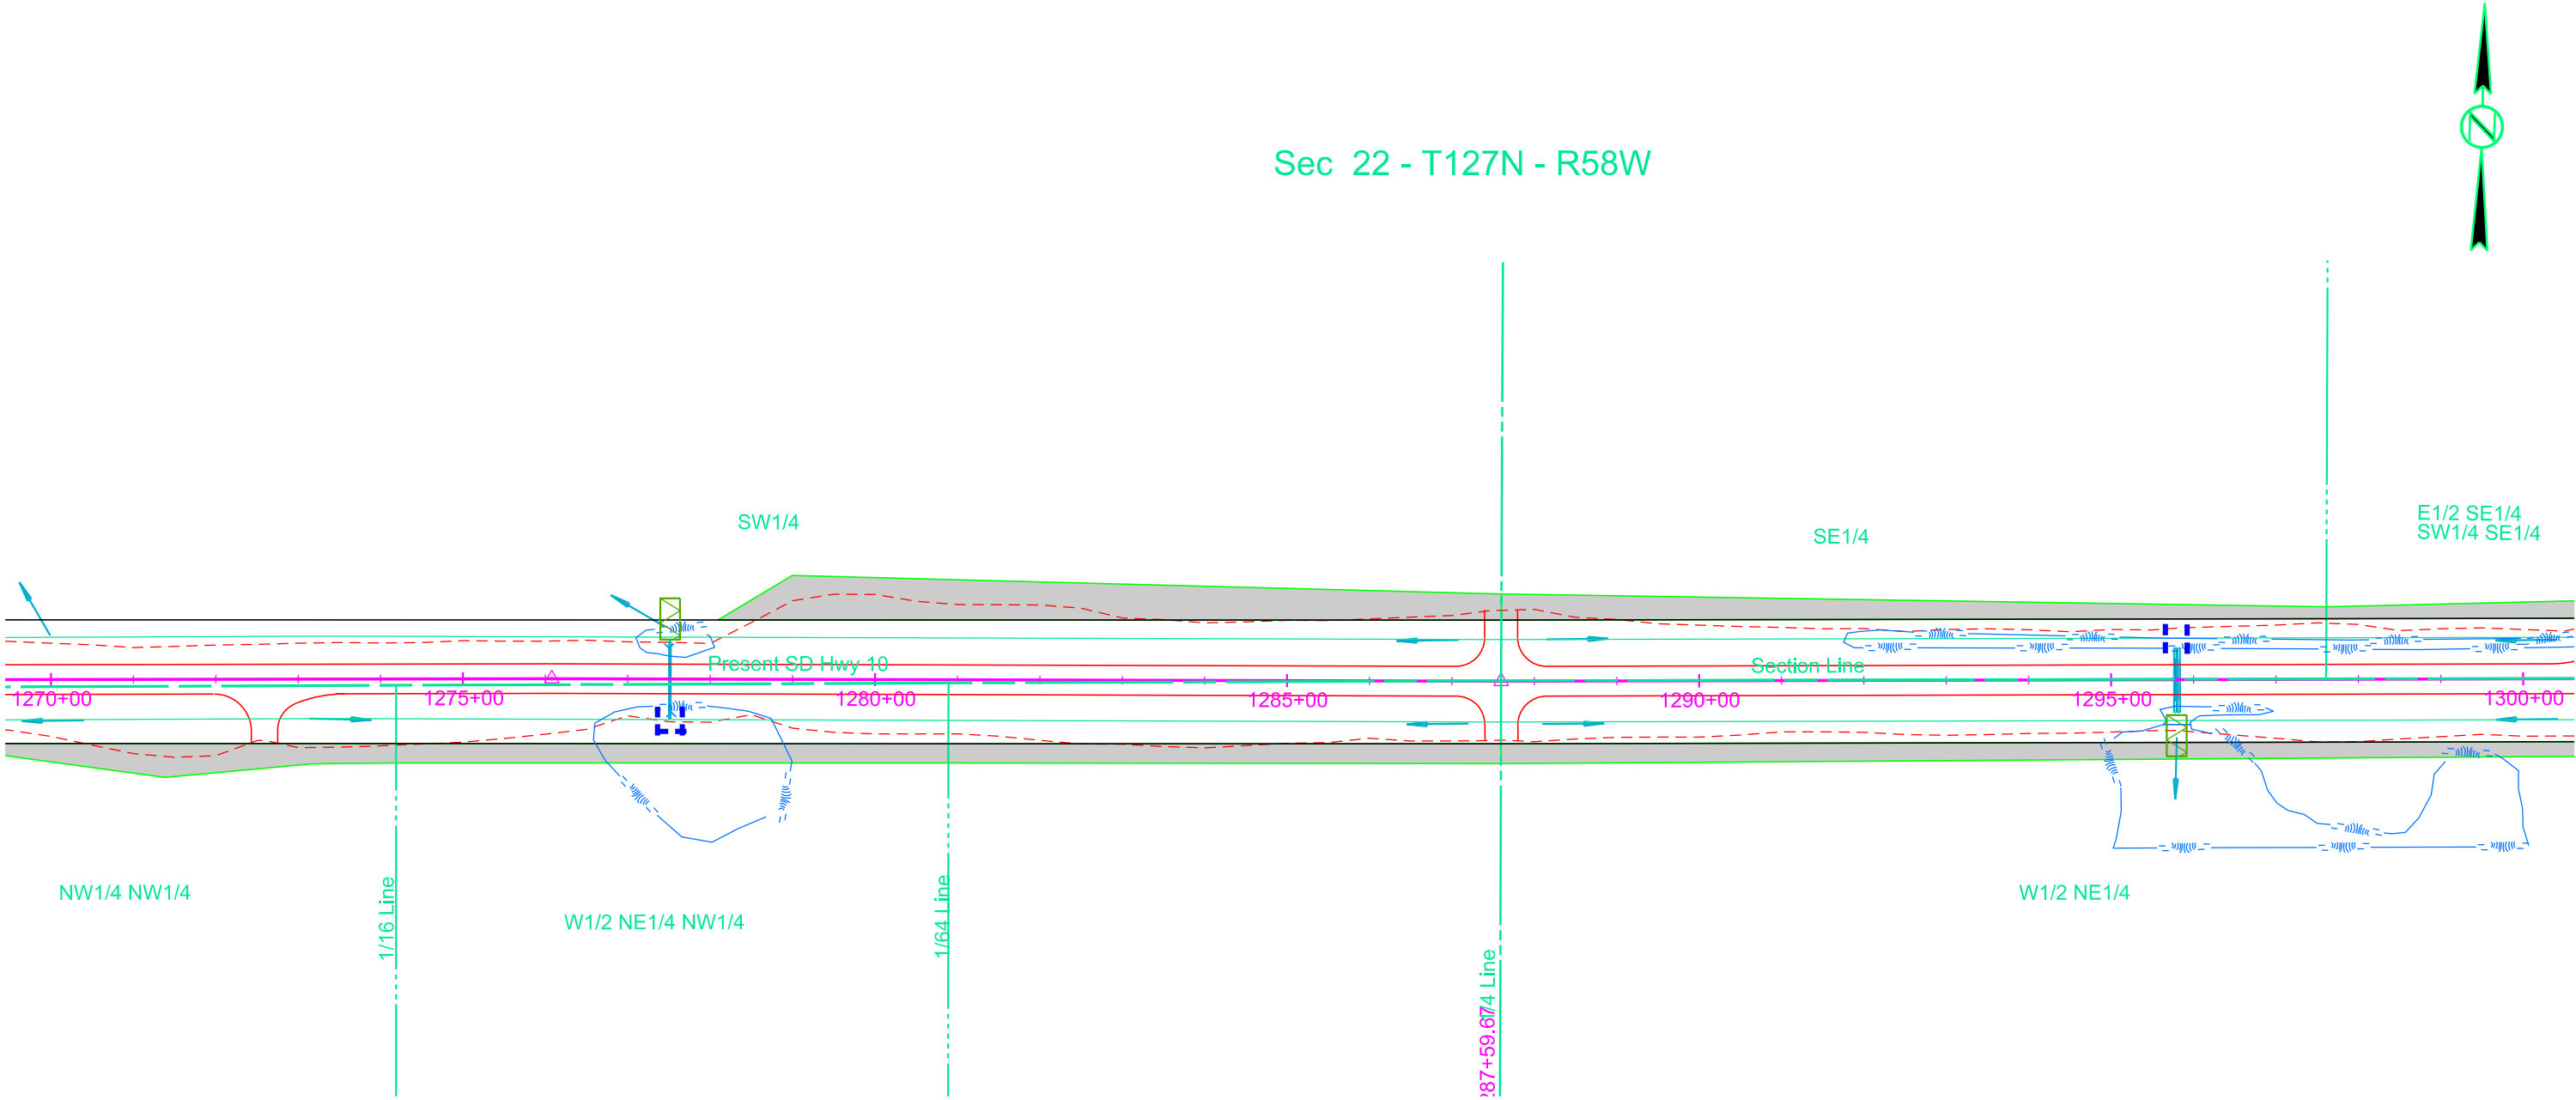

Plot Scale - 1:200

Plotted From - TRPR13525

Install High Flow Silt Fence at the following locations:  
1301+19 - 46' L Inlet end of pipe 18 Ft  
1307+14 - 47' L Inlet end of pipe 18 Ft  
Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket  
at the following locations:  
1301+19 L Outlet end of pipe 89 SqYd  
1307+14 L Outlet end of pipe 89 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D43	D50

Plotting Date: 02/29/2024



Sec 22 - T127N - R58W

Sec. 23 - T127N - R58W

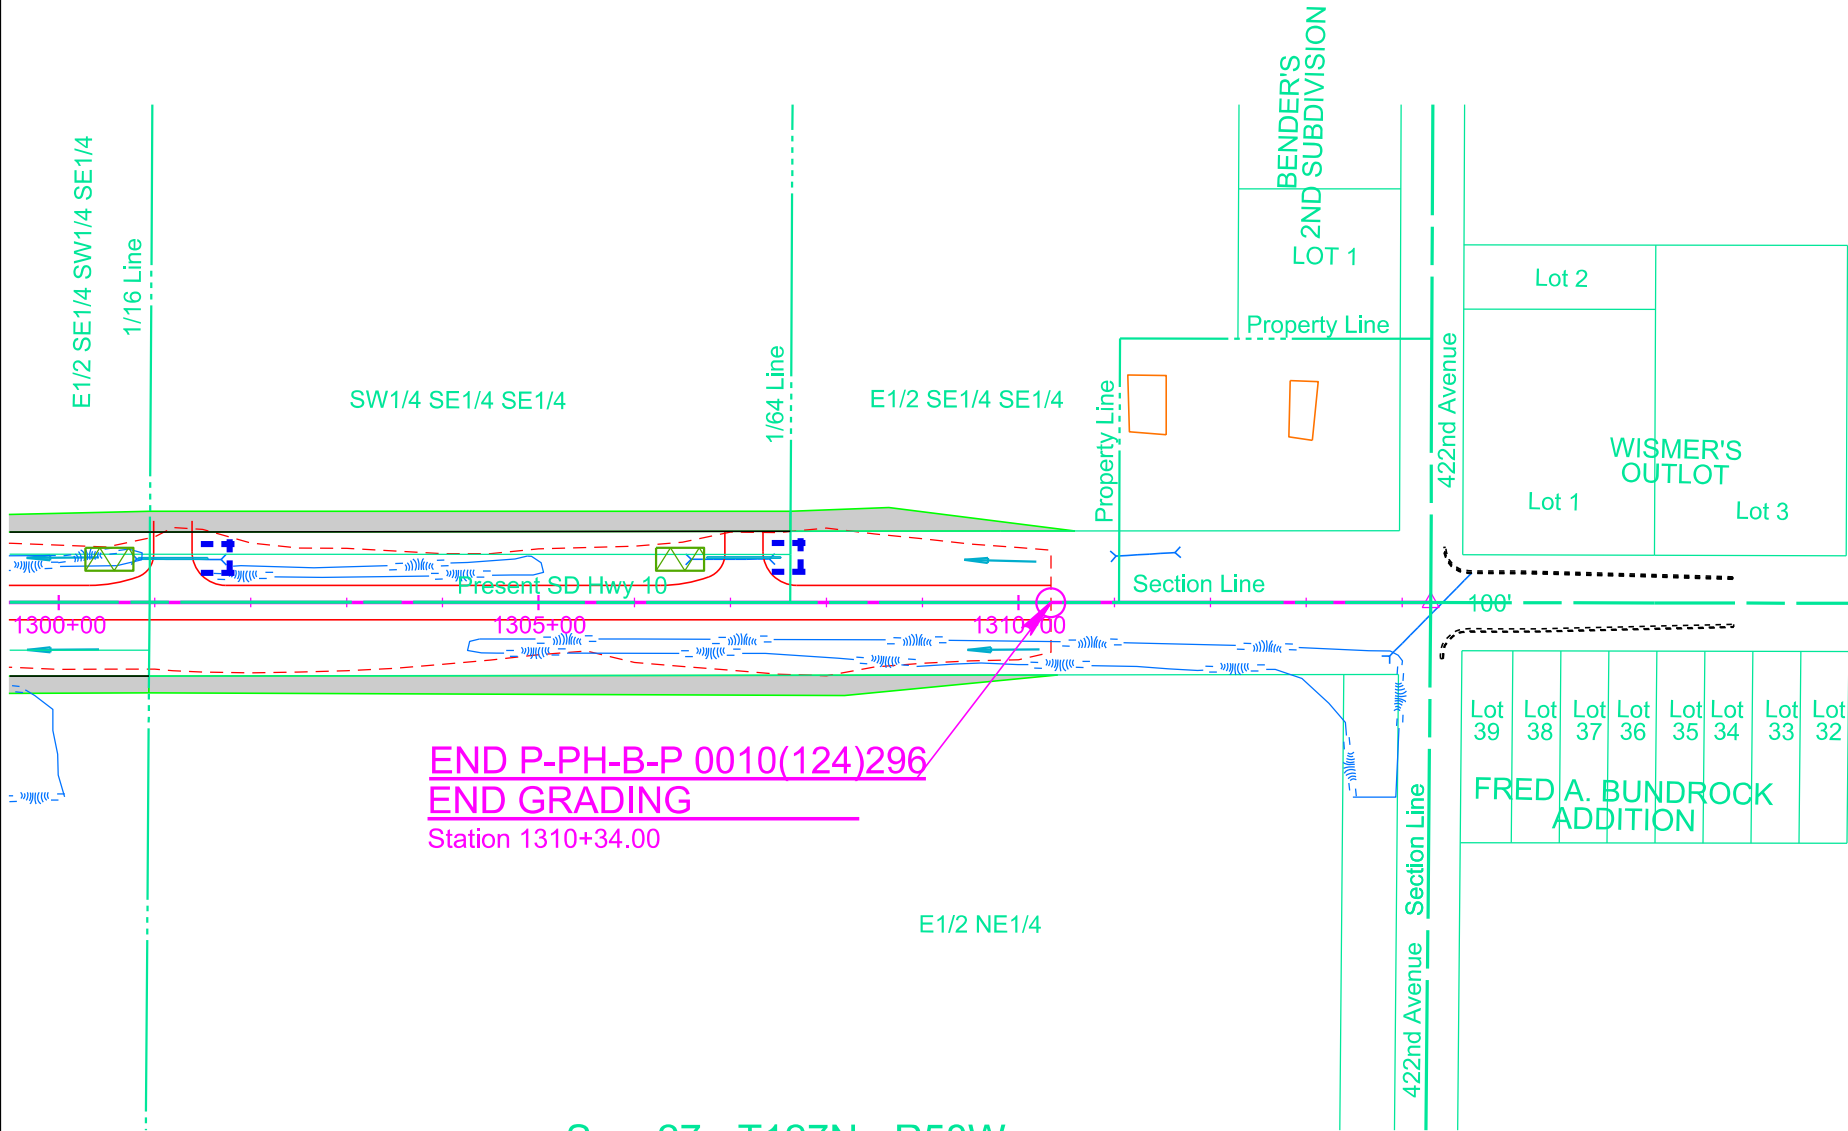

Sec 27 - T127N - R58W

Sec. 26 - T127N - R58W

Plot Scale - 1:300

# OPTIONS FOR DEWATERING AND SEDIMENT COLLECTING

OPTIONS ARE NOT LIMITED TO WHAT IS SHOWN ON THIS SHEET

NO MATTER THE SYSTEM OR METHOD USED, THE CONTRACTOR MUST MEET THE TERMS OF THE TEMPORARY DISCHARGE PERMIT AND THE STORMWATER PERMIT FOR CONSTRUCTION ACTIVITIES.

Various systems, devices, and products are shown on this sheet to give the Contractor ideas of what may be used for water treatment. Other systems, devices, and products are available and can be used with approval from the Engineer.

The Contractor may elect to block a portion of storm sewer near the outfall with sand bags and pump the water out to be treated with a flocculent or allow the water to set in a lined dumpster until sediment to falls out of suspension before discharging the water. Drop inlet protection devices could also be used as part of a treatment train. The Contractor may pump dirty water into a hydroseeder and mix it with a flocculent, and spray the mixture back onto a sediment pond.

## PURPOSE

The purpose of a dewatering and sediment collection system is to collect turbid storm water on the project, treat it with flocculents as needed, and capture the sediment that falls out of suspension before the water is discharged into "Waters of the US" or "Waters of the State". Refer to the Environmental Commitments for the specific requirements for each body of water on this project.

The Contractor will need to create a Pollution Prevention Plan (PPP) for dewatering and sediment collection if the Contractor choses to discharge the water into "Waters of the US" or "Waters of the State" instead of disposing of the water off-site, using it for irrigation, or using it for hydroseeding. The Contractor will also need to obtain a Temporary Discharge Permit from the South Dakota Department of Agriculture & Natural Resources (DANR) on all projects outside of Indian Reservation boundaries.

Suggestions for dewatering and sediment collection may be shown on the plan sheets. It is the Contractor's responsibility to dewater and collect sediment. The Contractor will have to intercept and treat the stormwater before storm sewer outfalls into "Waters of the US" or "Waters of the State". The Contractor may need more than one dewatering and sediment collection system to capture and treat stormwater at multiple outfalls and/or locations simultaneously during each phase of the project.

## PAYMENT

No additional payment will be made for Dewatering and Sediment Collecting. Dewatering and Sediment Collecting will be incidental to other items on the project.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D44	D50

Plotting Date: 02/29/2024

DEWATERING BAGS AND SOCKS capture sediment and should be placed on pavement, vegetated areas, or gravel.

Dandy Dewatering Bag  
Dandy Products, Inc.  
Powell, OH  
Phone: 1.800.591.2284  
www.dandyproducts.com

Non-woven Sediment Filter Bags  
Indian Valley Industries, Inc.  
Johnson City, NY  
Phone: 1.800.659.5111  
www.iviindustries.com

Taurus Dewatering Bags/Socks  
SolHuTec Group, Inc.  
Sebastian, FL  
Phone: 1.888.703.9889  
www.solhutech.com

Ultra-Dewatering Bag  
UltraTech International, Inc  
Jacksonville, FL  
Phone: 1.800.764.9563  
www.spillcontainment.com

Heavy Duty Dirtbag 55  
ACF Environmental  
Richmond, VA  
Phone: 1.800.223.9021  
www.acfenvironmental.com

Pump-It Tube  
Flo-Water, LLC  
West Des Moines, IA  
Phone: 1.515.577.6763  
www.flo-water.net

FLOCCULENTS listed below are considered to be safe for the environment, if used as directed:

APS 700 Series Floc Logs  
Applied Polymer Systems, Inc.  
Woodstock, GA  
Phone: 1.866.200.9868  
http://www.siltstop.com

Floc, Floc Soc, Floc Bag  
Innovative Turf Solutions Products  
Cincinnati, OH  
Phone: 1.513.317.8311  
http://www.innovativeturfsolutions.com

Biostar CH  
Hild & Associates, Inc.  
Stillwater, MN  
Phone: 1.715.426.5131  
www.biostar-ch.com

Terra-Tubes  
ACF Environmental  
Buffalo Grove, IL  
Phone: 1.800.366.1180  
www.terratubes.com

FI-3500 Tablets  
JRM Chemical, Inc.  
Cleveland, OH  
Phone: 1.216.475.8488  
http://www.soilmoist.com

Tigerfloc  
Floc Systems Inc.  
Surrey, British Columbia  
Phone: 1.604.343.2046  
www.flocsystems.com

## PORTABLE FLOCCULENT SYSTEMS



Eco Pond Rescue Water Wagon  
Eco Pond Rescue LLC  
Seminole, Florida  
Phone: 1.727.412.4323  
www.ecopondrescue.com

WTS2000 Portable Sediment Tank  
Aqualete Industries, LLC  
Ocean, New Jersey  
Phone: 1.732.695.6336  
http://aqualeteindustries.com

Dry Flocculent Mixing System  
Innovative Equipment Solutions  
Hot Springs, Arkansas  
Phone: 1.501.525.8484  
http://www.neptunewash.com

## THE CASCADE SYSTEM

The cascade system is shown below and to the right for conceptual purposes only; however, the cascade system will at a minimum incorporate the use of 2 flocculent housing units and 2 water and sediment storage units. Design and construction of the water and sediment storage units are project site specific and will be the Contractor's responsibility. A water and sediment storage unit may consist of a storage bin lined with plastic, the bed of a dump truck lined with plastic, a sediment basin, or other Engineer approved unit. The treatment flocculent bag may be from the list or an approved equal.

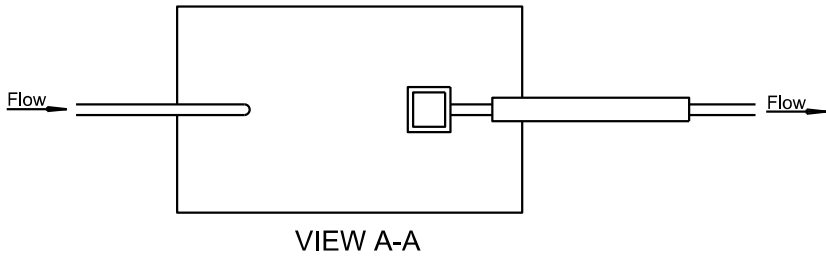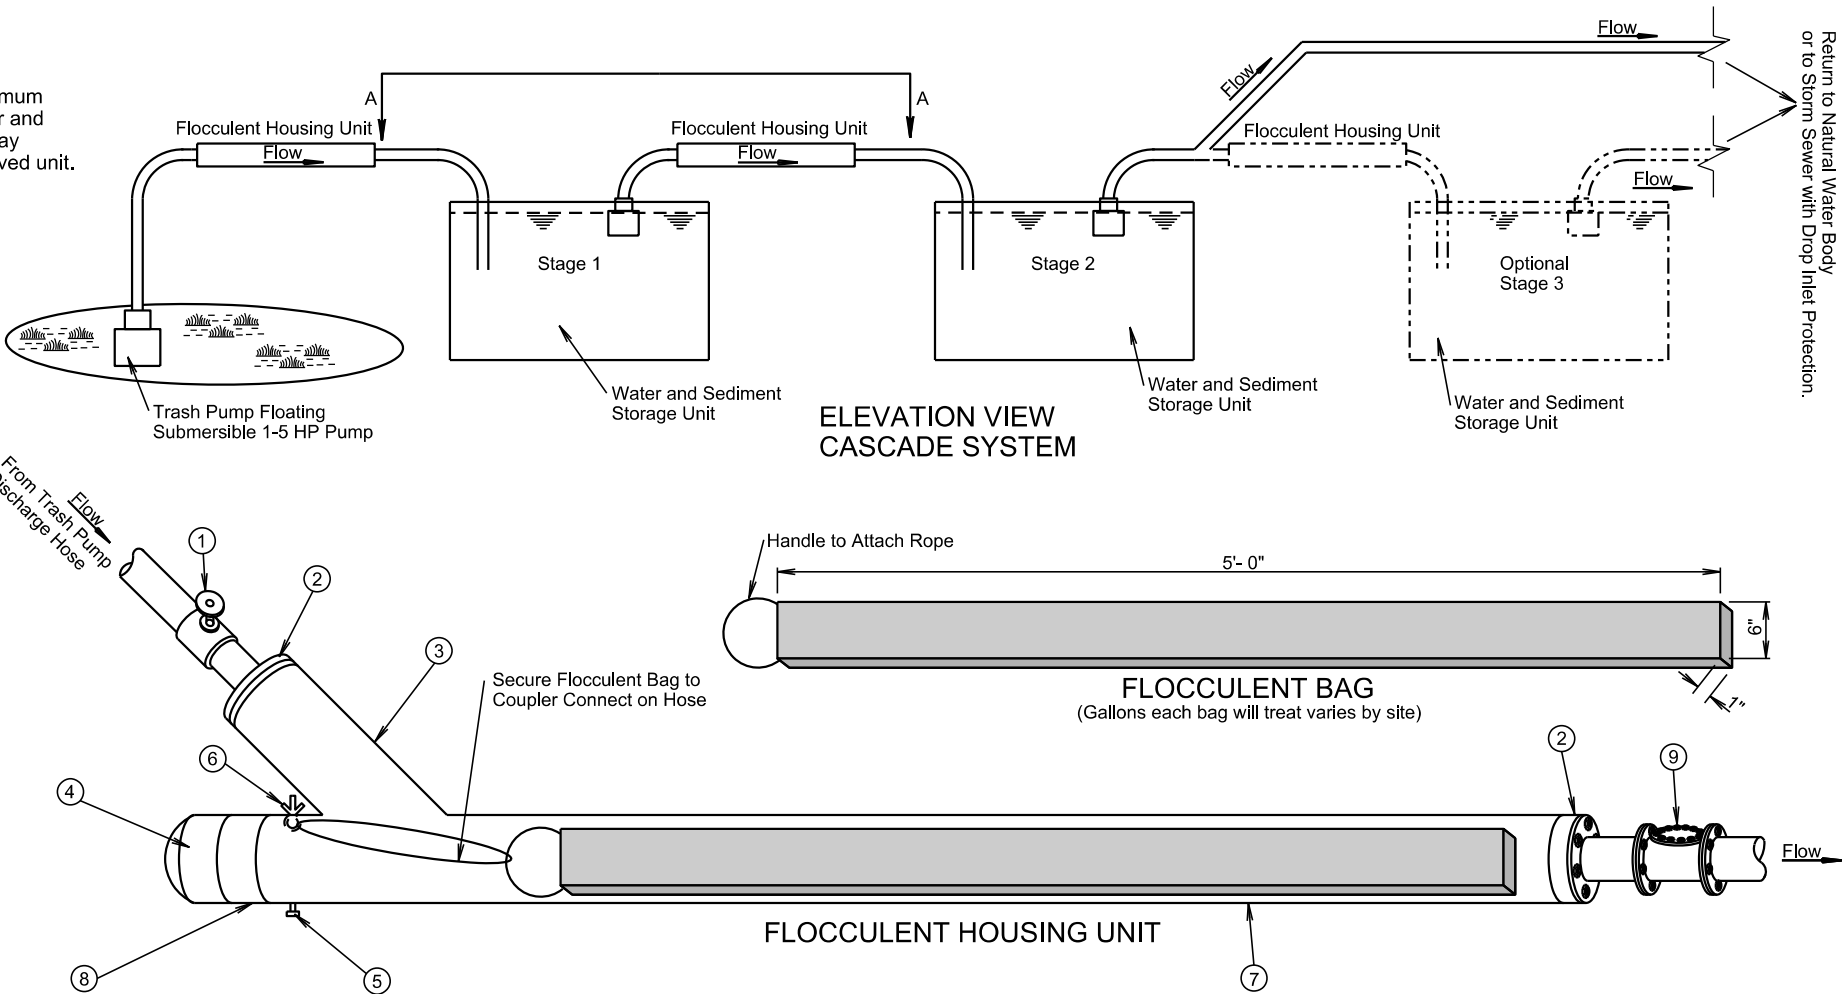

FLOCCULENT HOUSING UNIT (estimated quantities for information only)			
NO.	DESCRIPTION	QUANTITY	UNIT
1	4" or 6" Dia. Sch. 40 Gate Valve	1	Each
2	4" X 6" or 6" X 8" Sch. 40 PVC Bushing	2	Each
3	6" or 8" Dia. Sch. 40 PVC "Y"	1	Each
4	6" or 8" Dia. Sch. 40 PVC Female Threaded Cap	1	Each
5	1" Dia. Sch. 80 PVC Drain Valve	1	Each
6	1/2" Eye Bolt with Wing Nut and Rubber Gromets	1	Each
7	6" or 8" Dia. Sch. 40 PVC Pipe	10	Ft.
8	6" or 8" Dia. Sch. 40 PVC Male Adapter	1	Each
9	4" or 6" Dia. Sch. 40 PVC Swing Check Valve	1	Each

FLOW RATE ESTIMATE	
Pump Type	Flow Rate (gpm)
2"	50-250
3" Gas	250-350
4" Diesel	500-750
6" Diesel	750-1000



Plotted From - TRPR13525

File - ...rd\proj\brwn0514\4\Dewatering.dgn


# SDDOT CONSTRUCTION ENTRANCE

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D45	D50

Plotting Date: 02/29/2024

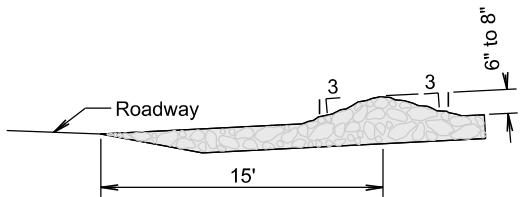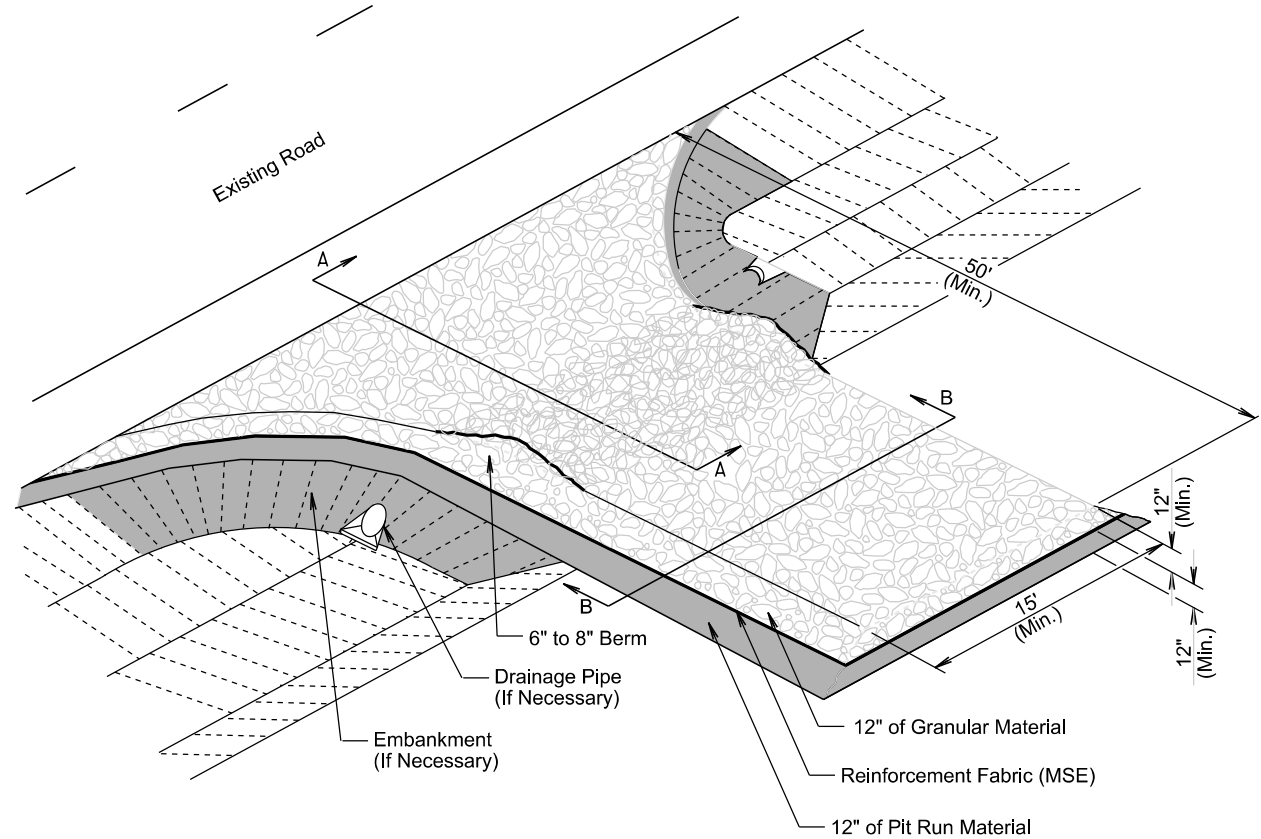

SECTION A-A

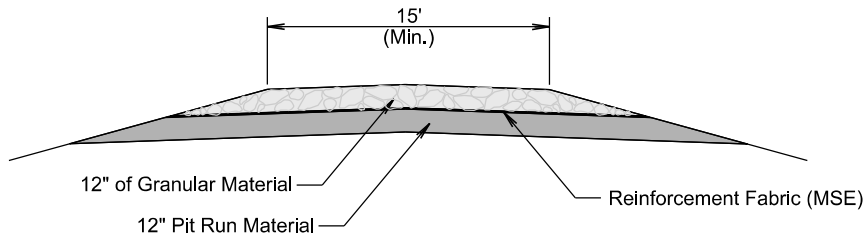

SECTION B-B



## GENERAL NOTES:

If the grade of the entrance slopes down to the roadway, a berm of extra rock will be used to prevent sediment or mud from being deposited on the roadway. See SECTION A-A.


If a drainage pipe is necessary the size and type will be determined by the Contractor to meet field conditions. All cost will be incidental to the various contract items.

If embankment is necessary it will be pit run material.

TRANSVERSE TO ROADWAY

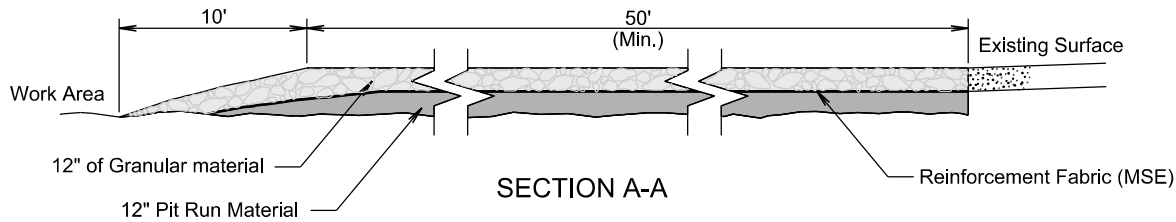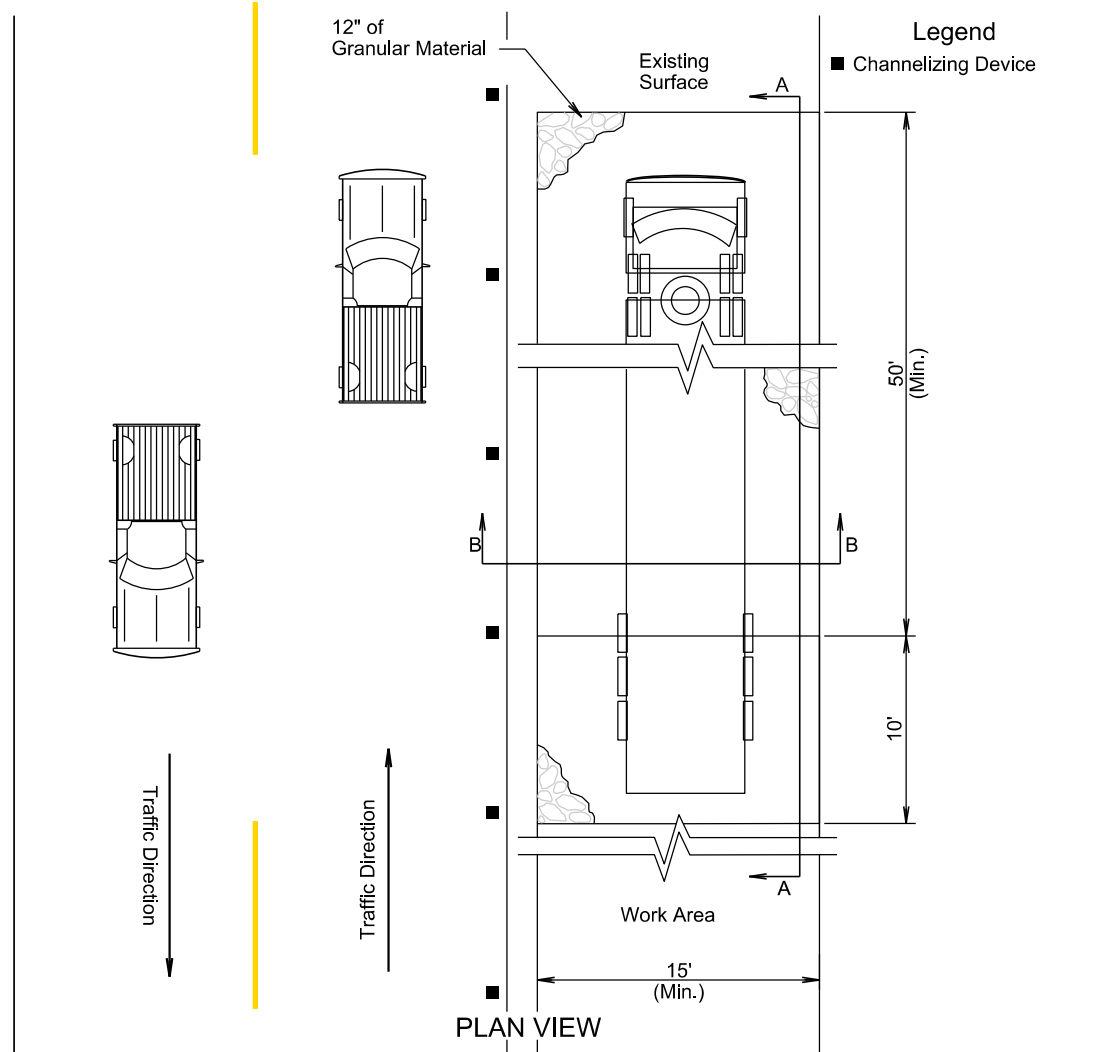

SECTION A-A

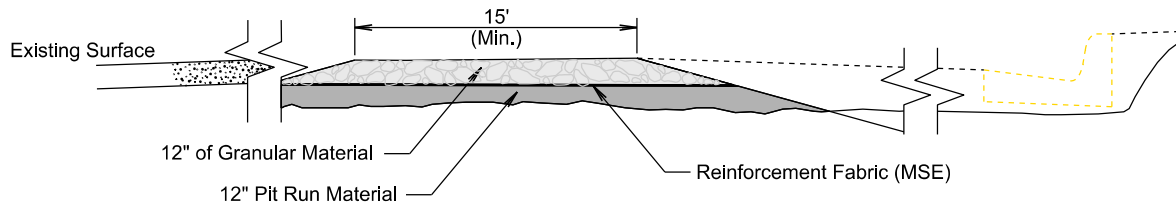


SECTION B-B


PARALLEL TO ROADWAY

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D46	D50


Plotting Date: 02/29/2024

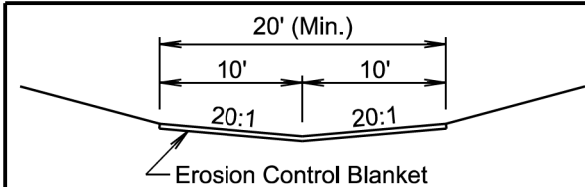


STANDARD DITCH SECTION

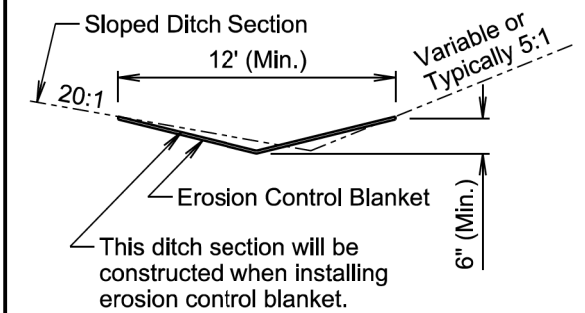


SLOPED DITCH SECTION

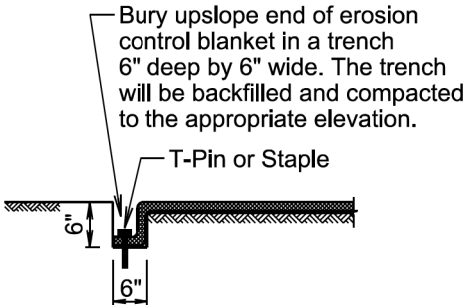

TRENCH DETAIL

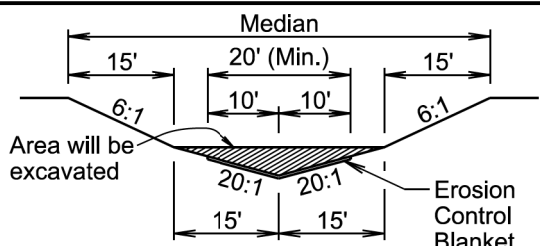


MEDIAN SECTION



\* Use a 4" (Min.) overlap wherever two widths of erosion control blanket are applied side by side.

\* Use a 6" (Min.) overlap wherever one roll of erosion control blanket ends and another begins.

OVERLAP DETAIL

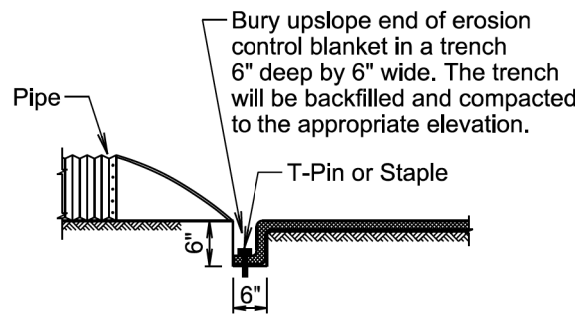

PIPE END DETAIL

GENERAL NOTES:

Prior to placement of the erosion control blanket, the areas will be properly prepared, shaped, seeded, and fertilized.

Erosion control blanket will be unrolled in the direction of the flow of water when placed in ditches and on slopes. The upslope end of the erosion control blanket will be buried in a trench 6" wide by 6" deep. There will be at least a 6" overlap wherever one roll of erosion control blanket ends and another begins, with the upslope erosion control blanket placed on top of the downslope erosion control blanket.

The erosion control blanket will be pinned to the ground according to the manufacturer's installation recommendations.


After the placement of the erosion control blanket, the Contractor will fine grade along all edges of the blanket to maintain a uniform slope adjacent to the blanket and level any low spots which might prevent uniform and unrestricted flow of side drainage directly onto the erosion control blanket.

All ditch sections will be shaped when installing the erosion control blanket. All costs for shaping the ditches will be incidental to the contract unit price per foot for "Shaping for Erosion Control Blanket".

February 14, 2020

Published Date: 2024	S D D O T	EROSION CONTROL BLANKET	PLATE NUMBER 734.01
			Sheet 1 of 1

## MANUAL LOW FLOW SILT FENCE INSTALLATION

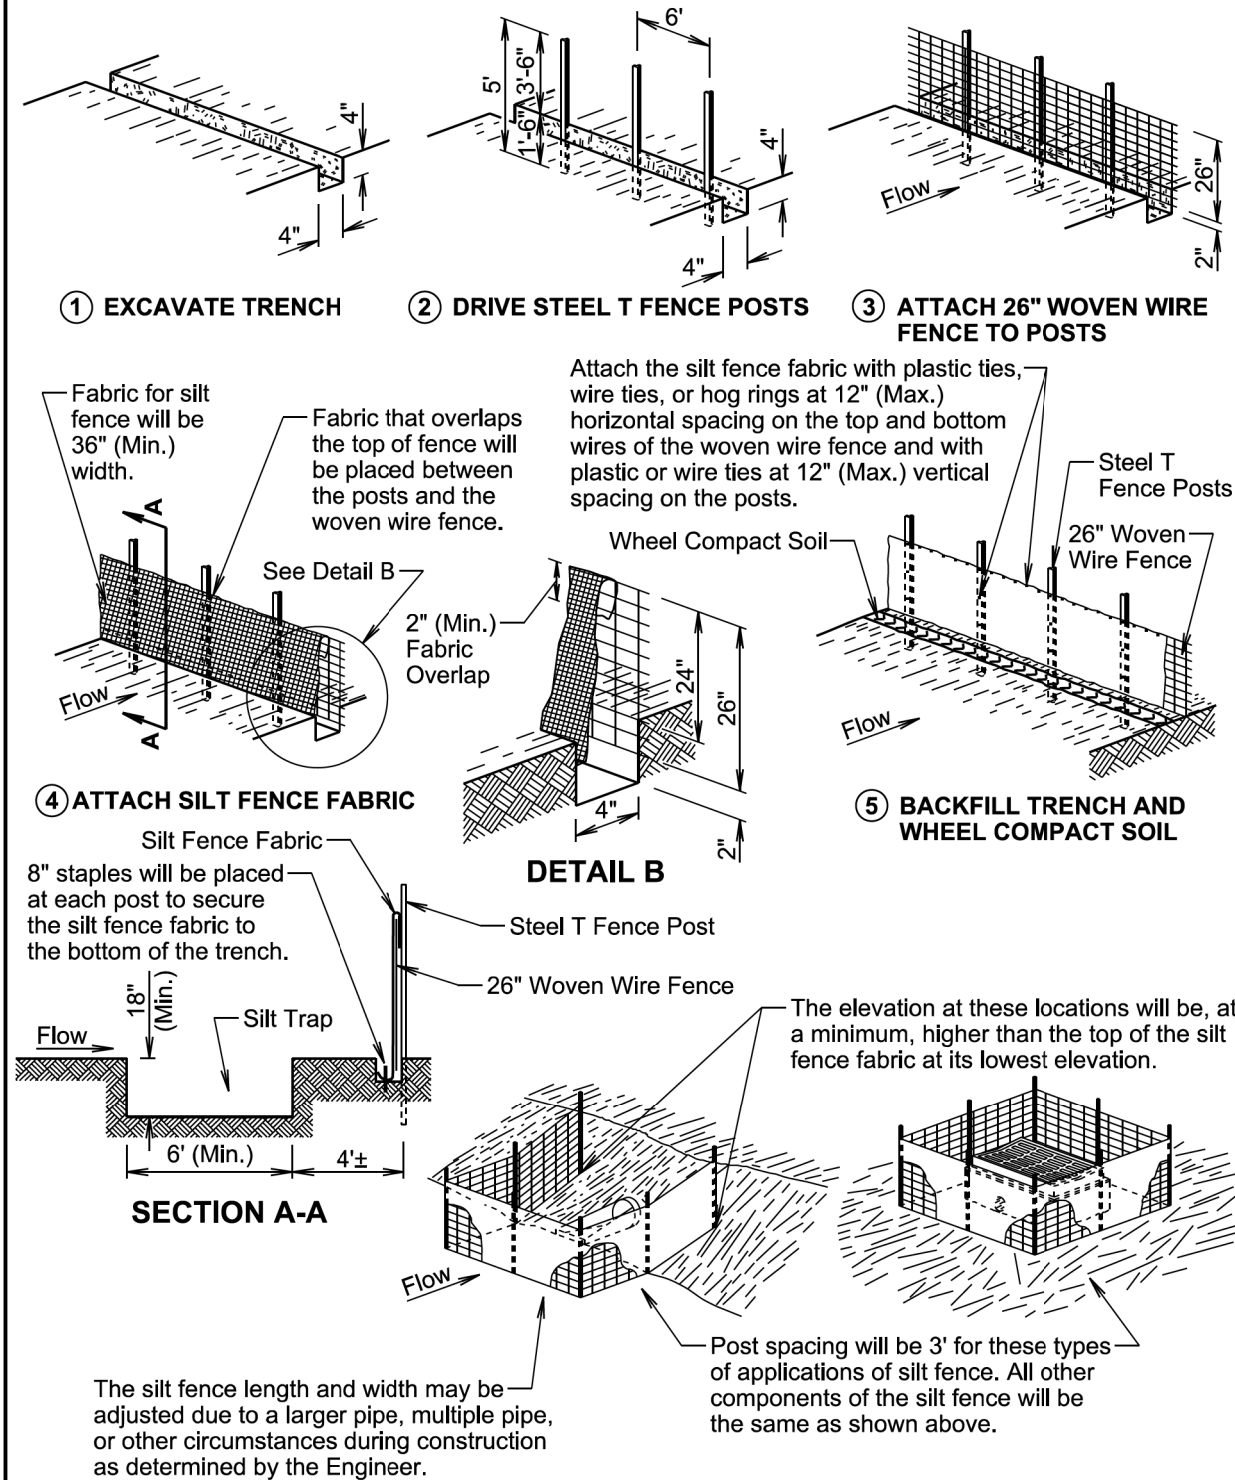

February 14, 2020

Published Date: 2024


S  
D  
D  
O  
T

LOW FLOW SILT FENCE  
AND SILT TRAP

PLATE NUMBER  
734.04

Sheet 1 of 2

## MACHINE SLICED LOW FLOW SILT FENCE INSTALLATION

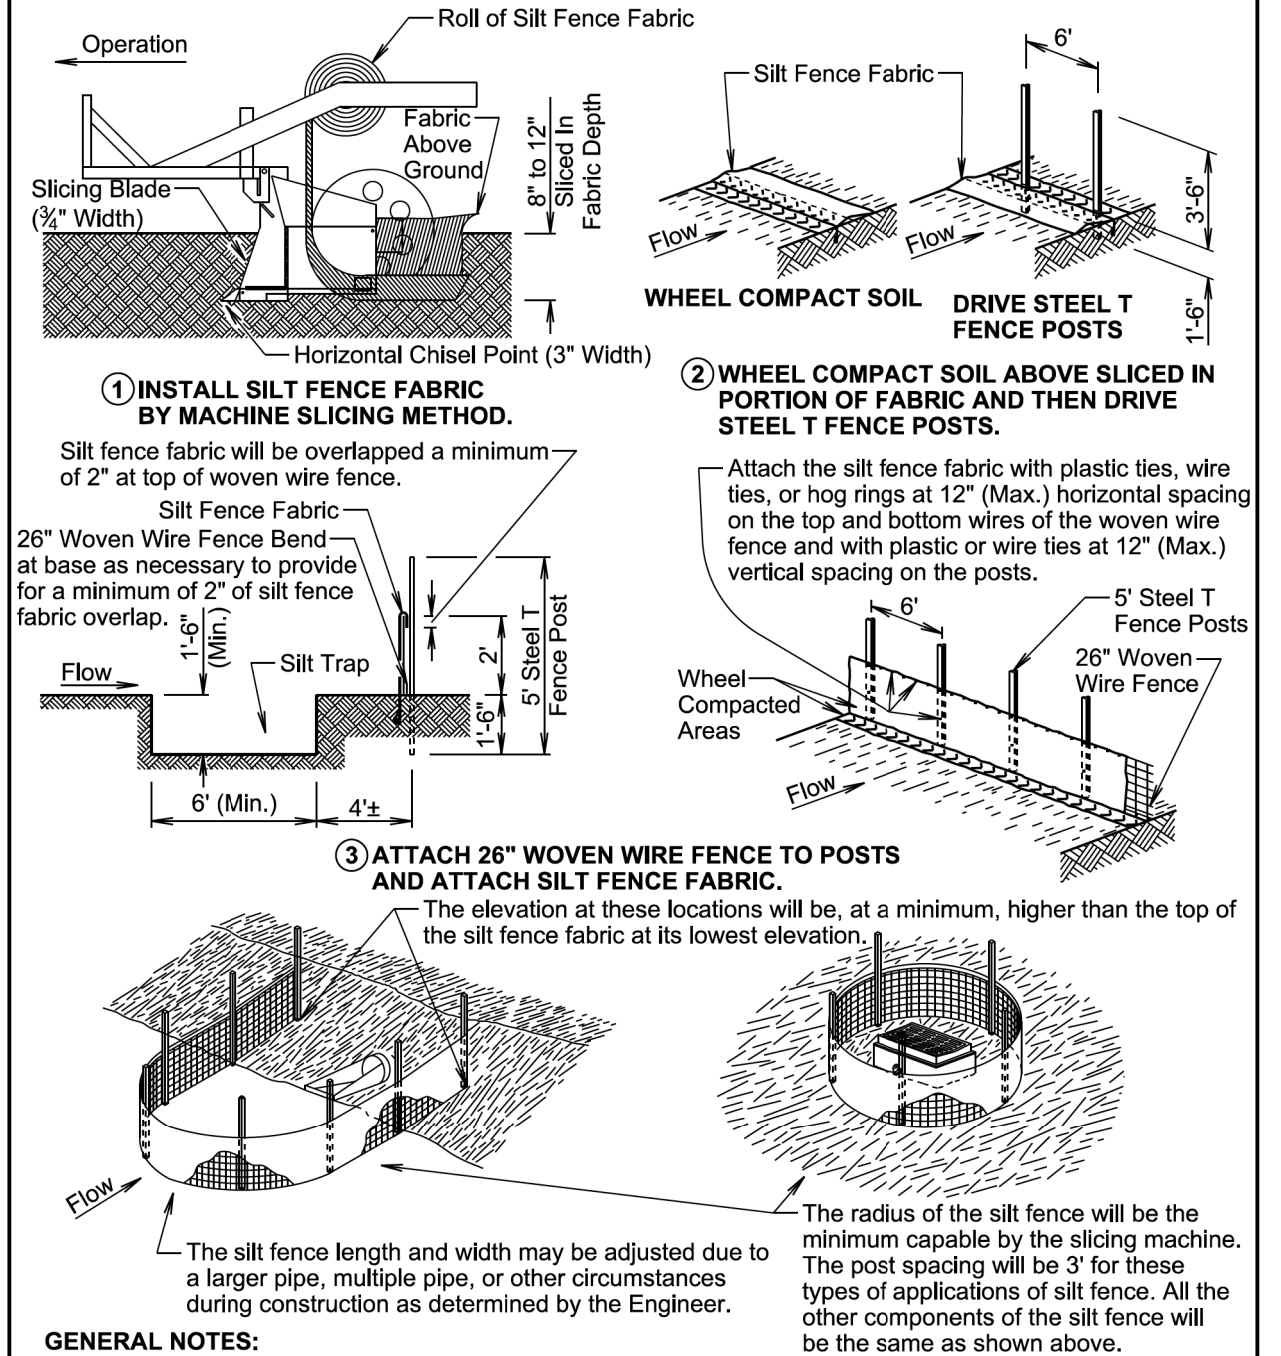

February 14, 2020

Published Date: 2024


S  
D  
D  
O  
T

LOW FLOW SILT FENCE  
AND SILT TRAP

PLATE NUMBER  
734.04

Sheet 2 of 2



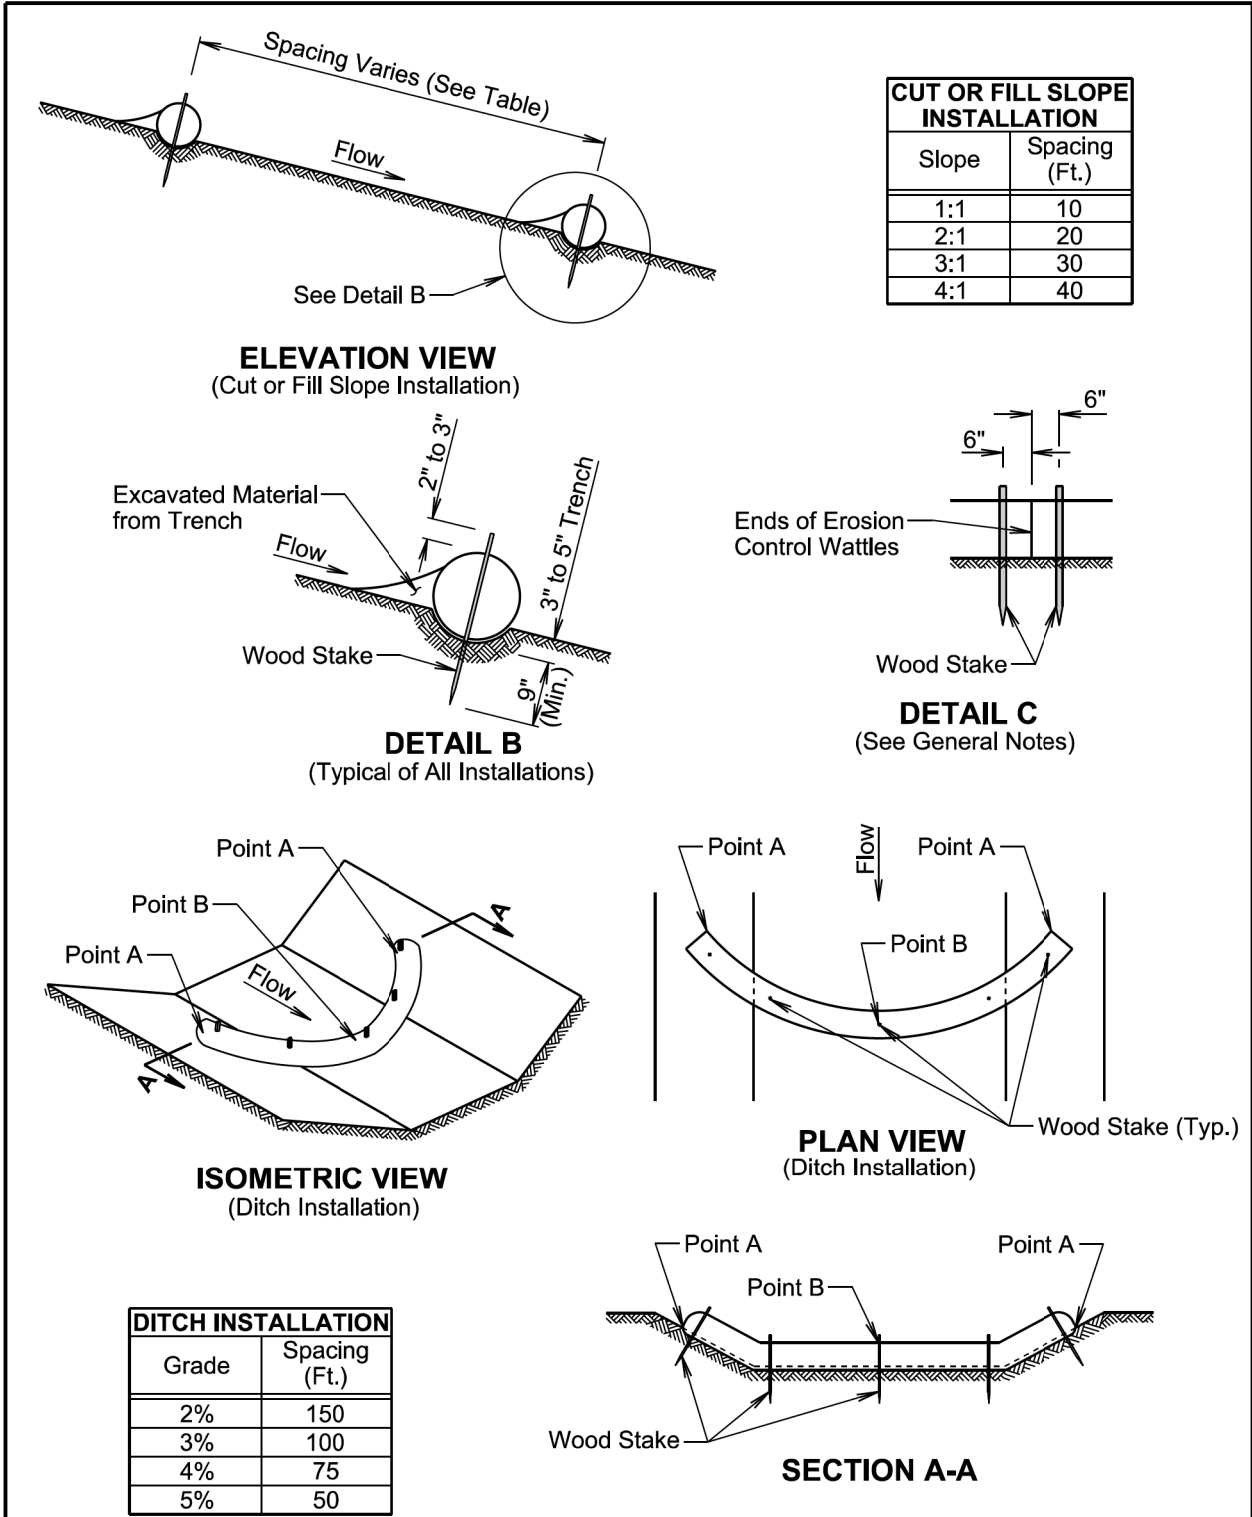

February 14, 2020

Published Date: 2024	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 1 of 2

**GENERAL NOTES:**

At cut or fill slope installations, wattles will be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor will dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes will be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes will be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles will be 3' to 4'.

Where installing running lengths of wattles, the Contractor will butt the second wattle tightly against the first and will not overlap the ends. See Detail C.

The Contractor and Engineer will inspect the erosion control wattles in accordance with the storm water permit. The Contractor will remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping will be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping will be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials will be incidental to the contract unit price per foot for the corresponding erosion control wattle contract item.


All costs for removing the erosion control wattle from the project including labor, equipment, and materials will be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".

February 14, 2020

Published Date: 2024	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 2 of 2

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PH-B-PT 0010(124)296	D50	D50

Plotting Date: 02/29/2024

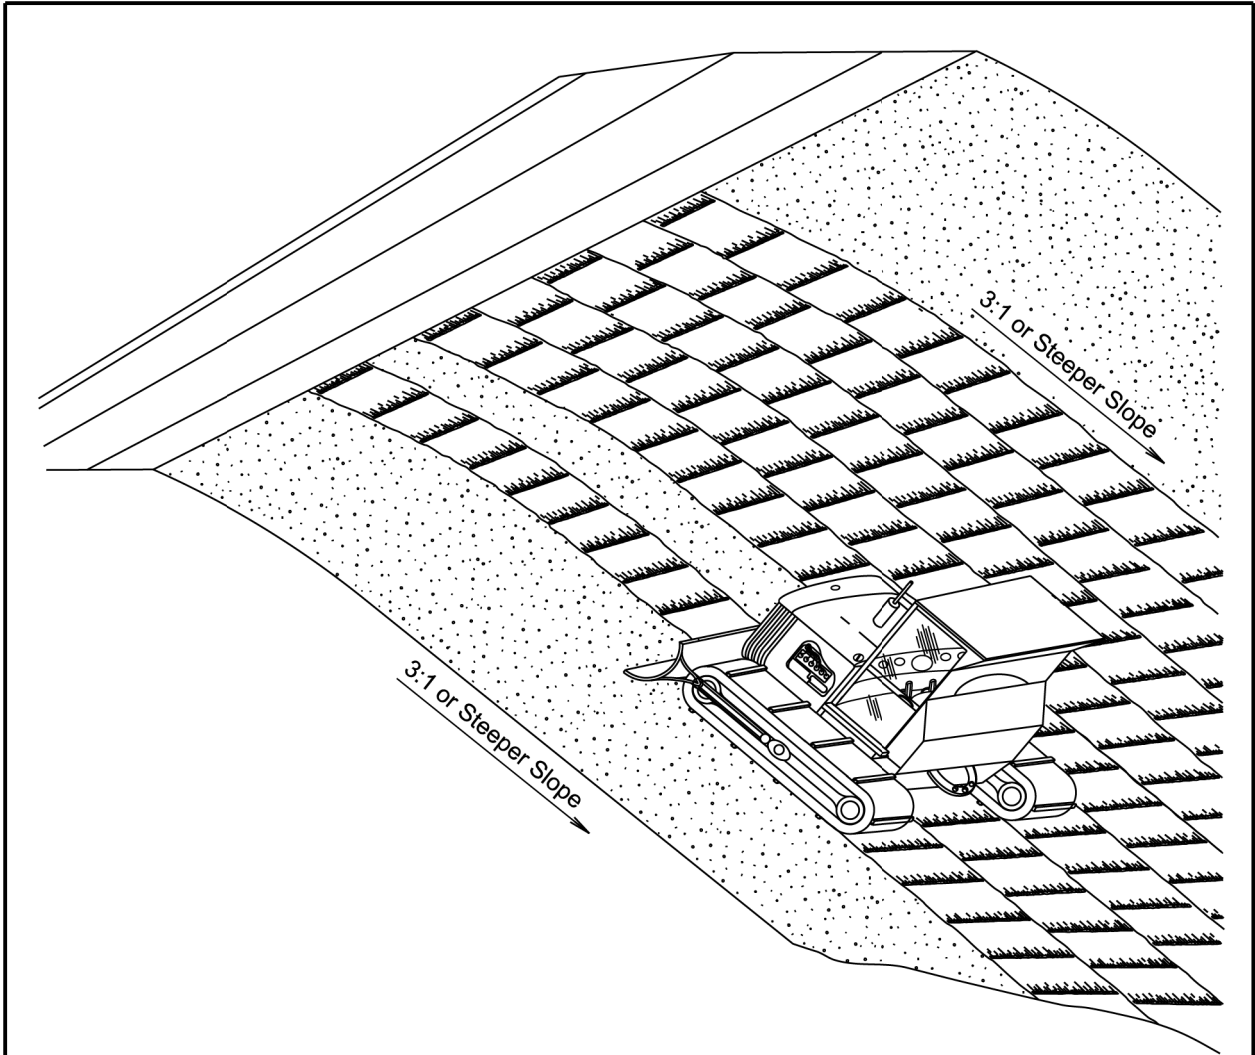

**GENERAL NOTES:**

Where practical, surface roughening will be done on slopes 3:1 and steeper and on slopes deemed necessary by the Engineer.

The equipment used for surface roughening will be equipped with tracks that are capable of creating ridges in the soil that are perpendicular to the slope. The final condition of the surface roughening will be approved by the Engineer.

Measurement for surface roughening will be to the nearest tenth of an acre.

All costs associated with surface roughening including labor, equipment, and materials will be incidental to the contract unit price per acre for "Surface Roughening".

February 14, 2020

<i>Published Date: 2024</i>	<b>S D D O T</b>	<b>SURFACE ROUGHENING</b>	<b>PLATE NUMBER</b> <b>734.25</b>
			<i>Sheet 1 of 1</i>