


SECTION D: EROSION AND SEDIMENT CONTROL PLANS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D1	D33
Plotting Date: 07/24/2024			

INDEX OF SHEETS

D1	General Layout with Index
D2-D6	Estimate with General Notes and Tables
D7-D10	Stormwater Pollution Prevention Plan Checklist
D11	Erosion and Sediment Control Legend
D12-D27	Erosion and Sediment Control Plan Sheets
D28	Dewatering and Sediment Collection System Details
D29	SDDOT Construction Entrance Details
D30-D33	Standard Plates

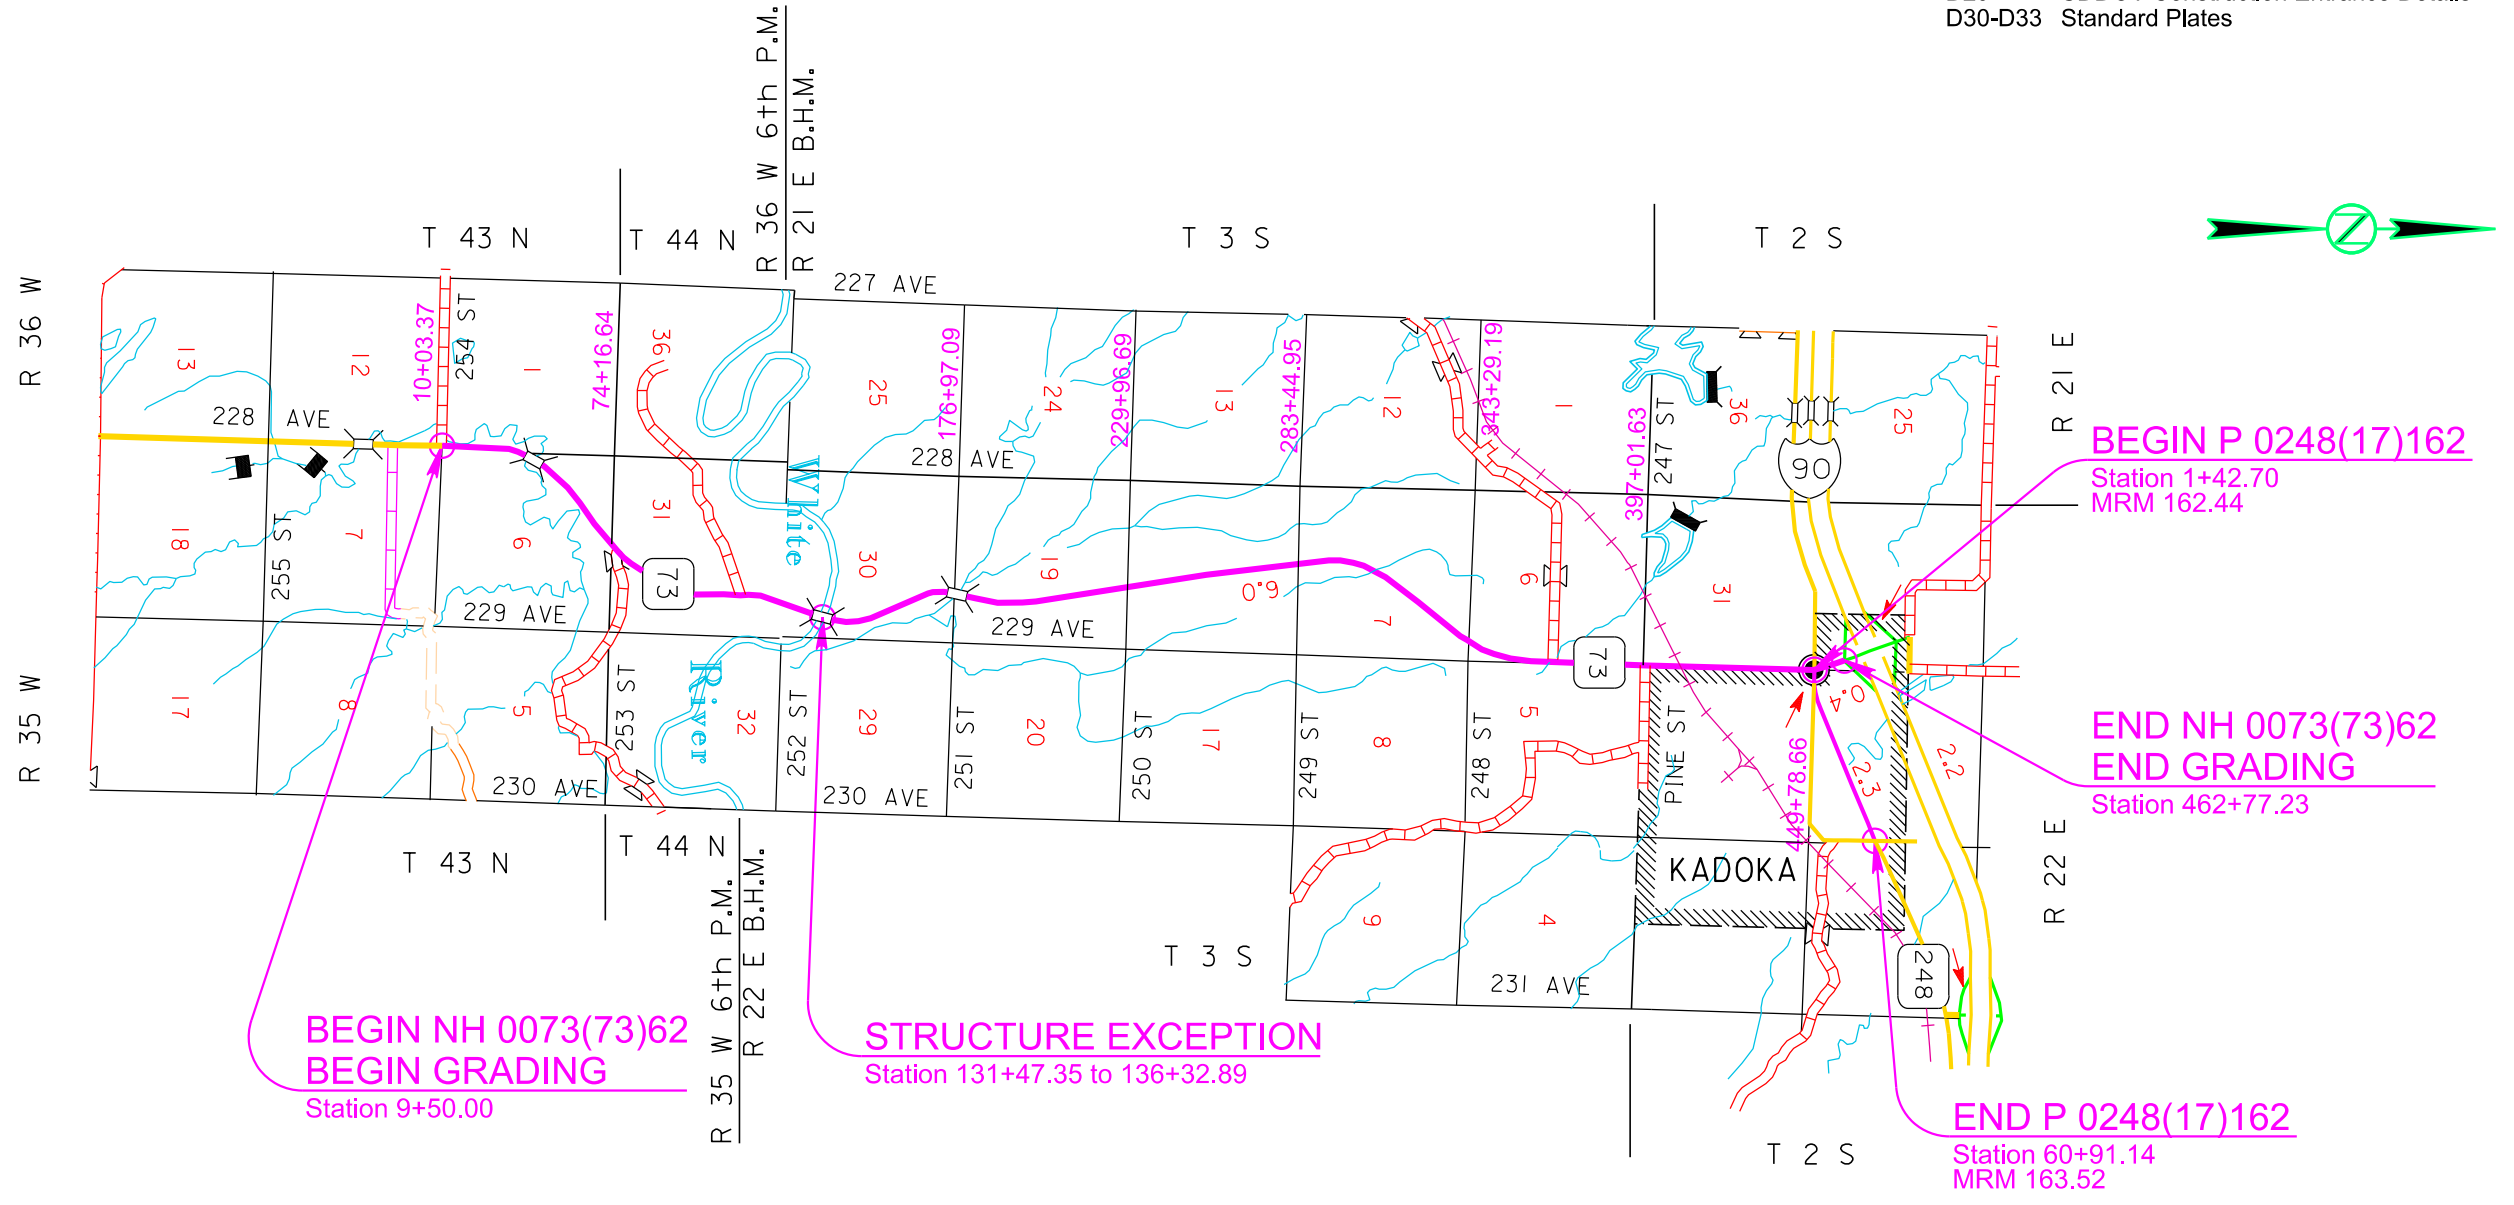

Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jacob\54\HV\TitleD.dgn

SECTION D ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E1690	Remove Sediment	47.0	CuYd
110E1700	Remove Silt Fence	14,099	Ft
230E0010	Placing Topsoil	79,063	CuYd
730E0100	Cover Crop Seeding	100.0	Bu
730E0210	Type F Permanent Seed Mixture	4,817	Lb
731E0200	Fertilizing	92.60	Ton
732E0100	Mulching	370.5	Ton
732E0500	Fiber Reinforced Matrix	111.1	Ton
734E0103	Type 3 Erosion Control Blanket	19,284	SqYd
734E0104	Type 4 Erosion Control Blanket	1,071	SqYd
734E0154	12" Diameter Erosion Control Wattle	20,455	Ft
734E0165	Remove and Reset Erosion Control Wattle	5,114	Ft
734E0510	Shaping for Erosion Control Blanket	11,450	Ft
734E0602	Low Flow Silt Fence	2,800	Ft
734E0604	High Flow Silt Fence	11,299	Ft
734E0610	Mucking Silt Fence	978	CuYd
734E0620	Repair Silt Fence	3,525	Ft
831E0110	Type B Drainage Fabric	1,380	SqYd
900E1320	Construction Entrance	2	Each
900E5147	Articulated Concrete Mattress	1,380.0	SqYd

PLACING TOPSOIL

The thickness will be approximately 4 inches within the right-of-way and 6 inches on temporary easements.

The estimated amount of topsoil to be placed is as follows:

Station	to Station	Topsoil (CuYd)
9+50	30+00	2,551
30+00	60+00	4,144
60+00	90+00	7,521
90+00	120+00	5,468
120+00	150+00	2,914
150+00	180+00	2,517
180+00	210+00	7,684
210+00	240+00	8,292
240+00	270+00	4,545
270+00	300+00	6,292
300+00	330+00	9,239
330+00	360+00	3,512
360+00	390+00	4,577
390+00	420+00	5,448
420+00	450+00	3,229
450+00	462+77.23	1,130
Total:		79,063

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum will consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier will provide certification of the fungal species claimed and the live propagule count. The inoculum will include a minimum 25% the fungal species *Rhizophagus intraradices*. The remaining 75% may include other endomycorrhizal fungal species.

All seed will be inoculated by the seed supplier with a minimum of 100,000 live propagules of mycorrhizal fungi per acre. All costs of inoculating the seed will be incidental to the contract unit price per pound for the corresponding permanent seed mixture.

The mycorrhizal inoculum will be as shown below or an approved equal:

Product	Manufacturer
MycoApply	Mycorrhizal Applications, Inc. Grants Pass, OR Phone: 1-866-476-7800 www.mycorrhizae.com
AM 120 Multi Species Blend	Reforestation Technologies Int. Gilroy, CA Phone: 1-800-784-4769 www.reforest.com
LALRISE Prime and Max WP	Lallemand Specialties Inc. Milwaukee, WI Phone: 1-844-590-7781 www.lallemandplantcare.com

FERTILIZING

The Contractor will apply an all-natural slow release fertilizer prior to seeding or placing sod. The all-natural fertilizer will have a minimum guaranteed analysis of 4-4-4 and be USDA Certified BioBased. It should provide a minimum of 4% (N) nitrogen with a minimum water insoluble nitrogen (WIN) fraction of 2.07%, a minimum of 4% (P2O5) available phosphate, a minimum of 4% (K2O) soluble potash, and a maximum carbon to nitrogen ratio (C:N ratio) of 5:1. The all-natural fertilizer will be free of weed-seed and pathogens accomplished through thermophilic composting, and not mechanical or chemical sterilization, to assure presence of beneficial soil microbiology. The fertilizer will have a near neutral pH, a low salt index, a low biological oxygen demand, contain organic humic and fulvic acids, and have high aerobic organism counts. The fertilizer will also be stable, free of bad odors, and be unattractive as a food source for animals. It should also be in a granular form that is easily spread.

The fertilizer will be applied on all areas seeded with Type F Seed at a rate of 1,000 pounds per acre in accordance with the manufacturer's recommended method of application.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D2	D33

Plotting Date: 07/24/2024

The all-natural slow release fertilizer will be as shown below or an approved equal:

Product	Manufacturer
Sustane	Sustane Corporate Headquarters Cannon Falls, Minnesota Phone: 1-800-352-9245 www.sustane.com
Perfect Blend	Perfect Blend, LLC Bellevue, WA Phone: 1-866-456-8890 www.perfect-blend.com
Nature Safe	Nature Safe Fertilizers Irving, TX Phone: 1-605-759-5622 www.naturesafe.com

PERMANENT SEEDING

The areas to be seeded consist of all newly graded areas within the project limits except for the top of roadways and temporary easements under cultivation.

Type F Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	7
Green Needlegrass	Lodorm, AC Mallard Ecovar	4
Sideoats Grama	Butte, Pierre	3
Blue Grama	Bad River	2
Oats or Spring Wheat: April through May; Winter Wheat: August through November		10
Total:		26

COVER CROP SEEDING

Cover crop seeding may be used on this project as a temporary erosion control measure. The actual limits and use of cover crop seeding will be determined by the Engineer during construction.

1:200 Plot Scale

Plotted From: TRPR13525

File: ...:\proj\ack05\HV\Notes\SectionD.dgn

MULCHING (GRASS HAY OR STRAW)

Grass Hay or Straw Mulch for temporary stabilization is to be used on this project at locations noted in the table and at locations determined by the Engineer during construction. The quantity in the Estimate of Quantities includes Grass Hay or Straw Mulch for temporary stabilization and Grass Hay or Straw Mulch for after permanent seeding. A second application of Grass Hay or Straw Mulch on areas that receive temporary Grass Hay or Straw Mulch will not be required unless the Engineer determines a second application is necessary due to deterioration of the initial application.

An additional 25 tons of Grass Hay or Straw Mulch has been added to the Estimate of Quantities for temporary erosion control on areas determined by the Engineer during construction.

If the Contractor uses a no-till drill, mulch may be applied prior to seeding and the mulch can then be punched into the soil by the no-till drill. If the Contractor uses this process, the no-till drill seeding will be completed immediately following the mulch application and the mulch will be punched into the soil at a 3-inch depth.

TABLE OF MULCHING (GRASS HAY OR STRAW)

Station	Location	Quantity (Ton)
45+00 to 49+00 L	Disturbed area	1.0
45+00 to 50+00 R	Disturbed area	1.2
61+00 to 63+00 R	Inslope	0.7
67+00 to 70+00 R	Inslope	0.7
75+50 to 91+00 R	Backslope	16.6
76+15 to 82+00 L	Backslope	2.0
91+50 to 102+00 L	Inslope	3.5
91+50 to 102+00 R	Inslope/Backslope/Ditch	3.5
140+00 to 143+00 R	Inslope/Backslope/Ditch	2.2
186+00 to 210+00 R	Backslope	12.3
190+20 to 195+50 L	Backslope	2.0
200+00 to 204+25 L	Backslope	2.0
210+00 to 225+50 L	Backslope	9.2
210+00 to 214+50 R	Backslope	1.5
219+00 to 230+00 R	Backslope	5.0
225+50 to 232+00 L	Inslope/Backslope/Ditch	3.2
232+25 to 237+50 R	Backslope	1.5
233+5 to 236+00 L	Inslope	1.2
241+00 to 244+00 L	Inslope	1.2
247+50 to 250+25 R	Inslope	0.8
249+00 to 250+50 L	Inslope/Backslope/Ditch	1.1
258+00 to 260+50 R	Inslope	1.2
258+50 to 262+00 L	Inslope	1.1
276+00 to 288+50 L	Inslope	5.6
276+00 to 282+00 R	Inslope	2.1
286+00 to 290+50 R	Inslope	2.1
292+50 to 296+50 R	Inslope	1.8
293+50 to 299+00 L	Inslope/Backslope/Ditch	3.4
300+00 to 320+00 L	Inslope/Backslope/Ditch	15.0
303+50 to 319+50 R	Inslope/Backslope/Ditch	8.9
395+00 to 402+50 L	Inslope/Backslope/Ditch	3.0
395+00 to 403+15 R	Inslope/Backslope/Ditch	3.0
411+50 to 414+50 L	Inslope	0.8
411+50 to 414+50 R	Inslope	0.6
Additional Quantity:		25.0
Total Quantity for Temporary Stabilization:		146.0
Total Quantity:		370.5

FIBER REINFORCED MATRIX

Fiber reinforced matrix will be applied in a separate operation following permanent seeding at locations noted in the table and at locations determined by the Engineer during construction. The application rate is 3,000 pounds per acre.

An additional quantity of Fiber Reinforced Matrix has been added to the Estimate of Quantities for erosion control on areas determined by the Engineer during construction.

The contractor will use a Fiber Reinforced Matrix from the approved products list, or an approved equal. The approved product list for Fiber Reinforced Matrix may be viewed at the following internet site.

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

TABLE OF FIBER REINFORCED MATRIX

Station	Location	Quantity (Ton)
45+00 to 49+00 L	Inslope/Backslope	0.7
45+00 to 50+00 R	Inslope/Backslope	0.9
61+00 to 63+00 R	Inslope	0.6
67+00 to 70+00 R	Inslope	0.5
75+50 to 91+00 R	Backslope	12.7
76+15 to 82+00 L	Backslope	1.6
91+50 to 102+00 L	Inslope	2.6
91+50 to 102+00 R	Inslope/Backslope	2.6
140+00 to 143+00 R	Inslope/Backslope	1.7
186+00 to 210+00 R	Backslope	9.2
190+20 to 195+50 L	Backslope	1.5
200+00 to 204+25 L	Backslope	1.5
210+00 to 225+50 L	Backslope	6.9
210+00 to 214+50 R	Backslope	1.2
219+00 to 230+00 R	Backslope	3.7
225+50 to 232+00 L	Inslope/Backslope/Ditch	2.4
232+25 to 237+50 R	Backslope	1.1
233+50 to 236+00 L	Inslope	0.9
241+00 to 244+00 L	Inslope	0.9
247+50 to 250+25 R	Inslope	0.6
249+00 to 250+50 L	Inslope/Backslope	0.8
258+00 to 260+50 R	Inslope	0.9
258+50 to 262+00 L	Inslope	0.8
276+00 to 288+50 L	Inslope	4.2
276+00 to 282+00 R	Inslope	1.6
286+00 to 290+50 R	Inslope	1.6
292+50 to 296+50 R	Inslope	1.3
293+50 to 299+00 L	Inslope/Backslope	2.5
300+00 to 320+00 L	Inslope/Backslope	11.2
303+50 to 319+50 R	Inslope/Backslope	6.7
395+00 to 402+50 L	Inslope/Backslope	2.3
395+00 to 403+15 R	Inslope/Backslope	2.3
411+50 to 414+50 L	Inslope	0.6
411+50 to 414+50 R	Inslope	0.5
Additional Quantity:		20.0
Total:		111.1

LOW FLOW SILT FENCE

The low flow silt fence fabric provided will be from the approved product list. The approved product list for low flow silt fence may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

Low flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.04 for details.

An additional quantity of Low Flow Silt Fence has been added to the Estimate of Quantities for temporary sediment control.

TABLE OF LOW FLOW SILT FENCE

Station	Location	Quantity (Ft)
39+51 L/R	Inlet and Outlet ends of Box Culvert (200 Ft each end)	400
131+47 to 136+33 L/R	Between bridge berms and waterway (300 Ft each side)	600
177+37 L/R	Inlet and Outlet ends of Box Culvert (150 Ft each end)	300
Additional Quantity:		1,500
Total:		2,800

HIGH FLOW SILT FENCE

The high flow silt fence fabric provided will be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

High flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.05 for details.

An additional quantity of high flow silt fence has been added to the Estimate of Quantities for temporary sediment control.

TABLE OF HIGH FLOW SILT FENCE

Station	Location	Quantity (Ft)
10+00 - 49' L	Inlet end of pipe	18
17+79 L/R	Inlet and Outlet ends of pipe (60 Ft each end)	120
23+78 - 49' R	Inlet end of pipe	18
32+69 L	Inlet end of pipe	18
48+16 L	Inlet end of pipe	18

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D3	D33

Plotting Date: 07/24/2024 REV. 08-07-23 BS

1:200 Plot Scale

Plotted From: TRPR13525

File: ...:\proj\ack05\HV\Notes\SectionD.dgn

An additional quantity of Type 3 Erosion Control Blanket has been added to the Estimate of Quantities for temporary erosion control.

TABLE OF EROSION CONTROL BLANKET

Station	Location	Type	Quantity (SqYd)
10+00 L	Outlet end of pipe	3	55
17+79 L/R	Inlet and outlet ends of pipe (55 SqYd Each side)	3	110
23+78 R	Outlet end of pipe	3	55
32+69 L	Outlet end of pipe	3	55
48+16 L	Outlet end of pipe	3	55
49+62 L	Outlet end of pipe	3	55
67+00 to 68+12 L	Ditch channel bottom	3	200
67+87 R	Outlet end of pipe	3	55
68+12 R	Outlet end of pipe	3	55
68+12 to 69+00 L	Ditch channel bottom	4	156
74+15 L	Outlet end of pipe	3	97
75+50 to 88+75 R	Ditch channel bottom	3	2,400
76+50 to 80+00 L	Ditch channel bottom	3	623
82+12 L	Outlet end of pipe	3	55
2+64 (dr82)	Outlet end of pipe	3	178
82+15 to 88+75 L	Ditch channel bottom	3	1,175
89+50 to 91+00 R	Ditch channel bottom	3	267
92+12 L	Outlet end of pipe	3	55
95+35 R	Outlet end of pipe	3	55
107+00 L	Outlet end of pipe	3	55
107+00 R	Outlet end of pipe	3	55
108+34 R	Outlet end of pipe	3	55
138+16 L	Outlet end of pipe	3	55
145+56 R	Outlet end of pipe	3	55
157+13 R	Outlet end of pipe	3	55
166+63 R	Outlet end of pipe	3	55
171+10 L	Outlet end of pipe	3	55
171+10 R	Outlet end of pipe	3	55
175+63 R	Outlet end of pipe	3	55
185+62 L	Outlet end of pipe	3	55
185+62 to 204+00 R	Ditch channel bottom	3	3,130
190+21 to 195+00 L	Ditch channel bottom	3	935
196+27 L	Outlet end of pipe	3	55
199+50 to 204+00 L	Ditch channel bottom	3	800
219+92 R	Outlet end of pipe	3	55
225+50 to 231+00 R	Ditch channel bottom	3	975
227+81 L	Outlet end of pipe	3	55
229+00 to 232+00 L	Ditch channel bottom	4	535
231+94 L	Outlet end of pipe	3	55
237+44 L	Outlet end of pipe	3	55
241+00 to 247+00 R	Ditch channel bottom	3	1,180
241+64 L	Outlet end of pipe	3	55
249+50 to 250+00 L	Ditch channel bottom	3	230
249+93 R	Outlet end of pipe	3	55

Additional Quantity: 1,500
Total: 11,299

EROSION CONTROL BLANKET

Erosion control blanket will be installed 16 feet wide at the locations noted in the table and at locations determined by the Engineer during construction.

The erosion control blanket provided will be from the approved product list. The approved product list for erosion control blanket may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

(continued)		354+88 – 49' R	Inlet end of pipe	18
49+62 – 49' L	Inlet end of pipe	368+04 – 49' R	Inlet end of pipe	18
61+00 to 63+00 R	Perimeter control	368+08 – 49' L	Inlet end of pipe	18
65+50 to 70+00 R	Perimeter control	382+37 L/R	Across ditch at inlet end of pipe (30 Ft each side)	60
67+87 L/R	Cattle Pass (60 Ft each end)	379+02 L/R	Inlet and Outlet end of pipe (60 Ft each end)	120
68+12 L	Inlet end of pipe	395+76 L/R	Inlet and Outlet ends of pipe (60 Ft each end)	120
74+15 R	Inlet end of pipe	400+37 R	Inlet end of pipe	18
82+00 R	Inlet end of pipe	403+11 – 49' L	Inlet end of pipe	18
82+12 – 88' L	Inlet end of pipe	407+80 – 49' R	Inlet end of pipe	18
88+00 to 90+00 L	Perimeter control	411+50 to 414+00 L	Perimeter control	250
88+75 R	Inlet end of pipe	413+18 L/R	Inlet and Outlet ends of pipe (60 Ft each end)	120
90+00 to 100+00 L	Perimeter control	420+72 L	Inlet end of pipe	18
92+12 R	Inlet end of pipe	421+21 – 49' R	Inlet end of pipe	18
95+35 R	Inlet end of pipe	423+40 – 49' L	Inlet end of pipe	18
107+00 – 49' L	Inlet end of pipe	423+66 – 46' R	Inlet end of pipe	18
107+00 – 49' R	Inlet end of pipe	427+42 L	Across ditch at inlet end of pipe (30 Ft each side)	60
108+34 L	Inlet end of pipe	438+00 – 49' R	Inlet end of pipe	18
138+16 – 49' R	Inlet end of pipe	442+42 – 49 R	Inlet end of pipe	18
145+56 L	Across ditch at inlet end of pipe	443+67 – 49' L	Inlet end of pipe	18
153+50 to 166+00 R	Perimeter control	444+80 – 49' R	Inlet end of pipe	18
157+13 L	Inlet end of pipe	444+93 – 49' L	Inlet end of pipe	18
166+63 L/R	Inlet and Outlet ends of pipe (60 Ft each end)	445+29 – 49' R	Inlet end of pipe	18
171+10 – 49' L	Inlet end of pipe	447+76 – 49' L	Inlet end of pipe	18
171+10 – 49' R	Inlet end of pipe	448+32 R	Inlet end of pipe	18
175+63 – 49' L	Inlet end of pipe	451+33 – 49' L	Inlet end of pipe	18
185+62 R	Inlet end of pipe	453+32 – 49 R	Inlet end of pipe	18
190+21 R	Inlet end of pipe	453+32 – 49' L	Inlet end of pipe	18
196+27 R	Inlet end of pipe	455+27 – 49' R	Inlet end of pipe	18
196+50 to 199+50 L	Perimeter control	455+43 – 49' L	Inlet end of pipe	18
204+41 – 49' R	Inlet end of pipe	457+00 – 49' R	Inlet end of pipe	18
205+00 to 210+00 L	Perimeter control	457+34 – 49' L	Inlet end of pipe	18
219+92 L	Inlet end of pipe	457+79 L	Inlet end of pipe	18
226+20 R	Inlet end of pipe	458+42 – 49' L	Inlet end of pipe	18
227+81 R	Inlet end of pipe	458+70 – 49' R	Inlet end of pipe	18
231+94 R	Inlet end of pipe	459+86 – 49' L	Inlet end of pipe	18
237+44 R	Inlet end of pipe	459+86 – 49' R	Inlet end of pipe	18
241+64 R	Inlet end of pipe	462+50 to 463+75 L/R	Perimeter control	350
249+93 L	Inlet end of pipe			
259+70 L	Inlet end of pipe			
274+00 to 286+00 L	Perimeter control			
287+86 L	Inlet end of pipe			
294+99 L	Inlet end of pipe			
303+00 to 307+00 R	Perimeter control			
304+99 L	Inlet end of pipe			
307+17 L/R	Inlet and Outlet ends of pipe (60 Ft each end)			
313+00 to 319+00 R	Perimeter control			
316+66 L	Inlet end of pipe			
326+36 R	Inlet end of pipe			
331+92 L	Inlet end of pipe			
340+91 L	Across ditch at inlet end of pipe (30 Ft each side)			

Plot Scale - 1:200

Plotted From - TRPR13525

File - ...:\proj\ack05\HV\Notes\SectionD.dgn

(continued)

259+70 R	Outlet end of pipe	3	55
287+86 R	Outlet end of pipe	3	55
294+99 R	Outlet end of pipe	3	55
305+00 to 307+15 R	Ditch channel bottom	4	380
316+66 R	Outlet end of pipe	3	55
326+36 L	Outlet end of pipe	3	55
331+92 R	Outlet end of pipe	3	55
340+91 R	Outlet end of pipe	3	55
354+88 L	Outlet end of pipe	3	55
368+04 L	Outlet end of pipe	3	55
368+08 R	Outlet end of pipe	3	55
382+37 L	Outlet end of pipe	3	55
379+02 R	Outlet end of pipe	3	55
395+76 L	Outlet end of pipe	3	55
399+00 to 400+37 L	Ditch channel bottom	3	245
400+37 to 402+00 R	Ditch channel bottom	3	290
403+11 L	Outlet end of pipe	3	55
407+80 R	Outlet end of pipe	3	55
413+18 L	Outlet end of pipe	3	55
420+72 R	Outlet end of pipe	3	55
423+21 L	Outlet end of pipe	3	55
423+40 R	Outlet end of pipe	3	55
427+42 R	Outlet end of pipe	3	55
438+00 L	Outlet end of pipe	3	55
442+42 R	Outlet end of pipe	3	55
443+67 L	Outlet end of pipe	3	55
444+80 R	Outlet end of pipe	3	55
444+93 L	Outlet end of pipe	3	55
448+63 L	Outlet end of pipe	3	55
451+33 L	Outlet end of pipe	3	55
453+32 L	Outlet end of pipe	3	55
453+32 R	Outlet end of pipe	3	55
453+32 R	Outlet end of pipe	3	55
455+27 R	Outlet end of pipe	3	55
455+43 L	Outlet end of pipe	3	55
457+00 R	Outlet end of pipe	3	55
457+34 L	Outlet end of pipe	3	55
457+79 R	Outlet end of pipe	3	55
458+42 L	Outlet end of pipe	3	55
458+70 R	Outlet end of pipe	3	55
459+86 L	Outlet end of pipe	3	55
459+86 R	Outlet end of pipe	3	55
Additional Quantity:		3	2,500

Total Type 3 Erosion Control Blanket: 19,284

Total Type 4 Erosion Control Blanket: 1,071

SHAPING FOR EROSION CONTROL BLANKET

The ditches will be shaped for the erosion control blanket as specified on Standard Plate 734.01.

ARTICULATED CONCRETE MATTRESS

Articulated concrete mattress will be installed at locations noted in the table and at locations determined by the Engineer during construction.

Installation of the articulated concrete mattress will be in accordance with the manufacturer's installation instructions.

All costs for furnishing and installing the articulated concrete mattress including hauling, materials, equipment, labor, and incidentals necessary will be paid for at the contract unit price per square yard for "Articulated Concrete Mattress".

The articulated concrete mattress will be as shown below or an approved equal:

Product	Manufacturer
Articulated Concrete Block Mattress	Forterra, Inc Rapid City, SD Phone: 1-605-737-5208 www.forterrabp.com

TABLE OF ARTICULATED CONCRETE MATTRESS

Station	Location	Quantity (SqYd)
80+00 to 82+00 L	Ditch channel bottom	355
225+50 to 227+90 L	Ditch channel bottom	300
259+00 to 260+00 R	Ditch channel bottom	215
305+00 to 307+15 R	Ditch channel bottom	380
395+76 to 395+50 L	Ditch channel bottom	130
Total:		1,380

TYPE B DRAINAGE FABRIC

Type B Drainage Fabric will be installed at all locations where Articulated Concrete Mattress is to be installed. Type B Drainage Fabric will be installed directly under the Articulated Concrete Mattress.

All costs associated with installing Type B Drainage Fabric including equipment, labor, and materials will be incidental to the contract unit price per SqYd for Type B Drainage Fabric.

EROSION CONTROL WATTLE

Erosion control wattles for restraining the flow of runoff and sediment will be installed at locations noted in the table and at locations determined by the Engineer during construction. Refer to Standard Plate 734.06 for details.

The Contractor will provide certification that the erosion control wattles do not contain noxious weed seeds.

Erosion control wattles will remain on the project to decompose.

An additional quantity of 12" Diameter Erosion Control Wattles has been added to the Estimate of Quantities for temporary erosion and sediment control in highway ditch channels and as an alternative to low flow or high flow silt fence at wetland areas adjacent to the highway.

The erosion control wattle provided will be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

TABLE OF EROSION CONTROL WATTLE

Station	Location	Diameter (Inch)	Quantity (Ft)
76+00 to 81+50 R	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	360
77+00 to 91+00 R	Backslope (100 Ft spacing)	12	3,500
77+00 to 79+50 L	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	180
83+00 to 88+00 R	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	330
83+00 to 88+00 L	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	330
90+00 R	Ditch channel bottom	12	30
90+50 R	Ditch channel bottom	12	30
131+58 R	Inlet	12	20
131+59 L	Inlet	12	20
140+00 to 142+50 R	Backslope (100 Ft Spacing)	12	325
186+00 to 189+00 R	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	210
188+00 to 219+00 R	Backslope (100 Ft Spacing)	12	1,575
191+00 to 203+50 R	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	750
191+00 to 195+00 L	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	270
192+00 to 204+00 L	Backslope (100 Ft Spacing)	12	475
200+00 to 203+50 L	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	240
211+50 to 223+50 L	Backslope (100 Ft Spacing)	12	1,175

Plot Scale - 1:200

Plotted From - TRPR13525

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D6	D33

Plotting Date: 07/24/2024

(continued)

220+00 to 224+00	R	Backslope (100 Ft Spacing)	12	400
229+50 to 231+50	L	Ditch channel bottom (30 Ft - 50 Ft Spacing)	12	150
277+50 to 299+00	L	Backslope (75 Ft Spacing)	12	1,850
277+50 to 296+50	R	Backslope (75 Ft Spacing)	12	950
300+00 to 320+00	L	Inslope (75 Ft Spacing)	12	2,075
301+00 to 309+50	L	Backslope (75 Ft Spacing)	12	725
303+50 to 319+00	R	Inslope (75 Ft Spacing)	12	1,525
460+20 to 462+50	L/R	Perimeter control	12	460
		Additional Quantity:	12	2,500
Total:				20,455

DEWATERING AND SEDIMENT COLLECTING

The Contactor has the option to treat sediment laden water trapped within the project limits or the Contractor may elect to transport sediment laden water off the project. Refer to the OPTIONS FOR DEWATERING AND SEDIMENT COLLECTING detail sheet for more information.

Water transported off the project limits will not be disposed of in an area where it can enter a waterway. The disposal site must be approved by the Engineer.

Separate payment will not be made for any Dewatering and Sediment Collection efforts. All costs involved with necessary Dewatering and Sediment Collection efforts will be incidental to other contract items.

CONSTRUCTION ENTRANCE

The Contractor will install a Construction Entrance at locations where there is a potential for mud tracking and sediment flow from the construction site and work area onto a paved public roadway.

It is the Contractor's option to use the SDDOT Construction Entrance (See SDDOT Construction Entrance notes and details), a product from the list provided in these notes, or other products or processes as approved by the Engineer during construction.

If the Contractor elects to use one of the products listed in the table, then the Contractor will install the construction entrance product in accordance with the manufacturer's installation instructions or as directed by the Engineer.

The Contractor will maintain the construction entrance such that mud tracking and sediment flow will not enter the roadway or adjacent drainage areas. The construction entrance will be routinely inspected, and the Contractor will repair or replace material as deemed necessary by the Engineer.

All costs for furnishing, installing, maintaining, and removal of the construction entrance including equipment, labor, materials, and incidentals will be included in the contract unit price per each for "Construction Entrance".

The following table is a list of known construction entrance products available for use:

Product	Manufacturer
Grizzly Rumble Grate (10' width and 24' length required)	Trackout Control, LLC Tempe, AZ Phone: 1-800-761-0056 www.trackoutcontrol.com
Pro Grid (12' width and 24' length including combination of grids and ramps required)	Pro-Tec Equipment, Inc. Charlotte, MI Phone: 1-800-292-1225 www.pro-tecequipment.com
Tracking Pad (12' width and 24' length (2 - 12'x12' pads) and 2 - 4'x4' turning flares)	Tracking Pads LLC Commerce City, CO Phone: 1-303-501-5640 www.trackingpads.com
FODS Trackout Control Mat (12' width and 5 mats to get a 35' length)	FODS, LLC Denver, CO Phone: 1-844-200-3637 http://www.getfods.com
DuraDeck and MegaDeck HD An adequate quantity is needed to prevent tires from becoming muddy (does not remove mud)	Signature Systems Group, LLC Flower Mound, TX Phone: 1-800-931-7301 https://www.signature-systems.com/
Track-Out Control Mat (10' width and 24' length required)	RubberForm Recycled Products, LLC Lockport, NY Phone: 1-716-478-0408 www.rubberform.com

SDDOT CONSTRUCTION ENTRANCE

If the SDDOT Construction Entrance is utilized, then the Contractor will install the SDDOT Construction Entrance in accordance with these notes and the detail drawings.

Pit run material will be obtained from a granular source and will conform to the following gradation:

Sieve Size	Percent Passing
6"	100%
#4	0-60%
#200	0-20%

The pit run material will be compacted to the satisfaction of the Engineer.

The aggregate for the granular material will conform to the following gradation requirements:

Sieve Size	Percent Passing
3"	100%
2 1/2"	90-100%
1 1/2"	25-60%
3/4"	0-10%
1/2"	0-5%

The granular material will be placed in 6" maximum lifts.

It is anticipated that the granular material will need to be periodically removed and replaced as it becomes inundated with mud and sediment.

The Reinforcement Fabric (MSE) will be in conformance with Section 831 of the Specifications. The Reinforcement Fabric (MSE) will be on the Approved Products List for this material or will be certified by the supplier to meet this specification prior to installation.

The Reinforcement Fabric (MSE) should be kept as taut as possible prior to placing.

Equipment will not be allowed on the Reinforcement Fabric (MSE) until the first lift of granular material is in place.

All seams in the Reinforcement Fabric (MSE) will be overlapped at least 2' and shingled.

File - ...:\proj\ack05\HV\Notes\SectionD.dgn

STORMWATER POLLUTION PREVENTION PLAN CHECKLIST

(The numbers left of the title headings are reference numbers to the GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES (Stormwater Permit))

5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION

To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES

- **5.3 (3a): Project Limits** (See Title Sheet)
- **5.3 (3a): Project Description** (See Title Sheet)
- **5.3 (4): Site Map(s)** (See Title Sheet and Plans)
- **Major Soil Disturbing Activities** (check all that apply)
 - Clearing and grubbing
 - Excavation/borrow
 - Grading and shaping
 - Filling
 - Other (describe):
- **5.3 (3b): Total Project Area** 302 Acres
- **5.3 (3b): Total Area to be Disturbed** 177 Acres
- **5.3 (3c): Maximum Area Disturbed at One Time** 41.2 Acres
- **5.3 (3d): Existing Vegetative Cover** 75%
- **5.3 (3d): Description of Vegetative Cover** Typical west river native and introduced roadside vegetation
- **5.3 (3e): Soil Properties:** Silt Clay, Sandy Clay, Clay Silt, Clay, Gravelly Silty Sand
- **5.3 (3f): Name of Receiving Water Body/Bodies** White River, Timber Creek
- **5.3 (3g): Location of Construction Support Activity Areas**

5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES

- **Special sequencing requirements** (see Section C).
The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date
Install stabilized construction entrances.	
Install perimeter protection where runoff may exit site.	
Install perimeter protection around stockpiles.	
Install channel and ditch bottom protection.	
Clearing and grubbing.	
Remove and stockpile topsoil.	
Stabilize disturbed areas.	
Install utilities, storm sewers, curb and gutter.	
Install inlet and culvert protection after completing storm drainage and other utility installations.	
Final grading.	
Final paving.	
Removal of protection devices.	
Reseed areas disturbed by removal activities.	

5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES

All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)

Description	Estimated Start Date
<input type="checkbox"/> Natural Buffers (within 50 ft of Waters of State)	
<input checked="" type="checkbox"/> Silt Fence	
<input checked="" type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Berm / Windrow	
<input type="checkbox"/> Floating Silt Curtain	
<input checked="" type="checkbox"/> Stabilized Construction Entrances	
<input type="checkbox"/> Entrance/Exit Equipment Tire Wash	
<input type="checkbox"/> Other:	

Structural Erosion and Sediment Controls

Description	Estimated Start Date
<input checked="" type="checkbox"/> Silt Fence	
<input type="checkbox"/> Temporary Berm/Windrow	
<input checked="" type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Sediment Barriers	
<input type="checkbox"/> Erosion Bales	
<input type="checkbox"/> Temporary Slope Drain	
<input checked="" type="checkbox"/> Turf Reinforcement Mat	
<input type="checkbox"/> Riprap	
<input checked="" type="checkbox"/> Gabions	
<input type="checkbox"/> Rock Check Dams	
<input type="checkbox"/> Sediment Traps/Basins	
<input checked="" type="checkbox"/> Culvert Inlet Protection	
<input type="checkbox"/> Transition Mats	
<input type="checkbox"/> Median/Area Drain Inlet Protection	
<input type="checkbox"/> Curb Inlet Protection	
<input type="checkbox"/> Interceptor Ditch	
<input type="checkbox"/> Concrete Washout Facility	
<input type="checkbox"/> Work Platform	
<input type="checkbox"/> Temporary Water Barrier	
<input type="checkbox"/> Temporary Water Crossing	
<input type="checkbox"/> Permanent Stormwater Ponds	
<input type="checkbox"/> Permanent Open Vegetated Swales	
<input type="checkbox"/> Natural Depressions to allow for Infiltration	
<input type="checkbox"/> Sequential Systems that combine several practices	
<input type="checkbox"/> Other:	

Plotting Date: 07/24/2024

Dust Controls

Description	Estimated Start Date
<input type="checkbox"/> Tarps & Wind impervious fabrics	
<input type="checkbox"/> Watering	
<input type="checkbox"/> Stockpile location/orientation	
<input type="checkbox"/> Dust Control Chlorides	
<input type="checkbox"/> Other	

Dewatering BMPs

Description	Estimated Start Date
<input type="checkbox"/> Sediment Basins	
<input type="checkbox"/> Dewatering bags	
<input type="checkbox"/> Weir tanks	
<input type="checkbox"/> Temporary Diversion Channel	
<input type="checkbox"/> Other:	

Stabilization Practices (See Detail Plan Sheets)

(Stabilization measures shall begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization shall be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities (3.18))

Description	Estimated Start Date
<input type="checkbox"/> Vegetation Buffer Strips	
<input checked="" type="checkbox"/> Temporary Seeding (Cover Crop Seeding)	
<input checked="" type="checkbox"/> Permanent Seeding	
<input type="checkbox"/> Sodding	
<input type="checkbox"/> Planting (Woody Vegetation for Soil Stabilization)	
<input checked="" type="checkbox"/> Mulching (Grass Hay or Straw)	
<input type="checkbox"/> Fiber Mulching (Wood Fiber Mulch)	
<input type="checkbox"/> Soil Stabilizer	
<input type="checkbox"/> Bonded Fiber Matrix	
<input checked="" type="checkbox"/> Fiber Reinforced Matrix	
<input checked="" type="checkbox"/> Erosion Control Blankets	
<input type="checkbox"/> Surface Roughening (e.g. tracking)	
<input type="checkbox"/> Other:	

Wetland Avoidance

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes No If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D8	D33

Plotting Date: 07/24/2024

5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure's capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor's Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in "DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES" above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

➤ Material Management

- Housekeeping
 - Only needed products will be stored on-site by the Contractor.
 - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
 - Products must be stored in original containers and labeled.
 - Material mixing will be conducted in accordance with the manufacturer's recommendations.
 - When possible, all products will be completely used before properly disposing of the container off-site.
 - The manufacturer's directions for disposal of materials and containers will be followed.
 - The Contractor's site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
 - Dust generated will be controlled in an environmentally safe manner.
- Hazardous Materials
 - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
 - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
 - If surplus product must be disposed of, manufacturer's label directions for disposal will be followed.

- Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
- Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
- Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ Spill Control Practices

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer's recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor's site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ Spill Response

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor's site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.

- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent's designee will be responsible for completing the spill reporting form and for reporting the spill to SDDANR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor's site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

➤ Waste Disposal

- All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.

➤ Hazardous Waste

- All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.

➤ Sanitary Waste

- Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D9	D33

Plotting Date: 07/24/2024

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading "POLLUTION PREVENTION PROCEDURES" (check all that apply).

- Concrete and Portland Cement
- Detergents
- Paints
- Metals
- Bituminous Materials
- Petroleum Based Products
- Diesel Exhaust Fluid
- Cleaning Solvents
- Wood
- Cure
- Texture
- Chemical Fertilizers
- Other:

Product Specific Practices

▪ Petroleum Products

All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.

▪ Fertilizers

Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.

▪ Paints

All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer's instructions and any applicable state and local regulations.

▪ Concrete Trucks

Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- Discharges from water line flushing.
- Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor's site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDANR immediately **if any one of the following** conditions exists:
 - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
 - The release or spill causes an immediate danger to human health or safety
 - The release or spill exceeds 25 gallons
 - The release or spill causes a sheen on surface water
 - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
 - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
 - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
 - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDANR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDANR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge shall be sent to SDDANR within 14 days of the discharge.

5.4: SWPPP CERTIFICATIONS

➤ **Certification of Compliance with Federal, State, and Local Regulations**

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

➤ **South Dakota Department of Transportation**

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Authorized Signature (See the General Permit, Section 7.4 (1))

➤ **Prime Contractor**

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

➤ **Contractor Information:**

- Prime Contractor Name: _____
- Contractor Contact Name: _____
- Address: _____
- _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ **Erosion Control Supervisor**

- Name: _____
- Address: _____
- _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ **SDDOT Project Engineer**

- Name: _____
- Business Address: _____
- Job Office Location: _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ **SDDANR Contact Spill Reporting**

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

➤ **SDDANR Contact for Hazardous Materials.**

- (605) 773-3153

➤ **National Response Center Hotline**

- (800) 424-8802.

➤ **SDDANR Stormwater Contact Information**

- SDDANR Stormwater (800) 737-8676
- Surface Water Quality Program (605) 773-3351

5.5: REQUIRED SWPPP MODIFICATIONS

➤ **5.5 (1): Conditions Requiring SWPPP Modification**

The SWPPP must be modified, including the site map(s), in response to any of the following conditions:

- When a new operator responsible for implementation of any part the SWPPP begins work on the site.
- When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
- To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
- If inspections by site staff, local officials, SDDANR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
- To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
- If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.

➤ **5.5 (2): Deadlines for SWPPP Modification**

Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.

➤ **5.5 (3): Documentation of Modifications to the Plan**

All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.

➤ **5.5 (4): Certification Requirements**

All modifications made to the SWPPP must be signed and certified as required in Section 7.4.

➤ **5.5 (5): Required Notice to Other Operators**
































If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form.

EROSION AND SEDIMENT CONTROL LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D11	D33

Plotting Date: 07/24/2024

-  Silt Fence J-Hooks
-  Low Flow Silt Fence
-  High Flow Silt Fence
-  High Flow Silt Fence at Pipe
-  Sediment Control at Inlet After Placement of Surfacing
-  Sediment Control at Inlet Before Placement of Surfacing
-  Temporary Sediment Barrier
-  Temporary Water Barrier
-  Floating Silt Curtain
-  Sediment Filter Bags
-  Triangular Silt Barriers
-  Erosion Control Wattles on Slopes
-  Erosion Control Wattles at Inlets
-  Erosion Control Wattles in Ditches
-  Erosion Bales
-  Surfacing Roughening
-  Temporary Grass Hay or Straw Mulch/ Soil Stabilizer
-  Cut Interceptor Ditch
-  Temporary Slope Drain
-  Bonded Fiber Matrix/ Fiber Reinforced Matrix
-  Rock Check Dam
-  Type 1 Erosion Control Blanket
-  Type 2 Erosion Control Blanket
-  Type 3 Erosion Control Blanket
-  Type 4 Erosion Control Blanket
-  Type 1 Turf Reinforcement Mat
-  Type 2 Turf Reinforcement Mat
-  Type 3 Turf Reinforcement Mat
-  Transition Mat
-  Articulated Concrete Matress
-  Silt Trap (See Standard Plate 734.04)

BEST MANAGEMENT PRACTICES

Best Management Practices (BMPs) are split into three categories and are to be used throughout construction.

INITIAL PHASE

BMPs from the Legend shown as Orange Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Initial Phase prior to earth disturbing activities and remain in place for the Intermediate Phase for temporary stabilization and in the Final Phase to achieve final stabilization.

INTERMEDIATE PHASE

BMPs from the Legend shown as Blue Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Intermediate Phase for temporary stabilization and remain in place in the Final Phase to achieve final stabilization.

FINAL PHASE

BMPs from the Legend shown as Green Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Final Phase to achieve final stabilization.

If these items are applicable they are to be shown in the updated SWPPP using the Symbols given.

- | | |
|---|--|
|  TS Topsoil Stockpile |  M On-Site Construction Material Storage Area |
|  B Borrow Area |  SK Spill Kit |
|  CE Stabilized Construction Entrance |  WP Work Platform |
|  VB Vegetated Buffer Strip |  CC Cover Crop Seeding |
|  CW Concrete Washout |  PT Portable Toilet |
|  AP Asphalt Plant Site | |
|  CP Concrete Plant Site | |
|  V Vehicle and Equipment Parking Area, Fueling Area, or Maintenance Area | |
|  D Dumpster or other Trash and Debris Containers | |

Install High Flow Silt Fence at the following locations:
 10+00 - 49' L Inlet end of pipe 18 Ft
 17+79 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft
 23+78 - 49' R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:
 10+00 L Outlet end of pipe 55 SqYd
 17+79 L/R Inlet and Outlet ends of pipe (55 SqYd Each side) 110 SqYd
 23+78 R Outlet end of pipe 55 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D12	D33


Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jack0514\1000ec.dgn

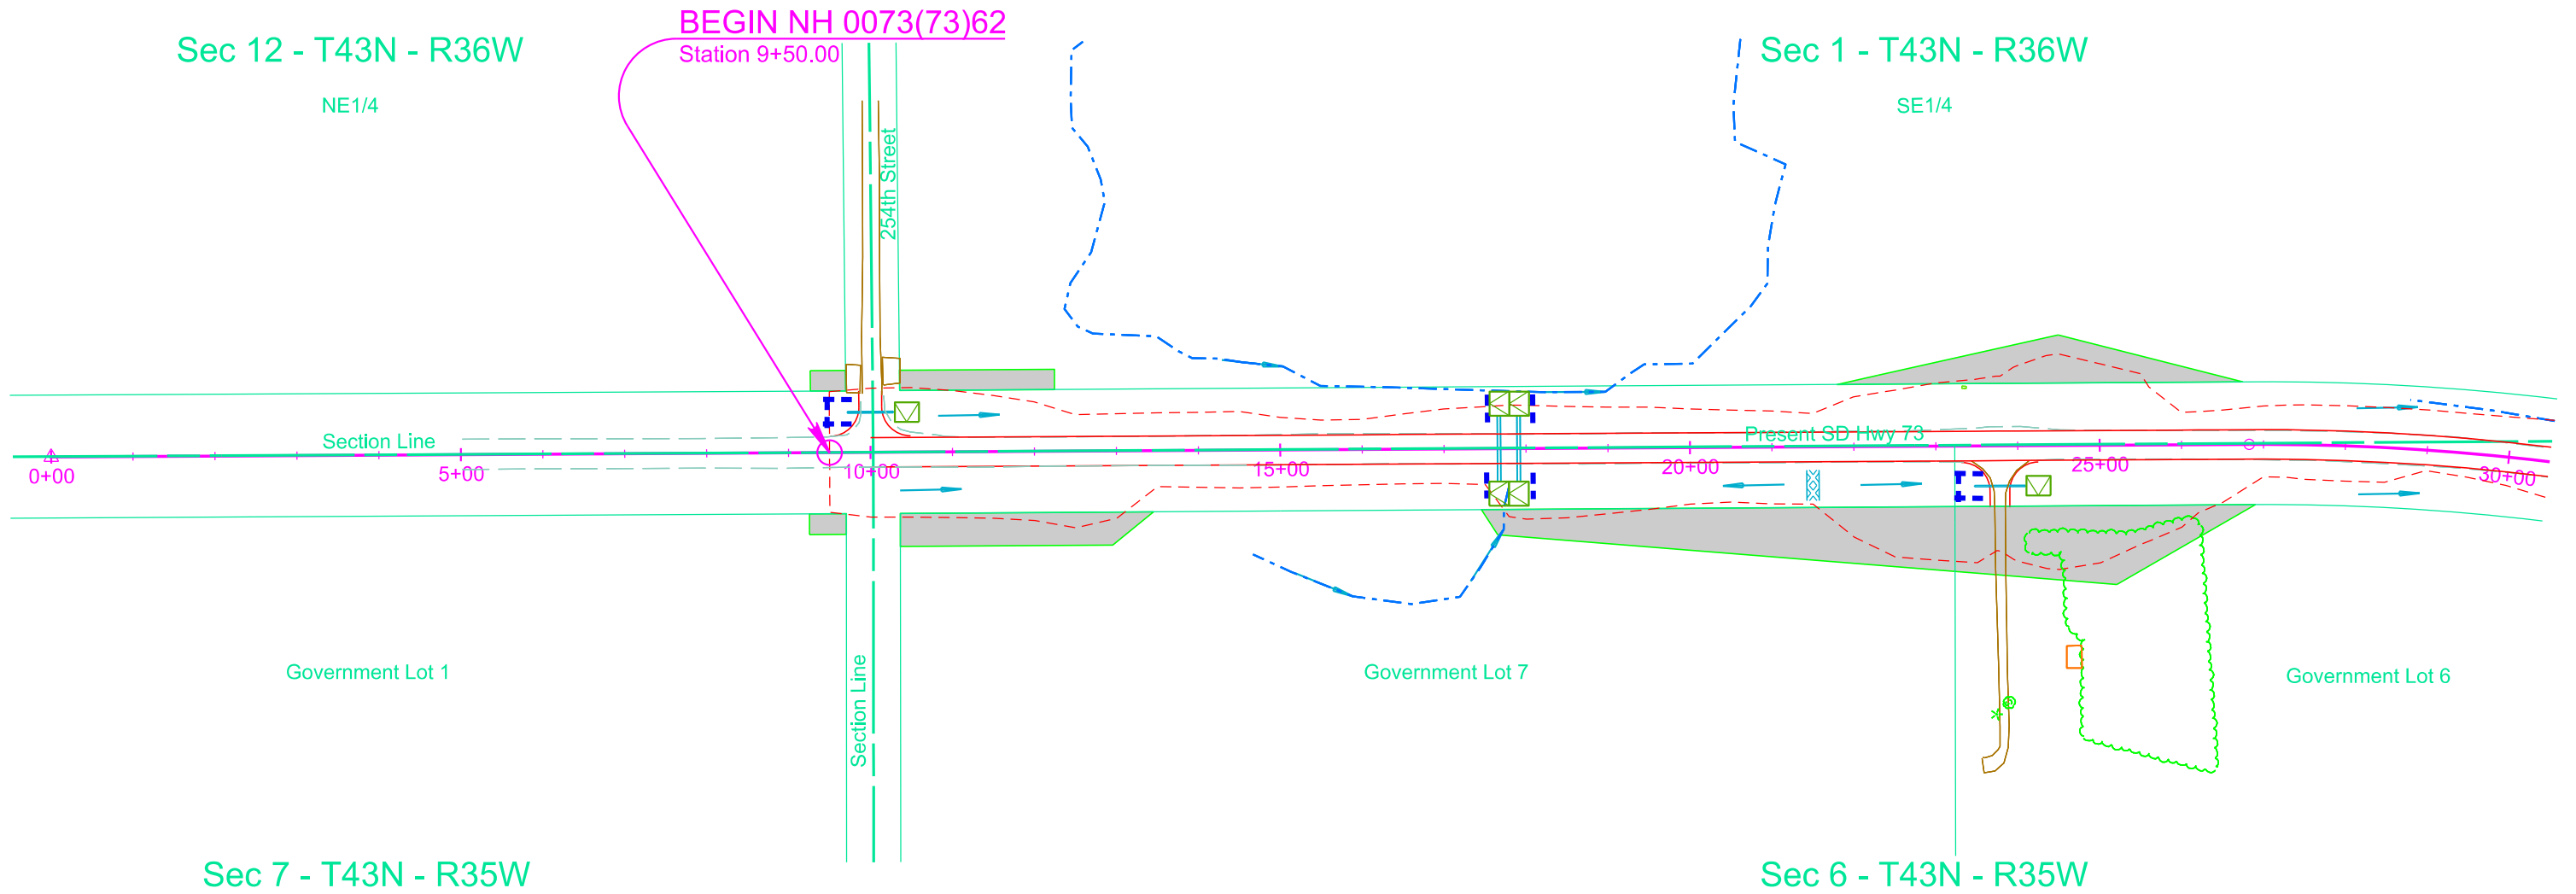

Install Low Flow Silt Fence at the following locations:
 39+51 L/R Inlet and outlet of box culvert (200 each end) 400 Ft

Install High Flow Silt Fence at the following locations:
 32+69 L Inlet end of pipe 18 Ft
 48+16 L Inlet end of pipe 18 Ft
 49+62 - 49' L Inlet end of pipe 18 Ft
 Around topsoil stockpiles—quantity and location to be determined


Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 45+00 to 49+00 L Disturbed area 1.0 Tons
 45+00 to 50+00 R Disturbed area 1.2 Tons

Apply Fiber Reinforced Matrix at the following locations:
 45+00 to 49+00 L Inslope/Backslope 0.7 Tons
 45+00 to 50+00 R Inslope/Backslope 0.9 Tons

Install Type 3 Erosion Control Blanket at the following locations:
 32+69 L Outlet end of pipe 55 SqYd
 48+16 L Outlet end of pipe 55 SqYd
 49+62 L Outlet end of pipe 55 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL
	NH 0073(73)62 P 0248(17)162	D13	D33


Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jack05\14\0303ec.dgn

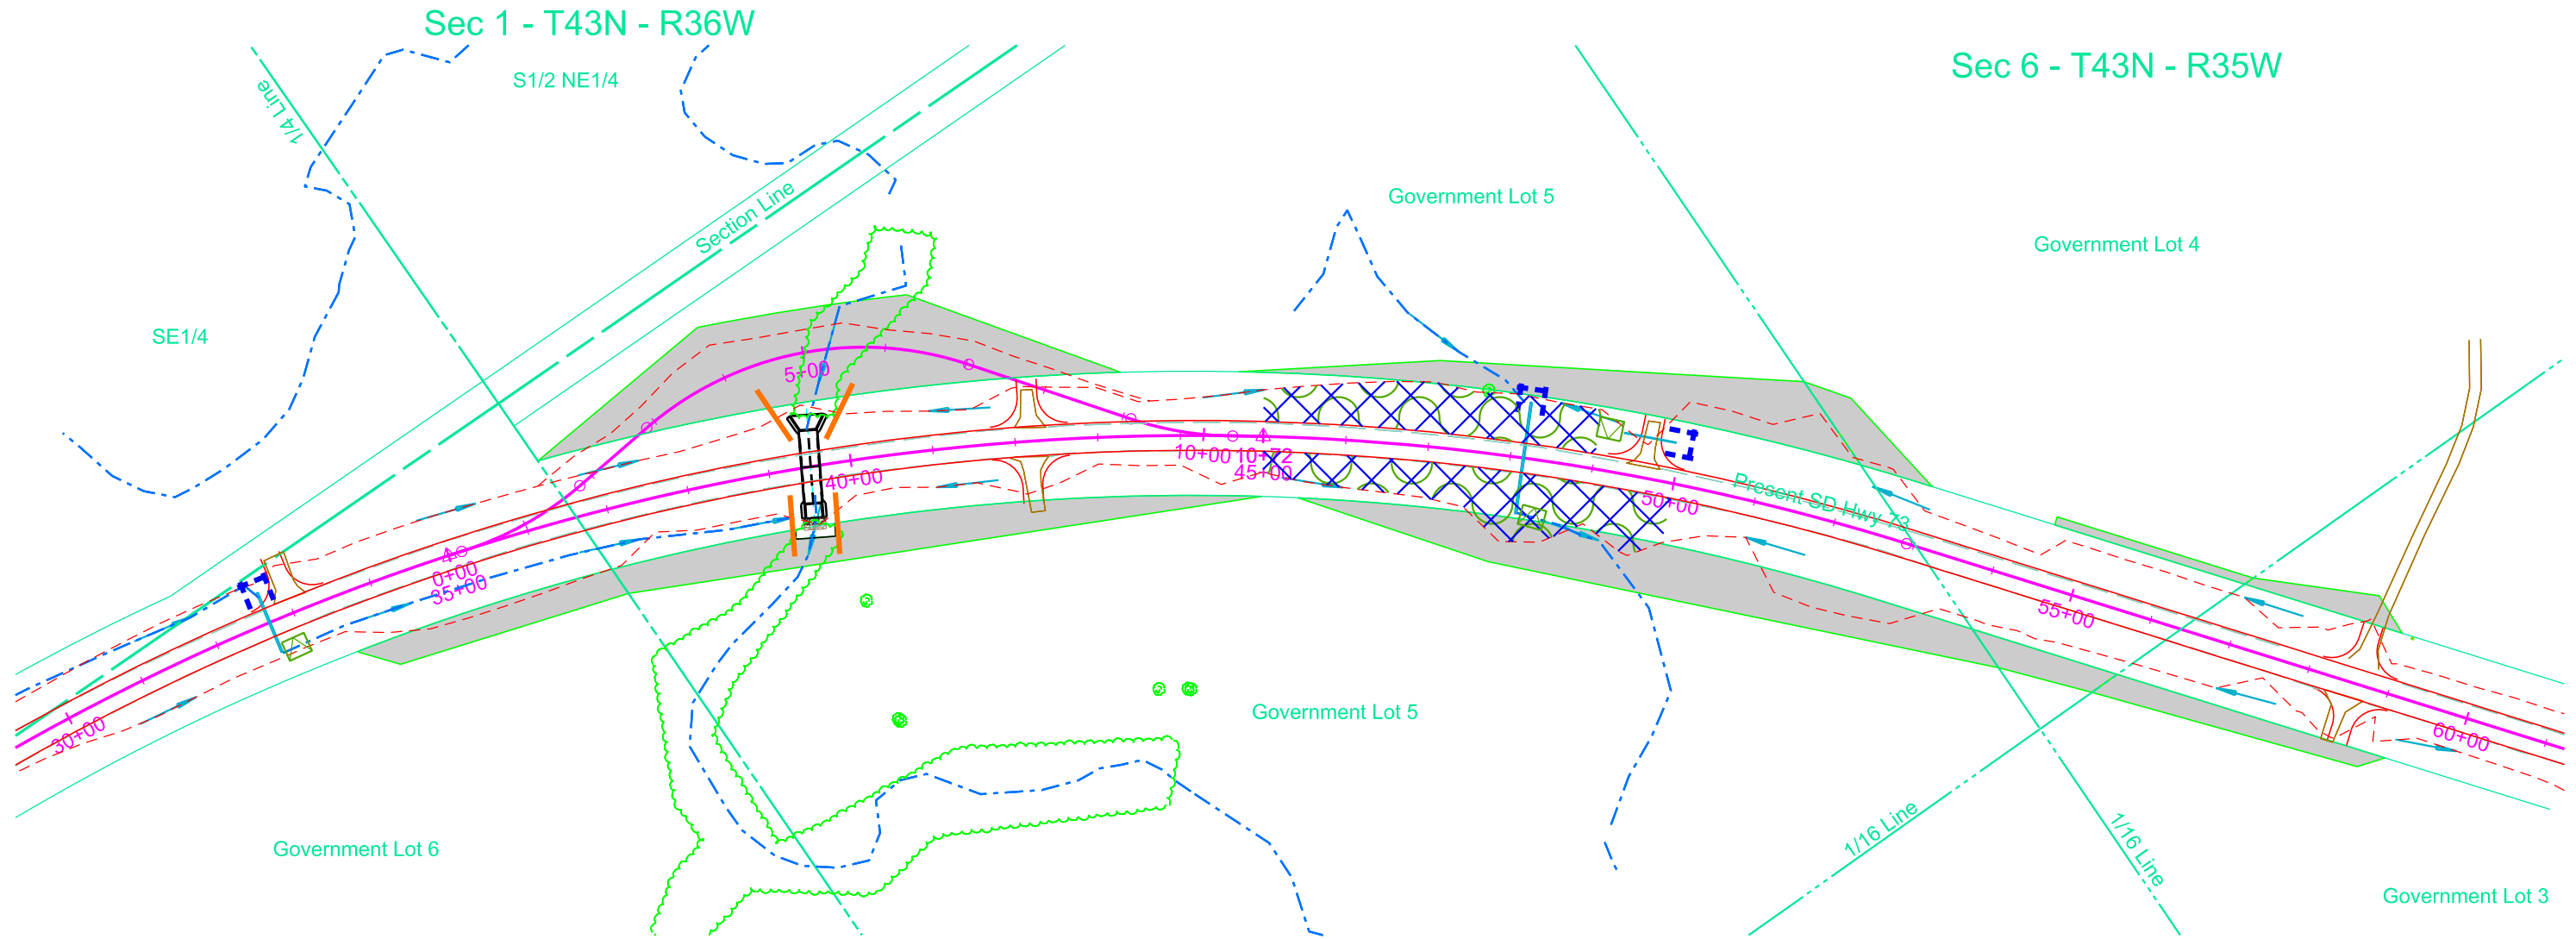

Install High Flow Silt Fence at the following locations:
 61+00 to 63+00 R Perimeter control 550 Ft
 65+50 to 70+00 R Perimeter control 500 Ft
 88+00 to 90+00 L Perimeter control 200 Ft



Install High Flow Silt Fence at the following locations:
 67+87 L/R Cattle Pass (60 Ft each side) 120 Ft
 68+12 L Inlet end of pipe 18 Ft
 74+15 R Inlet end of pipe 18 Ft
 82+00 R Inlet end of pipe 18 Ft
 82+12 - 88' L Inlet end of pipe 18 Ft
 88+75 R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install 12" Diameter Erosion Control Wattles
 at the following locations:
 76+00 to 81+50 R Ditch channel bottom (30 Ft - 50 Ft Spacing) 360 Ft
 77+00 to 79+50 L Ditch channel bottom (30 Ft - 50 Ft Spacing) 180 Ft
 83+00 to 88+00 R Ditch channel bottom (30 Ft - 50 Ft Spacing) 330 Ft
 83+00 to 88+00 L Ditch channel bottom (30 Ft - 50 Ft Spacing) 330 Ft
 90+00 R Ditch channel bottom 30 Ft
 90+50 R Ditch channel bottom 30 Ft

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL
	NH 0073(73)62 P 0248(17)162	D14	D33

Plotting Date: 07/24/2024

Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 61+00 to 63+00 R Inslope 0.7 Ton
 67+00 to 70+00 R Inslope 0.7 Ton
 75+50 to 91+00 R Backslope 16.6 Tons
 76+15 to 82+00 L Backslope 2.0 Tons

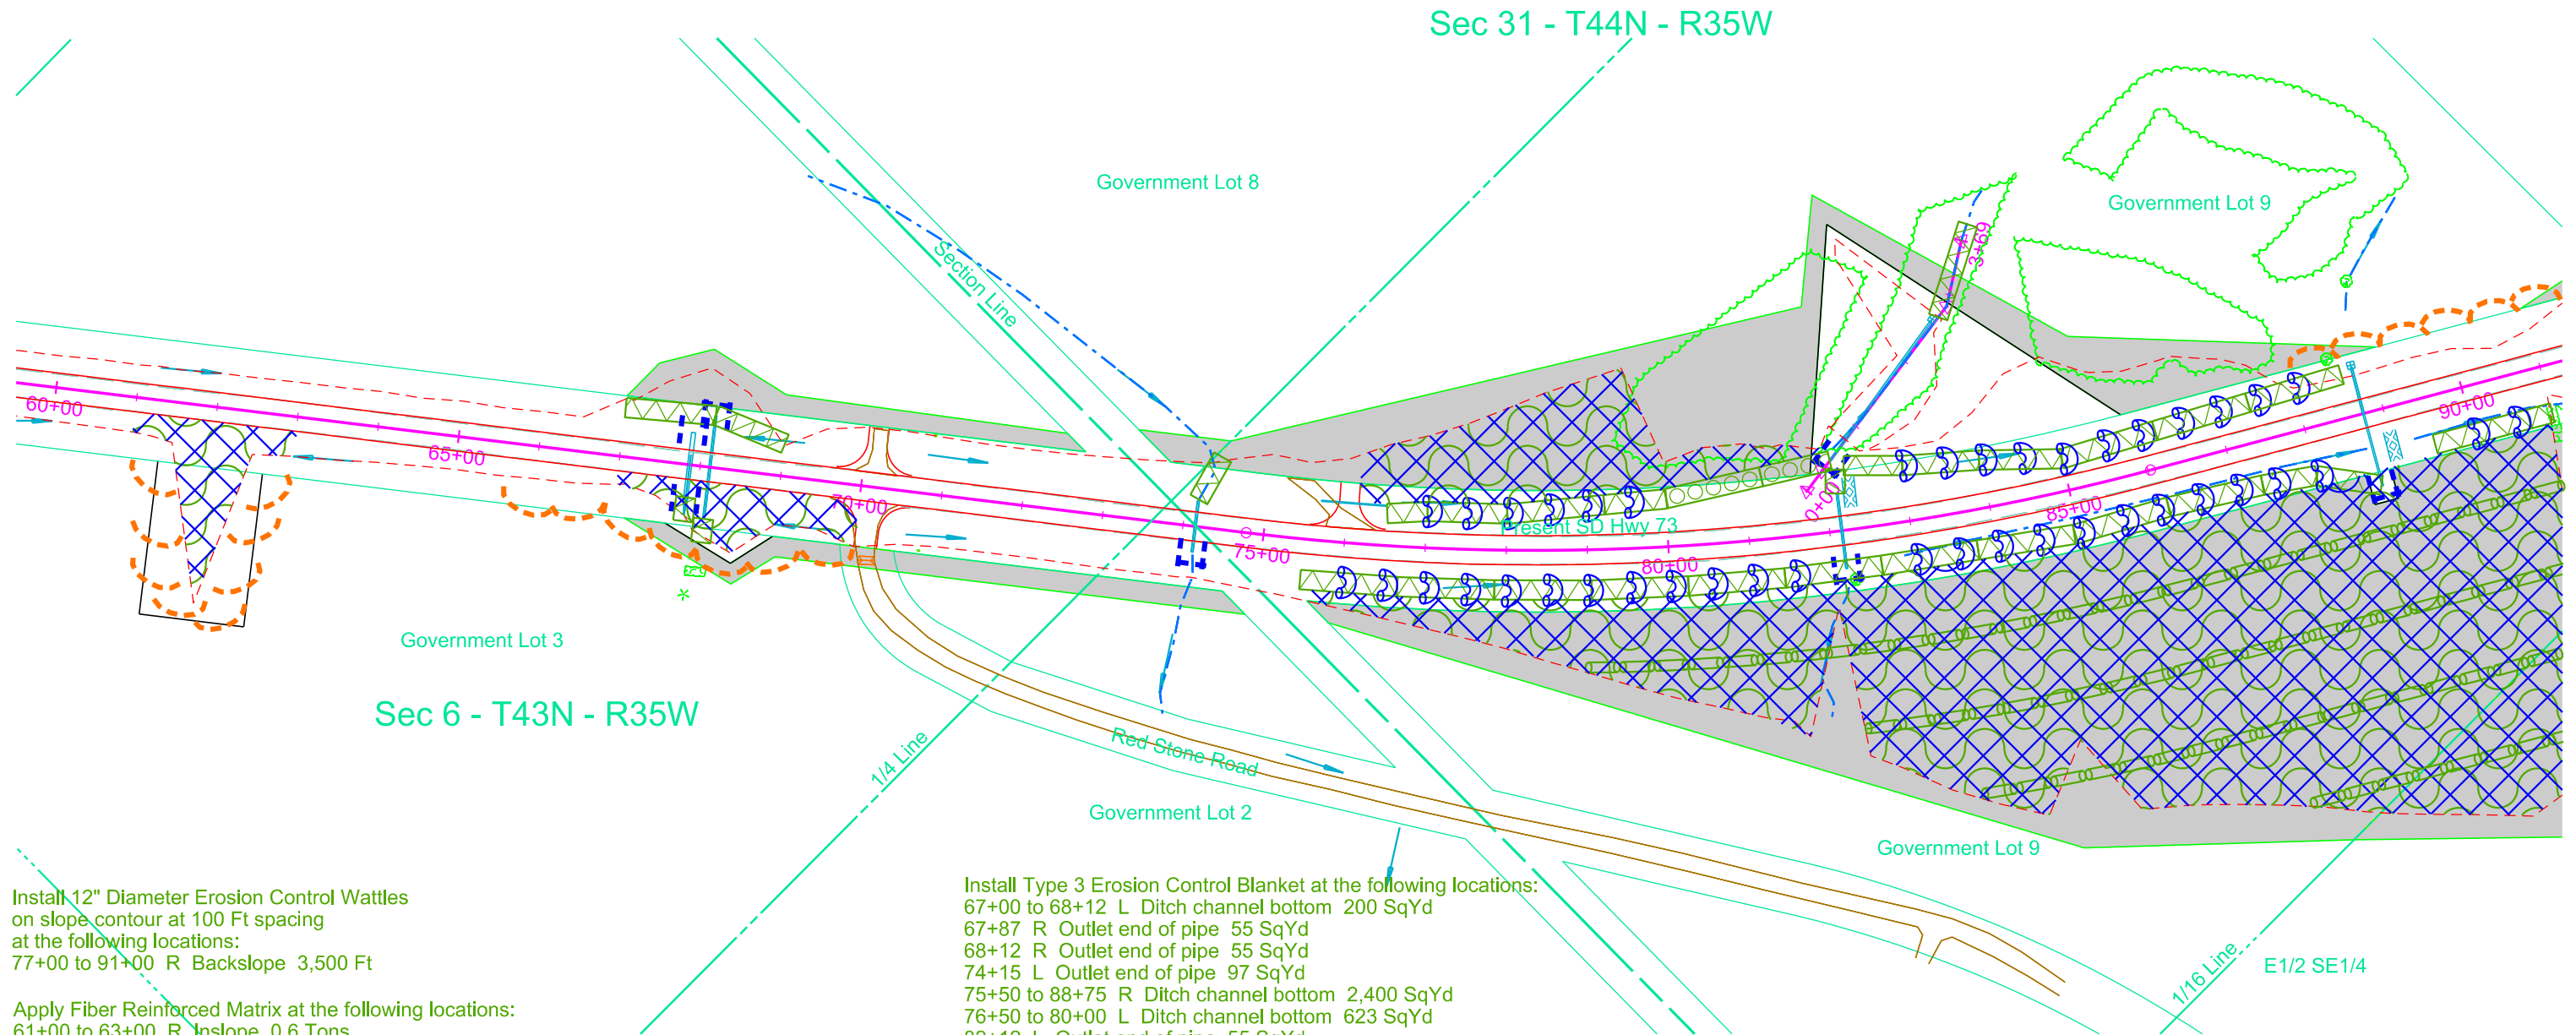

Install 12" Diameter Erosion Control Wattles
 on slope contour at 100 Ft spacing
 at the following locations:
 77+00 to 91+00 R Backslope 3,500 Ft

Apply Fiber Reinforced Matrix at the following locations:
 61+00 to 63+00 R Inslope 0.6 Tons
 67+00 to 70+00 R Inslope 0.5 Tons
 75+50 to 91+00 R Backslope 12.7 Tons
 76+15 to 81+00 L Backslope 1.6 Tons

Install Articulated Concrete Mattress
 at the following locations:
 80+00 to 82+00 L Ditch channel bottom 355 SqYd

Install Type 3 Erosion Control Blanket at the following locations:
 67+00 to 68+12 L Ditch channel bottom 200 SqYd
 67+87 R Outlet end of pipe 55 SqYd
 68+12 R Outlet end of pipe 55 SqYd
 74+15 L Outlet end of pipe 97 SqYd
 75+50 to 88+75 R Ditch channel bottom 2,400 SqYd
 76+50 to 80+00 L Ditch channel bottom 623 SqYd
 82+12 L Outlet end of pipe 55 SqYd
 2+64 (dr82) Outlet end of pipe 178 SqYd
 82+15 to 88+75 L Ditch channel bottom 1,175 SqYd
 89+50 to 91+00 R Ditch channel bottom 267 SqYd

Install Type 4 Erosion Control Blanket
 at the following locations:
 68+12 to 69+00 L Ditch channel bottom 156 SqYd

Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trp\jacob\514\1030sec.dgn

Install High Flow Silt Fence at the following locations:
90+00 to 100+00 L Perimeter control 1,550 Ft

Install High Flow Silt Fence at the following locations:
92+12 R Inlet end of pipe 18 Ft
95+35 R Inlet end of pipe 18 Ft
107+00 - 49' L Inlet end of pipe 18 Ft
107+00 - 49' R Inlet end of pipe 18 Ft
108+34 L Inlet end of pipe 18 Ft
Around topsoil stockpiles--quantity and location to be determined


Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
Placing Topsoil on disturbed areas until Permanent
Seeding can be completed at the following locations:
91+50 to 102+00 L Inslope 3.5 Tons
91+50 to 102+00 R Inslope/Backslope/Ditch 3.5 Tons

Apply Fiber Reinforced Matrix at the following locations:
91+50 to 102+00 L Inslope 2.6 Tons
91+50 to 102+00 R Inslope/Backslope 2.6 Tons

Install Type 3 Erosion Control Blanket at the following locations:
92+12 L Outlet end of pipe 55 SqYd
95+35 R Outlet end of pipe 55 SqYd
107+00 L Outlet end of pipe 55 SqYd
107+00 R Outlet end of pipe 55 SqYd
108+34 R Outlet end of pipe 55 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D15	D33

Plotting Date: 07/24/2024

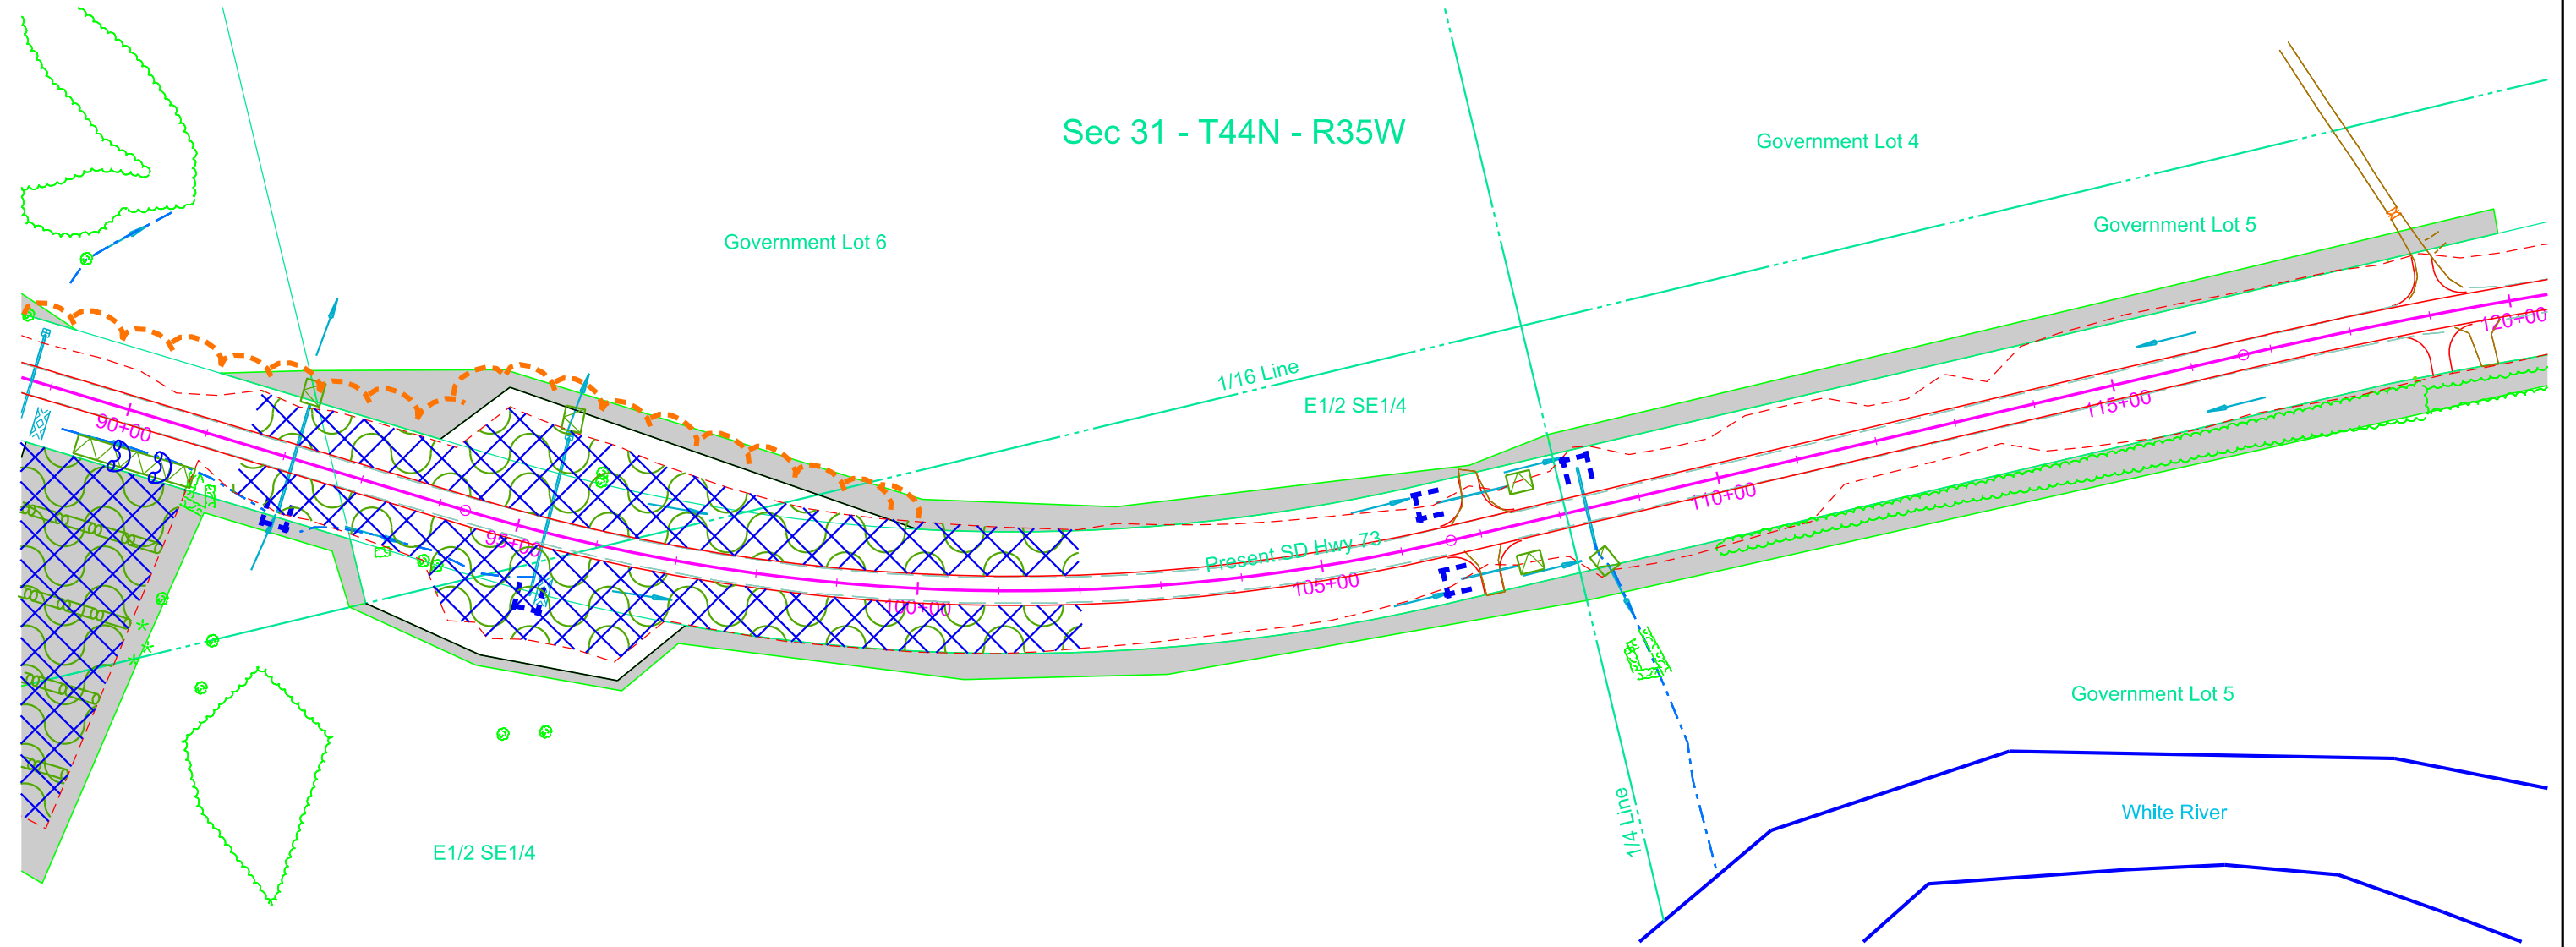

Install Low Flow Silt Fence at the following locations:
 131+47 to 136+33 L/R Between bridge berms and waterway (300 ft each side) 600 Ft

Install 12" Diameter Erosion Control
 Wattles* around median drains and
 pipe inlets at the following locations:
 131+58 R 20 Ft
 131+59 L 20 Ft
 *Remove and Reset Wattles as needed.

Install High Flow Silt Fence at the following locations:
 138+16 - 49' R Inlet end of pipe 18 Ft
 145+56 L Across ditch at inlet end of pipe 30 Ft
 Around topsoil stockpiles--quantity and location to be determined


Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 140+00 to 143+00 R Inslope/Backslope/Ditch 2.2 Tons

Apply Fiber Reinforced Matrix at the following locations:
 140+00 to 143+00 R Inslope/Backslope 1.7 Tons

Install 12" Diameter Erosion Control Wattles
 on slope contour at 100 Ft spacing
 at the following locations:
 140+00 to 142+50 R Backslope 325 Ft

Install Type 3 Erosion Control Blanket at the following locations:
 138+16 L Outlet end of pipe 55 SqYd
 145+56 R Outlet end of pipe 55 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D16	D33
Plotting Date:		07/24/2024	



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jacob\514\120sec.dgn

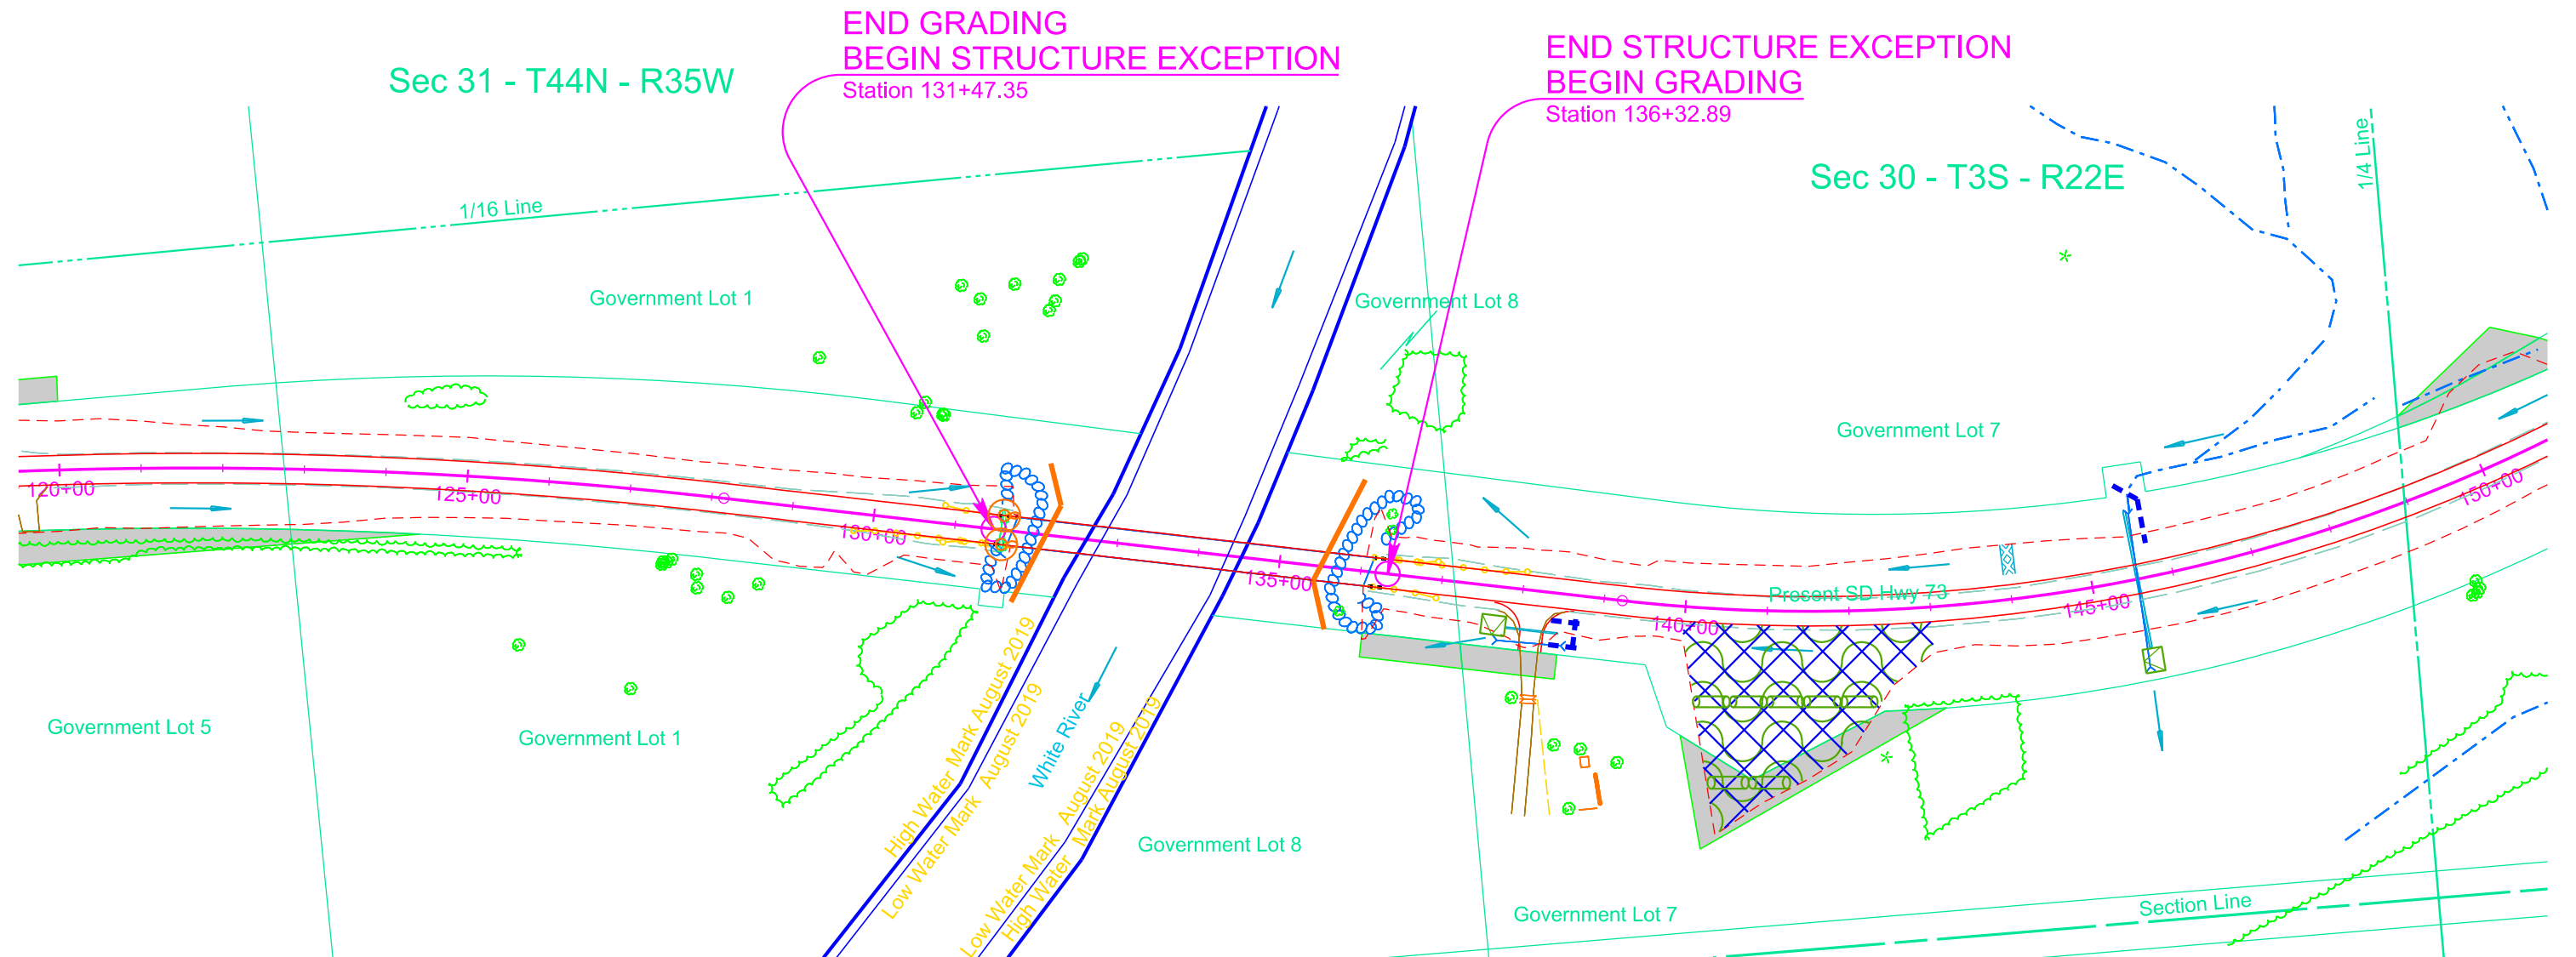

Install Low Flow Silt Fence at the following locations:
 177+37 L/R Inlet and outlet of box culvert (150 each end) 300 Ft


Install High Flow Silt Fence at the following locations:
 153+50 to 166+00 R Perimeter control 1,275 Ft

Install High Flow Silt Fence at the following locations:
 157+13 L Inlet end of pipe 18 Ft
 166+63 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft
 171+10 - 49' L Inlet end of pipe 18 Ft
 171+10 - 49' R Inlet end of pipe 18 Ft
 175+63 - 49' L Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:
 157+13 R Outlet end of pipe 55 SqYd
 166+63 R Outlet end of pipe 55 SqYd
 171+10 L Outlet end of pipe 55 SqYd
 171+10 R Outlet end of pipe 55 SqYd
 175+63 R Outlet end of pipe 55 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162		

Plotting Date: 07/24/2024



Sec 30 - T3S - R22E


W1/2 NE1/4

E1/2 NE1/4

SE1/4

SE1/4 SE1/4

Sec 19 - T3S - R22E

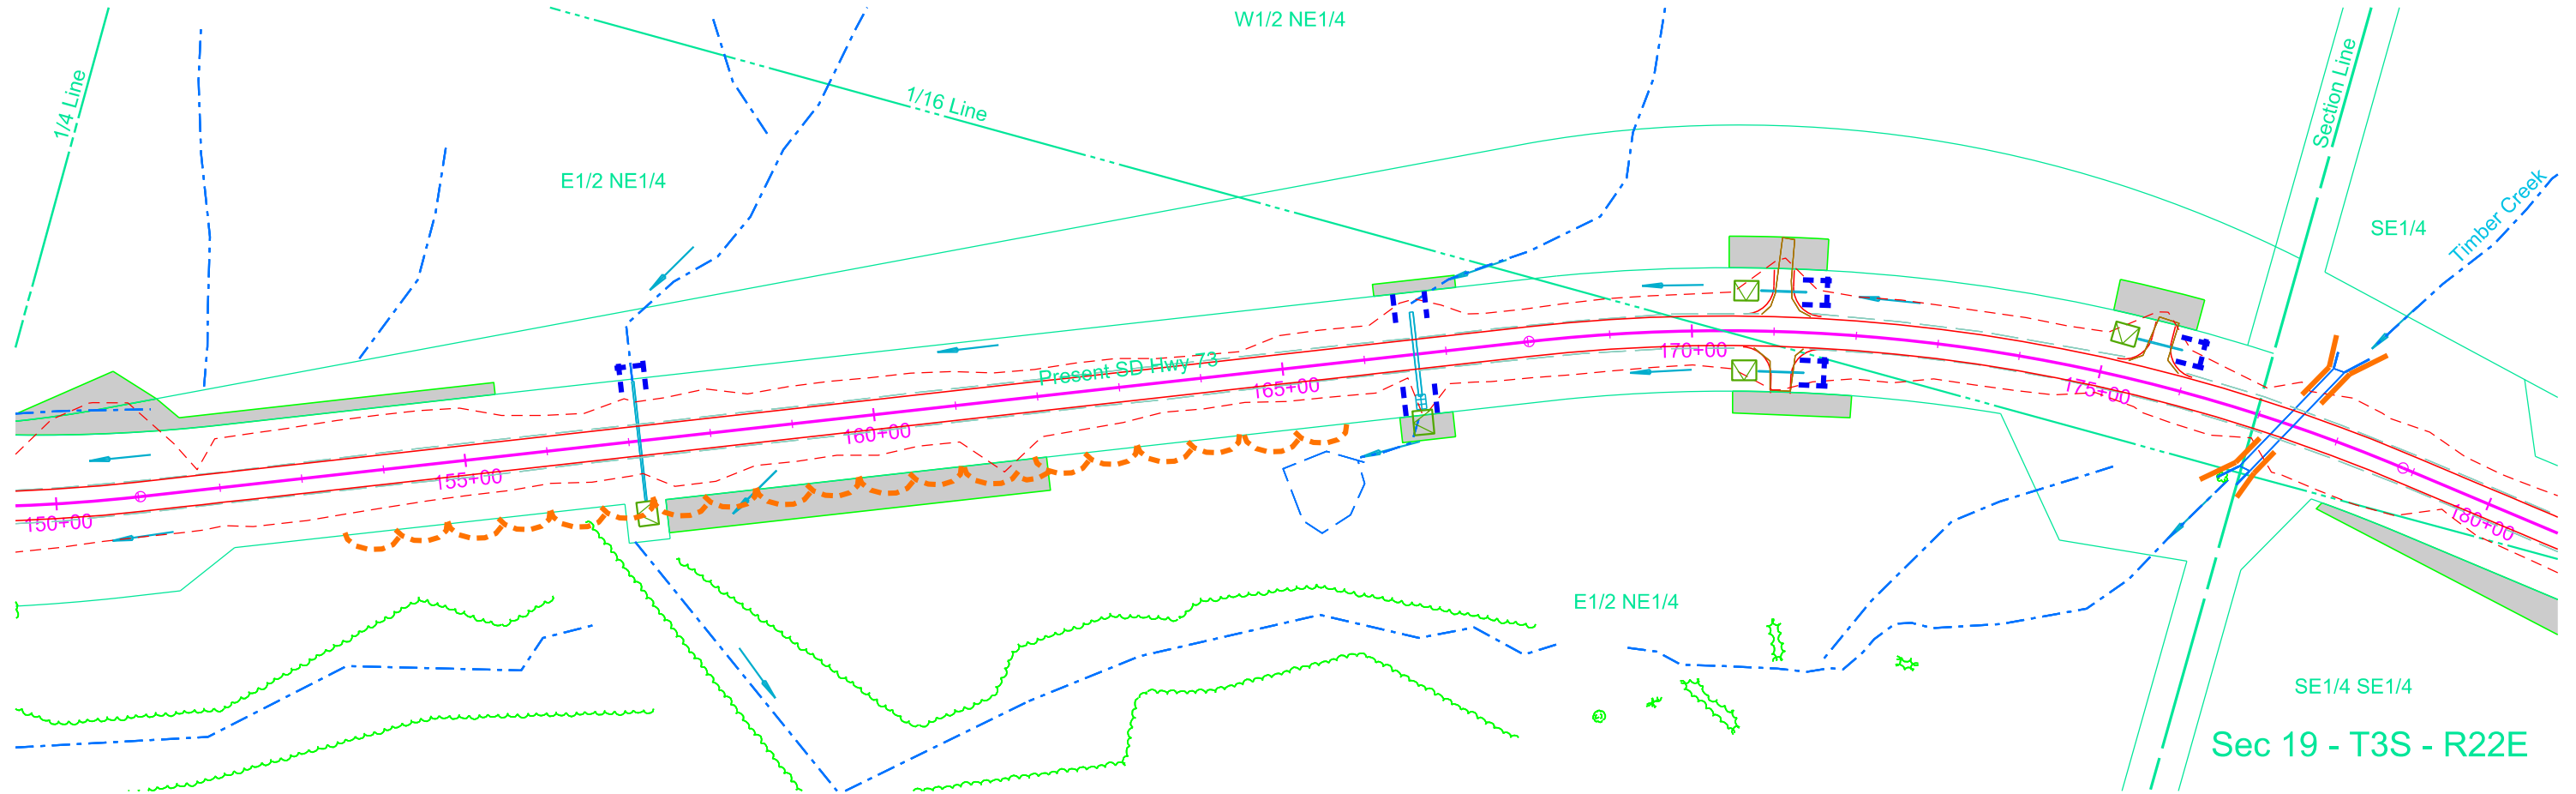

Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trp\jjaek05\17130sec.dgn

Install High Flow Silt Fence at the following locations:
 196+50 to 199+50 L Perimeter control 400 Ft
 205+00 to 210+00 L Perimeter control 600 Ft

Install High Flow Silt Fence at the following locations:
 185+62 R Inlet end of pipe 18 Ft
 190+21 R Inlet end of pipe 18 Ft
 196+27 R Inlet end of pipe 18 Ft
 204+41 - 49' R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 186+00 to 210+00 R Backslope 12.3 Tons
 190+20 to 195+50 L Backslope 2.0 Tons
 200+00 to 204+25 L Backslope 2.0 Tons

Install 12" Diameter Erosion Control Wattles
 at the following locations:
 186+00 to 189+00 R Ditch channel bottom (30 Ft - 50 Ft Spacing) 210 Ft
 191+00 to 203+50 R Ditch channel bottom (30 Ft - 50 Ft Spacing) 750 Ft
 191+00 to 195+00 L Ditch channel bottom (30 Ft - 50 Ft Spacing) 270 Ft
 200+00 to 203+50 L Ditch channel bottom (30 Ft - 50 Ft Spacing) 240 Ft


Install Type 3 Erosion Control Blanket
 at the following locations:
 185+62 L Outlet end of pipe 55 SqYd
 185+62 to 204+00 R Ditch channel bottom 3,130 SqYd
 190+21 to 195+50 L Ditch channel bottom 935 SqYd
 196+27 L Outlet end of pipe 55 SqYd
 199+50 to 204+00 L Ditch channel bottom 800 SqYd

Apply Fiber Reinforced Matrix at the following locations:
 186+00 to 210+00 R Backslope 9.2 Tons
 190+20 to 195+50 L Backslope 1.5 Tons
 200+00 to 204+25 L Backslope 1.5 Tons

Install 12" Diameter Erosion Control Wattles
 on slope contour at 100 Ft spacing
 at the following locations:
 188+00 to 219+00 R Backslope 1,575 Ft
 192+00 to 204+00 L Backslope 475 Ft

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D18	D33


Plotting Date: 07/24/2024



Plot Scale - 1:200


Plotted From - TRPR13525

File - U:\trproj\jack0514\1180sec.dgn

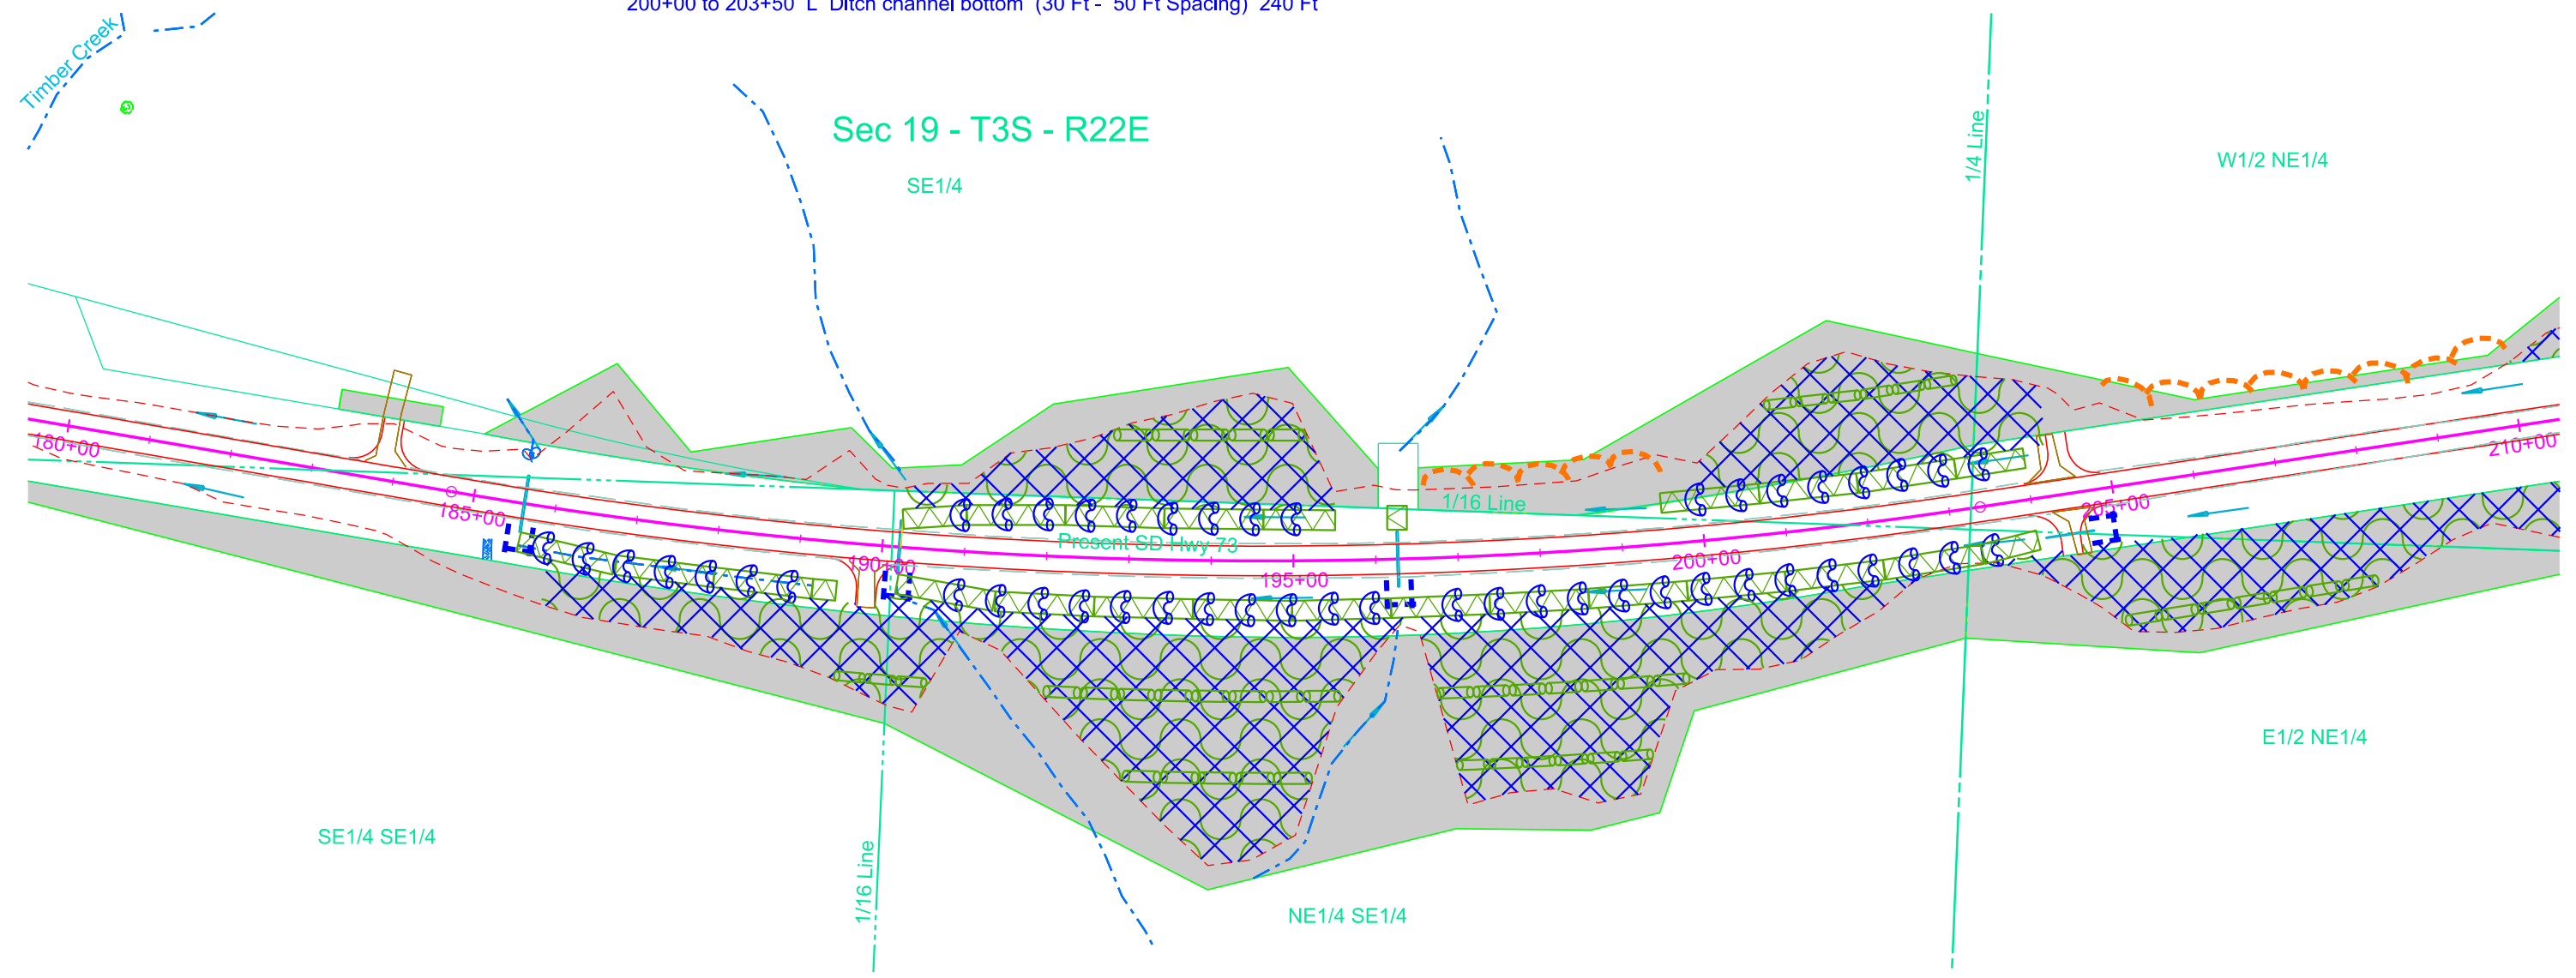

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D19	D33


Plotting Date: 07/24/2024



Install High Flow Silt Fence at the following locations:
 219+92 L Inlet end of pipe 18 Ft
 226+20 R Inlet end of pipe 18 Ft
 227+81 R Inlet end of pipe 18 Ft
 231+94 R Inlet end of pipe 18 Ft
 237+44 R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Apply Grass Hay or Straw Mulch at 2 Tons/Acre after Placing Topsoil on disturbed areas until Permanent Seeding can be completed at the following locations:
 210+00 to 225+50 L Backslope 9.2 Tons
 210+00 to 214+50 R Backslope 1.5 Tons
 219+00 to 230+00 R Backslope 5.0 Tons
 225+50 to 232+00 L Inslope/Ditch/Backslope 3.2 Tons
 232+25 to 237+50 R Backslope 1.5 Tons
 233+50 to 236+00 L Inslope 1.2 Tons

Install 12" Diameter Erosion Control Wattles at the following locations:
 229+50 to 231+50 L Ditch channel bottom (30 Ft - 50 Ft Spacing) 150 Ft

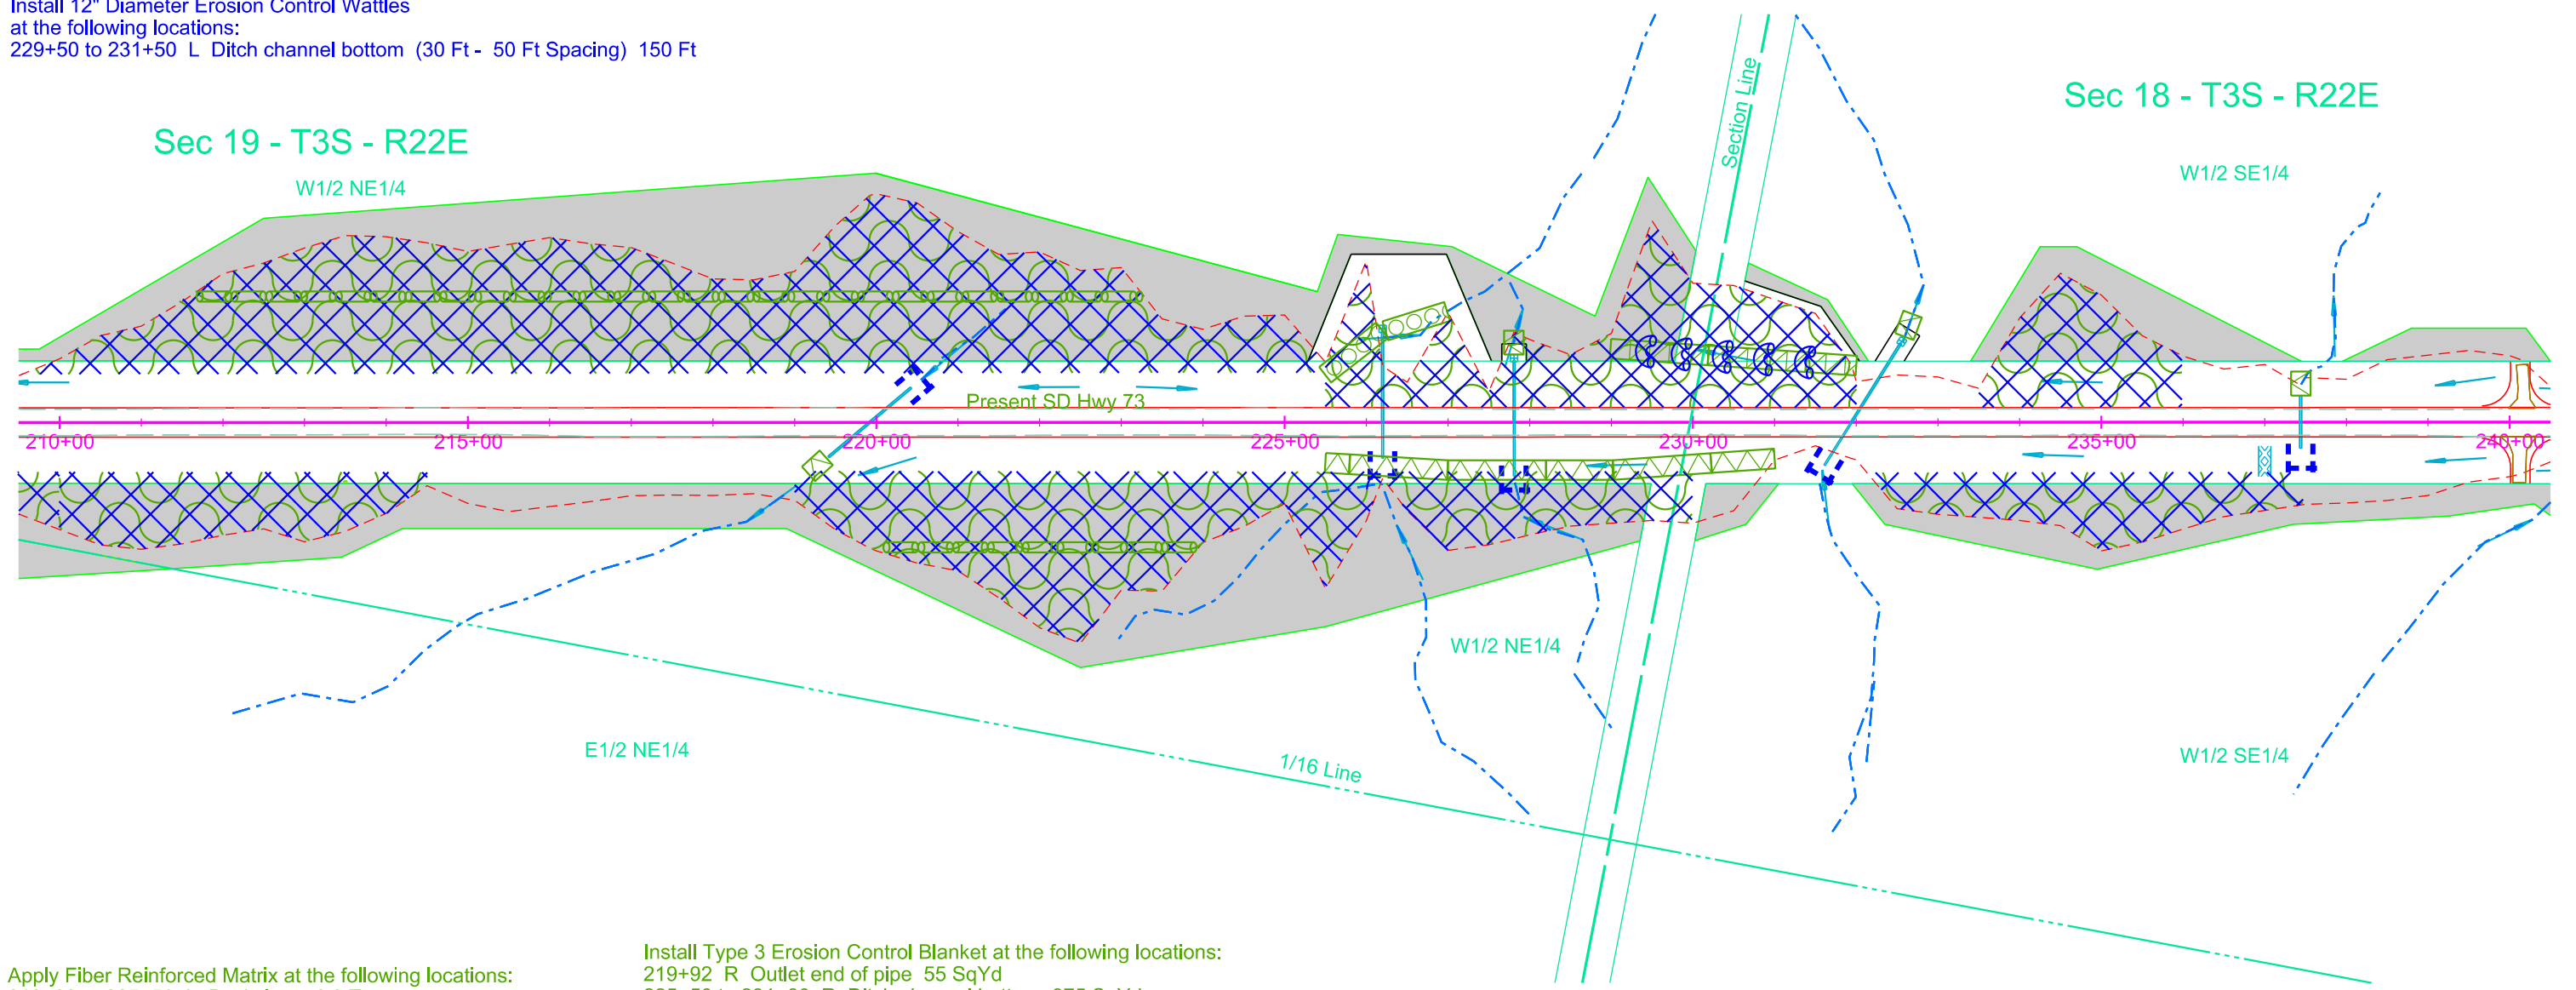

Apply Fiber Reinforced Matrix at the following locations:
 210+00 to 225+50 L Backslope 6.9 Tons
 210+00 to 214+50 R Backslope 1.2 Tons
 219+00 to 230+00 R Backslope 3.7 Tons
 225+50 to 232+00 L Inslope/Backslope 2.4 Tons
 232+25 to 237+50 R Backslope 1.1 Tons
 233+50 to 236+00 L Inslope 0.9 Tons

Install 12" Diameter Erosion Control Wattles on slope contour at 100 Ft spacing at the following locations:
 211+50 to 223+50 L Backslope 1,175 Ft
 220+00 to 224+00 R Backslope 400 Ft

Install Type 3 Erosion Control Blanket at the following locations:
 219+92 R Outlet end of pipe 55 SqYd
 225+50 to 231+00 R Ditch channel bottom 975 SqYd
 227+81 L Outlet end of pipe 55 SqYd
 231+94 L Outlet end of pipe 55 SqYd
 237+44 L Outlet end of pipe 55 SqYd

Install Type 4 Erosion Control Blanket at the following locations:
 229+00 to 232+00 L Ditch channel bottom 535 SqYd

Install Articulated Concrete Mattress at the following locations:
 225+50 to 227+90 L Ditch channel bottom 300 SqYd

Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\proj\jacob\514\210sec.dgn

Install High Flow Silt Fence at the following locations:
 241+64 R Inlet end of pipe 18 Ft
 249+93 L Inlet end of pipe 18 Ft
 259+70 L Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 241+00 to 244+00 L Inslope 1.2 Tons
 247+50 to 250+25 R Inslope 0.8 Tons
 249+00 to 250+50 L Inslope/Backslope/Ditch 1.1 Tons
 258+00 to 260+50 R Inslope 1.2 Tons
 258+50 to 262+00 L Inslope 1.1 Tons


Install Type 3 Erosion Control Blanket at the following locations:
 241+00 to 247+00 R Ditch channel bottom 1,180 SqYd
 241+64 L Outlet end of pipe 55 SqYd
 249+50 to 250+00 L Ditch channel bottom 230 SqYd
 249+93 R Outlet end of pipe 55 SqYd
 259+70 R Outlet end of pipe 55 SqYd

Apply Fiber Reinforced Matrix at the following locations:
 241+00 to 244+00 L Inslope 0.9 Tons
 247+50 to 250+25 R Inslope 0.6 Tons
 249+00 to 250+50 L Inslope/Backslope 0.8 Tons
 258+00 to 260+50 R Inslope 0.9 Tons
 258+50 to 262+00 L Inslope 0.8 Tons

Install Articulated Concrete Mattress
 at the following locations:
 259+00 to 260+00 R Ditch channel bottom 215 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162		


Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trp\proj\jack\0514\240sec.dgn

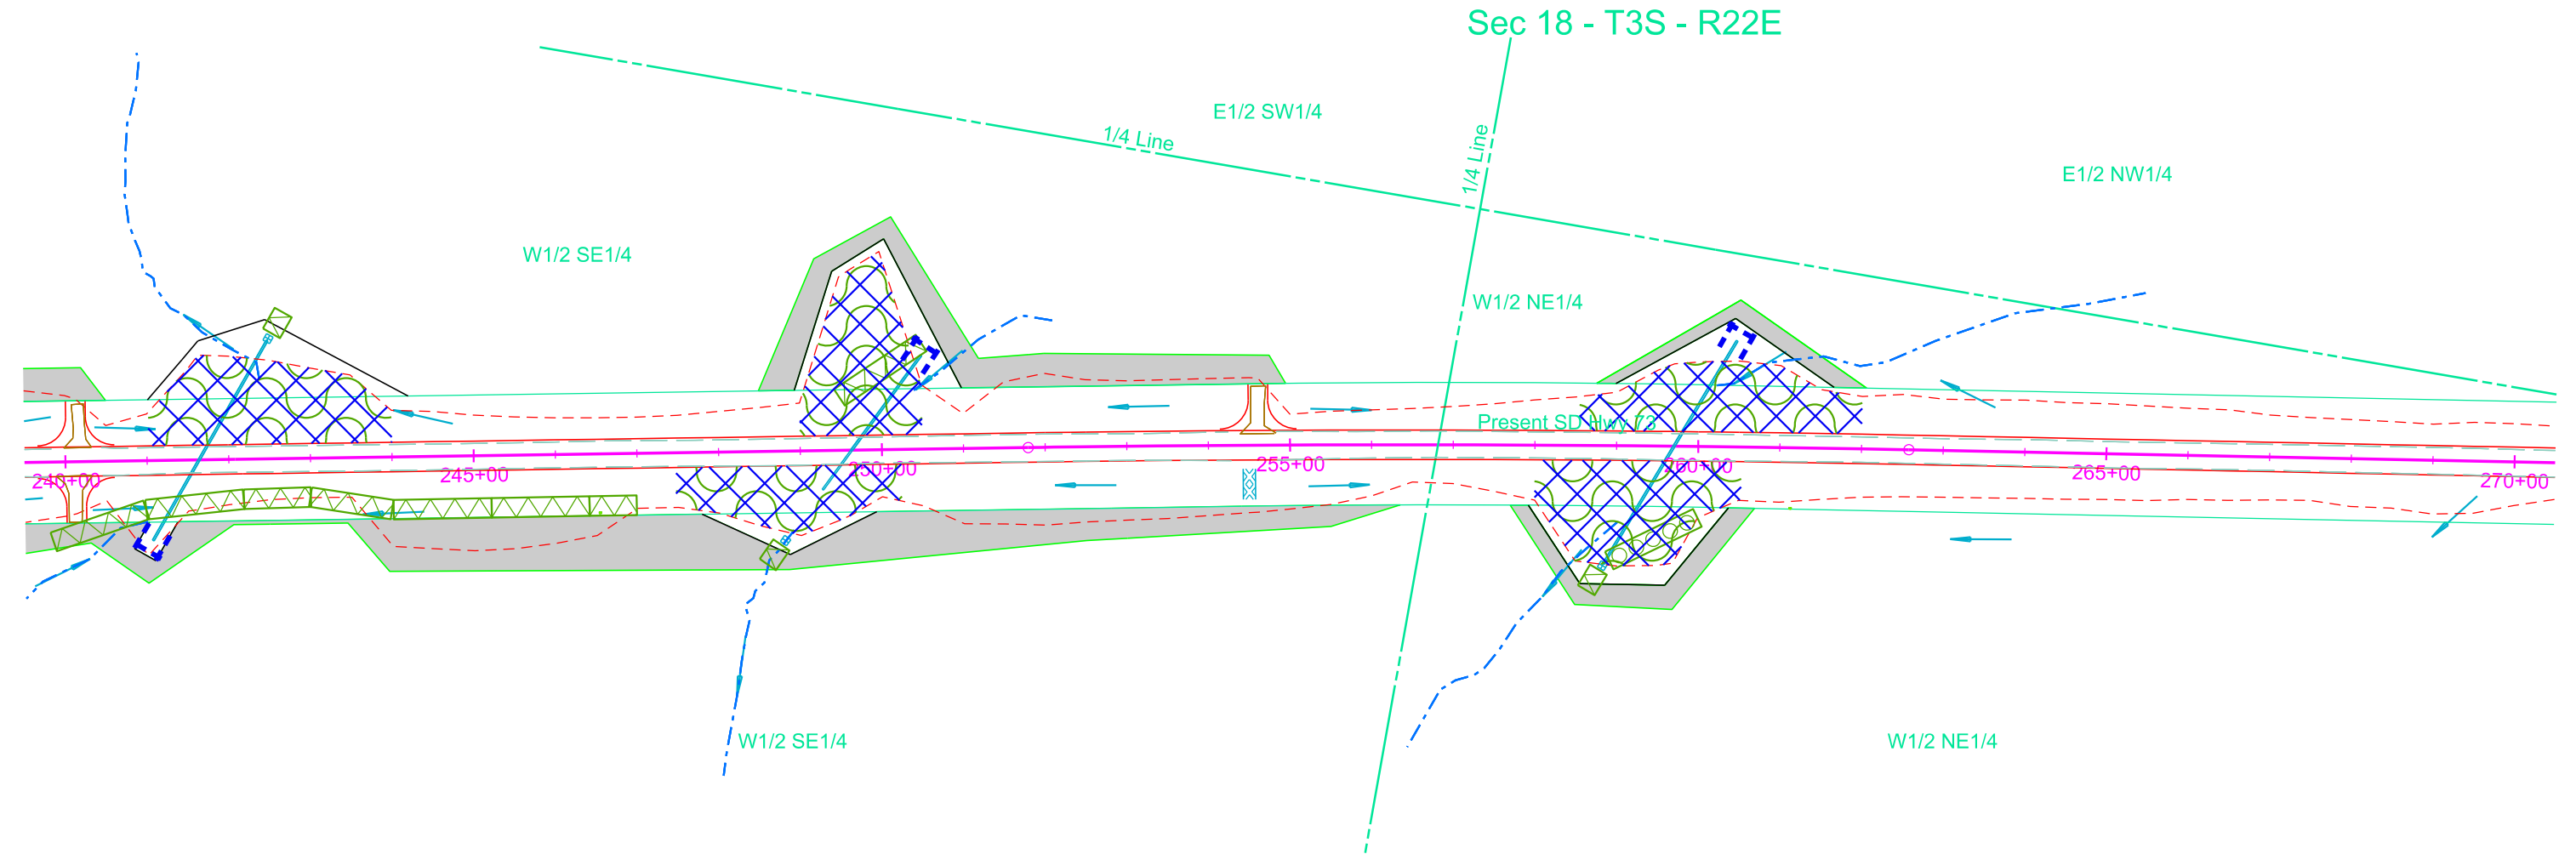

Install High Flow Silt Fence at the following locations:
 274+00 to 286+00 L Perimeter control 700 Ft

Install High Flow Silt Fence at the following locations:
 287+86 L Inlet end of pipe 18 Ft
 294+99 L inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:
 287+86 R Outlet end of pipe 55 SqYd
 294+99 R Outlet end of pipe 55 SqYd

Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 276+00 to 288+50 L Inslope 5.6 Tons
 276+00 to 282+00 R Inslope 2.1 Tons
 286+00 to 290+50 R Inslope 2.1 Tons
 292+50 to 296+50 R Inslope 1.8 Tons
 293+50 to 299+00 L Inslope/Backslope/Ditch 3.4 Tons

Apply Fiber Reinforced Matrix at the following locations:
 276+00 to 288+50 L Inslope 4.2 Tons
 276+00 to 282+00 R Inslope 1.6 Tons
 286+00 to 290+50 R Inslope 1.6 Tons
 292+50 to 296+50 R Inslope 1.3 Tons
 293+50 to 299+00 L Inslope/Backslope 2.5 Tons

Install 12" Diameter Erosion Control Wattles
 on slope contour at 75 Ft spacing
 at the following locations:
 277+50 to 299+00 L Inslope 1,850 Ft
 277+50 to 296+50 R Inslope 950 Ft

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D21	D33


Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jacob0514\1270sec.dgn

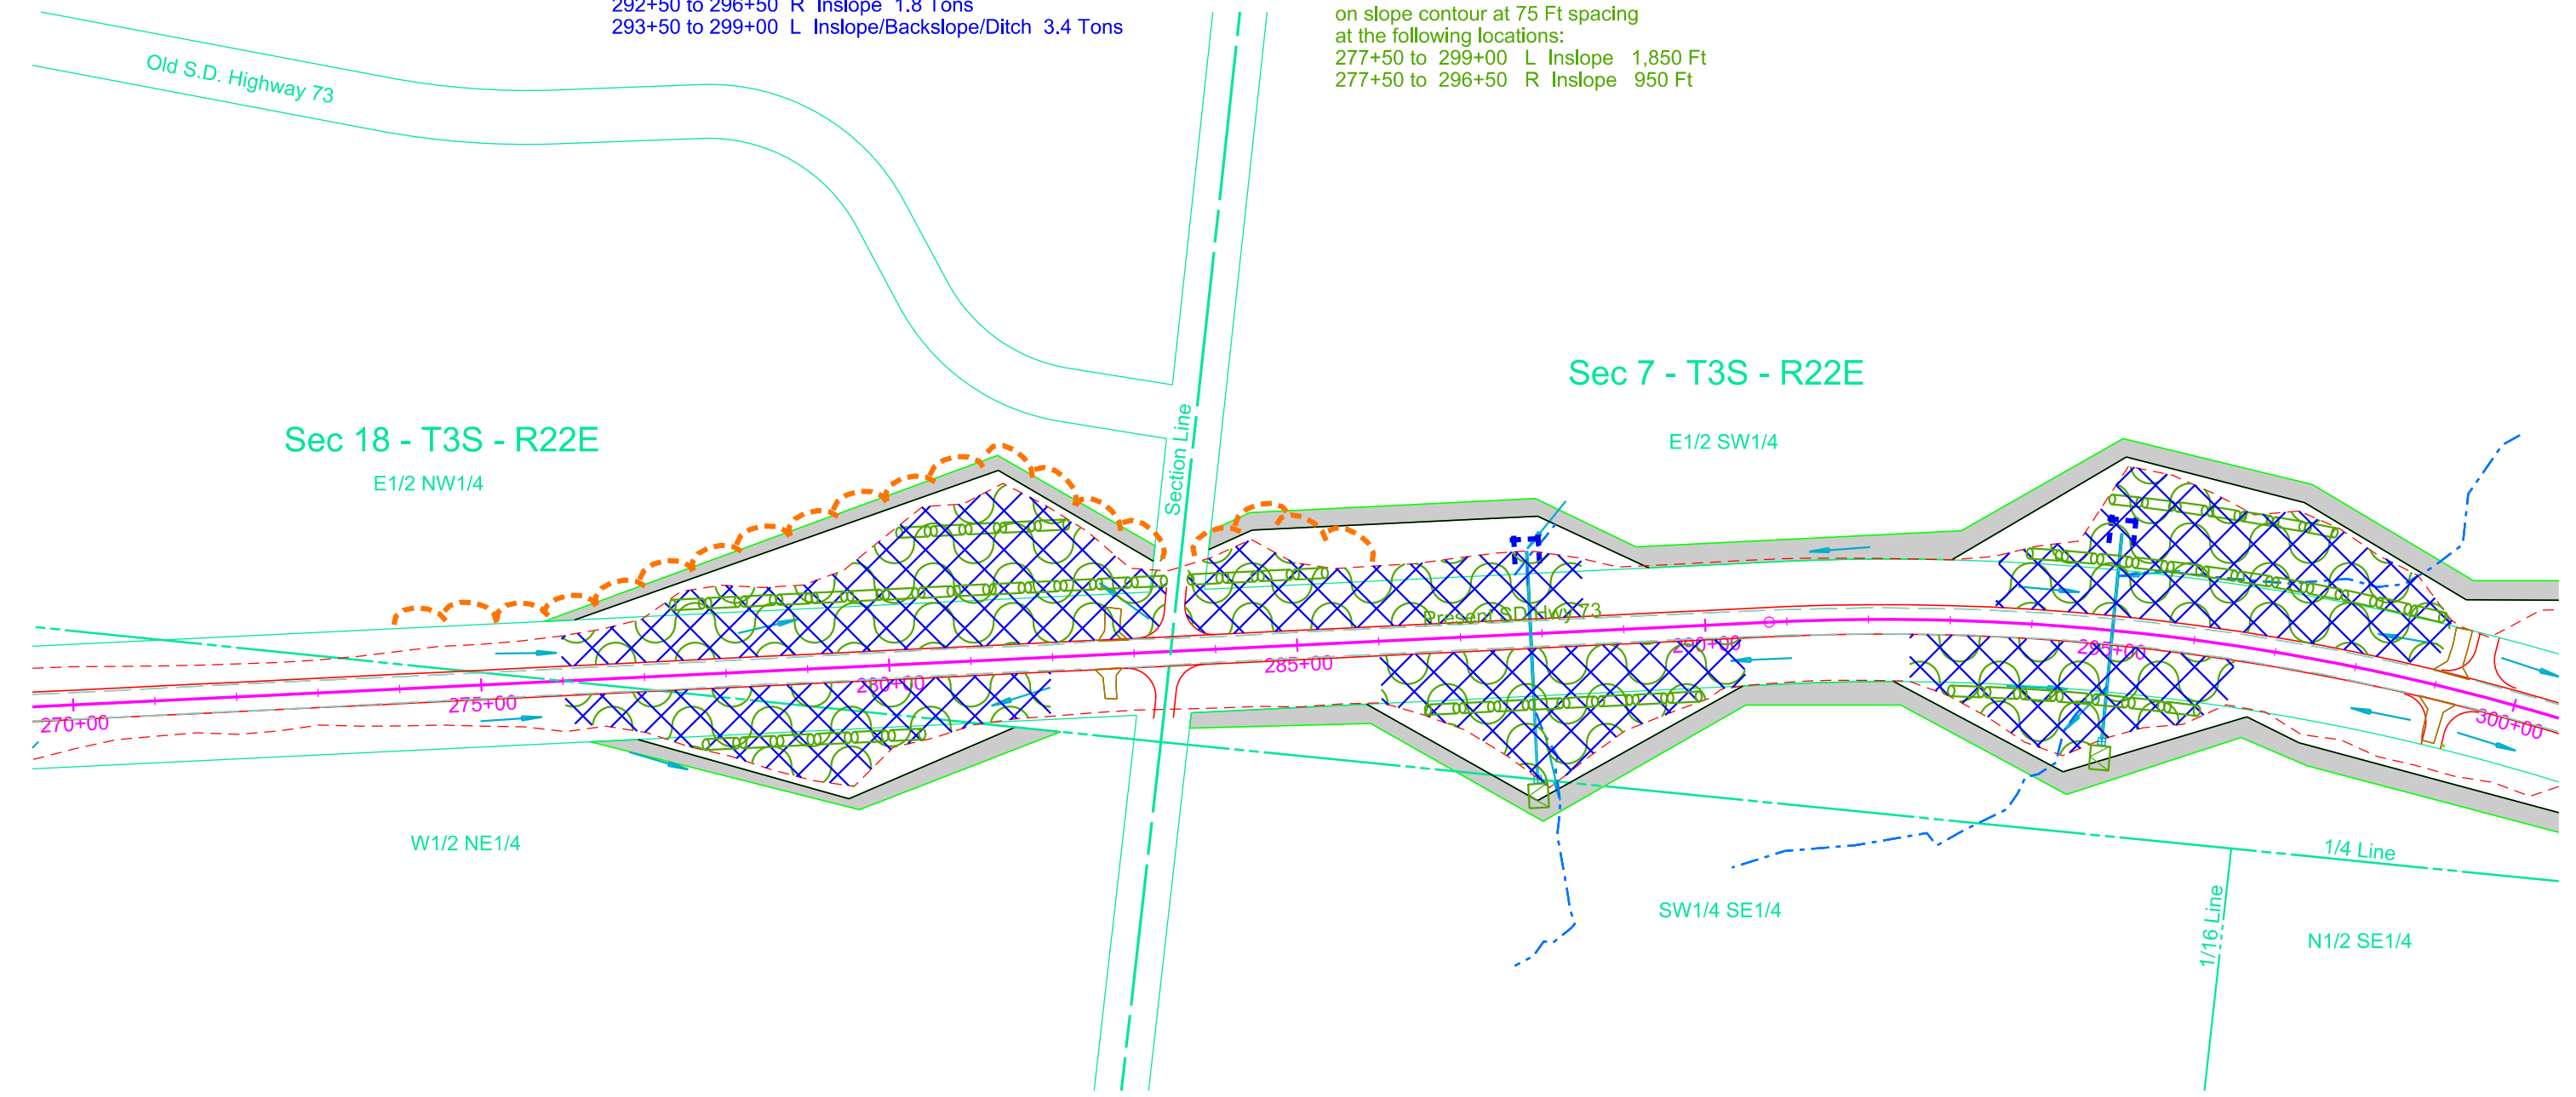

Install High Flow Silt Fence at the following locations:
 303+00 to 307+00 R Perimeter control 450 Ft
 313+00 to 319+00 R Perimeter control 700 Ft

Install High Flow Silt Fence at the following locations:
 304+99 L Inlet end of pipe 18 Ft
 307+17 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft
 316+66 L Inlet end of pipe 18 Ft
 326+36 R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Apply Fiber Reinforced Matrix at the following locations:
 300+00 to 320+00 L Inslope/Backslope 11.2 Tons
 303+50 to 319+50 R Inslope/Backslope 6.7 Tons


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D22	D33

Plotting Date: 07/24/2024


Install Type 3 Erosion Control Blanket at the following locations:
 316+66 R Outlet end of pipe 55 SqYd
 326+36 L Outlet end of pipe 55 SqYd

Install Articulated Concrete Mattress at the following locations:
 305+00 to 307+15 R Ditch channel bottom 380 SqYd

Install 12" Diameter Erosion Control Wattles on slope contour at 75 Ft spacing at the following locations:
 300+00 to 320+00 L Inslope 2,075 Ft
 301+00 to 309+50 L Backslope 725 Ft
 303+50 to 319+00 R Inslope 1,525 Ft



Sec 7 - T3S - R22E

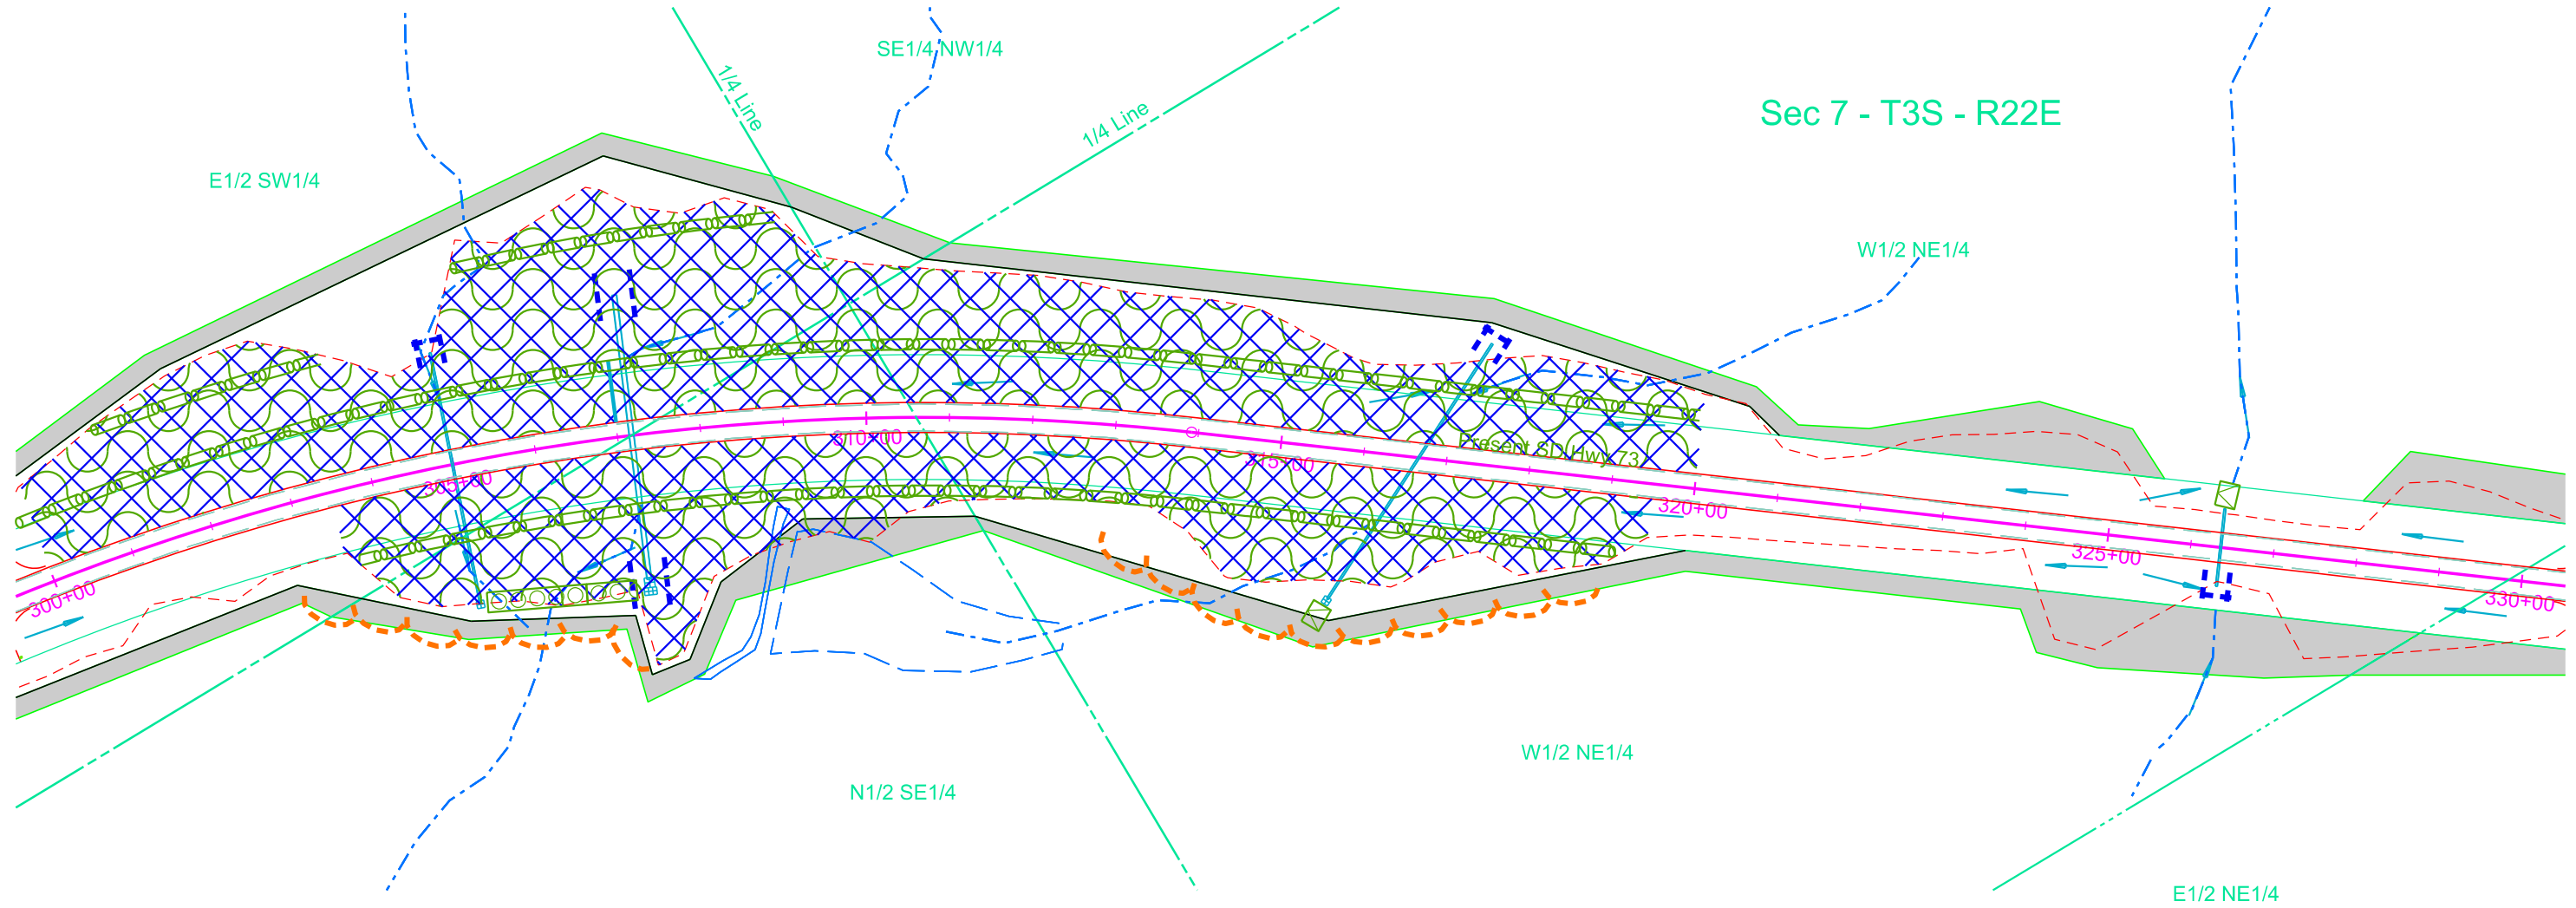

Plot Scale - 1:200

Plotted From - TRPR13525


File - U:\trp\jacob\0514\300sec.dgn

Install High Flow Silt Fence at the following locations:
 331+92 L Inlet end of pipe 18 Ft
 340+91 L Across ditch at inlet end of pipe (30 Ft each side) 60 Ft
 354+88 - 49' R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:
 331+92 R Outlet end of pipe 55 SqYd
 340+91 R Outlet end of pipe 55 SqYd
 354+88 L Outlet end of pipe 55 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D23	D33

Plotting Date: 07/24/2024



Plotted From: TRPR13525 Plot Scale: 1:200

File: U:\trproj\jacob51\1330sec.dgn

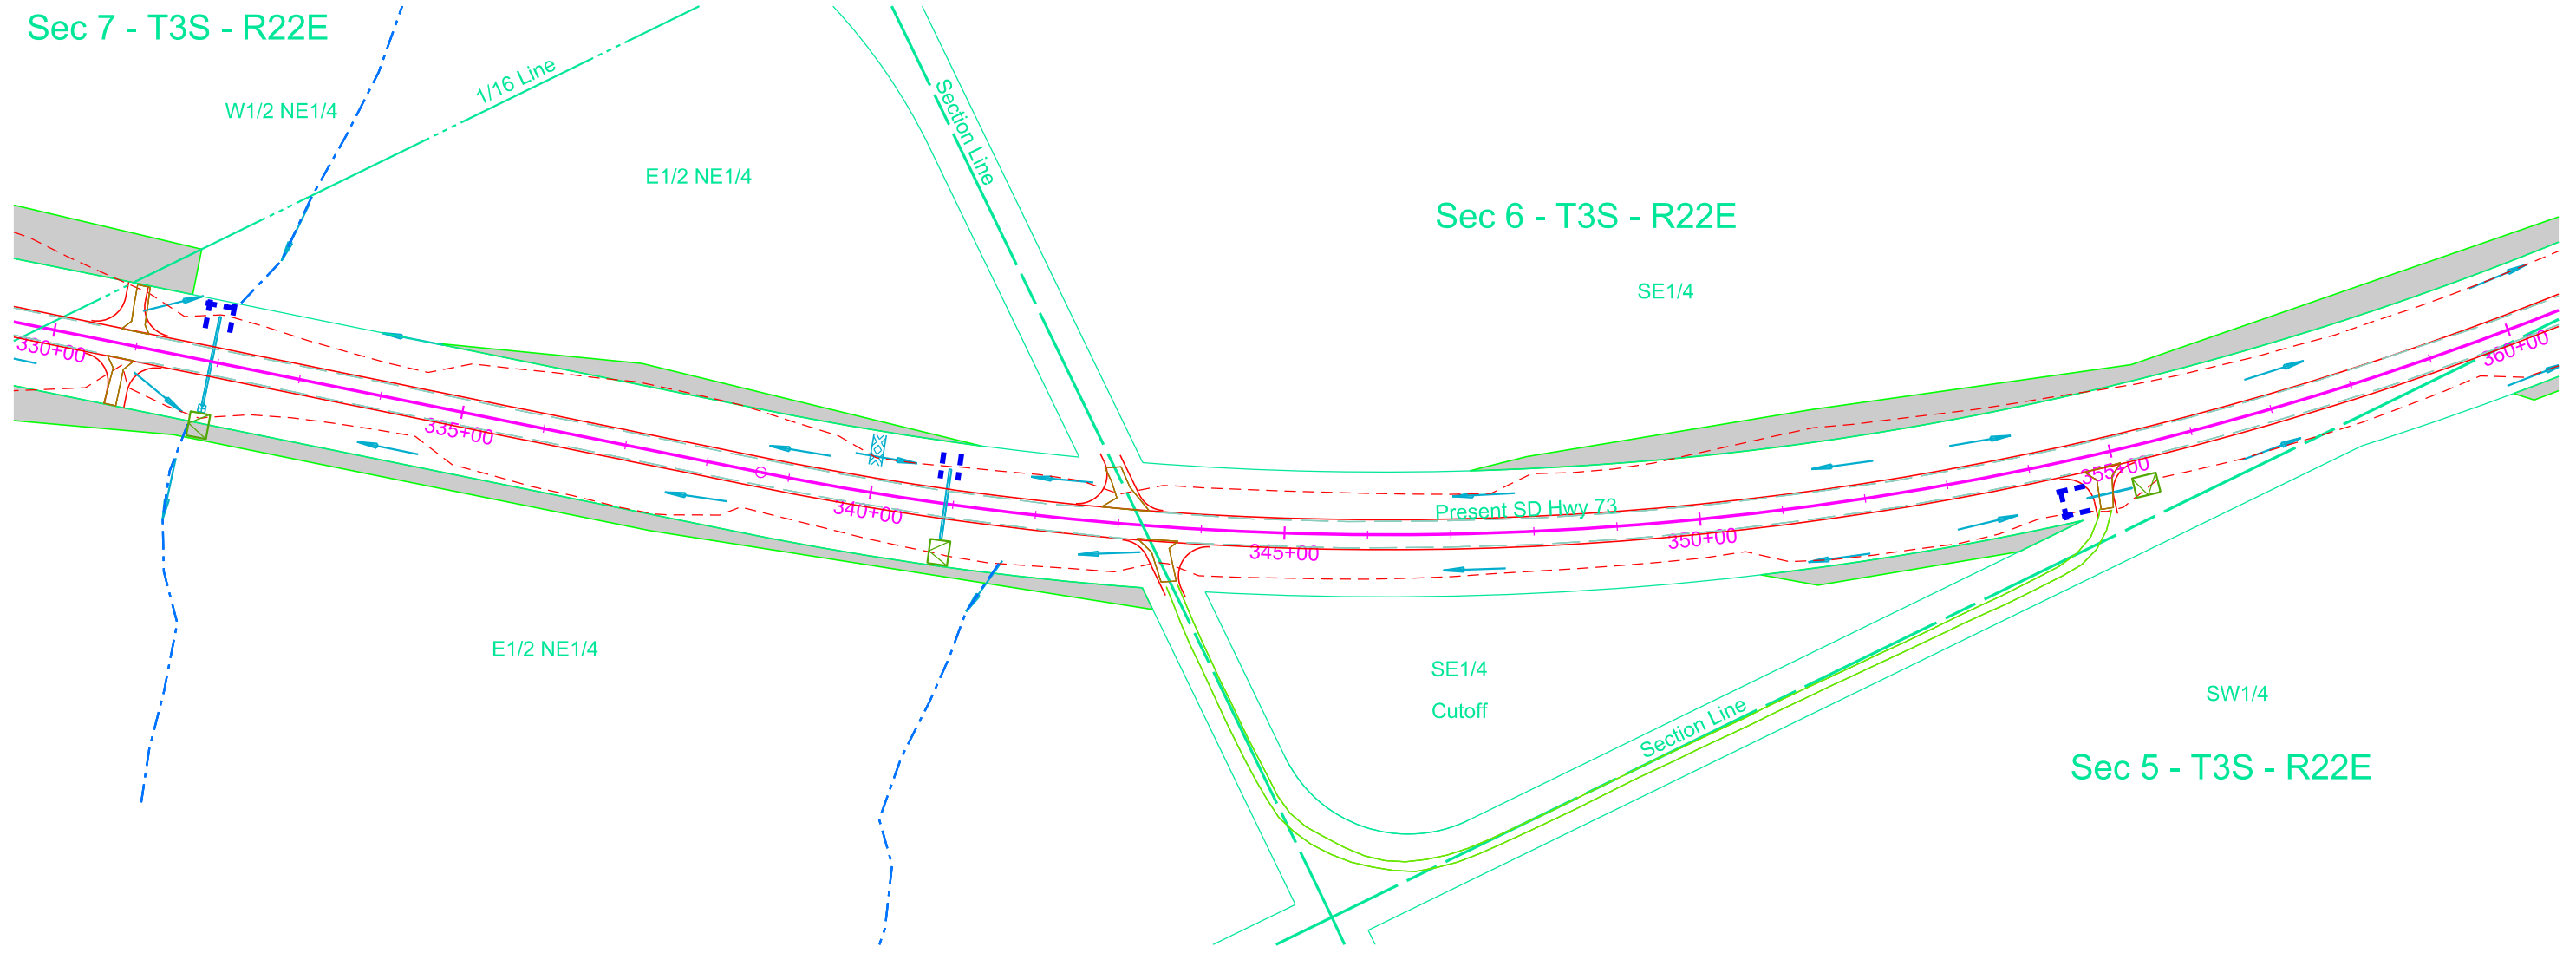

Install High Flow Silt Fence at the following locations:
 368+04 - 49' R Inlet end of pipe 18 Ft
 368+08 - 49' L Inlet end of pipe 18 Ft
 382+37 L/R Across ditch at inlet end of pipe (30 Ft both sides) 60 Ft
 379+02 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:
 368+04 L Outlet end of pipe 55 SqYd
 368+08 R Outlet end of pipe 55 SqYd
 382+37 L Outlet end of pipe 55 SqYd
 379+02 R Outlet end of pipe 55 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162		
Plotting Date: 07/24/2024		D24	D33



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jack0514\3680sec.dgn

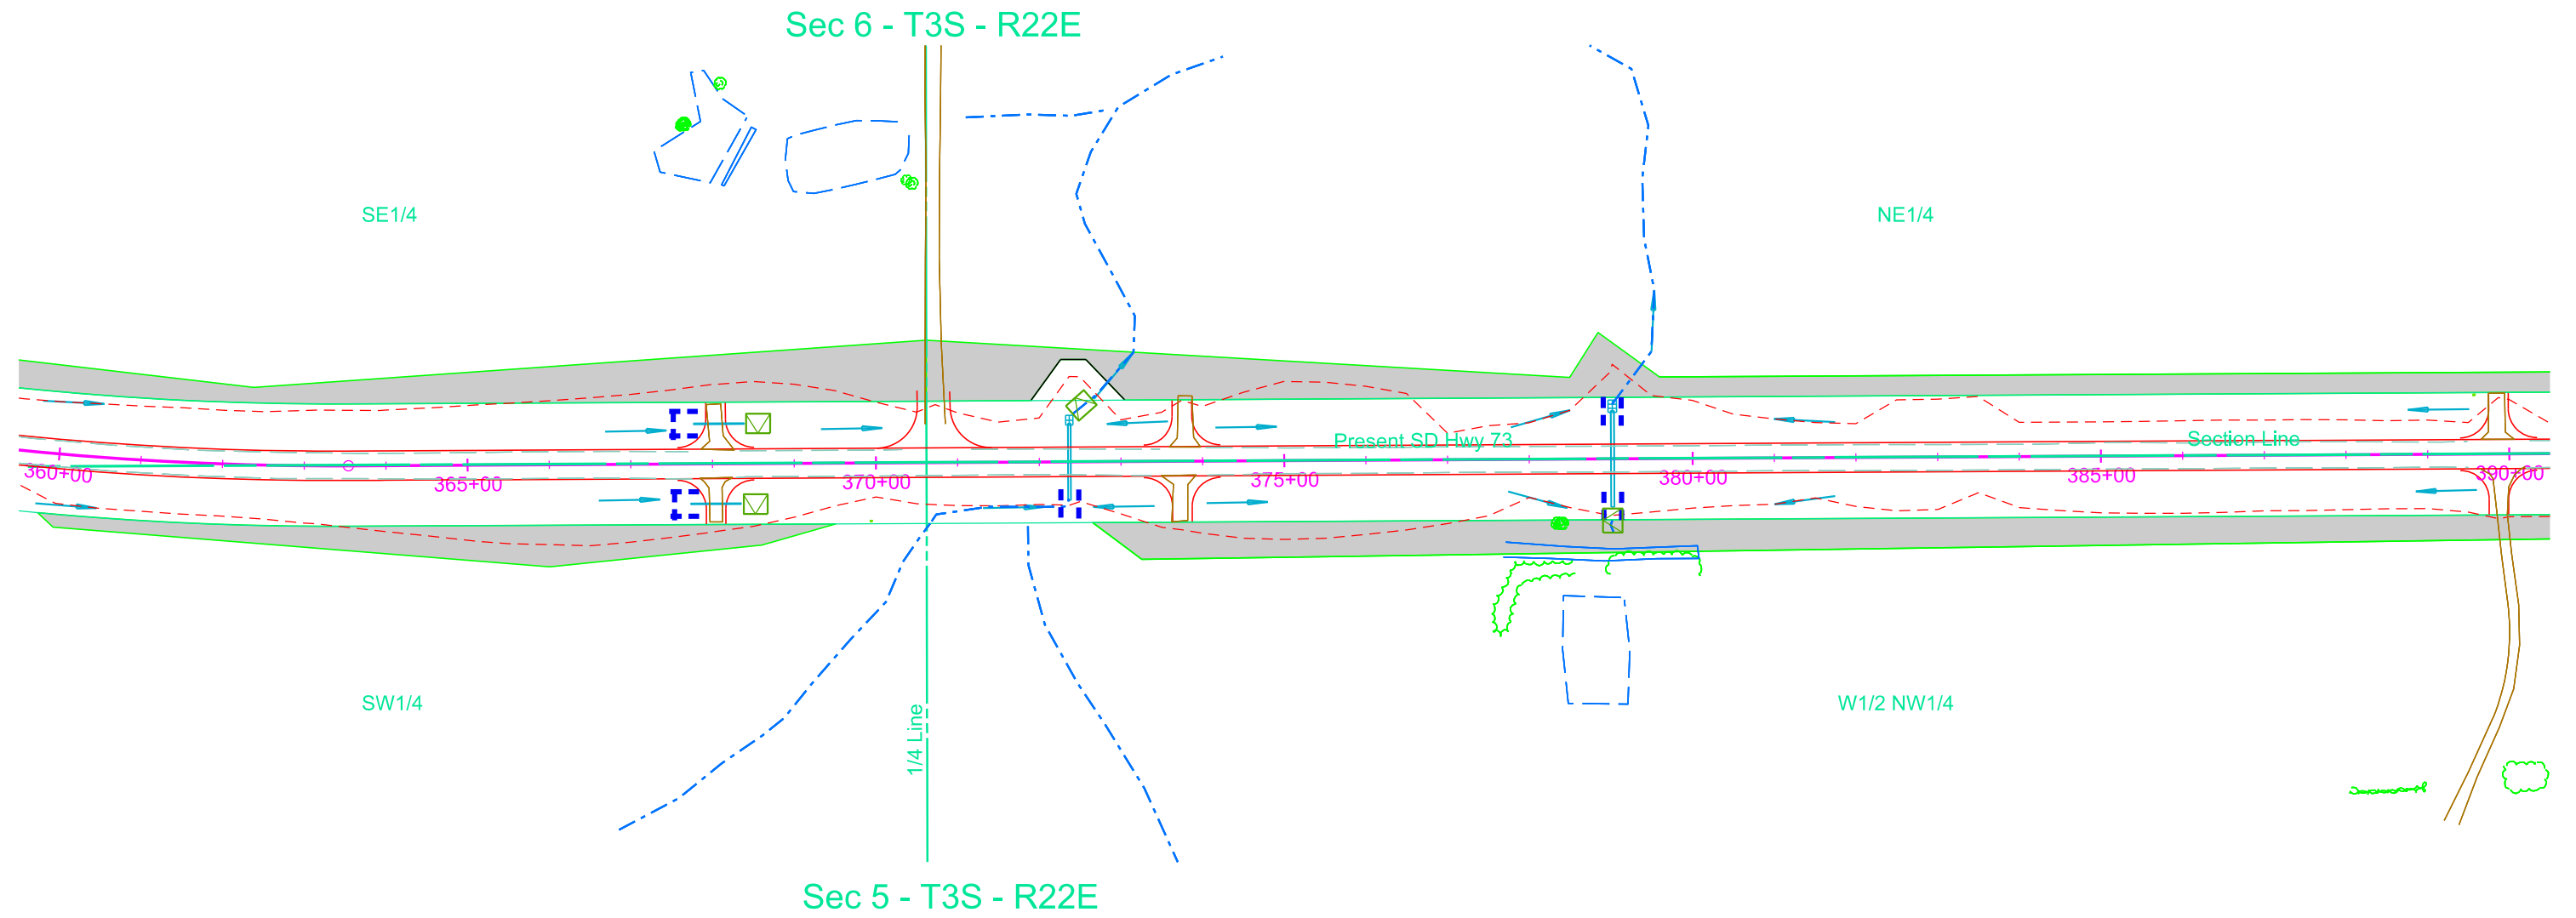

Install High Flow Silt Fence at the following locations:
 411+50 to 414+00 L Perimeter control 250 Ft

Install High Flow Silt Fence at the following locations:
 395+76 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft
 400+37 R Inlet end of pipe 18 Ft
 403+11 - 49' L Inlet end of pipe 18 Ft
 407+80 - 49' R Inlet end of pipe 18 Ft
 413+18 L/R Inlet and Outlet ends of pipe (60 Ft each end) 120 Ft
 Around topsoil stockpiles--quantity and location to be determined

Apply Grass Hay or Straw Mulch at 2 Tons/Acre after
 Placing Topsoil on disturbed areas until Permanent
 Seeding can be completed at the following locations:
 395+00 to 402+50 L Inslope/Backslope/Ditch 3.0 Tons
 395+00 to 403+15 R Inslope/Backslope/Ditch 3.0 Tons
 411+50 to 414+50 L Inslope 0.8 Tons
 411+50 to 414+50 R Inslope 0.6 Tons


Install Type 3 Erosion Control Blanket at the following locations:
 395+76 L Outlet end of pipe 55 SqYd
 399+00 to 400+37 L Ditch channel bottom 245 SqYd
 400+37 to 402+00 R Ditch channel bottom 290 SqYd
 403+11 L Outlet end of pipe 55 SqYd
 407+80 R Outlet end of pipe 55 SqYd
 413+18 L Outlet end of pipe 55 SqYd

Apply Fiber Reinforced Matrix at the following locations:
 395+00 to 402+50 L Inslope/Backslope 2.3 Tons
 395+00 to 403+15 R Inslope/Backslope 2.3 Tons
 411+50 to 414+50 L Inslope 0.6 Tons
 411+50 to 414+50 R Inslope 0.5 Tons

Install Articulated Concrete Mattress
 at the following locations:
 395+76 to 396+50 L Ditch channel bottom 130 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D25	D33


Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jack0514\330sec.dgn

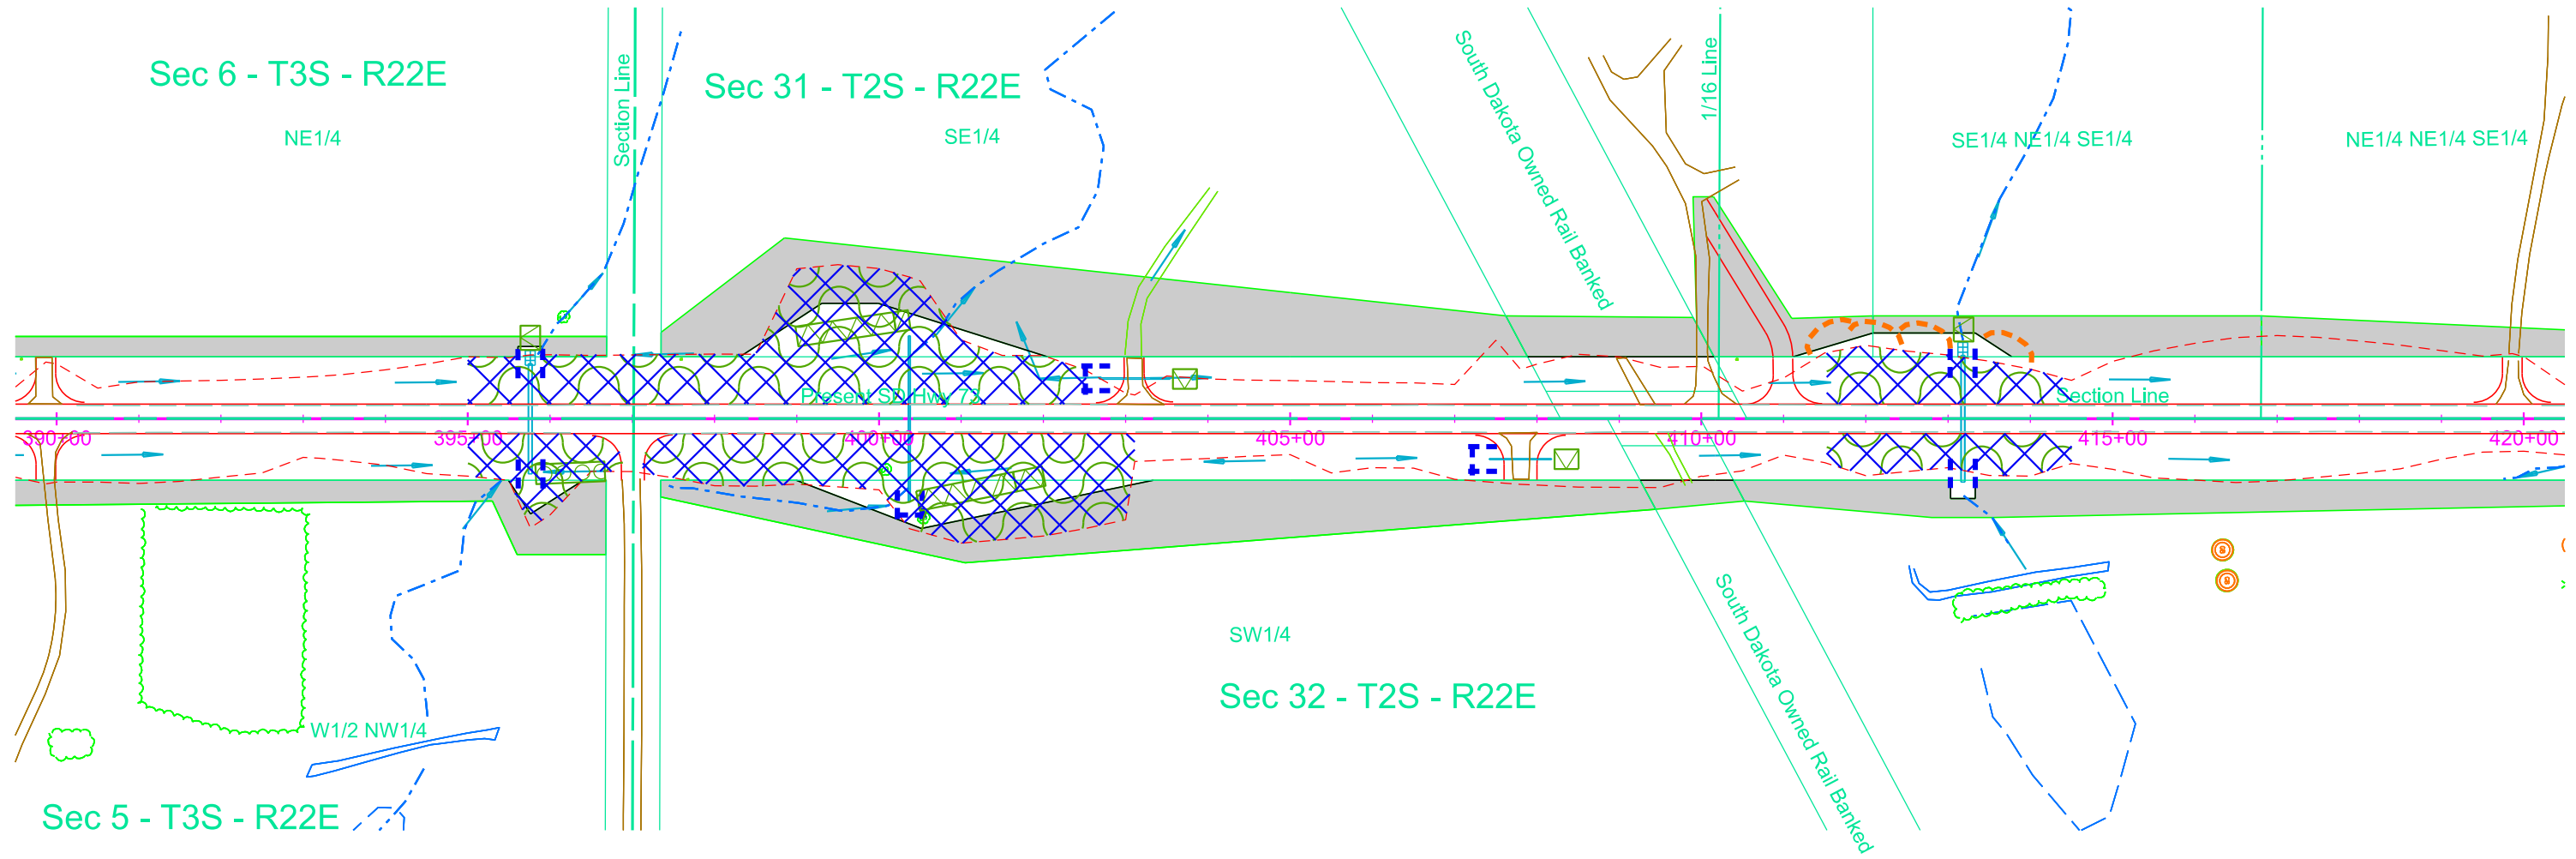

Install High Flow Silt Fence at the following locations:

- 420+72 L Inlet end of pipe 18 Ft
- 421+21 - 49' R Inlet end of pipe 18 Ft
- 423+40 - 49' L Inlet end of pipe 18 Ft
- 423+66 - 46' R Inlet end of pipe 18 Ft
- 427+42 L Across ditch at inlet end of pipe (30 Ft each side) 60 Ft
- 438+00 - 49' R Inlet end of pipe 18 Ft
- 442+42 - 49' R Inlet end of pipe 18 Ft
- 443+67 - 49' L Inlet end of pipe 18 Ft
- 444+80 - 49' R Inlet end of pipe 18 Ft
- 444+93 - 49' L Inlet end of pipe 18 Ft
- 445+29 - 49' R Inlet end of pipe 18 Ft
- 447+76 - 49' L Inlet end of pipe 18 Ft
- 448+32 R Inlet end of pipe 18 Ft
- Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:

- 420+72 R Outlet end of pipe 55 SqYd
- 423+21 L Outlet end of pipe 55 SqYd
- 423+40 R Outlet end of pipe 55 SqYd
- 427+42 R Outlet end of pipe 55 SqYd
- 438+00 L Outlet end of pipe 55 SqYd
- 442+42 R Outlet end of pipe 55 SqYd
- 443+67 L Outlet end of pipe 55 SqYd
- 444+80 R Outlet end of pipe 55 SqYd
- 444+93 L Outlet end of pipe 55 SqYd
- 448+63 L Outlet end of pipe 55 SqYd


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D26	D33

Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

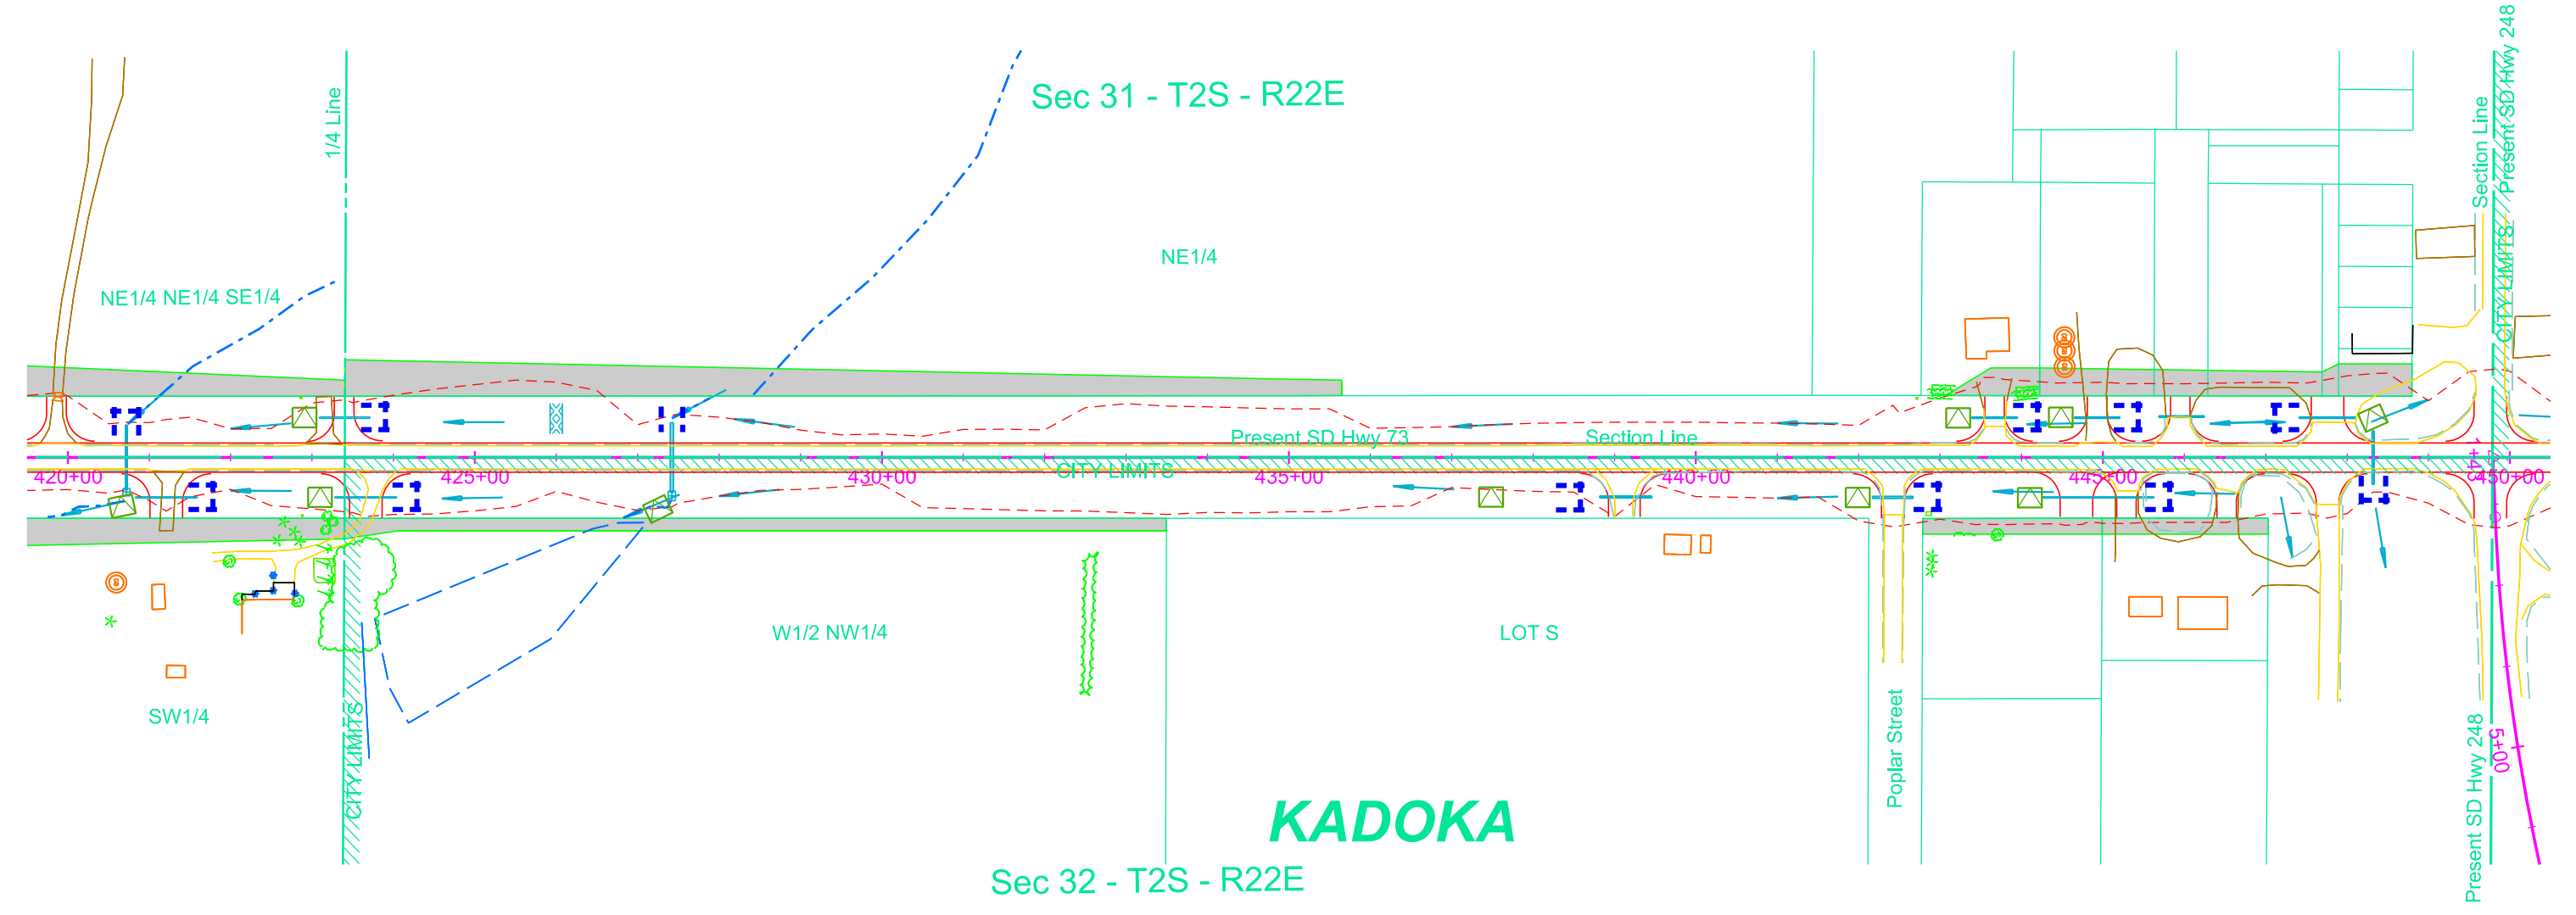

File - U:\trproj\jacob\514\420ec.dgn

Install High Flow Silt Fence at the following locations:
 462+50 to 463+75 L/R Perimeter control 350 Ft


Install 12" Diameter Erosion Control Wattles
 at the following locations:
 460+20 to 462+50 L/R Perimeter control 460 Ft

Install High Flow Silt Fence at the following locations:
 451+33 - 49' L Inlet end of pipe 18 Ft
 453+32 - 49' R Inlet end of pipe 18 Ft
 453+32 - 49' L Inlet end of pipe 18 Ft
 455+27 - 49' R Inlet end of pipe 18 Ft
 455+43 - 49' L Inlet end of pipe 18 Ft
 457+00 - 49' R Inlet end of pipe 18 Ft
 457+34 - 49' L Inlet end of pipe 18 Ft
 457+79 L Inlet end of pipe 18 Ft
 458+42 - 49' L Inlet end of pipe 18 Ft
 458+70 - 49' R Inlet end of pipe 18 Ft
 459+86 - 49' L Inlet end of pipe 18 Ft
 459+86 - 49' R Inlet end of pipe 18 Ft
 Around topsoil stockpiles--quantity and location to be determined

Install Type 3 Erosion Control Blanket at the following locations:
 451+33 L Outlet end of pipe 55 SqYd
 453+32 L Outlet end of pipe 55 SqYd
 453+32 R Outlet end of pipe 55 SqYd
 455+27 R Outlet end of pipe 55 SqYd
 455+43 L Outlet end of pipe 55 SqYd
 457+00 R Outlet end of pipe 55 SqYd
 457+34 L Outlet end of pipe 55 SqYd
 457+79 R Outlet end of pipe 55 SqYd
 458+42 L Outlet end of pipe 55 SqYd
 458+70 R Outlet end of pipe 55 SqYd
 459+86 L Outlet end of pipe 55 SqYd
 459+86 R Outlet end of pipe 55 SqYd

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D27	D33


Plotting Date: 07/24/2024



Plot Scale - 1:200

Plotted From - TRPR13525

File - U:\trproj\jacob051\1430sec.dgn

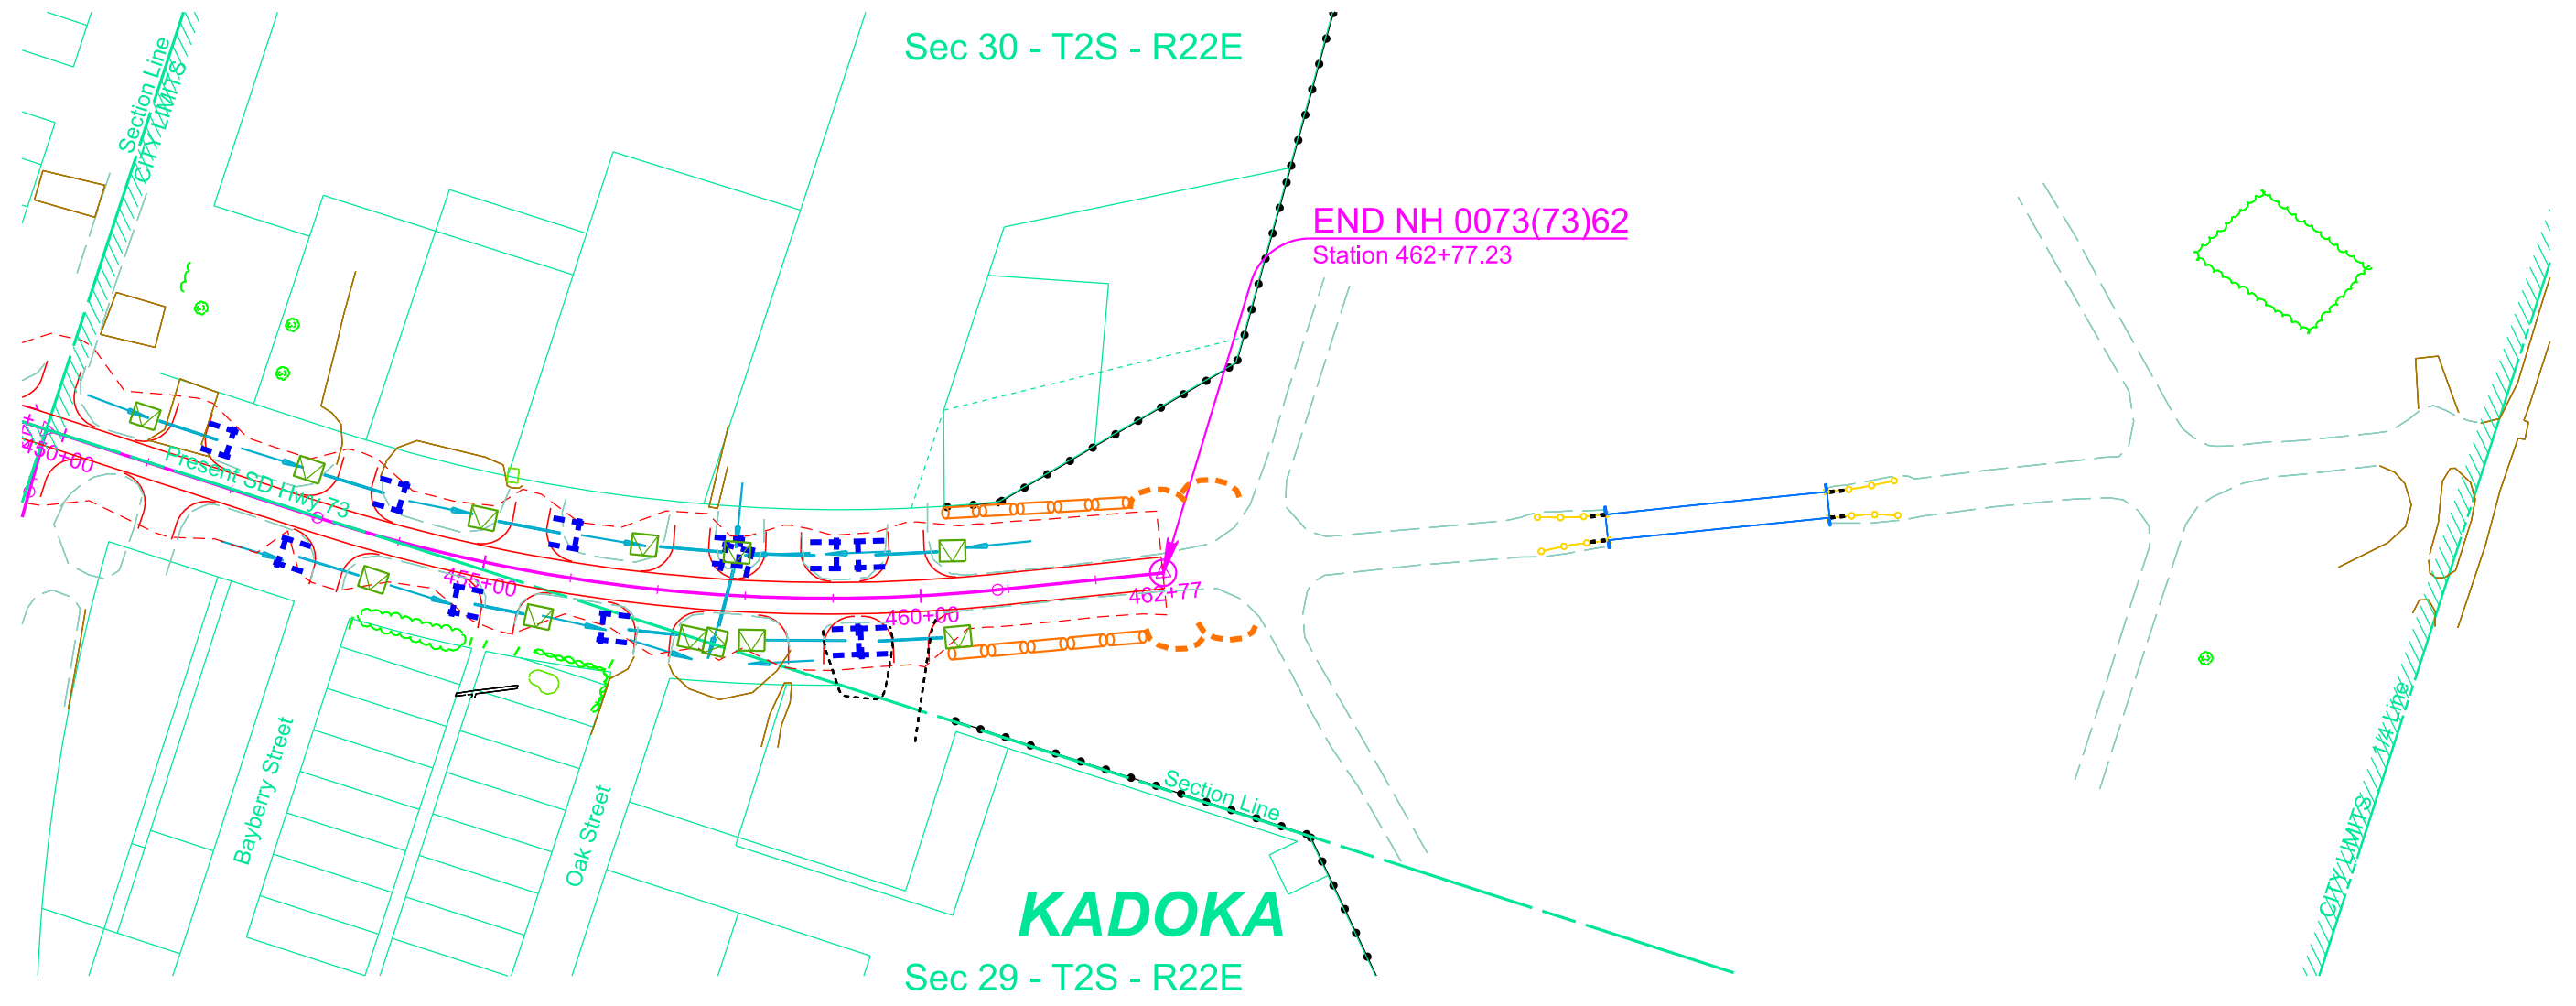

Sec 30 - T2S - R22E

END NH 0073(73)62
 Station 462+77.23



KADOKA

Sec 29 - T2S - R22E


SDDOT CONSTRUCTION ENTRANCE

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0073(73)62 P 0248(17)162	D29	D33

Plotting Date: 07/24/2024

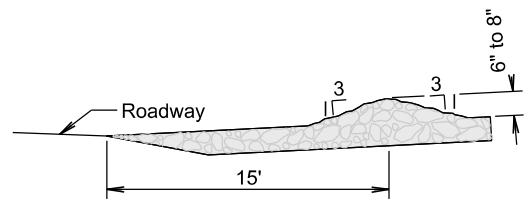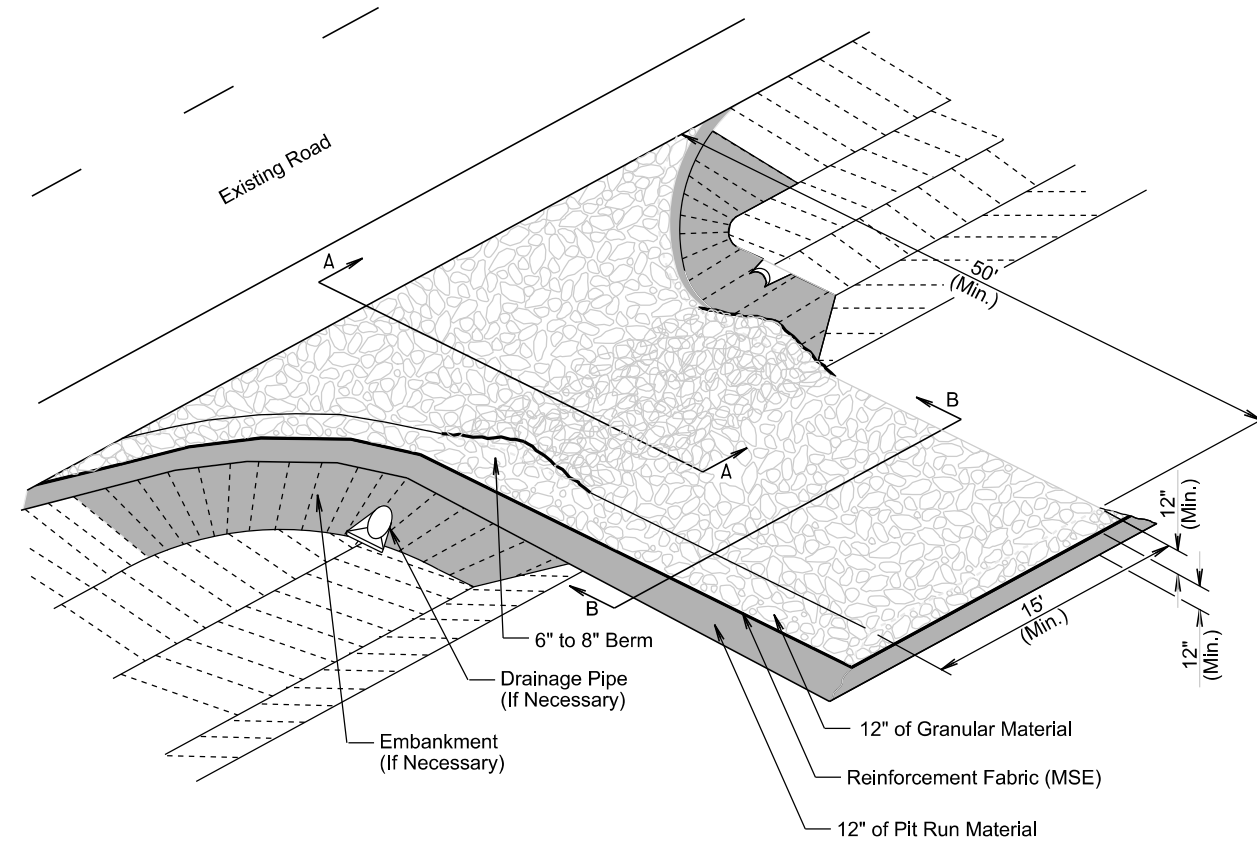

SECTION A-A

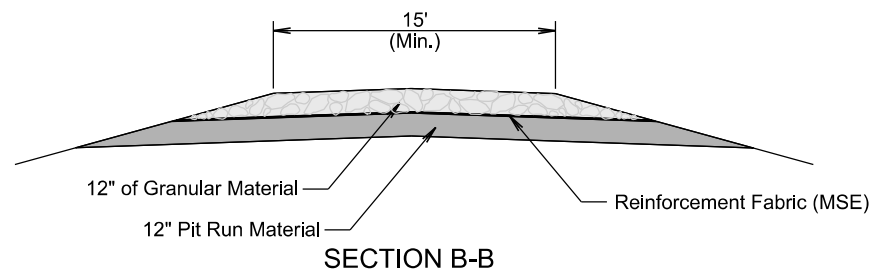

SECTION B-B



GENERAL NOTES:

If the grade of the entrance slopes down to the roadway, a berm of extra rock will be used to prevent sediment or mud from being deposited on the roadway. See SECTION A-A.


If a drainage pipe is necessary the size and type will be determined by the Contractor to meet field conditions. All cost will be incidental to the various contract items.

If embankment is necessary it will be pit run material.

TRANSVERSE TO ROADWAY

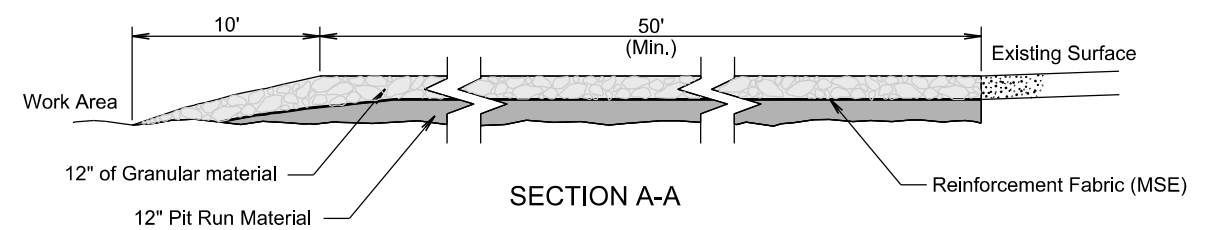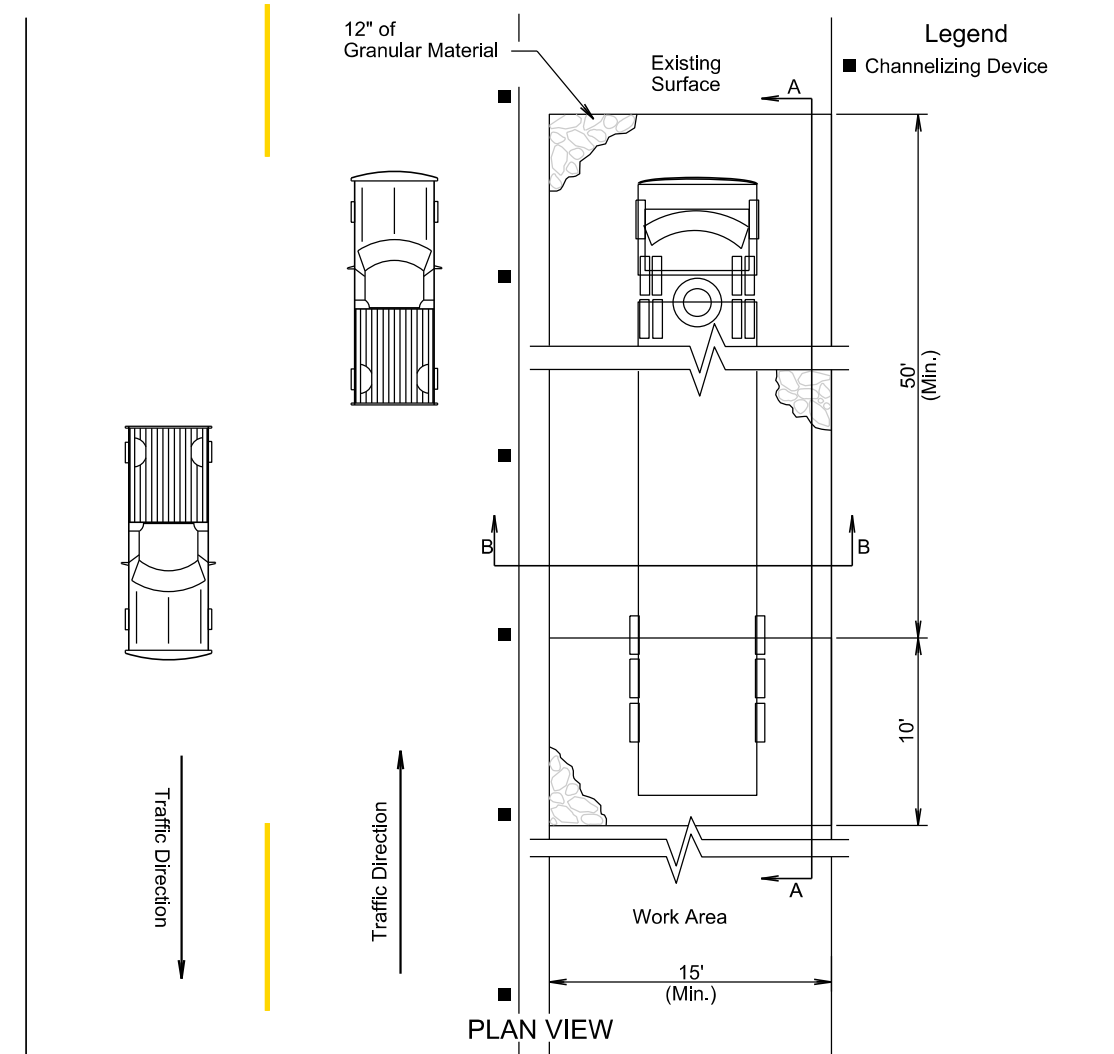


SECTION A-A

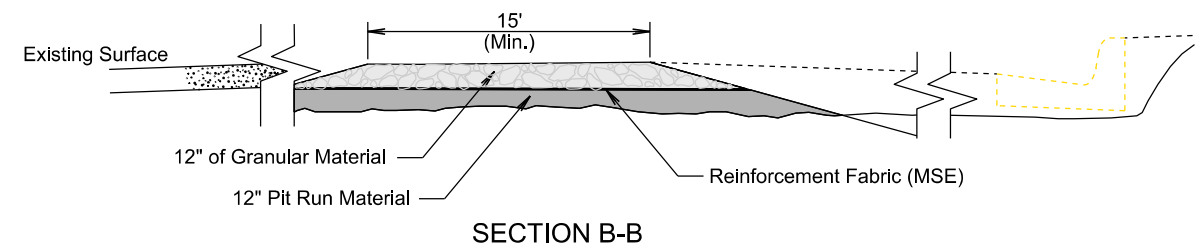


SECTION B-B


PARALLEL TO ROADWAY

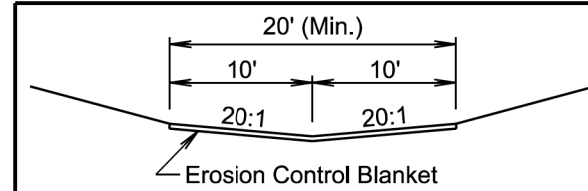


STANDARD DITCH SECTION

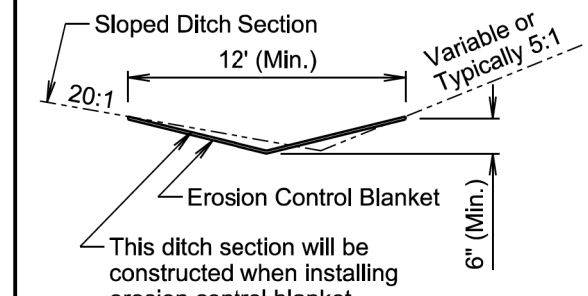


SLOPED DITCH SECTION

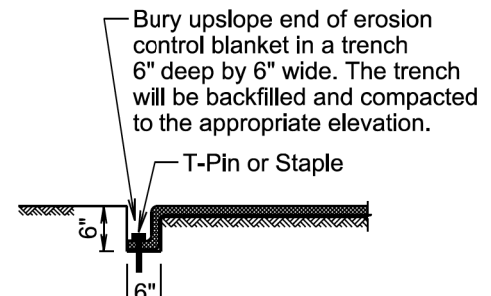

TRENCH DETAIL

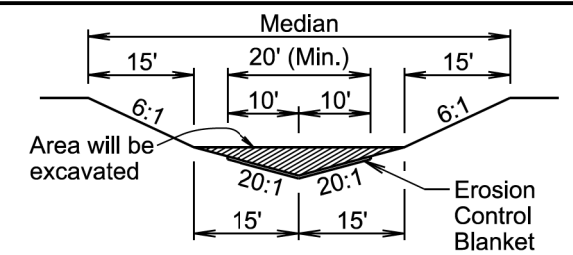


MEDIAN SECTION



* Use a 4" (Min.) overlap wherever two widths of erosion control blanket are applied side by side.

* Use a 6" (Min.) overlap wherever one roll of erosion control blanket ends and another begins.

OVERLAP DETAIL

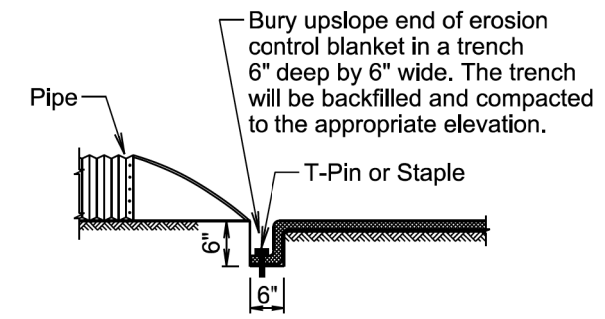

PIPE END DETAIL

GENERAL NOTES:

Prior to placement of the erosion control blanket, the areas will be properly prepared, shaped, seeded, and fertilized.

Erosion control blanket will be unrolled in the direction of the flow of water when placed in ditches and on slopes. The upslope end of the erosion control blanket will be buried in a trench 6" wide by 6" deep. There will be at least a 6" overlap wherever one roll of erosion control blanket ends and another begins, with the upslope erosion control blanket placed on top of the downslope erosion control blanket.

The erosion control blanket will be pinned to the ground according to the manufacturer's installation recommendations.


After the placement of the erosion control blanket, the Contractor will fine grade along all edges of the blanket to maintain a uniform slope adjacent to the blanket and level any low spots which might prevent uniform and unrestricted flow of side drainage directly onto the erosion control blanket.

All ditch sections will be shaped when installing the erosion control blanket. All costs for shaping the ditches will be incidental to the contract unit price per foot for "Shaping for Erosion Control Blanket".


February 14, 2020

<i>Published Date: 2025</i>	S D D O T	EROSION CONTROL BLANKET	PLATE NUMBER 734.01
			Sheet 1 of 1


MANUAL LOW FLOW SILT FENCE INSTALLATION

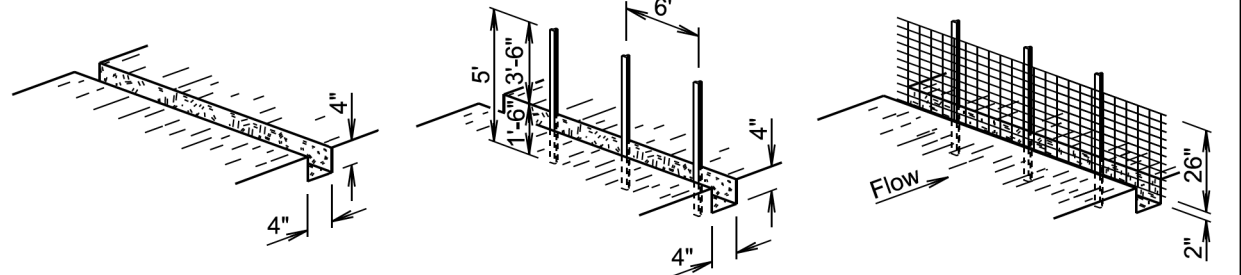

- EXCAVATE TRENCH
- DRIVE STEEL T FENCE POSTS
- ATTACH 26" WOVEN WIRE FENCE TO POSTS

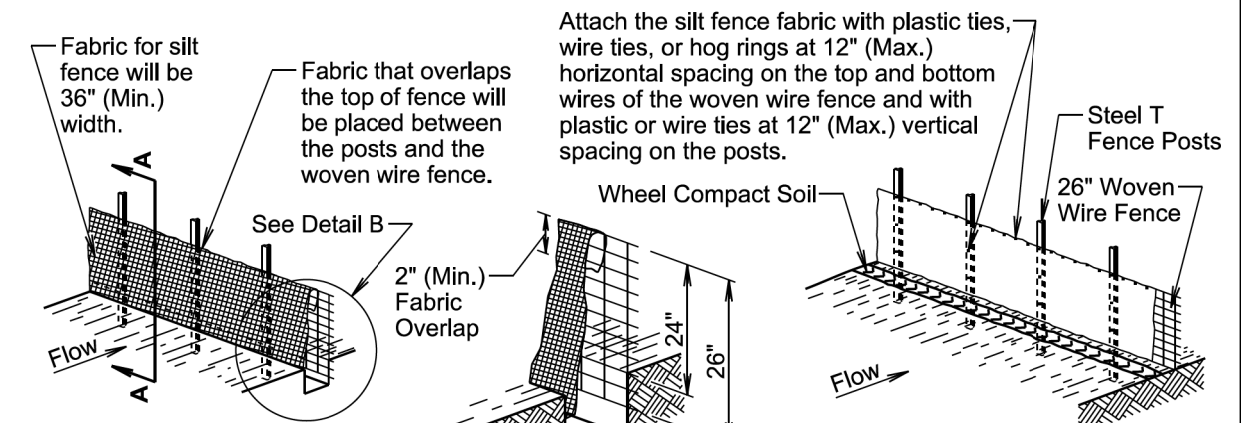

- ATTACH SILT FENCE FABRIC
- BACKFILL TRENCH AND WHEEL COMPACT SOIL

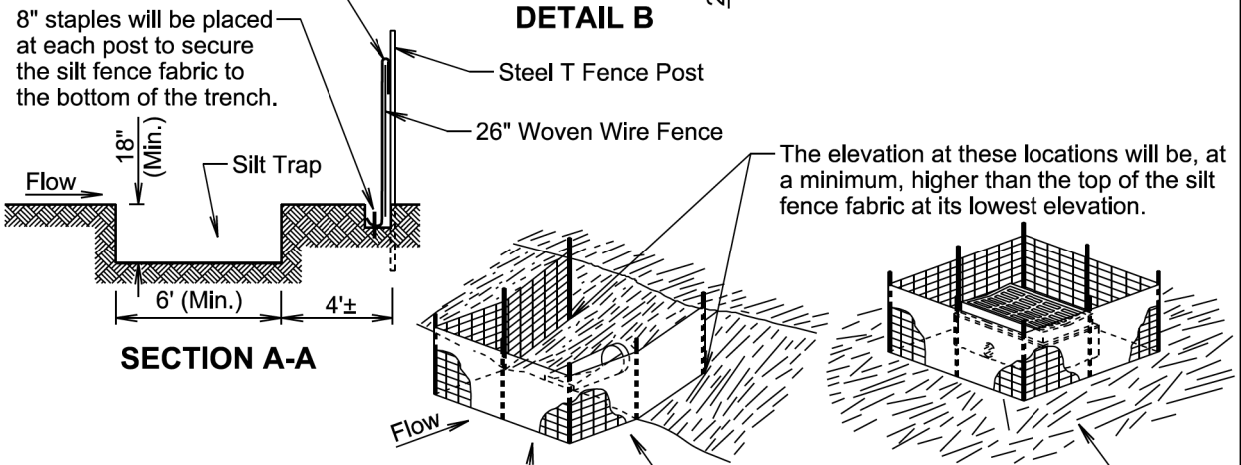


The silt fence length and width may be adjusted due to a larger pipe, multiple pipe, or other circumstances during construction as determined by the Engineer.

Post spacing will be 3' for these types of applications of silt fence. All other components of the silt fence will be the same as shown above.


February 14, 2020

Published Date: 2025	S D D O T	LOW FLOW SILT FENCE AND SILT TRAP	PLATE NUMBER 734.04
			Sheet 1 of 2


MACHINE SLICED LOW FLOW SILT FENCE INSTALLATION

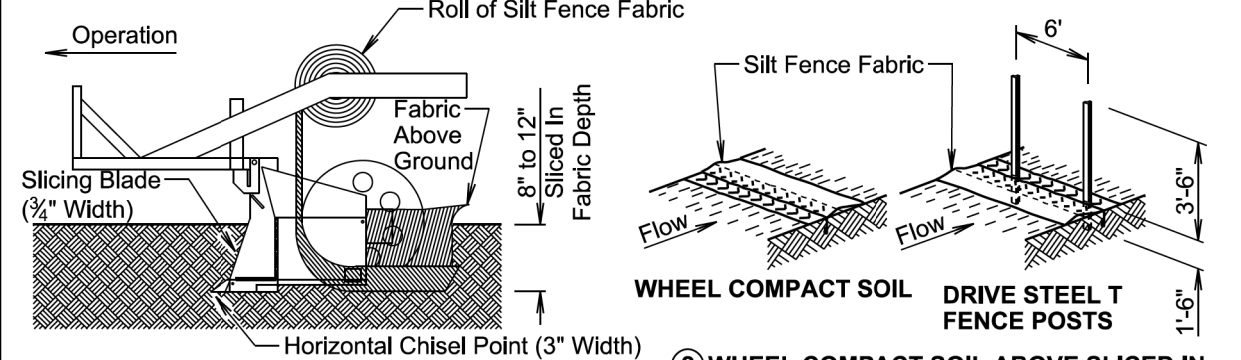

- INSTALL SILT FENCE FABRIC BY MACHINE SLICING METHOD.
- WHEEL COMPACT SOIL ABOVE SLICED IN PORTION OF FABRIC AND THEN DRIVE STEEL T FENCE POSTS.

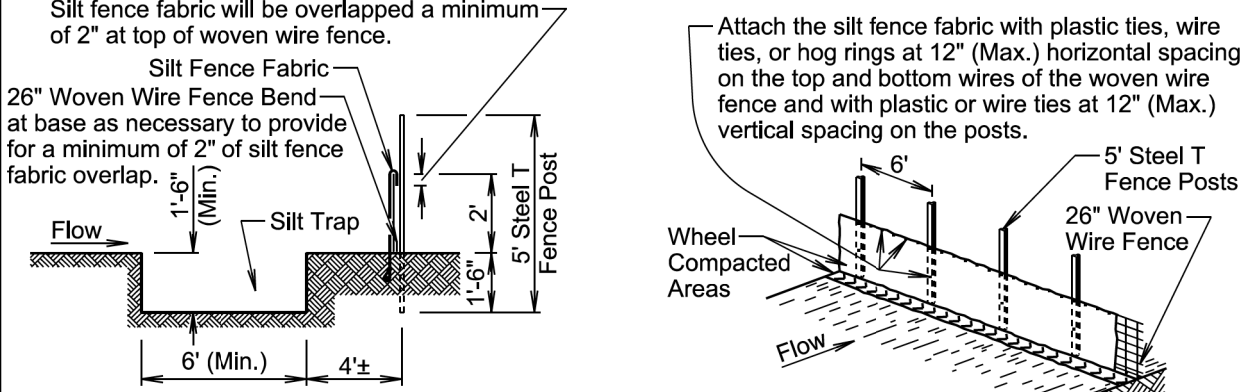

- ATTACH 26" WOVEN WIRE FENCE TO POSTS AND ATTACH SILT FENCE FABRIC.

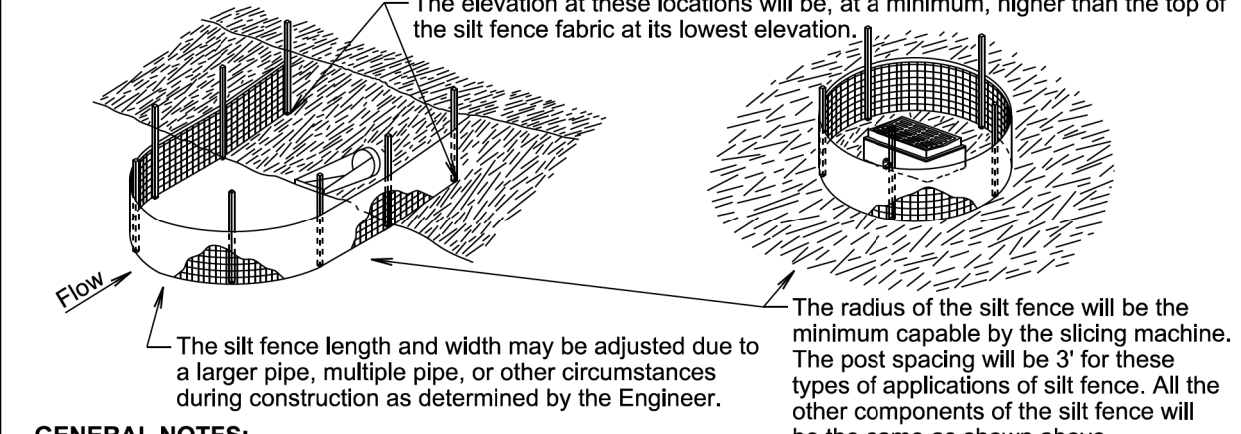

GENERAL NOTES:



A silt trap will be provided when specified by a plan note. All costs for constructing the silt trap will be incidental to the contract unit price per cubic yard for "Silt Trap".

If a trench can not be dug or the silt fence fabric can not be sliced in due to the type of earthen material (such as rock), then a row of 30 to 40 pound sandbags butted end to end will be provided on top of the extra length of silt fence fabric to prevent underflow.

February 14, 2020

Published Date: 2025	S D D O T	LOW FLOW SILT FENCE AND SILT TRAP	PLATE NUMBER 734.04
			Sheet 2 of 2

MANUAL HIGH FLOW SILT FENCE INSTALLATION

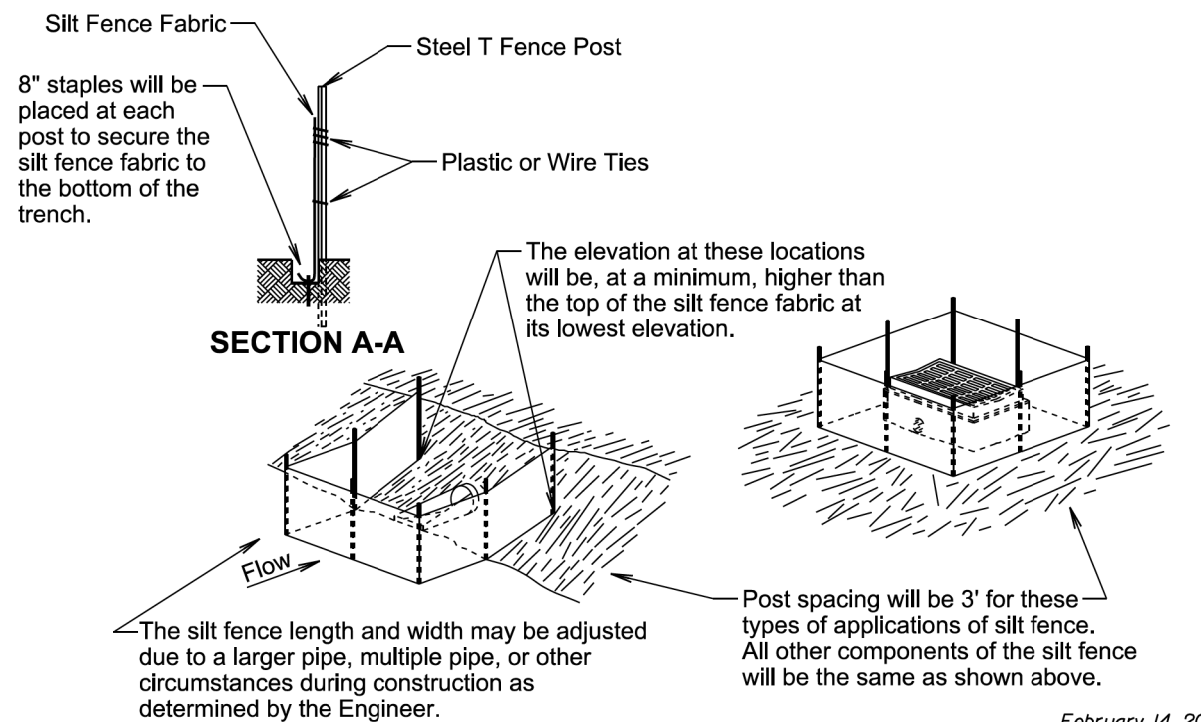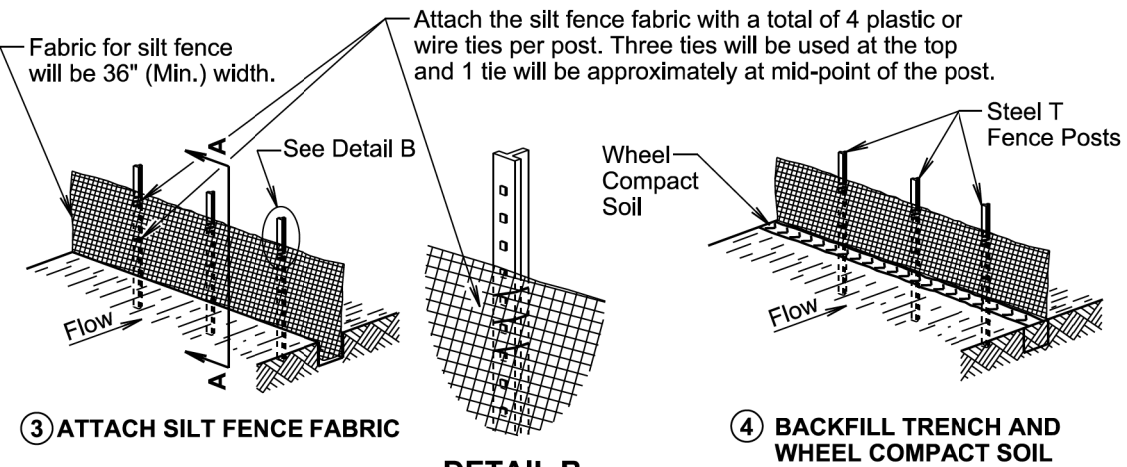

February 14, 2020

Published Date: 2025




S
D
D
O
T

HIGH FLOW SILT FENCE

PLATE NUMBER
734.05

Sheet 1 of 2

MACHINE SLICED HIGH FLOW SILT FENCE INSTALLATION

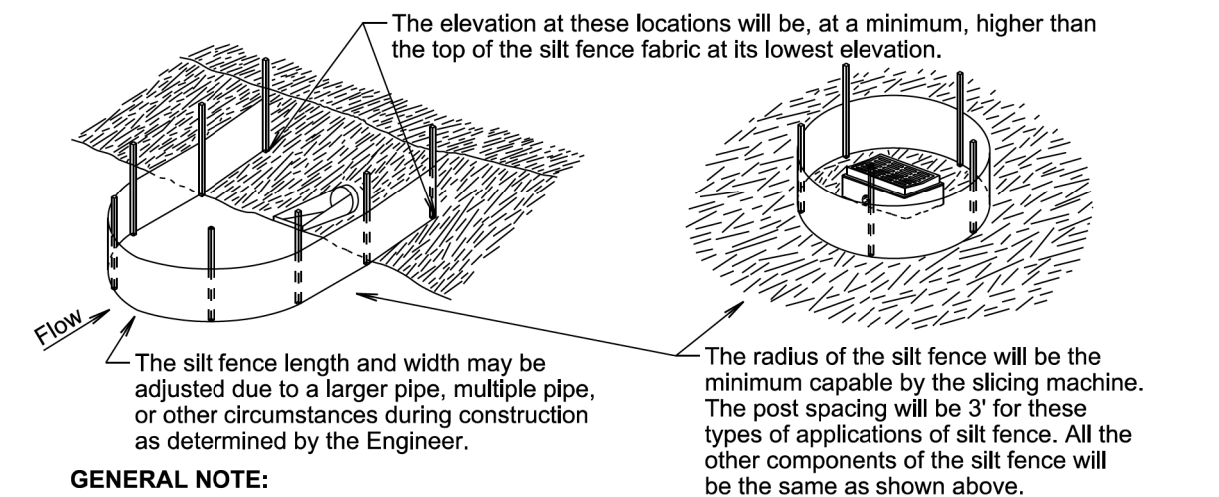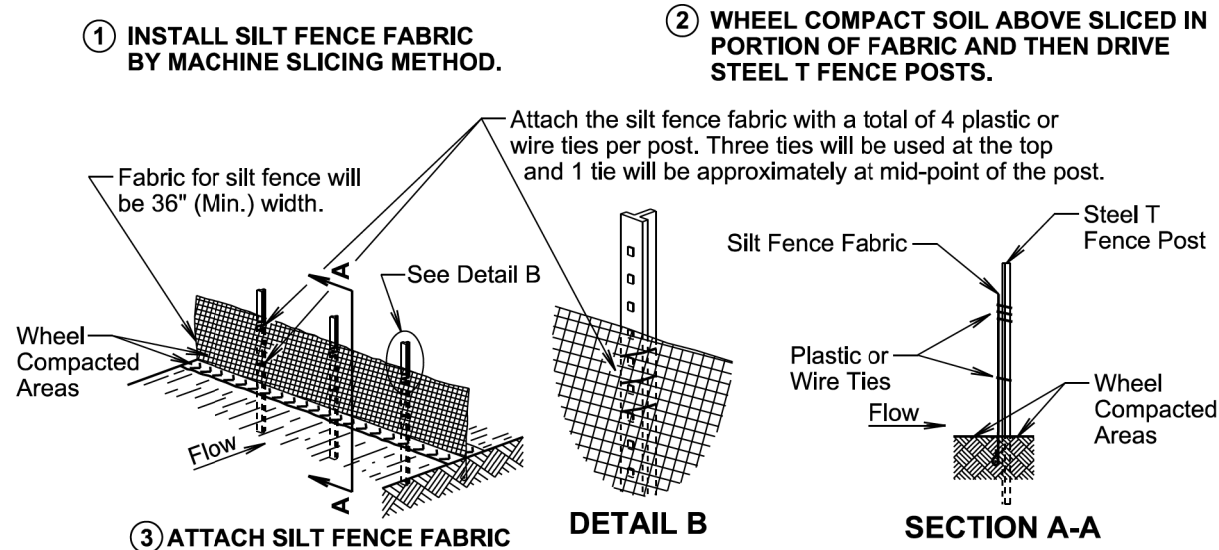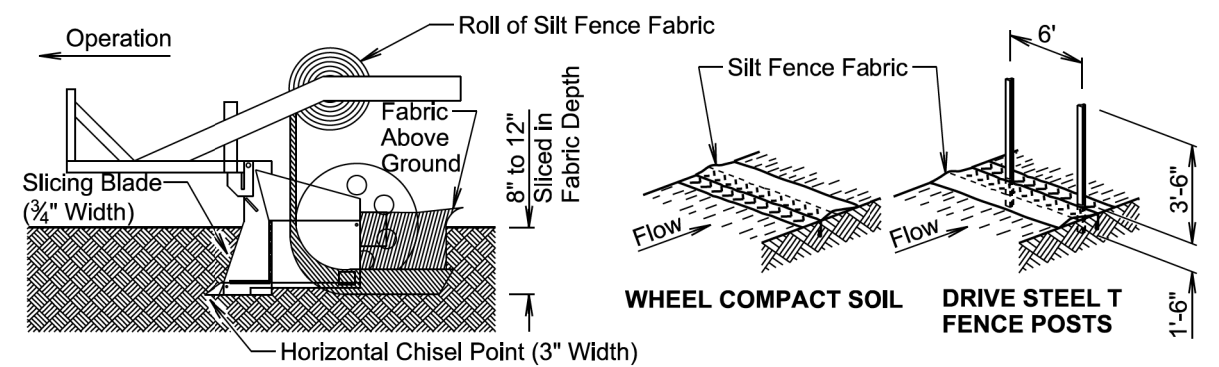

GENERAL NOTE:

If a trench can not be dug or the silt fence fabric can not be sliced in due to the type of earthen material (such as rock), then a row of 30 to 40 pound sandbags butted end to end will be provided on top of the extra length of silt fence fabric to prevent underflow.

February 14, 2020


Published Date: 2025

S
D
D
O
T

HIGH FLOW SILT FENCE

PLATE NUMBER
734.05

Sheet 2 of 2

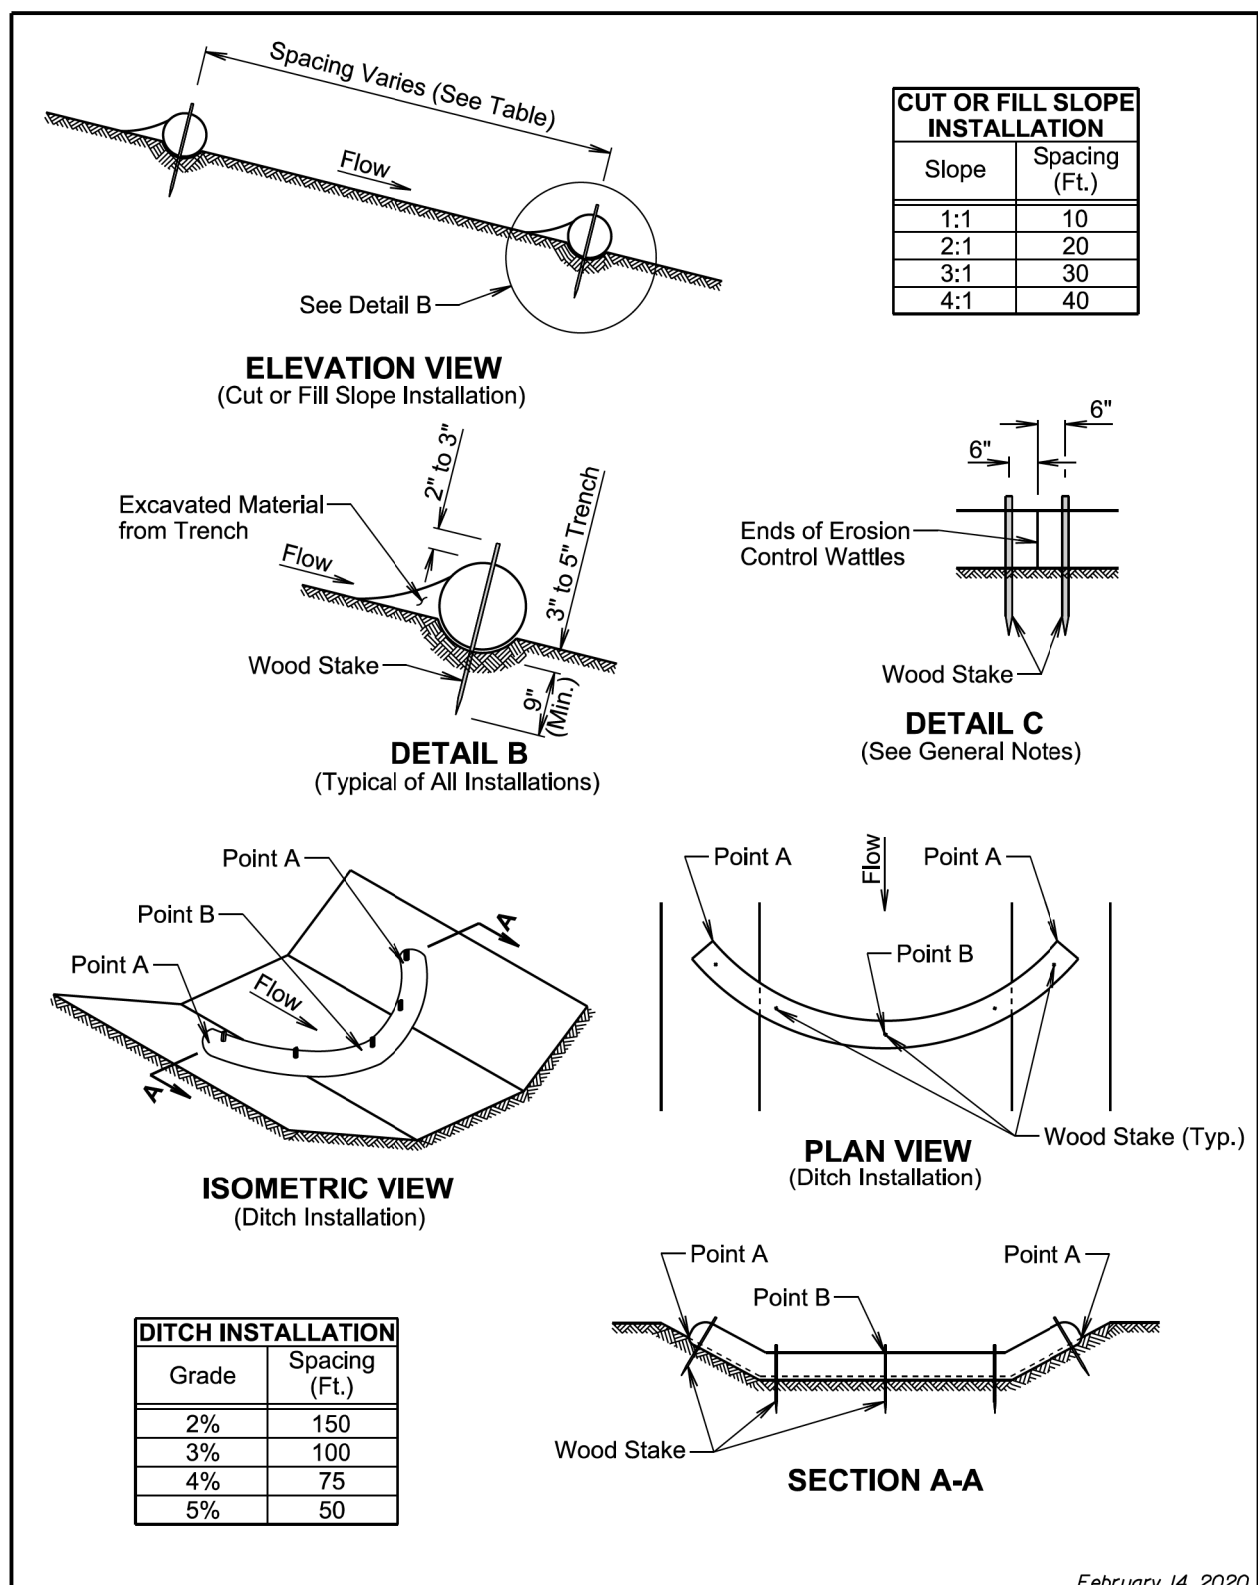

February 14, 2020

Published Date: 2025	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 1 of 2

GENERAL NOTES:

At cut or fill slope installations, wattles will be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor will dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes will be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes will be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles will be 3' to 4'.

Where installing running lengths of wattles, the Contractor will butt the second wattle tightly against the first and will not overlap the ends. See Detail C.

The Contractor and Engineer will inspect the erosion control wattles in accordance with the storm water permit. The Contractor will remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping will be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping will be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials will be incidental to the contract unit price per foot for the corresponding erosion control wattle contract item.

All costs for removing the erosion control wattle from the project including labor, equipment, and materials will be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".

February 14, 2020

Published Date: 2025	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 2 of 2

Plot Scale - 1:200

Plotted From - TRPR13525

File - ...ns73406_01s73406_02.dgn