

SECTION S: PERMANENT SIGNING PLANS


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PT 0011(145)83	S1	S12

Plotting Date: 07/16/2025

INDEX OF SHEETS

S1
S2-S3
S4
S5
S6
S7-S12

General Layout with Index
Estimate with General Notes & Tables
Sign Table
Special Sign Details
Square Steel Post Base Details
Standard Plate

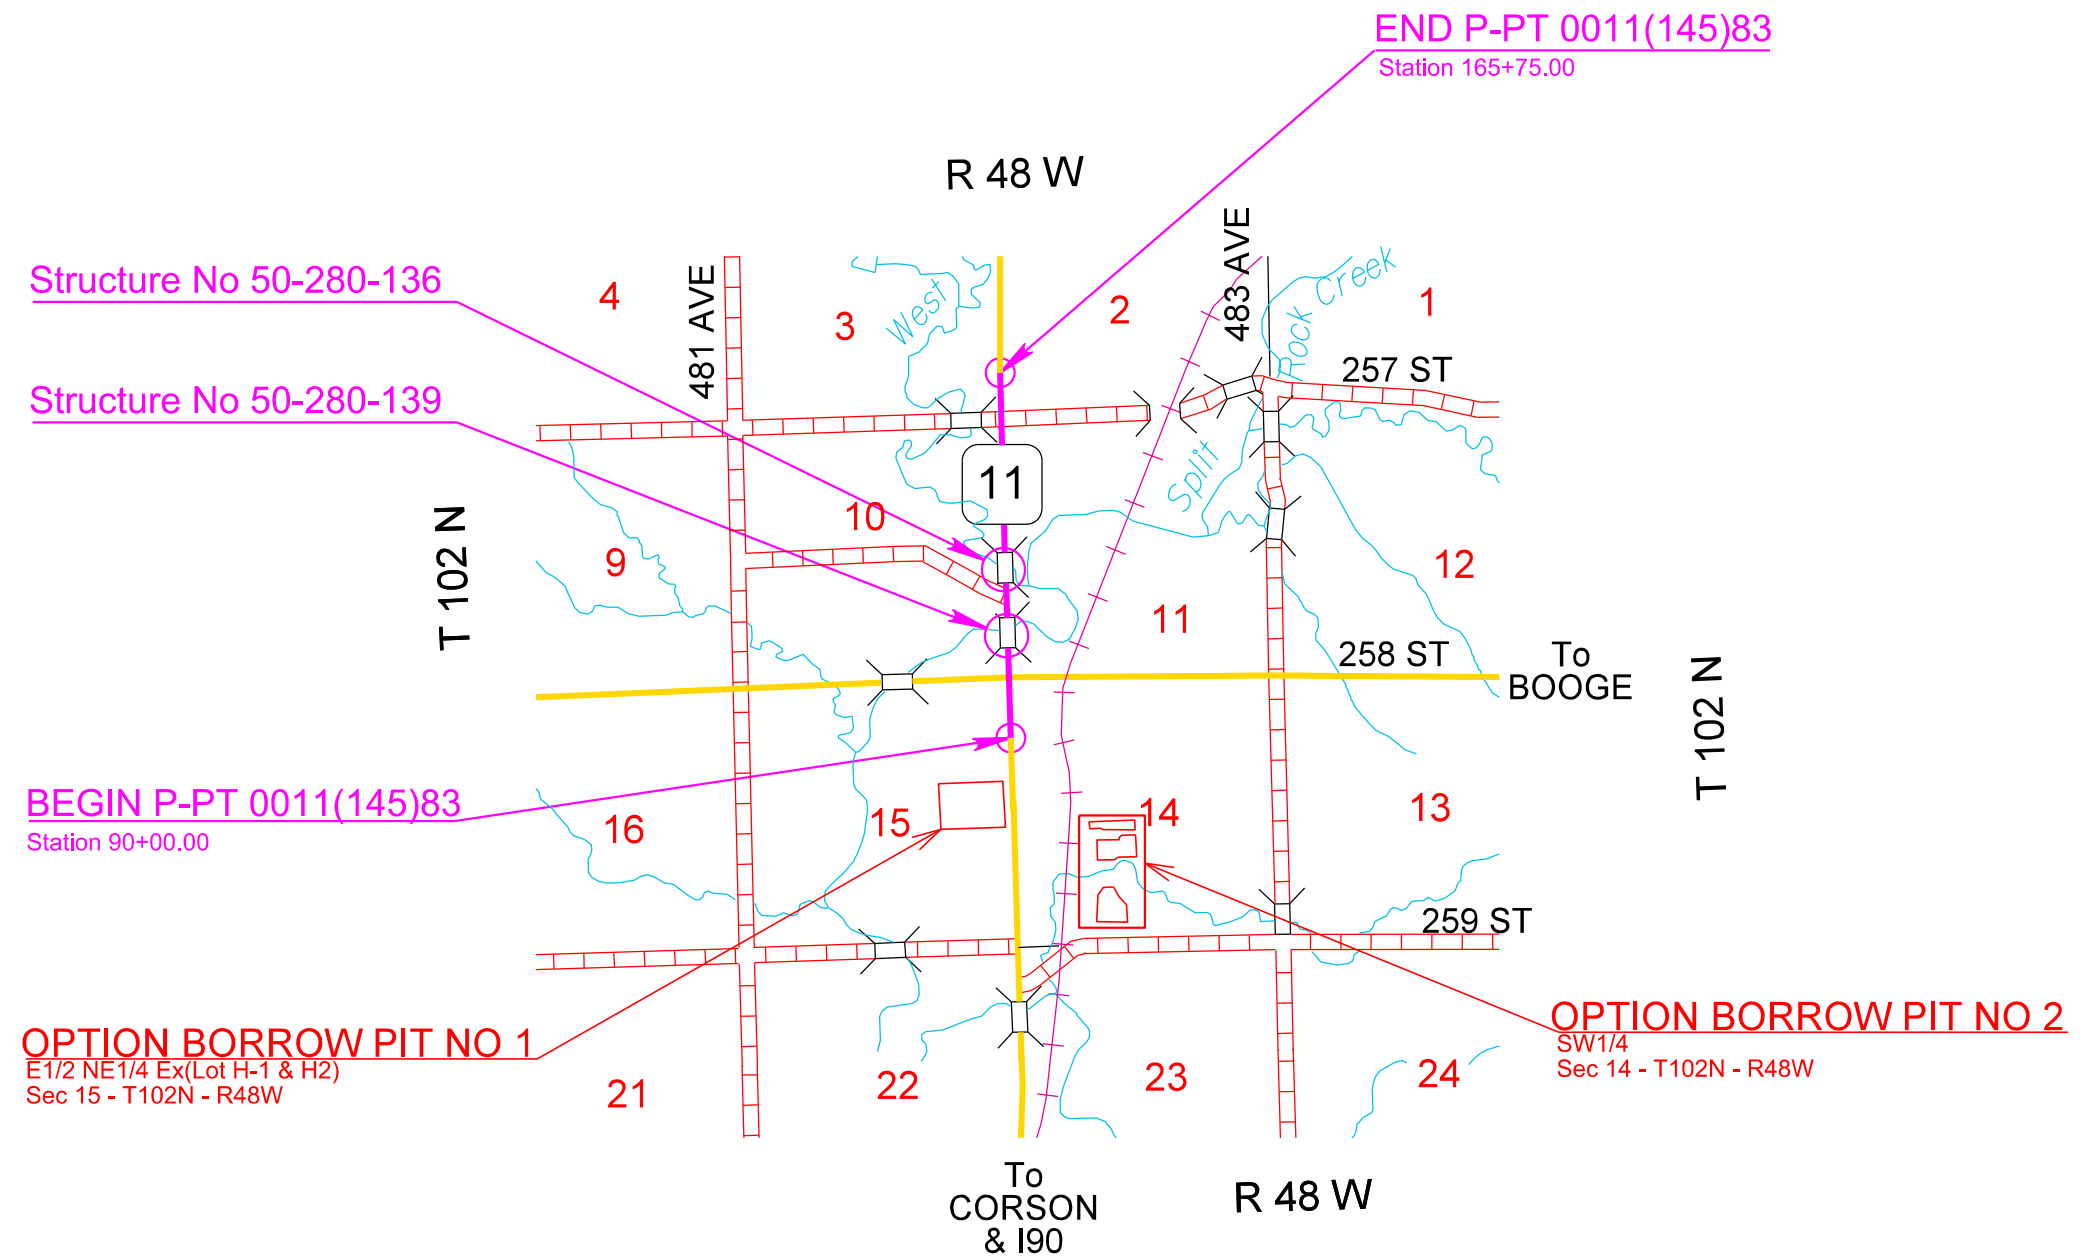

SECTION S – ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E0130	Remove Traffic Sign	8	Each
110E7150	Remove Sign for Reset	12	Each
110E7152	Remove Delineator for Reset	30	Each
632E1320	2.0"x2.0" Perforated Tube Post	222.3	Ft
632E1340	2.5"x2.5" Perforated Tube Post	27.0	Ft
632E2100	Reset Delineator	30	Each
632E2220	Guardrail Delineator	30	Each
632E2520	Type 2 Object Marker	4	Each
632E3203	Flat Aluminum Sign, Nonremovable Copy High Intensity	24.0	SqFt
632E3205	Flat Aluminum Sign, Nonremovable Copy Super/Very High Intensity	32.4	SqFt
632E3500	Reset Sign	12	Each

GENERAL PERMANENT SIGNING

New sign installations will be staked in the field by the Contractor and checked by the Engineer. The Contractor will give the Engineer a minimum of one week to check staked locations prior to signpost installation. Lateral offset of signs will be as shown in the plans or as directed by the Engineer.

The Contractor will be responsible for contacting South Dakota One Call to locate the utilities at the staked sign installation locations.

When signs are mounted in an assembly, they will be 1-2 inches apart vertically and horizontally.

The height of the post must not exceed the minimum height needed by more than 0.5 feet. Any portion that extends above the sign will be cut off. No separate payment will be made for cutting the post or for that length cut off.

Aluminum U-Channel stiffeners will be used on all signs 36 inches or greater in width and will conform to ASTM B221 Alloy 6063-T6 or 6061-T6. The U-Channel will be 2 inches in width and free of holes. The U-Channel stiffeners will also be used to connect various signs together so that an entire sign assembly can be erected on a single installation. Stiffeners may be fastened to signs by use of 1/4-inch diameter drive rivets.

The Contractor will use 3/8-inch diameter rust proof machine sign bolts, flat metal washers, neoprene washers (against the sign sheeting), lock washers, and nuts to fasten the sign to the channel aluminum and posts. A minimum of two bolts will extend through each post.

Prior to ordering signs, the Contractor will verify dimensions, background, border, and legend of the signs.

Prior to use, the Contractor will provide documentation for the sign support devices showing they meet the applicable NCHRP 350 or MASH requirements.

REMOVE TRAFFIC SIGN

Existing signs that are shown as being removed in the Permanent Signing Table will become the property of the Contractor. Existing signposts and bases will be removed in their entirety. All existing signs, posts, and/or hardware removed will not be reused. Holes remaining from the removal of wood posts will be backfilled and compacted with material placed in layers not to exceed 6 inches in depth.

All costs associated with the removal of existing signs, posts, hardware, and backfilled holes will be incidental to the contract unit price per each for “Remove Traffic Sign”. Quantities will be per assembly at the contract unit price per each.

REMOVE SIGN FOR RESET AND RESET SIGN

Signs that are scheduled for reset will be dismantled and reassembled to the extent needed by the Contractor to properly reset the sign. Signs will be handled with care so that the existing signs, posts, and bases are not damaged during the relocation process. The Contractor will replace and pay for any reset signs damaged in their care. The Contractor will remove and dispose of any existing posts for all reset signs that require use of new posts as shown in the Table of Permanent Signing.

All costs for removing, dismantling, and disposing of any existing posts will be incidental to the contract unit price per each for “Remove Sign for Reset”. All costs for resetting the existing signs will be incidental to the contract unit price per each for “Reset Sign”. All quantities for Remove Sign for Reset and Reset Sign will be per assembly at the contract unit price per each.

NEW PERMANENT SIGNING

All signs will be manufactured in accordance with the sheeting manufacturer's recommendations utilizing a matched component system, including inks, electronic cuttable films, and protective overlay films.

All Flat Aluminum Signs, Nonremovable Copy High Intensity will have sheeting in conformance with the requirements of ASTM D4956 Type IV. All Flat Aluminum Signs, Nonremovable Copy Super/Very High Intensity will have sheeting in conformance with the requirements of ASTM D4956 Type XI.

All costs associated with furnishing and installing the new permanent signs, and with furnishing and installing stiffeners and hardware will be incidental to the contract unit price per square foot for “Flat Aluminum Sign, Nonremovable Copy High Intensity” or “Flat Aluminum Sign, Nonremovable Copy Super/Very High Intensity”.

DIGITALLY PRINTED SIGNS

Digitally printed signs will be allowed on this project. If the Contractor elects to provide digitally printed signs, such signs will adhere to the following specifications.

PROTECTIVE OVERLAY FILM

Permanent traffic signs printed with digital ink systems will be fabricated with a full sign protective overlay film designed to provide a smooth surface needed for retroreflectivity, and to protect the sign from fading and UV degradation. The overlamine will comply with the retroreflective sheeting manufacturer's recommendations to ensure proper adhesion and transparency and will also meet the reflective film durability as identified in Table 1.

DIGITALLY PRINTED SIGNS (CONTINUED)

Revised, 08/05/2025(MY)

Table 1: Retroreflective Film Minimum Durability Requirements

ASTM D4956 Type	Full Sign Replacement Term (years)	Sheeting Replacement Term (years)
I	0	7
III	7	10
IV	7	10
VIII	7	10
IX	7	12
XI	7	12

FABRICATION

Retroreflective sheeting will be applied to a properly cleaned and prepared aluminum sign blank in accordance with the retroreflective sheeting manufacturer's recommendations. Sign legend will be applied using digital print technologies and systems in accordance with the retroreflective sheeting manufacturer's recommendations and the requirements of these plans.

Finished signs will be free of ragged edges and must be supplied clean and free of scratches, grease, oil, lubricants or other contaminants. Minor blemishes (dirt speck, dust, etc.) may settle on the fresh ink surface or become entrapped between the sheeting surface and transparent overlay film due to static charge within the sign shop environment. Any blemish must be minor and not interfere with the communication of the sign message to the motorist. The blemish must not be visible to the naked eye when viewed from 30 feet or greater.

After application of the retroreflective sheeting, sign blanks will be stacked and packaged face to face, back to back, and protected in accordance with the sheeting manufacturer's recommendations. Finished signs will be securely packaged to prevent damage during transit or storage according to the sheeting manufacturer's recommendations.

TRAFFIC SIGN PERFORMANCE WARRANTY PROVISIONS

Based on the ASTM Type of sheeting specified, traffic control signs will be warranted for the duration shown in Table 1. Full product terms and conditions are as established by each sheeting manufacturer and may contain certain limitations based on sheeting and ink colors, and geographic exposure of the sign. A copy of the warranty document with complete details of terms and conditions will be supplied if requested by the Engineer.

CERTIFIED DIGITAL SIGN FABRICATOR

Sign fabricators using digital imaging methods to produce regulated traffic signs must be certified by the reflective sheeting manufacturer whose materials are used to produce the delivered signs.


DATE TAGGING SIGNS WITH PERTINENT INFORMATION

All digitally printed signs are required to be date-tagged with the following 2 components:

DIGITALLY PRINTED SIGNS (CONTINUED)

1. Date tags on the back of signs
- Tags will have the following information and be fabricated with material and printing system that are as durable as the warranted sign.
- Name of Sign Fabricator
 - Date the sign was fabricated (month and year)
 - Process that was used for sign fabrication (digitally printed)
 - Supplier of sheeting that was used for fabricating the sign.

2. Border date
- The month and year (mm/yyyy) of sign fabrication will be printed in the border of the sign in 3/8” sans serif font. Border date will be printed with the same warranted printed system as the sign face. The date should be printed in the locations indicated below.

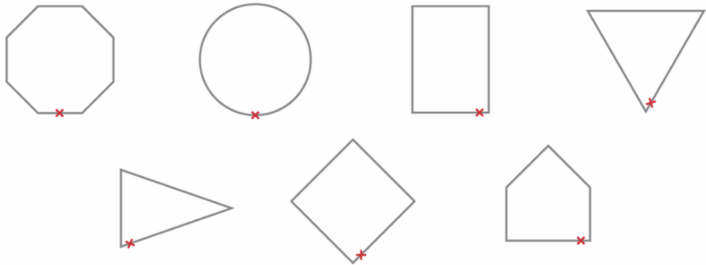

SQUARE TUBE ANCHOR SLEEVE

The Contractor will furnish and install new 2.5” x 2.5” x 18”, 12 Gauge square tube anchor sleeve or equivalent components as approved by the Engineer for 2.0” x 2.0” perforated tube posts. A 2.25” x 2.25” x 4’, 12 Gauge perforated tube post will be used as the anchor post for installation with the square tube anchor sleeve.

SQUARE TUBE POST SLEEVE

All 2.5” x 2.5”, 10 Gauge perforated tube post will be sleeved with a 2-3/16” x 2-3/16” x 4’, 10 Gauge perforated tube post.

WINGED SLIP BASE ANCHOR

The Contractor will furnish and install new winged slip base anchors for 2.5” x 2.5” perforated tube posts as required in the Permanent Signing Table. Winged slip base anchors will be installed using the direct drive method. Winged slip base anchors will consist of a slip base (upper), a 48-inch long winged anchor (lower), and a hardware kit.

SIGN TABLE

SIGN DATA											POST DATA						
MRM & OFFSET* {Ft}	REMOVE TRAFFIC SIGN ^	REMOVE SIGN FOR RESET & RESET SIGN^	DESCRIPTION	SIGN CODE	SIGN SIZE (in.)	NEW SIGN (SqFt)			SIGN FACES	COMMENTS	POST LENGTHS ⚠		BASE #	SIZE/QUANT. {Ft}			
						Type IV	Type XI				INSIDE	OUTSIDE		2.0"x2.0" TUBE	2.5"x2.5" TUBE		
SD11	110E0130	110E7150 & 632E3500			W X H	632E3203	632E3205							632E1320	632E1340		
83+0.181 -16.0' L	1{PT}		NO PASSING ZONE	W14-3	48 X 48		5.6		SOUTH	Remove existing sign & post and install new sign and post	13.0'		A	13.0			
83+0.320 -16.0' R		1{PT}		M1-6	24 X 36				SOUTH	Remove & reset signs on a new post	13.5'		A	13.5			
83+0.342 -16.0' R	1{PT}			M6-4P D9-10	24 X 18 72 X 24	12.0			SOUTH	Remove existing sign & post and install new sign and post	11.0'	11.9	A	22.9			
83.4+0.013 -32.0' L		1{PT}	STOP	R1-1	36 X 36				WEST	Remove and reset sign on a new post	12.0'		A	12.0			
83.42+0.007 -32.0' R		1{PT}	STOP	R1-1	36 X 36				EAST	Remove and reset sign on a new post	12.0'		A	12.0			
83.42+0.011 -16.0' R		1{PT}		D3-1	30 X 12 42 X 12				E/W N/S		11.0'		A	11.0			
83.42+0.145 -16.0' R		1{PT}		Special					SOUTH	Remove & reset signs on a new post	13.5'		S		13.5		
83+0.058 -16.0' L		1{PT}		M1-6	24 X 36				NORTH	Remove & reset signs on a new post	13.5'		A	13.5			
83.42+0.08 -16.0' L	1{PT}			M6-4P D9-10	24 X 18 72 X 24	12.0			NORTH	Remove existing sign & post and install new sign and post	11.0'	11.4	A	22.4			
83.65+0.00 -6.0' R		1{PT}	MRM 83.65	D10-3	4 X 15				N/S	Remove and Reset MRMs back to back	6.3'		A	6.5			
83.65+0.045 -16.0' R	1{PT}		NO PASSING ZONE	W14-3	48 X 48		5.6		NORTH	Remove existing sign & post and install new sign and post	13.0'		A	13.0			
83.65+0.162 -16.0' R		1{PT}		Special					NORTH	Remove & reset signs on a new post	13.5'		S		13.5		
83.42+0.011 -16.0' R		1{PT}		D3-1	30 X 12 48 X 12				E/W N/S	Remove & reset signs on a new post	11.0'		A	11.0			
83.65+0.181 -26.0' L	1{PT}		STOP	R1-1	30 X 30		5.2		WEST	Remove existing sign & post and install new sign and post	11.5'		A	11.5			
83.89+0.001 -6.0' R		1{PT}	MRM 83.65	D10-3	4.5 X 15				N/S	Remove and Reset MRMs back to back	6.3'		A	6.5			
84+0.001 -6.0' R		1{PT}	MRM 84	D10-3	4.5 X 15				N/S	Remove and Reset MRMs back to back	6.3'		A	6.5			
84+0.39 -32.0' L	1{PT}		STOP	R1-1	30 X 30		5.2		WEST	Remove existing sign & post and install new sign and post	11.5'		A	11.5			
84+0.401 -32.0' R	1{PT}		STOP	R1-1	30 X 30		5.2		EAST	Remove existing sign & post and install new sign and post	11.5'		A	11.5			
84+0.405 -16.0' R		1{PT}		D3-1	30 X 12 42 X 12				E/W N/S	Remove & reset signs on a new post	11.0'		A	11.0			
84+0.423 -16.0' L	1{PT}		NO PASSING ZONE	W14-3	48 X 48		5.6		SOUTH	Remove existing sign & post and install new sign and post	13.0'		A	13.0			
	8	12	05V6 TOTALS			24.0	32.4							222.3	27.0		


* - Offset measured from edge of the shoulder to post of Sign.

- (S)lip Base, (A)nchor Stub Post


^ -Number and type- [{U}-Channel {W}ood {PT} Perforated Tube {LP} Light Pole]- of support(s)

X -Plan post lengths are estimates. The post lengths will be field verified by the Contractor.

Flat Aluminum Sign Detail - High Intensity Sheeting Type (IV)

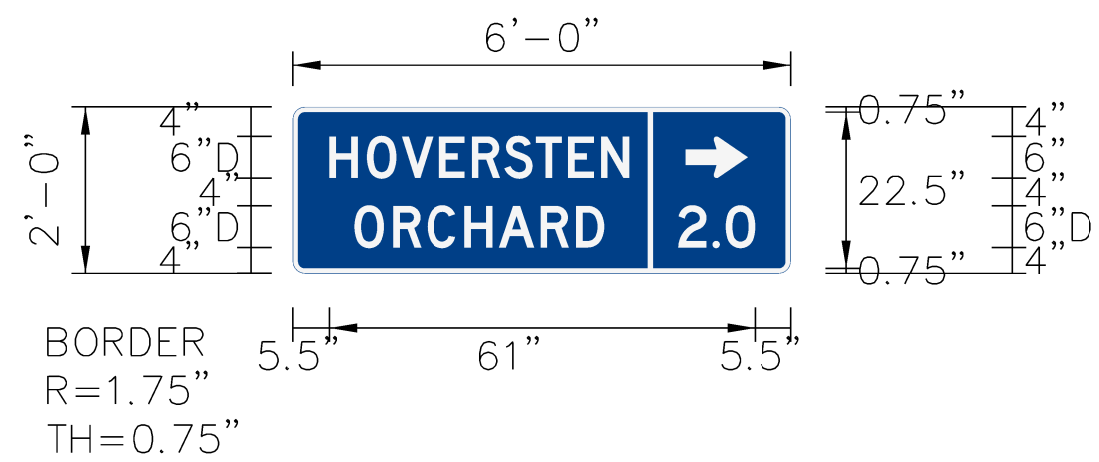


Panel Style: guide_con_general_services.ssi
M.U.T.C.D.: 2009 Edition

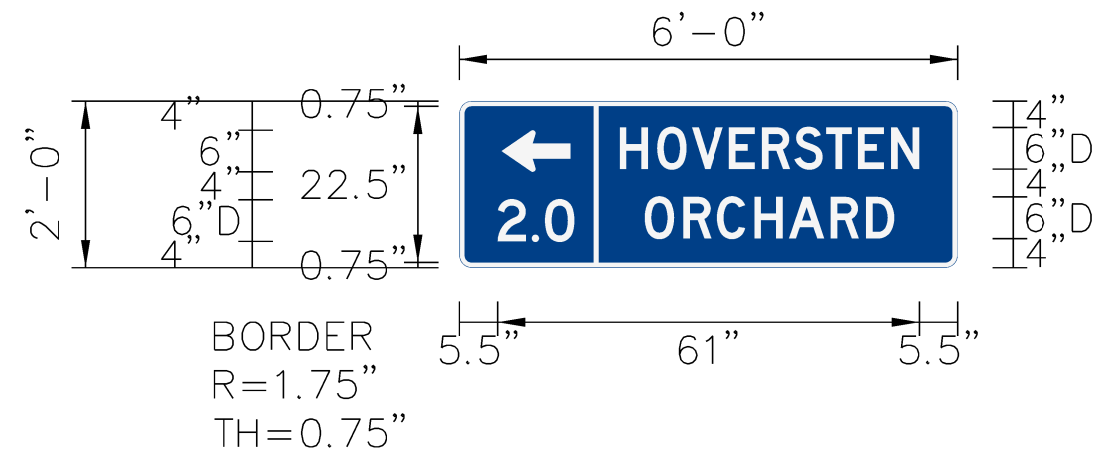


Panel Style: guide_con_general_services.ssi
M.U.T.C.D.: 2009 Edition


2" SQUARE STEEL PERFORATED TUBE POST WINGED SLEEVE ANCHOR BASE DETAILS (Typical)

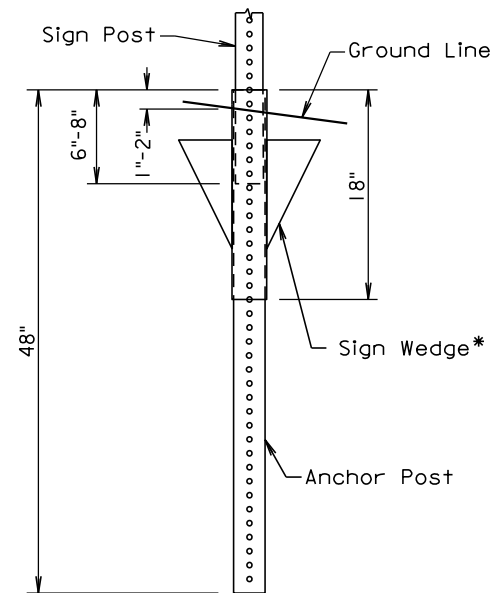

* - 18" Multi-directional Sleeve w/4 Blades, or Equivalent.
Manufacturer Recommended Dimensions and Installation.


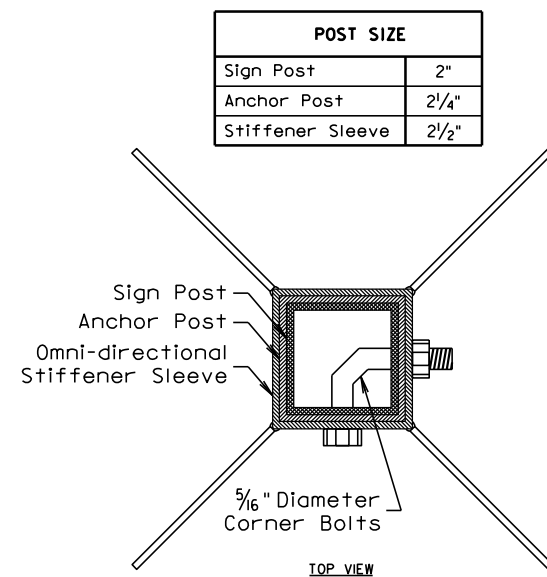


2 1/2" SQUARE STEEL PERFORATED TUBE POST WINGED BREAKAWAY ANCHOR DETAILS FOR SOIL INSTALLATIONS (Typical)

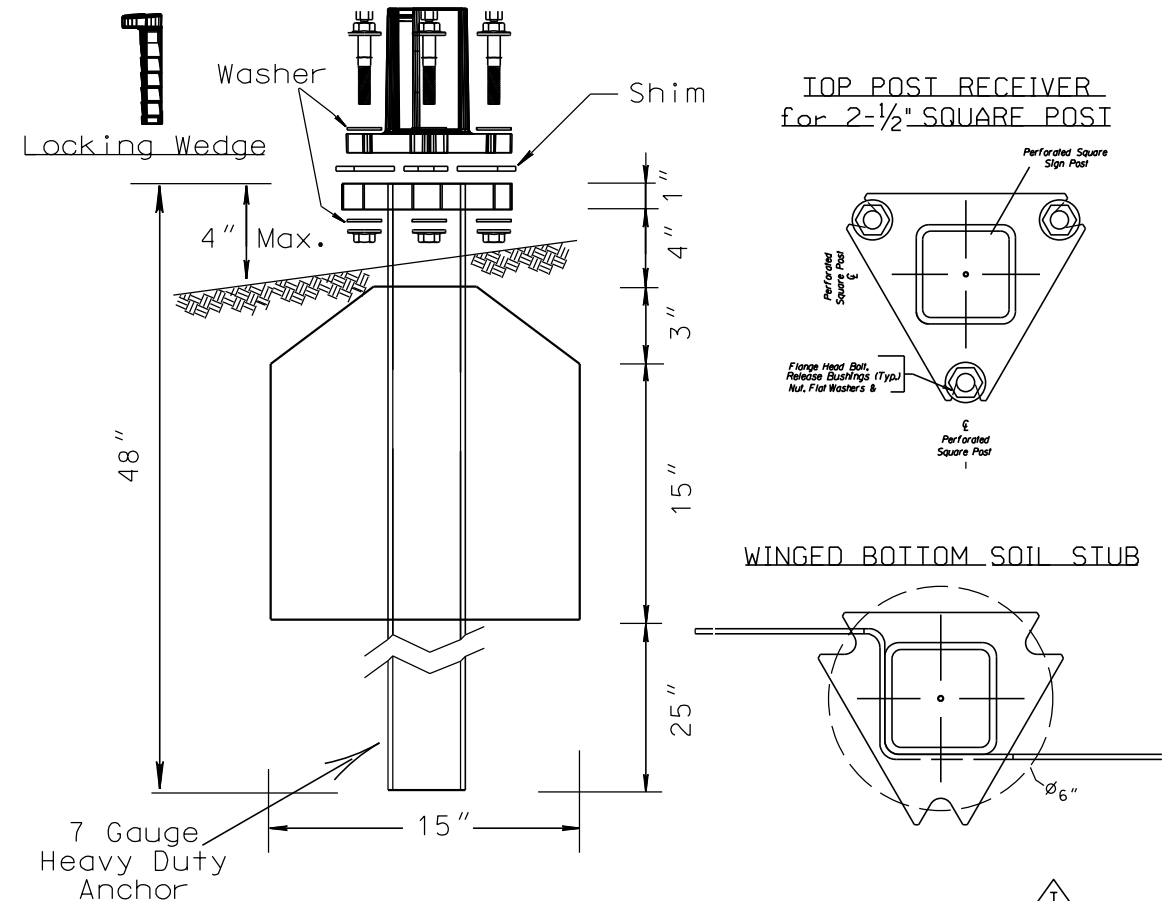


GENERAL NOTES:

1. Dimensions shown may vary by Manufacturer.
2. The Contractor must use Manufacturer recommended assembly parts and procedures.
3. Sign installations must meet MASH breakaway requirements.
4. All posts must be galvanized in accordance with ASTM A653
5. All hardware must be galvanized in accordance with ASTM A153

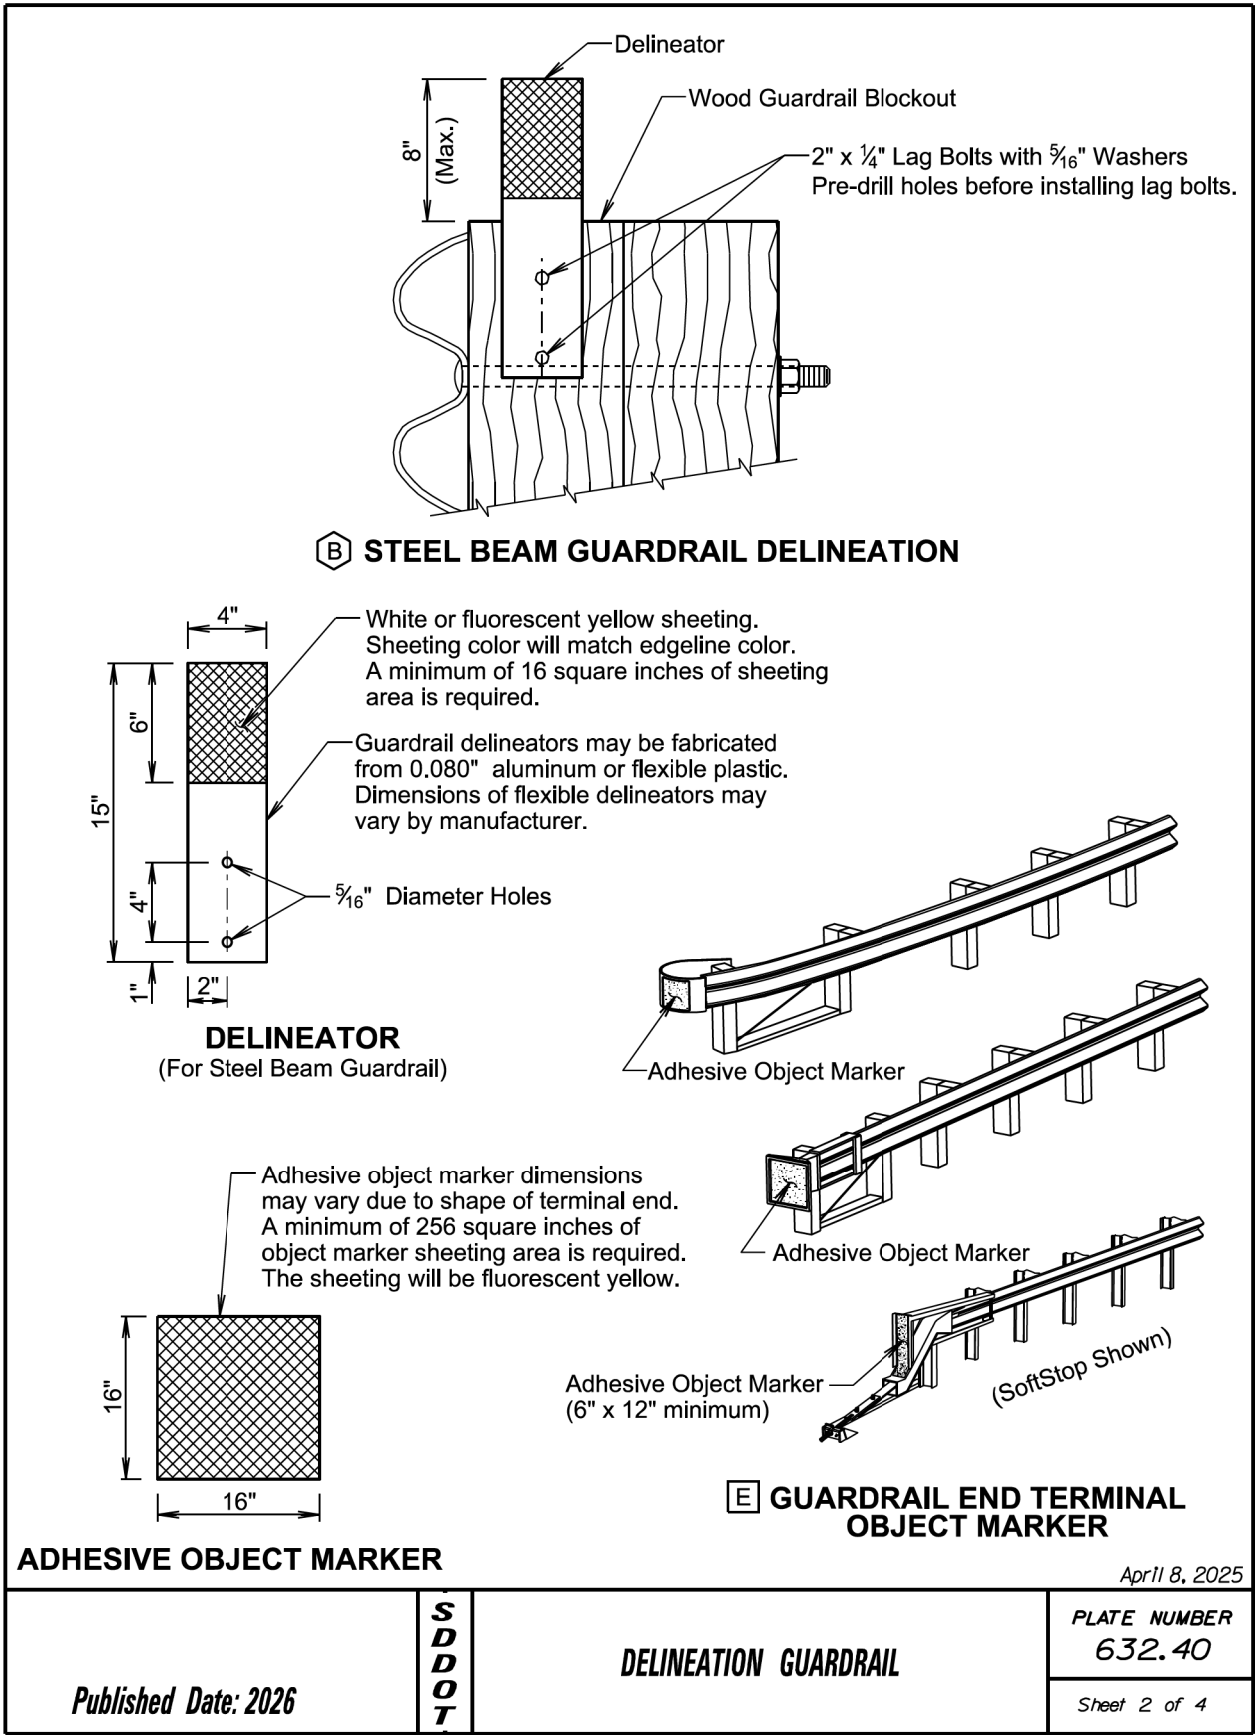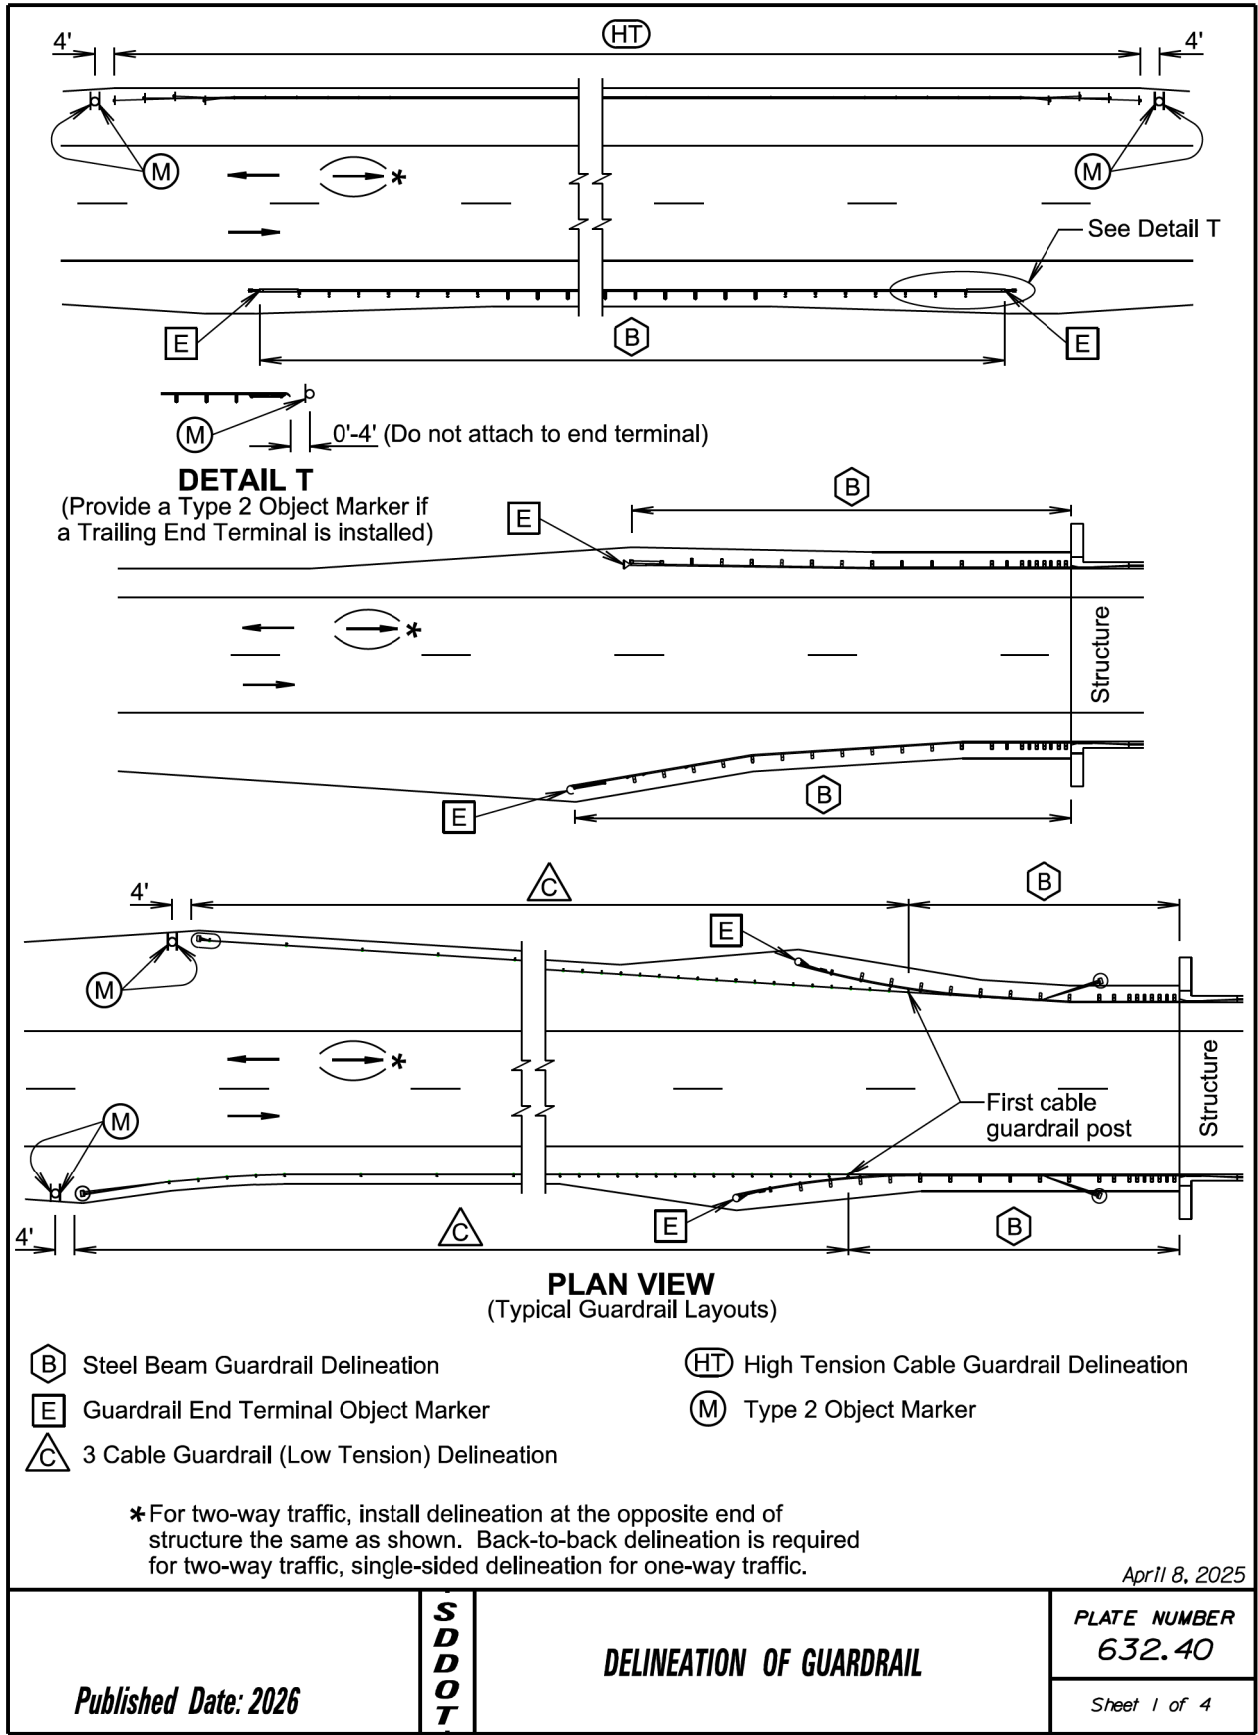

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PT 0011(145)83	S8	S12

Plotting Date: 07/15/2025

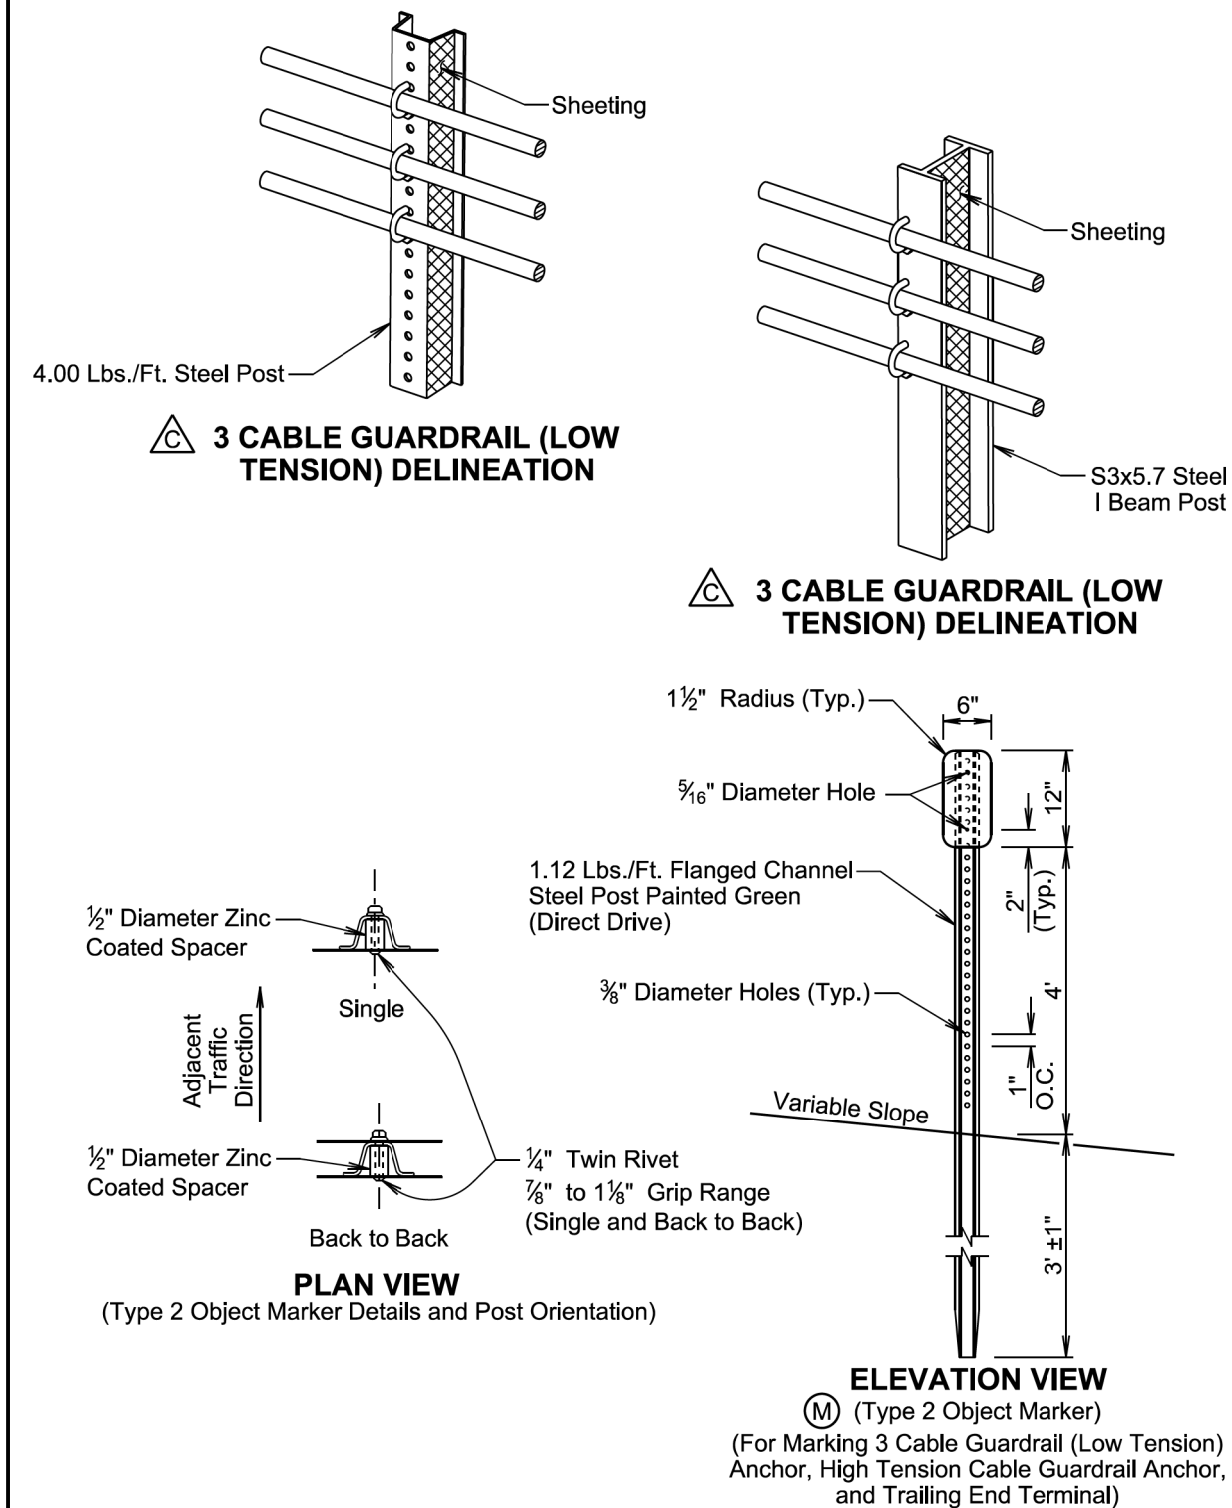

April 8, 2025

Published Date: 2026	S D D O T	DELINEATION OF GUARDRAIL	PLATE NUMBER 632.40
			Sheet 3 of 4

GENERAL NOTES:

The delineation of high tension cable guardrail will be reflective sheeting placed back to back on every third post cap or cable spacer. Maximum spacing of delineation will not exceed 35 feet. The sheeting will be type XI in conformance with ASTM D4956. The color of the reflective sheeting will be the same as the nearest pavement marking.

The delineators for steel beam guardrail and sheeting on 3 cable guardrail (low tension) posts will be covered with a minimum of 16 square inches of reflective sheeting. The reflective sheeting will be type XI in conformance with ASTM D4956. Along two-way roadways the sheeting will be on both sides of the delineators and guardrail posts and will be white in color. For one-way roadways the sheeting will only be required on the side facing traffic and the color will be the same as the nearest pavement marking, yellow on the left side of the roadway and white on the right side.

When steel beam guardrail is attached to a bridge the first delineator will be attached to the post nearest the bridge.

At bridges with guardrail less than 200 feet in length, a minimum of 4 delineators will be placed in addition to the end terminal yellow object marker. The spacing between the delineators will be approximately one third of the length of the guardrail.

At bridges with guardrail 200 feet and greater in length, including bridges that have steel beam guardrail transitioning to 3 cable guardrail (low tension), the delineators will be placed at a spacing of approximately 50 feet. Delineation will extend throughout the length of the guardrail system.

Steel beam guardrail that is not attached to a bridge and is less than 200 feet in length, a minimum of 4 delineators will be placed in addition to the end terminal yellow object markers. The spacing between the delineators will be approximately one third of the length of the guardrail.

Steel beam guardrail that is not attached to a bridge and is 200 feet and greater in length, including steel beam guardrail transitioning to 3 cable guardrail (low tension), the delineators will be placed at a spacing of approximately 50 feet. Delineation will extend throughout the length of the guardrail system.

All costs for furnishing and installing single or back to back guardrail delineation on 3 cable guardrail and steel beam guardrail will be included in the contract unit price per each for "Guardrail Delineator".

All costs for furnishing and installing the reflective sheeting on the cable spacers or post caps for the high tension cable guardrail will be incidental to the respective high tension cable guardrail contract item.

An adhesive object marker will be placed on the end of the W beam guardrail or MGS end terminal. The adhesive object marker dimensions may vary due to the shape of the terminal end. A minimum of 256 square inches of object marker reflective sheeting area is required on end terminals with sufficient surface area. Other end terminals (SoftStop) will require an adhesive object marker with a minimum size of 6" x 12". The reflective sheeting will be fluorescent yellow type XI sheeting in conformance with ASTM D4956. All costs for furnishing and installing the adhesive object marker will be incidental to various contract items.


A type 2 object marker will be placed such that the edges of the type 2 object marker and the 3 cable guardrail (low tension) anchor, high tension cable guardrail anchor, or the trailing end terminal that are nearest to the roadway will be installed in line with the same lateral offset from the traveled way at the location as noted on sheet 1 of this standard plate. The type 2 object marker (6" x 12") will have fluorescent yellow type XI sheeting in conformance with ASTM D4956. All costs for furnishing and installing the type 2 object marker including the steel post, 6" x 12" reflective panel, and hardware will be included in the contract unit price per each for "Type 2 Object Marker" for single-sided and "Type 2 Object Marker Back to Back" for back to back type 2 object markers.

April 8, 2025

Published Date: 2026	S D D O T	DELINEATION OF GUARDRAIL	PLATE NUMBER 632.40
			Sheet 4 of 4

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PT 0011(145)83	S9	S12

Plotting Date: 07/15/2025


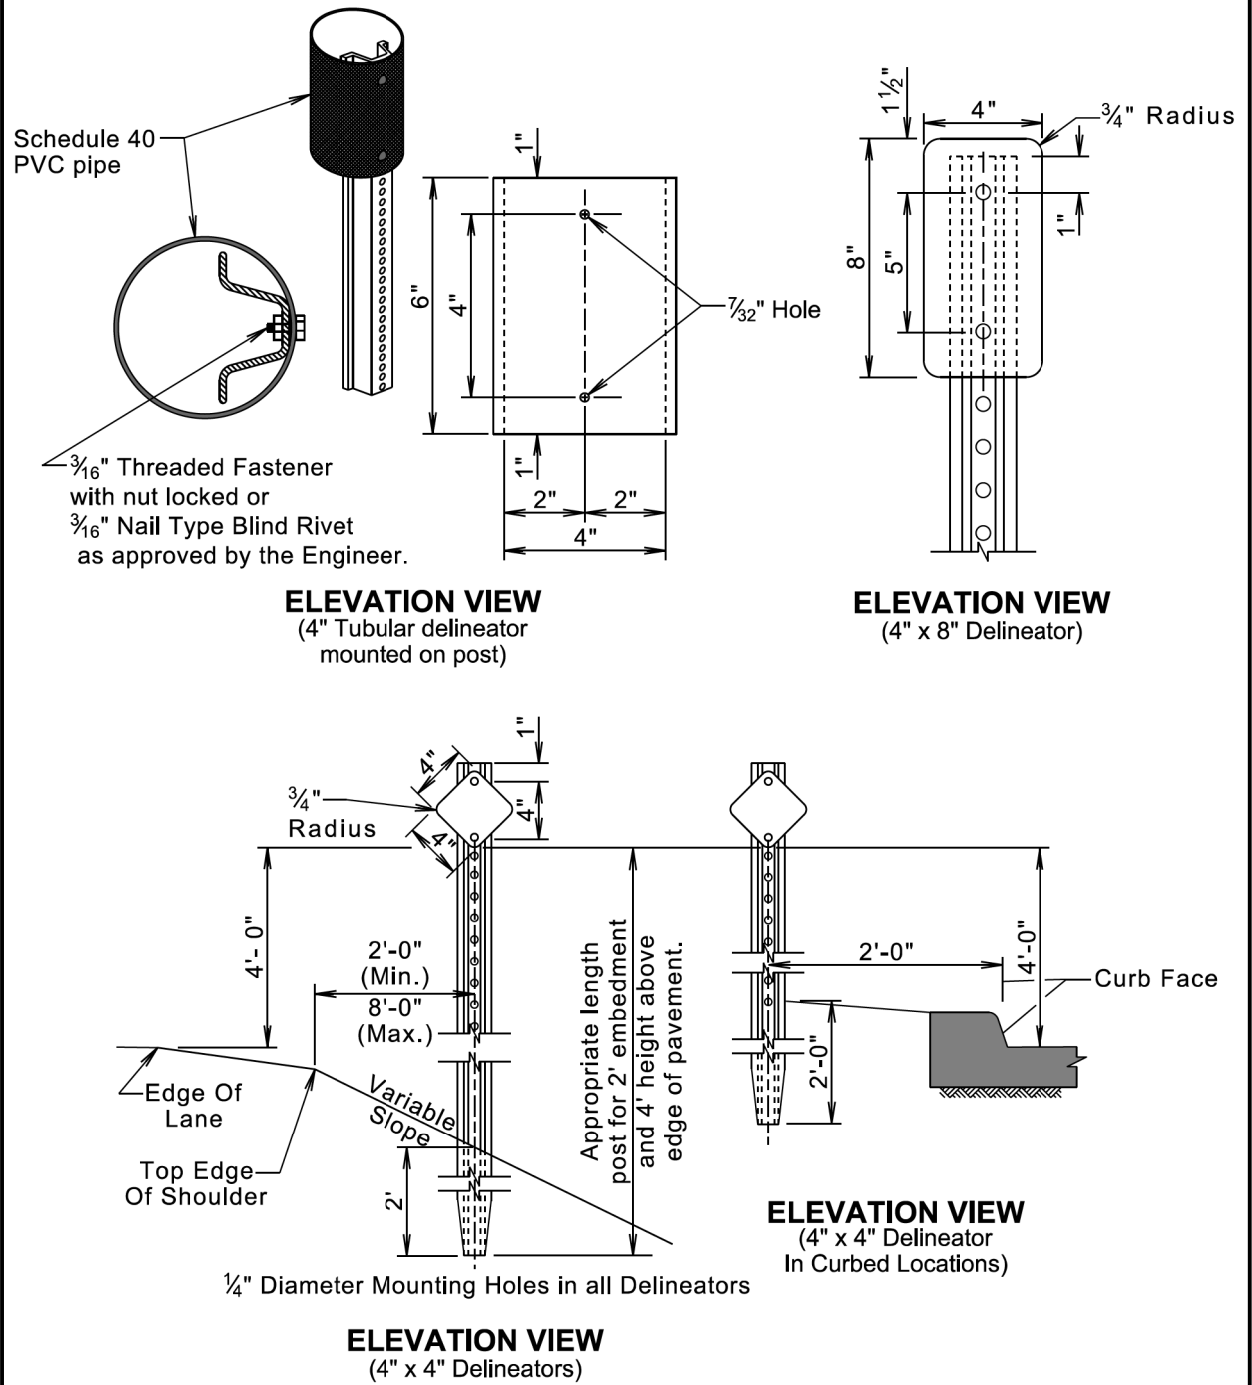


GENERAL NOTES:

Back-to-back delineation is required for two-way traffic, single-sided delineation for one-way traffic.

March 31, 2024

Published Date: 2026	S D D O T	DELINEATOR INSTALLATION DETAIL	PLATE NUMBER 632.42
			Sheet 1 of 1

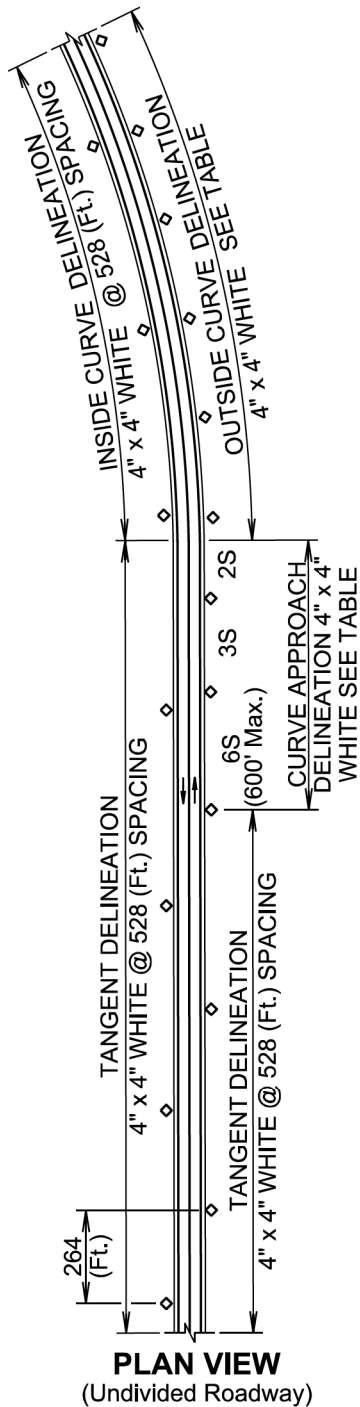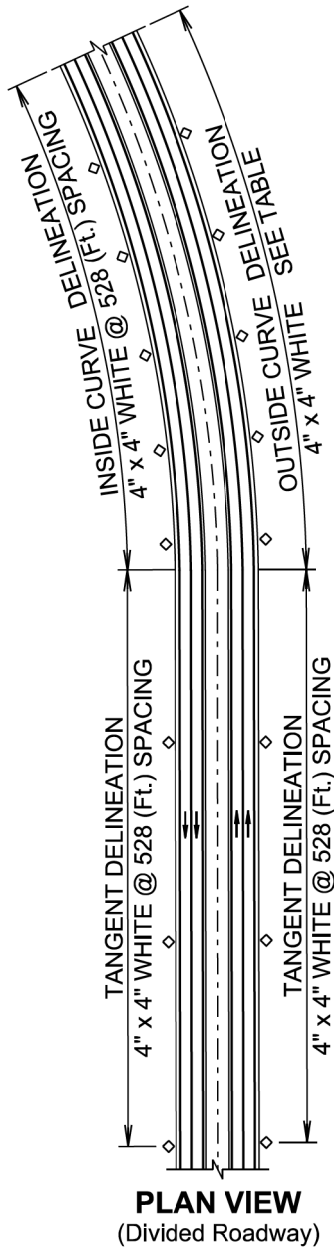

March 31, 2024

<i>Published Date: 2026</i>	S D D O T	DELINEATOR INSTALLATION SPACING	PLATE NUMBER 632.46
			Sheet 1 of 2

GENERAL NOTES:

Delineators will be located from 2 to 8 feet outside of the outer edge of shoulder. When a roadside barrier or other obstruction intrudes into the space between the pavement edge and the extension of the line of delineators, the delineators should be in line with the barrier or in line with the innermost edge of the obstruction.

When normal spacing is interrupted by driveways, crossroads, or approaches, delineators falling within such areas may be moved in either direction a distance not exceeding one-quarter of the standard spacing. Delineators still falling within such areas should be eliminated.

The spacing for specific radii may be interpolated from the table. The minimum spacing should be 20 feet. The spacing on curves should not exceed 300 feet. In advance of or beyond a curve, and proceeding away from the end of the curve, the spacing of the first delineator is 2S, the second 3S, and the third 6S, but not to exceed 300 feet. S refers to the delineator spacing for specific radii computed from the formula $S = 3\sqrt{R - 50}$. The distances for S shown in the table were rounded to the nearest 5 feet.

Curve approach delineation is not required if curve delineation spacing exceeds 100 ft.

Back-to-back delineation is required for two-way traffic, single-sided delineation for one-way traffic.




DELINEATOR SPACING OUTSIDE CURVE				
Radius of Curve (Ft.)	Curve Delineator Spacing (Ft.)	Curve Approach Spacing (Ft.)		
		A	B	C
50	20	40	65	125
115	25	50	75	150
150	30	60	90	180
180	35	70	110	215
250	40	85	125	250
300	45	95	140	285
400	55	110	170	300
500	65	125	190	300
600	70	140	210	300
700	75	150	230	300
800	80	165	245	300
900	85	175	260	300
1000	90	185	275	300

March 31, 2024

<i>Published Date: 2026</i>	S D D O T	DELINEATOR INSTALLATION SPACING	PLATE NUMBER 632.46
			Sheet 2 of 2

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-PT 0011(145)83	S11	S12


Plotting Date: 07/15/2025

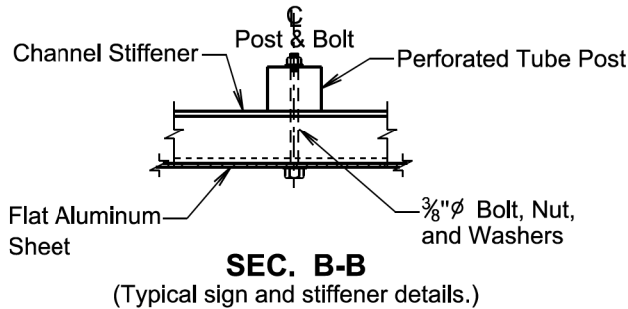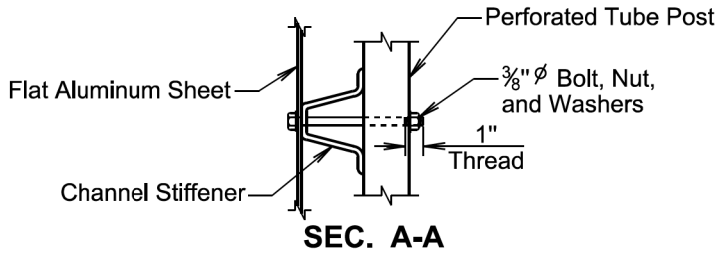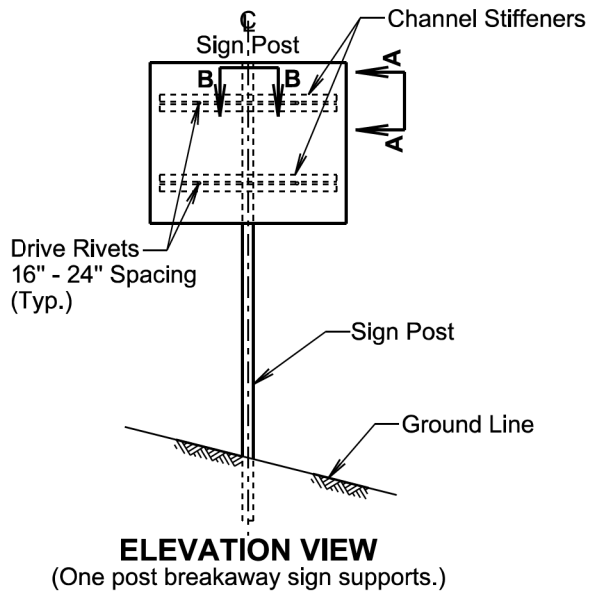

Ø A plastic washer, as recommended by the sheeting manufacturer, will be installed between the sign face and the metal washer shown.

November 19, 2020

Published Date: 2026	S D D O T	SIGN STIFFENER DETAILS	PLATE NUMBER 632.60
			Sheet 1 of 2

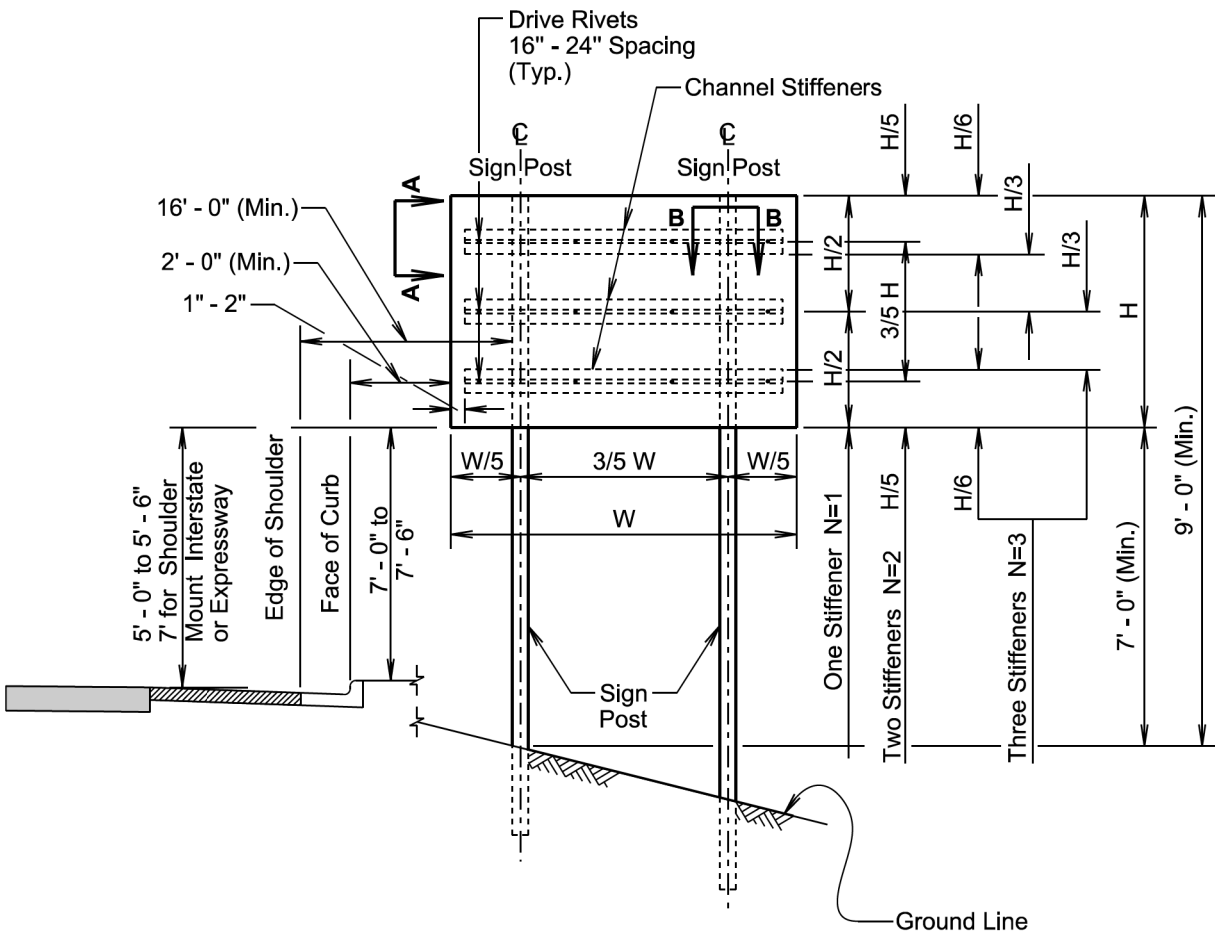

TWO POST BREAKAWAY SIGN SUPPORTS

GENERAL NOTES:

The number of stiffeners used (N) will be as follows:
If $H \leq 2' - 0''$ then $N = 1$
if $2' - 0'' < H \leq 8' - 0''$ then $N = 2$
if $8' - 0'' < H \leq 15' - 0''$ then $N = 3$
where H is the vertical dimension of the sign.

A minimum of two bolts will be required to fasten the sign to each post.

November 19, 2020

Published Date: 2026	S D D O T	SIGN STIFFENER DETAILS	PLATE NUMBER 632.60
			Sheet 2 of 2

