


SECTION D: EROSION AND SEDIMENT CONTROL PLANS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D1	D30

Plotting Date: 07/29/2026

INDEX OF SHEETS

- D1 General Layout with Index
- D2-D5 Estimate with General Notes and Tables
- D6-D9 Stormwater Pollution Prevention Plan Checklist
- D10 Erosion and Sediment Control Legend
- D11-D25 Erosion and Sediment Control Plan Sheets
- D26 Dewatering and Sediment Collection System Details
- D27 SDDOT Construction Entrance Details
- D28-D30 Standard Plates

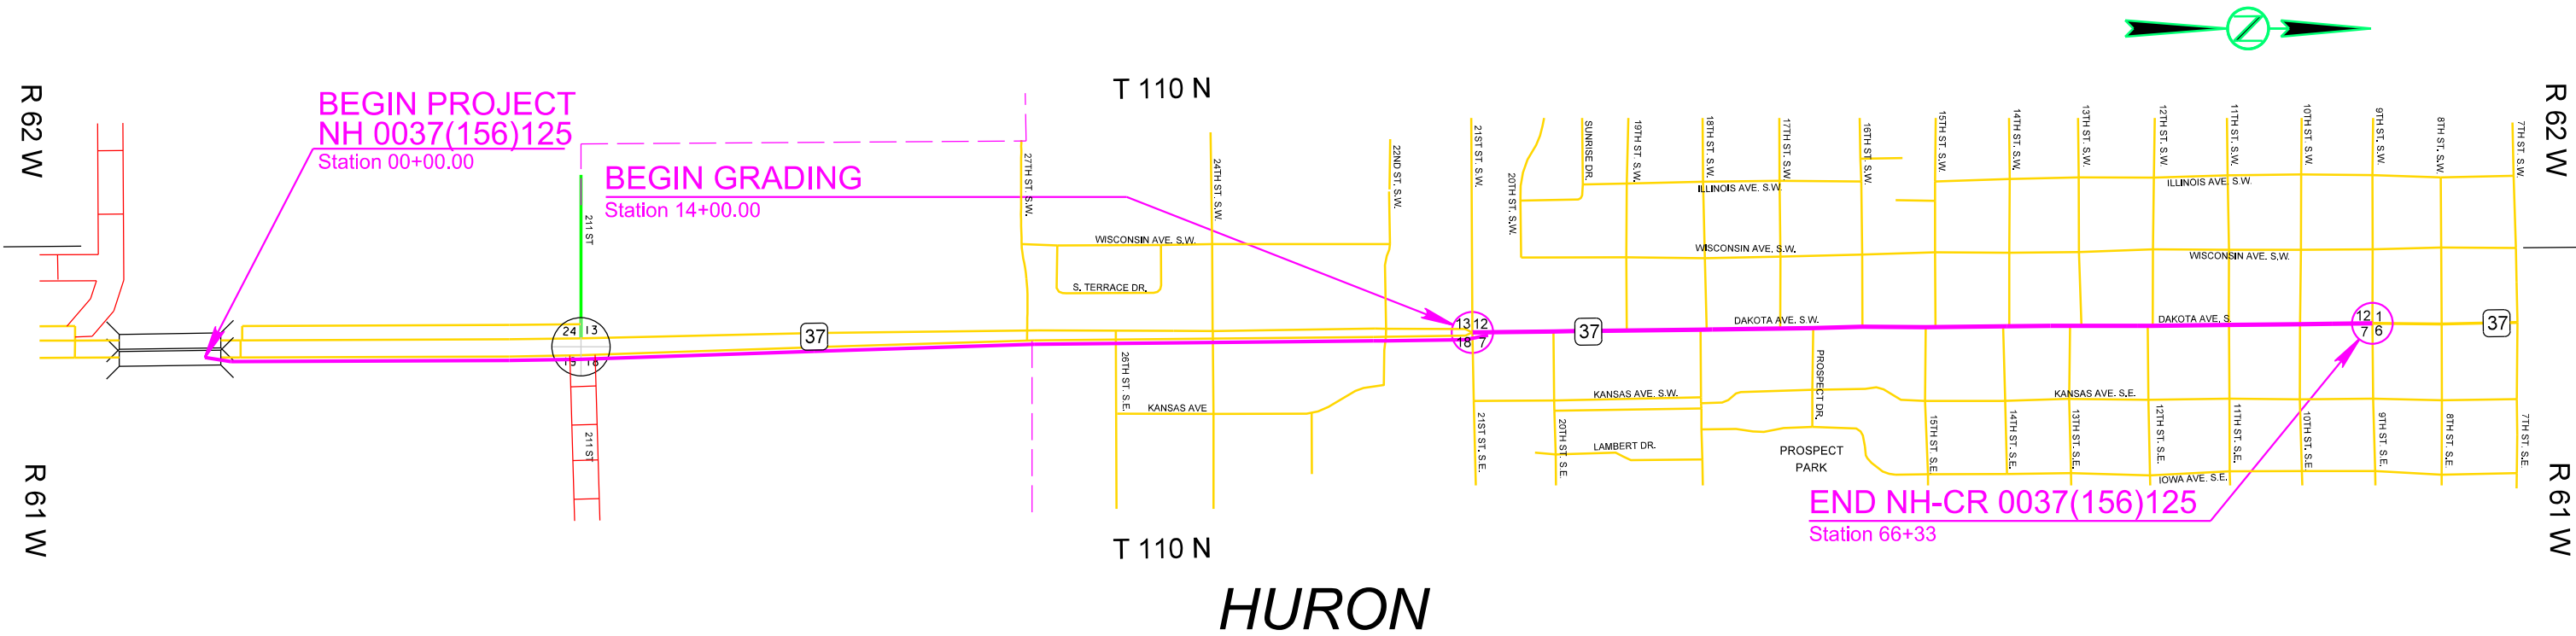

Plot Scale - 1:200

Plotted From - TRPR17200

1:200
Plot Scale -

Plotted From -
TRPR17200

SECTION D ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E1690	Remove Sediment	24.8	CuYd
110E1695	Remove Sediment Filter Bag	3,144	Ft
110E1700	Remove Silt Fence	3,312	Ft
120E6300	Water for Vegetation	494.8	MGal
230E0010	Placing Topsoil	3,665	CuYd
730E0206	Type D Permanent Seed Mixture	2,078	Lb
731E0200	Fertilizing	5.05	Ton
732E0200	Fiber Mulching	6.8	Ton
734E0170	Temporary Sediment Barrier	500	Ft
734E0180	Sediment Filter Bag	3,144	Ft
734E0604	High Flow Silt Fence	3,312	Ft
734E0610	Mucking Silt Fence	230	CuYd
734E0620	Repair Silt Fence	828	Ft
734E0845	Sediment Control at Inlet with Frame and Grate	82	Each
734E0847	Sediment Control at Type S Reinforced Concrete Drop Inlet	64	Ft
734E5005	Dewatering	Lump Sum	LS
734E5010	Sweeping	15	Hour
900E1320	Construction Entrance	2	Each

PLACING TOPSOIL

The thickness will be approximately 4 inches within the right-of-way and 4 inches on temporary easements.

The estimated amount of topsoil to be placed is as follows:

Station	to	Station	Topsoil (CuYd)
100+00		179+50	3,033
16+00		22+00	46
22+00		28+00	80
28+00		34+00	41
34+00		40+00	27
40+00		46+00	83
46+00		52+00	147
52+00		58+00	115
58+00		64+00	78
64+00		66+00	15
Total:			3,665

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum will consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier will provide certification of the fungal species claimed and the live propagule count. The inoculum will include a minimum 25% the fungal species *Rhizophagus intraradices*. The remaining 75% may include other endomycorrhizal fungal species.

All seed will be inoculated by the seed supplier with a minimum of 20,000 live propagules of mycorrhizal fungi per 1,000 square feet. All costs of inoculating the seed will be incidental to the contract unit price per pound for the corresponding permanent seed mixture.

The Mycorrhizal Inoculum provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

FERTILIZING

The Contractor will apply an all-natural slow release fertilizer prior to seeding or placing sod. The all-natural fertilizer will have a minimum guaranteed analysis of 4-4-4 and be USDA Certified BioBased. It should provide a minimum of 4% (N) nitrogen with a minimum water insoluble nitrogen (WIN) fraction of 2.07%, a minimum of 4% (P2O5) available phosphate, a minimum of 4% (K2O) soluble potash, and a maximum carbon to nitrogen ratio (C:N ratio) of 5:1. The all-natural fertilizer will be free of weed-seed and pathogens accomplished through thermophilic composting, and not mechanical or chemical sterilization, to assure presence of beneficial soil microbiology. The fertilizer will have a near neutral pH, a low salt index, a low biological oxygen demand, contain organic humic and fulvic acids, and have high aerobic organism counts. The fertilizer will also be stable, free of bad odors, and be unattractive as a food source for animals. It should also be in a granular form that is easily spread.

The application rate is 34 pounds per 1,000 square feet.

The Fertilizer provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

PERMANENT SEEDING

The areas to be seeded consist of all newly graded areas within the project limits except for the top of roadways.

Lawn and turf seed, such as the Type D Permanent Seed Mixture, will be tested within 12 months prior to planting, exclusive of the calendar month in which the test was completed.

Type D Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/1000 SqFt)
Kentucky Bluegrass	Avalanche, Appalachian, Wildhorse, Blue Bonnet, Action	1.4
Perennial Ryegrass	Turf Type Varieties	1.4
Creeping Red Fescue	Epic, Boreal, Chantilly	1.4
Chewings Fescue	Ambrose, K2, Zodiac, Shadow III	1.4
Alkali Grass	Fults, Fults II, Quill, Salty	1.4
Total:		7

WATER FOR VEGETATION

Water for vegetation consists of applying water to seeded areas to enhance germination and/or root growth. When watering, use the following guidelines:

Immediately after seeding:

- Keep the topsoil moist but not excessively wet until the seed has germinated.
- Water a minimum of 3 days a week for 2 weeks preferably watering 2 or 3 times a day in small quantities.
- Use fine spray and low pressure to avoid topsoil wash and to prevent uncovering buried seeds.

After emergence:

- Topsoil will be kept thoroughly moistened by sprinkling, as necessary, for 6 weeks. After the 6-week period, an inspection will be made to determine if grass is established enough to suspend watering. Continue watering until grass has been thoroughly established.
- Never apply water at a rate faster than the topsoil can absorb.
- Water during early morning hours or early evening hours.
- Do not water when rain is forecasted for the area.
- If rainfall occurs, suspend watering according to rainfall amount.

An estimated 15 Gallons of water per square yard of seeding area was used to compute the quantity for the bid item “Water for Vegetation”.

All costs for furnishing and applying the water including hauling, materials, equipment, labor, and incidentals necessary will be paid for at the contract unit price per MGal for “Water for Vegetation”.

FIBER MULCHING

Fiber mulch will be applied in a separate operation following permanent seeding.

An additional 2% by weight of tackifier will be added to the fiber mulch product selected from the approved product list. If the product selected has guar gum tackifier included, then the additional 2% of tackifier will be guar gum. If the product selected has synthetic tackifier included, then the additional 2% of tackifier will be synthetic.

Fiber mulch will be applied at the rate of 2,000 pounds per acre.

The Contractor will allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

All costs for the additional tackifier added to the fiber mulch including labor, equipment, and materials will be incidental to the contract unit price per ton for “Fiber Mulching”.

The fiber mulch provided will be from the approved product list. The approved product list for fiber mulch may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D2	D30

Plotting Date: 07/29/2026

File - ...lpj\bead06\JANotesSectionD.dgn

1:200
Plot Scale -
Plotted From -

TABLE OF FIBER MULCHING

Location	Quantity (Ton)
Entire Area to Be Seeded	6.8
Total:	6.8

HIGH FLOW SILT FENCE

The high flow silt fence fabric provided will be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<https://apps.sd.gov/HC60ApprovedProducts/main.aspx>

High flow silt fence will be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.05 for details.

An additional quantity of high flow silt fence has been added to the Estimate of Quantities for temporary sediment control.

TABLE OF HIGH FLOW SILT FENCE

Station	Location	Quantity (Ft)
109+44-20' L	Inlet end of pipe	30
117+21-19' L	Inlet end of pipe	30
128+21-18' L	Inlet end of pipe	30
131+55-3' L	Inlet end of pipe	18
132+06-19' L	Inlet end of pipe	30
142+93-3' R	Inlet end of pipe	18
143+75-12' L	Inlet end of pipe	30
152+72-19' R	Inlet end of pipe	18
158+97-13' R	Inlet end of pipe	18
161+20-3' L	Inlet end of pipe	30
164+16-8 R	Inlet end of pipe	18
177+87-4 L	Inlet end of pipe	30
178+55-CL	Inlet end of pipe	30
Quantity from Interim Sediment Control at Inlets:		2,382
Additional Quantity:		600
Total:		3,312

INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING

Refer to Standard Plate 734.05 for details of installation of high flow silt fence at drop inlets, manholes, and junction boxes.

The high flow silt fence fabric provided will be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

In addition, the Contractor will do the following for this installation:

- A space of at least 1' will be provided between the silt fence installation and the inlet. This space will be filled completely with a 2" depth of aggregate, 2" minus or smaller.
- The top elevation of the silt fence will be such that a 12" horizontal flap of silt fence will remain at the bottom.
- The base of the silt fence will conform to the natural ground profile but does not need to be trenched in at the bottom.
- The extra 12" of the silt fence material may be cut so that the material will lay flat upon the subgrade.
- Sediment filter bags will be placed on the 12" flap around the perimeter of the silt fence installation. The sediment filter bags will overlap 6" at the ends and be placed tightly together.
- The sediment filter bags will be filled with clean aggregate 2" minus or smaller.

The Sediment Filter Bag provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

The sediment filter bag will be the Snake Bag from Sacramento Bag Manufacturing Company or an approved equal.

All costs for furnishing and installing the sediment filter bags will be incidental to the contract unit price per foot for "Sediment Filter Bag."

All costs for removing the sediment filter bags will be incidental to the contract unit price per foot for "Remove Sediment Filter Bag".

Payment for high flow silt fence will be as stated in Section 734.5 of the Specifications.

All costs for furnishing, installing, and removing the 2" depth of aggregate will be incidental to other erosion and sediment control contract items.

All costs for removing and disposing of sediment collected by the sediment control device will be incidental to the contract unit price per cubic yard for "Remove Sediment".

The removed sediment will be placed at a location away from the drop inlet where the sediment will not be washed back into the drop inlet or other storm sewer system.

The Contractor and Engineer will inspect and maintain the sediment control device once every week and within 24 hours after every rainfall event greater than 1/2".

TABLE OF INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING

Station	High Flow Silt Fence Quantity (Ft)	Sediment Filter Bag Quantity (Ft)	Remove Sediment Quantity (CuYd)
101+15-5' L	26	32	0.25
101+15-7' R	32	24	0.25
103+95-0' L	32	44	0.25
109+95-0' L	32	44	0.25

115+95-0' L	32	44	0.25
121+95-0' L	32	44	0.25
127+95-0' L	32	44	0.25
133+55-0' L	32	44	0.25
139+55-0' L	32	44	0.25
145+56-0' L	32	44	0.25
149+62-0' L	32	44	0.25
153+63-0' L	32	44	0.25
157+57-0' L	32	44	0.25
163+57-0' L	32	44	0.25
169+57-0' L	32	44	0.25
173+72-0' L	32	44	0.25
177+87-4' R	32	44	0.25
178+56-0' L	18	24	0.25
179+82-02' L	42	52	0.25
180+50-0' L	42	52	0.25
12+61-92' R	18	24	0.25
14+05-40.17' L	30	40	0.25
14+05-43.67' R	30	40	0.25
14+90-40.17' L	25	32	0.25
14+90-42.52' R	18	24	0.25
16+84-33.57' R	25	32	0.25
16+84-40.17' L	25	32	0.25
19+20-40.17' L	18	24	0.25
19+20-32.17' R	25	32	0.25
21+36-42.63' L	32	44	0.25
21+29-34.63' R	32	44	0.25
22+30-32.17' R	18	24	0.25
22+45-32.17' L	24	32	0.25
23+82-32.17' L	24	32	0.25
25+70-32.17' R	22	28	0.25
25+99-32.17' L	18	24	0.25
27+08-48.00' L	24	32	0.25
27+10-32.17' L	24	32	0.25
28+66-32.17' L	24	32	0.25
28+66-32.17' R	18	24	0.25
30+79-55.28' L	22	28	0.25
31+17-55.40' L	18	24	0.25
31+50-32.17' L	22	28	0.25
31+60-32.17' R	18	24	0.25
33+30-32.17' L	22	28	0.25
33+30-32.17' R	18	24	0.25
30+53-34.63' L	32	44	0.25
30+55-42.63' R	32	44	0.25
34+77-46.67' R	18	24	0.25
35.01-46.67' R	18	24	0.25
35+33-32.17' L	22	28	0.25
35+46-32.17' R	18	24	0.25
35+47-46.67' R	18	24	0.25
36+04-46.67' R	18	24	0.25

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D3	D30

Plotting Date: 07/29/2026 REV. 5/29/2026 EF

1:200
Plot Scale -
Plotted From -

(Continued)			
36+90-32.17' L	22	28	0.25
36+90-32.17' R	18	24	0.25
38+56-34.63' R	32	44	0.25
38+65-34.63' L	32	44	0.25
40+45-32.17' R	22	28	0.25
40+55-32.17' L	18	24	0.25
43+78-32.17' L	25	32	0.25
43+78-32.17' R	18	24	0.25
44+22-56.94' L	22	28	0.25
44+55-57.83' L	18	24	0.25
46+00-32.17' R	22	28	0.25
46+00-32.17' L	18	24	0.25
47+50-32.17' R	22	28	0.25
47+50-32.17' L	22	28	0.25
48+25-32.17' L	22	28	0.25
48+55-59.07' L	18	24	0.25
48+84-59.53' L	25	32	0.25
49+14-32.17' L	22	28	0.25
49+14-32.17' R	22	28	0.25
50+70-32.17' L	18	24	0.25
50+70-32.17' R	22	28	0.25
52+30-32.17' L	18	24	0.25
52+30-32.17' R	22	28	0.25
52+86-57.25' L	18	24	0.25
53+14-57.76' L	22	28	0.25
55+10-32.17' L	18	24	0.25
55+10-32.17' R	18	24	0.25
56+85-32.17' L	22	28	0.25
56+85-32.17' R	18	24	0.25
57+16-57.31' L	22	28	0.25
57+45-57.71' L	18	24	0.25
52+64-36.00' R	32	44	0.25
53+45-34.63' L	32	44	0.25
53+45-34.63' R	32	44	0.25
61+20-32.17' L	22	28	0.25
61+20-32.17' R	18	24	0.25
61+47-57.32' L	22	28	0.25
61+76-55.66' L	18	24	0.25
63+40-32.17' L	18	24	0.25
63+40-32.17' R	18	24	0.25
65+45-32.17' L	18	24	0.25
65+45-32.17' R	18	24	0.25
65+73-57.31' L	18	24	0.25
65+84-31.94' L	32	44	0.25
66+10-54.61' L	18	24	0.25
Total:	2,382	3,144	24.75

SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES

This type of sediment control device should be used where there is pavement in the vicinity of the drop inlets and storm water or sediment could possibly enter the frame and grate. Sediment Control at Inlet with Frame and Grate will be installed prior to working in the vicinity of the drop inlets.

The Contractor will be responsible for maintaining and repairing the sediment control devices for the duration of the project for which sediment control measures are required. Maintenance will be scheduled to prevent storm water from backing up into the driving lane.

“Sediment Control at Inlet with Frame and Grate” will be paid for one time at each location, regardless of the number of times the sediment control devices are installed, inspected, cleaned, removed, repaired, or replaced. All costs associated with furnishing, installing, inspecting, maintaining, cleaning, sediment removal, and repairing Sediment Control at Inlet with Frame and Grate will be incidental to the contract unit price per each for “Sediment Control at Inlet with Frame and Grate”.

Sediment collection devices will be:

A commercial made sediment collection device from the “Sediment Control at Inlet with Frame and Grate” list or an approved equal. The device will be installed in reinforced concrete drop inlets in accordance with the manufacturer's recommendations.

<https://sddot.com/business/certification/products/Default.aspx>

The Sediment Control at Inlets with Frames and Grates provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

TABLE OF SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES

Station	Quantity (Each)
101+15-5' L	1
103+95-0' L	1
109+95-0' L	1
115+95-0' L	1
121+95-0' L	1
127+95-0' L	1
133+55-0' L	1
139+55-0' L	1
145+56-0' L	1
163+57-0' L	1
169+57-0' L	1
173+72-0' L	1
177+87-4' R	1
178+56-0' L	1
12+61-92' R	1
14+05-40.17' L	1
14+05-43.67' R	1
14+90-40.17' L	1

14+90-42.52' R	1
16+84-40.17' L	1
16+84-33.57' R	1
19+20-40.17' L	1
19+20-32.17' R	1
22+30-32.17' R	1
22+45-32.17' L	1
23+82-32.17' L	1
25+70-32.17' R	1
25+99-32.17' L	1
27+08-48.00' L	1
27+10-32.17' L	1
28+66-32.17' L	1
28+66-32.17' R	1
30+79-55.28' L	1
31+17-56.48' L	1
31+50-32.17' L	1
31+60-32.17' R	1
33+30-32.17' L	1
33+30-32.17' R	1
34+77-46.67' R	1
35.01-46.67' R	1
35+33-32.17' L	1
35+46-32.17' R	1
35+47-46.67' R	1
36+04-46.67' R	1
36+90-32.17' L	1
36+90-32.17' R	1
40+45-32.17' R	1
40+55-32.17' L	1
43+78-32.17' L	1
43+78-32.17' R	1
44+22-56.94' L	1
44+55-57.83' R	1
46+00-32.17' R	1
46+00-32.17' L	1
47+50-32.17' L	1
47+50-32.17' R	1
48+25-32.17' L	1
48+55-59.07' L	1
48+84-59.53' L	1
49+14-32.17' L	1
49+14-32.17' R	1
50+70-32.17' L	1
50+70-32.17' R	1
52+30-32.17' L	1
52+30-32.17' R	1
52+86-57.25' L	1
53+14-57.76' L	1
55+10-32.17' L	1

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D4	D30

Plotting Date: 07/29/2026 REV. 5/29/2026 EF

(Continued)		
55+10-32.17' R	1	
56+85-32.17' L	1	
56+85-32.17' R	1	
57+16-57.31' L	1	
61+20-32.17' L	1	
61+20-32.17' R	1	
61+47-57.32' L	1	
61+76-57.66' L	1	
63+40-32.17' L	1	
63+40-32.17' R	1	
65+48-32.17' L	1	
65+48-32.17' R	1	
65+73-57.31' L	1	
66+10-54.61' L	1	
Total:	82	

SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLETS

The Sediment Control Device at Type S Inlets provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

TABLE OF SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLETS

Station	Clear Opening Width (Ft)	Quantity* (Ft)
21+36-42.63' L	6	8
21+29-34.63' R	6	8
30+53-34.63' L	6	8
30+55-34.63' R	6	8
38+56-34.63' R	6	8
38+65-34.63' L	6	8
53+45-34.63' L	6	8
53+45-34.63' R	6	8
Total:		64

* Quantity shown is the minimum length required and will be the basis of payment.

TEMPORARY SEDIMENT BARRIER

The Temporary Sediment Barrier provided will be from the approved product list. The approved product list for low flow silt fence may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

Temporary sediment barriers will be installed at locations determined by the Engineer during construction.

Installation of the temporary sediment barrier will be in accordance with the manufacturer's installation instructions. It is the Contractor's responsibility to select product(s) best suited as perimeter control, slope interrupters, and ditch checks based on site conditions.

All costs for furnishing, installing, and maintaining the temporary sediment barrier including hauling, materials, equipment, labor, and incidentals necessary will be paid for at the contract unit price per foot for "Temporary Sediment Barrier".

500 Ft added to the quantities.

DEWATERING AND SEDIMENT COLLECTING

Dewatering and Sediment Collection is expected to be necessary on this project due to underground construction of storm sewers and other underground utilities. Dewatering and Sediment Collection is expected to be needed at various locations.

The Contactor has the option to treat sediment laden water trapped within the project limits or the Contractor may elect to transport sediment laden water off the project. Refer to the OPTIONS FOR DEWATERING AND SEDIMENT COLLECTING detail sheet for more information.

Water transported off the project limits will not be disposed of in an area where it can enter a waterway. The disposal site must be approved by the Engineer.

STREET SWEEPING

Vehicle tracking of sediment from the construction site will be minimized. Street sweeping will be used if erosion and sediment control best management practices are not adequate to prevent sediment from being tracked onto the street.

The Contractor will use a pickup broom having integral self-contained storage to clean the roadway. The pickup broom used will be a minimum of 6 feet wide and have working gutter brooms.

At a minimum, sweeping will be required:

1. Prior to opening any segment or roadway to traffic.
2. Following pavement grooving operations and prior to the application of the pavement marking tape.
3. When sawing operations are underway in the inside driving lanes, the outside driving lanes and gutter may need to be swept to control dust.
4. When directed by the engineer.

All costs for cleaning the roadway with a pickup broom will be incidental to the contract unit price per hour for "Sweeping".

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D5	D30

Plotting Date: 07/29/2026

CONSTRUCTION ENTRANCE

The Contractor will install a Construction Entrance at locations where there is a potential for mud tracking and sediment flow from the construction site and work area onto a paved public roadway.

It is the Contractor's option to use the SDDOT Construction Entrance (See SDDOT Construction Entrance notes and details), a product from the list provided in these notes, or other products or processes as approved by the Engineer during construction.

If the Contractor elects to use one of the products listed in the table, then the Contractor will install the construction entrance product in accordance with the manufacturer's installation instructions or as directed by the Engineer.

The Contractor will maintain the construction entrance such that mud tracking and sediment flow will not enter the roadway or adjacent drainage areas. The construction entrance will be routinely inspected, and the Contractor will repair or replace material as deemed necessary by the Engineer.

All costs for furnishing, installing, maintaining, and removal of the construction entrance including equipment, labor, materials, and incidentals will be included in the contract unit price per each for "Construction Entrance".

The Construction Entrance provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

1:200
Plot Scale -

Plotted From -
TRPR17200

SDDOT CONSTRUCTION ENTRANCE

If the SDDOT Construction Entrance is utilized, then the Contractor will install the SDDOT Construction Entrance in accordance with these notes and the detail drawings.

Pit run material will be obtained from a granular source and will conform to the following gradation:

<u>Sieve Size</u>	<u>Percent Passing</u>
6"	100%
#4	0-60%
#200	0-20%

The pit run material will be compacted to the satisfaction of the Engineer.

The aggregate for the granular material will conform to the following gradation requirements:

<u>Sieve Size</u>	<u>Percent Passing</u>
3"	100%
2 1/2"	90-100%
1 1/2"	25-60%
3/4"	0-10%
1/2"	0-5%

The granular material will be placed in 6" maximum lifts.

It is anticipated that the granular material will need to be periodically removed and replaced as it becomes inundated with mud and sediment.

The Reinforcement Fabric (MSE) will be in conformance with Section 831 of the Specifications. The Reinforcement Fabric (MSE) will be on the Approved Products List for this material or will be certified by the supplier to meet this specification prior to installation.

The Reinforcement Fabric (MSE) should be kept as taut as possible prior to placing.

Equipment will not be allowed on the Reinforcement Fabric (MSE) until the first lift of granular material is in place.

All seams in the Reinforcement Fabric (MSE) will be overlapped at least 2' and shingled.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D6	D30

Plotting Date: 07/29/2026

1:200
Plot Scale -
Plotted From -

STORMWATER POLLUTION PREVENTION PLAN CHECKLIST
*(The numbers left of the title headings are **reference numbers** to the **GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES** (Stormwater Permit))*

5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION
To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

- 5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES**
- **5.3 (3a): Project Limits** (See Title Sheet)
 - **5.3 (3a): Project Description** (See Title Sheet)
 - **5.3 (4): Site Map(s)** (See Title Sheet and Plans)
 - **Major Soil Disturbing Activities** (check all that apply)
 - ☒ Clearing and grubbing
 - ☒ Excavation/borrow
 - ☒ Grading and shaping
 - ☐ Filling
 - ☐ Other (describe):
 - **5.3 (3b): Total Project Area** 12.635 Acres
 - **5.3 (3b): Total Area to be Disturbed** 12.635 Acres
 - **5.3 (3c): Maximum Area Disturbed at One Time**
 - **5.3 (3d): Existing Vegetative Cover (%)** 80%
 - **5.3 (3d): Description of Vegetative Cover** Urban lawn planting
 - **5.3 (3e): Soil Properties:** Fine sandy loam
 - **5.3 (3f): Name of Receiving Water Body/Bodies** James River
 - **5.3 (3g): Location of Construction Support Activity Areas**

- 5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES**
- **Special sequencing requirements** (Section C: Traffic Control)
The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date
Install stabilized construction entrance(s).	
Install perimeter protection where runoff may exit site.	
Install perimeter protection around stockpiles.	
Install channel and ditch bottom protection.	
Clearing and grubbing.	
Remove and stockpile topsoil.	
Stabilize disturbed areas.	
Install utilities, storm sewers, curb and gutter.	
Install inlet and culvert protection after completing storm drainage and other utility installations.	
Final grading.	
Final paving.	
Removal of protection devices.	
Reseed areas disturbed by removal activities.	

5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES
All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)	
Description	Estimated Start Date
☐ Natural Buffers (within 50 ft of Waters of State)	
☐ Silt Fence	
☐ Erosion Control Wattles	
☐ Temporary Berm / Windrow	
☐ Floating Silt Curtain	
☒ Stabilized Construction Entrances	
☐ Entrance/Exit Equipment Tire Wash	
☐ Other:	

Structural Erosion and Sediment Controls	
Description	Estimated Start Date
☒ Silt Fence	
☐ Temporary Berm/Windrow	
☐ Erosion Control Wattles	
☒ Temporary Sediment Barriers	
☐ Erosion Bales	
☐ Temporary Slope Drain	
☐ Turf Reinforcement Mat	
☒ Riprap	
☐ Gabions	
☐ Rock Check Dams	
☐ Sediment Traps/Basins	
☒ Culvert Inlet Protection	
☐ Transition Mats	
☒ Median/Area Drain Inlet Protection	
☒ Curb Inlet Protection	
☐ Interceptor Ditch	
☐ Concrete Washout Facility	
☐ Work Platform	
☐ Temporary Water Barrier	
☐ Temporary Water Crossing	
☐ Permanent Stormwater Ponds	
☐ Permanent Open Vegetated Swales	
☐ Natural Depressions to allow for Infiltration	
☐ Sequential Systems that combine several practices	
☐ Other:	

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D7	D30
Plotting Date:		07/29/2026	

Dust Controls	
Description	Estimated Start Date
☐ Tarps & Wind impervious fabrics	
☐ Watering	
☐ Stockpile location/orientation	
☐ Dust Control Chlorides	
☐ Other	

Dewatering BMPs	
Description	Estimated Start Date
☐ Sediment Basins	
☐ Dewatering bags	
☐ Weir tanks	
☐ Temporary Diversion Channel	
☐ Other:	

Stabilization Practices (See Detail Plan Sheets)
(Stabilization measures shall begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization shall be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities **(3.18)**)

Description	Estimated Start Date
☐ Vegetation Buffer Strips	
☐ Temporary Seeding (Cover Crop Seeding)	
☒ Permanent Seeding	
☐ Sodding	
☐ Planting (Woody Vegetation for Soil Stabilization)	
☐ Mulching (Grass Hay or Straw)	
☒ Fiber Mulching (Wood Fiber Mulch)	
☐ Soil Stabilizer	
☐ Bonded Fiber Matrix	
☐ Fiber Reinforced Matrix	
☐ Erosion Control Blankets	
☐ Surface Roughening (e.g. tracking)	
☐ Other:	

Wetland Avoidance
Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☐ No ☒ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure’s capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor’s Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in “DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES” above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

- **Material Management**
 - Housekeeping
 - Only needed products will be stored on-site by the Contractor.
 - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
 - Products must be stored in original containers and labeled.
 - Material mixing will be conducted in accordance with the manufacturer’s recommendations.
 - When possible, all products will be completely used before properly disposing of the container off-site.
 - The manufacturer’s directions for disposal of materials and containers will be followed.
 - The Contractor’s site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
 - Dust generated will be controlled in an environmentally safe manner.
 - Hazardous Materials
 - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
 - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
 - If surplus product must be disposed of, manufacturer’s label directions for disposal will be followed.

- Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
- Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
- Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ **Spill Control Practices**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer’s recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor’s site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ **Spill Response**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor’s site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.

- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent’s designee will be responsible for completing the spill reporting form and for reporting the spill to SDDANR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor’s site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

➤ **Waste Disposal**

- All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.

➤ **Hazardous Waste**

- All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.

➤ **Sanitary Waste**

- Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D8	D30

Plotting Date: 07/29/2026

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading “POLLUTION PREVENTION PROCEDURES” (check all that apply).

- ☒ Concrete and Portland Cement
- ☐ Detergents
- ☒ Paints
- ☒ Metals
- ☒ Bituminous Materials
- ☒ Petroleum Based Products
- ☐ Diesel Exhaust Fluid
- ☐ Cleaning Solvents
- ☒ Wood
- ☒ Cure
- ☒ Texture
- ☐ Chemical Fertilizers
- ☐ Other:

Product Specific Practices

- **Petroleum Products**
All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- **Fertilizers**
Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- **Paints**
All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer's instructions and any applicable state and local regulations.
- **Concrete Trucks**
Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- ☐ Discharges from water line flushing.
- ☐ Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- ☐ Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor's site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDANR immediately **if any one of the following** conditions exists:
 - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
 - The release or spill causes an immediate danger to human health or safety
 - The release or spill exceeds 25 gallons
 - The release or spill causes a sheen on surface water
 - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
 - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
 - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
 - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDANR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDANR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge shall be sent to SDDANR within 14 days of the discharge.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D9	D30

Plotting Date: 07/29/2026

1:200
Plot Scale -
Plotted From -

5.4: SWPPP CERTIFICATIONS

Certification of Compliance with Federal, State, and Local Regulations

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

South Dakota Department of Transportation

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Authorized Signature (See the General Permit, Section 7.4 (1))

Prime Contractor

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

Contractor Information:

- Prime Contractor Name: _____
- Contractor Contact Name: _____
- Address: _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

Erosion Control Supervisor

- Name: _____
- Address: _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

SDDOT Project Engineer

- Name: _____
- Business Address: _____
- Job Office Location: _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

SDDANR Contact Spill Reporting

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

SDDANR Contact for Hazardous Materials.

- (605) 773-3153

National Response Center Hotline

- (800) 424-8802.

SDDANR Stormwater Contact Information

- SDDANR Stormwater (800) 737-8676
- Surface Water Quality Program (605) 773-3351

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D10	D30
Plotting Date: 07/29/2026 REV. 7/29/2026 EF			

5.5: REQUIRED SWPPP MODIFICATIONS

5.5 (1): Conditions Requiring SWPPP Modification

The SWPPP must be modified, including the site map(s), in response to any of the following conditions:

- When a new operator responsible for implementation of any part the SWPPP begins work on the site.
- When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
- To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
- If inspections by site staff, local officials, SDDANR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
- To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
- If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.

5.5 (2): Deadlines for SWPPP Modification

Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.

5.5 (3): Documentation of Modifications to the Plan

All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.

5.5 (4): Certification Requirements

All modifications made to the SWPPP must be signed and certified as required in Section 7.4.

5.5 (5): Required Notice to Other Operators








If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form.

EROSION AND SEDIMENT CONTROL LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D11	D30

Plotting Date: 07/29/2026

-  Low Flow Silt Fence
-  High Flow Silt Fence
-  High Flow Silt Fence at Pipe
-  Sediment Control at Inlet After Placement of Surfacing
-  Sediment Control at Inlet Before Placement of Surfacing
-  Temporary Sediment Barriers
-  Temporary Water Barriers
-  Floating Silt Curtain
-  Sediment Filter Bags
-  Triangular Silt Barriers
-  Erosion Control Wattles on Slopes
-  Erosion Control Wattles at Inlets
-  Erosion Control Wattles in Ditches
-  Erosion Bales
-  Surfacing Roughening
-  Temporary Grass Hay or Straw Mulch/ Soil Stabilizer
-  Cut Interceptor Ditch
-  Temporary Slope Drain
-  Bonded Fiber Matrix/ Fiber Reinforced Matrix
-  Rock Check Dam
-  Type 1 Erosion Control Blanket
-  Type 2 Erosion Control Blanket
-  Type 3 Erosion Control Blanket
-  Type 4 Erosion Control Blanket
-  Type 1 Turf Reinforcement Mat
-  Type 2 Turf Reinforcement Mat
-  Type 3 Turf Reinforcement Mat
-  Transition Mat
-  Silt Trap (See Standard Plate 734.04)

BEST MANAGEMENT PRACTICES

Best Management Practices (BMPs) are split into three categories and are to be used throughout construction.

INITIAL PHASE

BMPs from the Legend shown as Orange Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Initial Phase prior to earth disturbing activities and remain in place for the Intermediate Phase for temporary stabilization and in the Final Phase to achieve final stabilization.





INTERMEDIATE PHASE

BMPs from the Legend shown as Blue Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Intermediate Phase for temporary stabilization and remain in place in the Final Phase to achieve final stabilization.

FINAL PHASE

BMPs from the Legend shown as Green Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Final Phase to achieve final stabilization.

If these items are applicable they are to be shown in the updated SWPPP using the Symbols given.

- | | | | |
|--|---|--|--|
|  TS | Topsoil Stockpile |  M | On-Site Construction Material Storage Area |
|  B | Borrow Area |  SK | Spill Kit |
|  CE | Stabilized Construction Entrance |  WP | Work Platform |
|  VB | Vegetated Buffer Strip |  CC | Cover Crop Seeding |
|  CW | Concrete Washout |  PT | Portable Toilet |
|  AP | Asphalt Plant Site | | |
|  CP | Concrete Plant Site | | |
|  V | Vehicle and Equipment Parking Area, Fueling Area, or Maintenance Area | | |
|  D | Dumpster or other Trash and Debris Containers | | |

Plot Scale = 1:100

Plotted From - TRPR17200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D12	D30

Sec 19 - T110N - R61W

File - ...rd\prj\bead06JA\000s_SSec.dgn

Plot Scale - 1:100

Plotted From - TRPR7200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D13	D30

Plotting Date: 07/29/2026




Install High Flow Silt Fence at the following locations:
117+21-19' L Across ditch at inlet end of pipe 30 Ft
128+21-18' L Across ditch at inlet end of pipe 30 Ft

Install Interim Sediment Control at Inlets, Manholes, and Junction
Boxes at the following locations:
115+95-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
121+95-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
127+95-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install Sediment Control at
Inlets with Frames and Grates
at the following locations:
115+95-0' L 1 Each
121+95-0' L 1 Each
127+95-0' L 1 Each

Install High Flow Silt Fence at the following locations:
131+55-3' L Inlet end of pipe 18 Ft

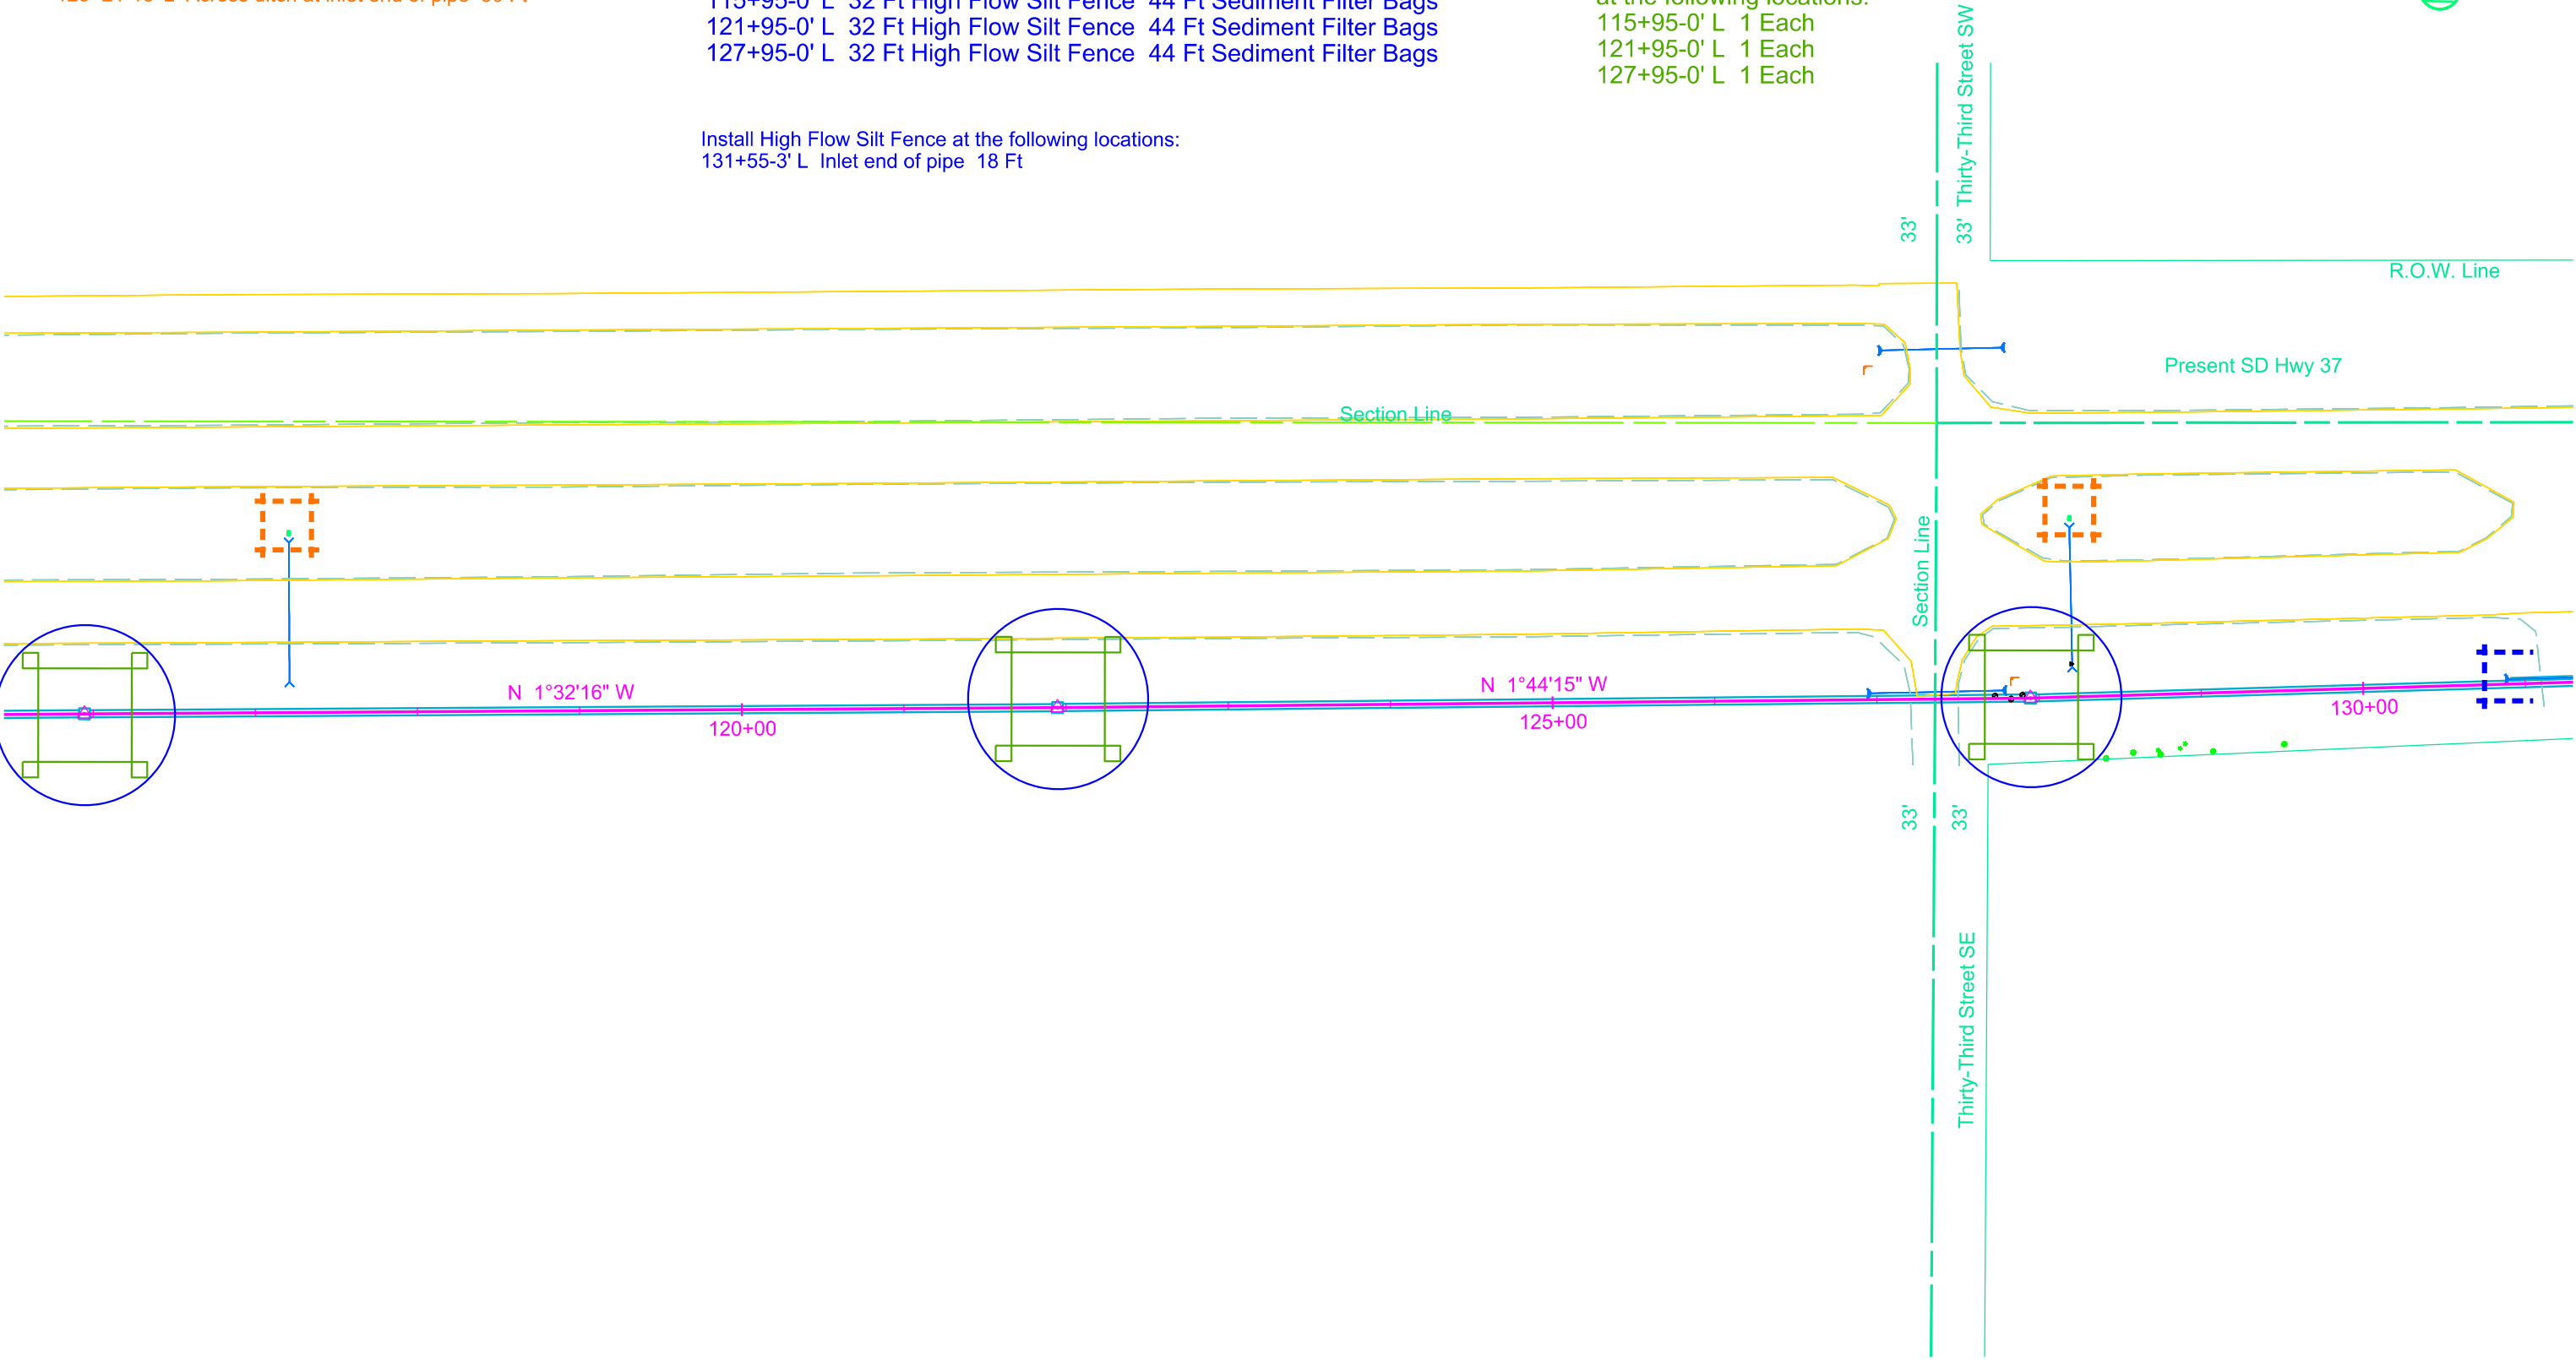

Plot Scale - 1:100

Plotted From - TRPR7200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D14	D30


Plotting Date: 07/29/2026

Install High Flow Silt Fence
at the following locations:
132+06-19' L Across ditch at inlet end of pipe 30 Ft
143+75-12' L Across ditch at inlet end of pipe 30 Ft

Install Interim Sediment Control at Inlets, Manholes, and Junction
Boxes at the following locations:
133+55-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
139+55-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
145+56-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install High Flow Silt Fence at the following locations:
142+93-3' R Inlet end of pipe 18 Ft

Install Sediment Control at
Inlets with Frames and Grates
at the following locations:
133+55-0' L 1 Each
139+55-0' L 1 Each
145+56-0' L 1 Each

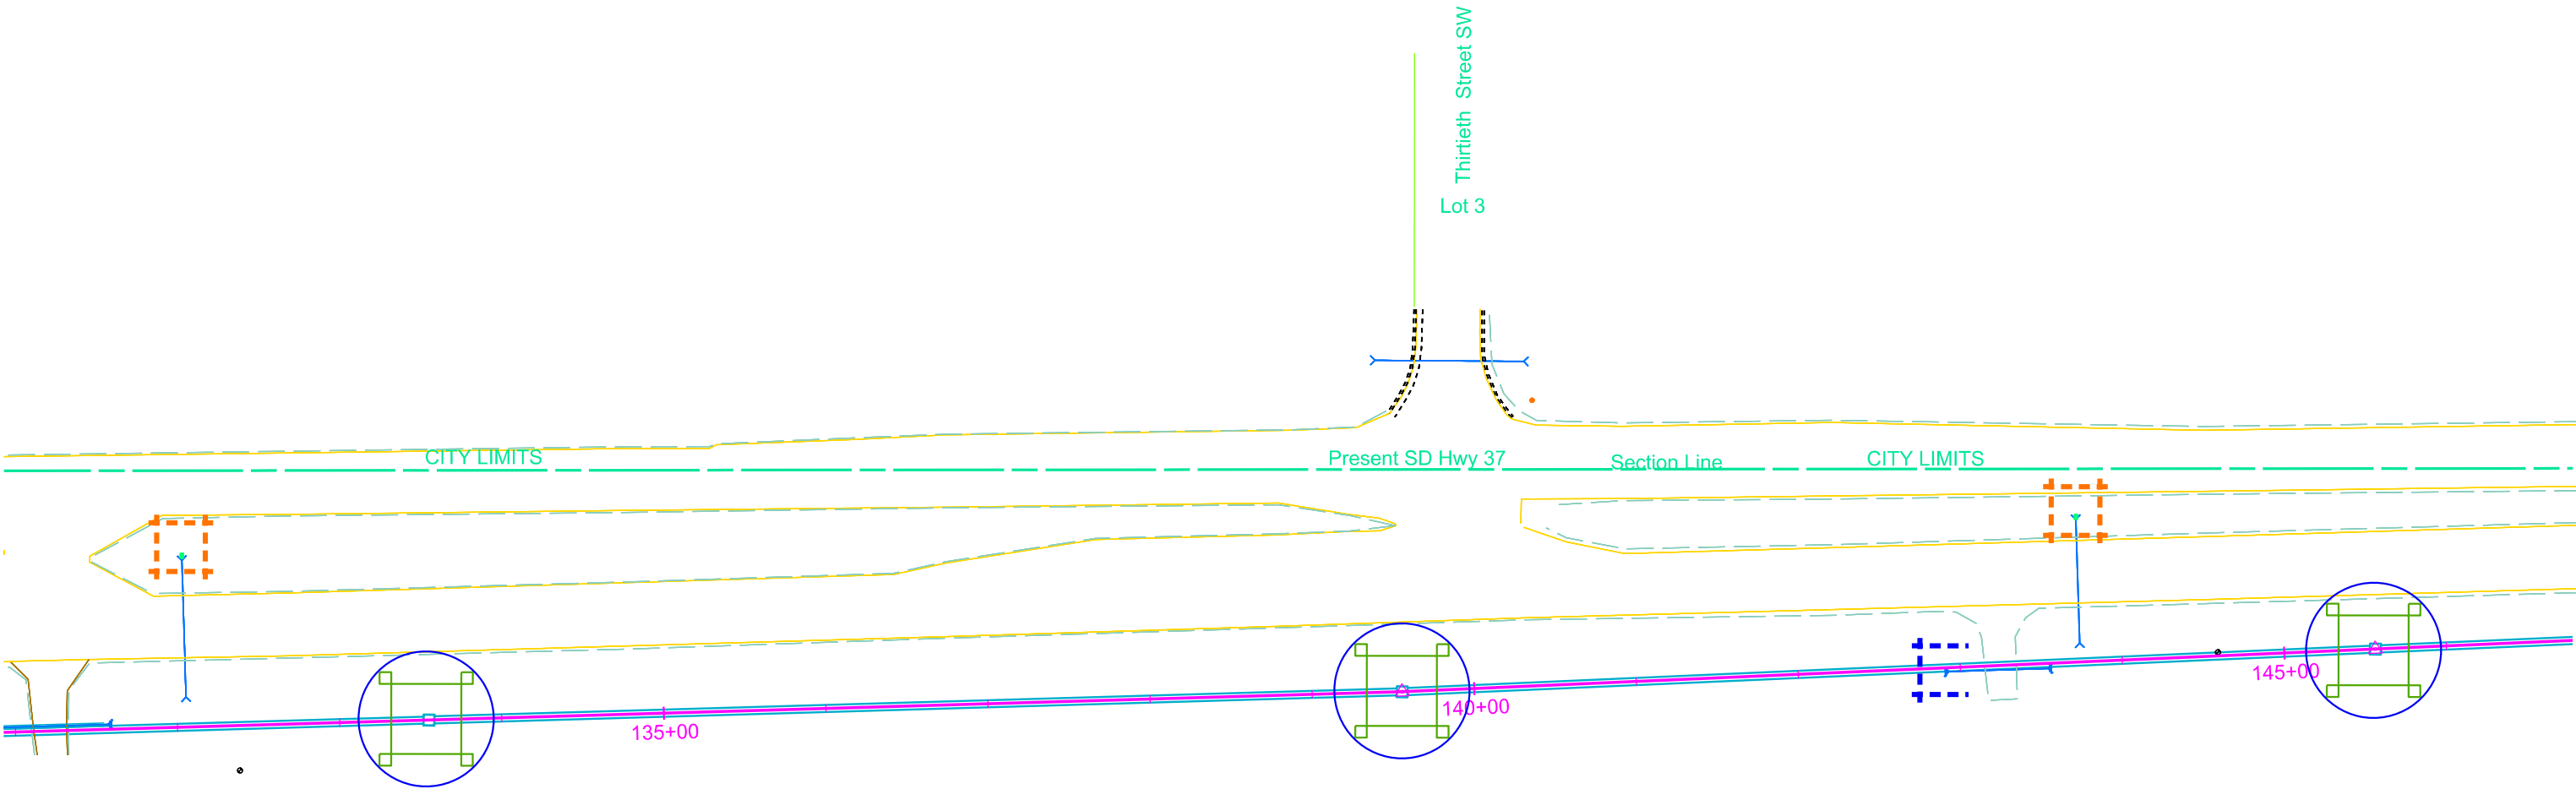

File - ...rdpr\head06\A001s_sSec.dgn


Plotted From: - TRPR17200
Plot Scale - 1:100

Install Interim Sediment Control at Inlets, Manholes, and Junction
Boxes at the following locations:
149+62-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
153+63-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
157+57-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install High Flow Silt Fence at the following locations:
152+72-19' R Inlet end of pipe 18 Ft
158+97-13' R Inlet end of pipe 18 Ft
161+20-3' L Inlet end of pipe 30 Ft

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D15	D30

Plotting Date: 07/29/2026

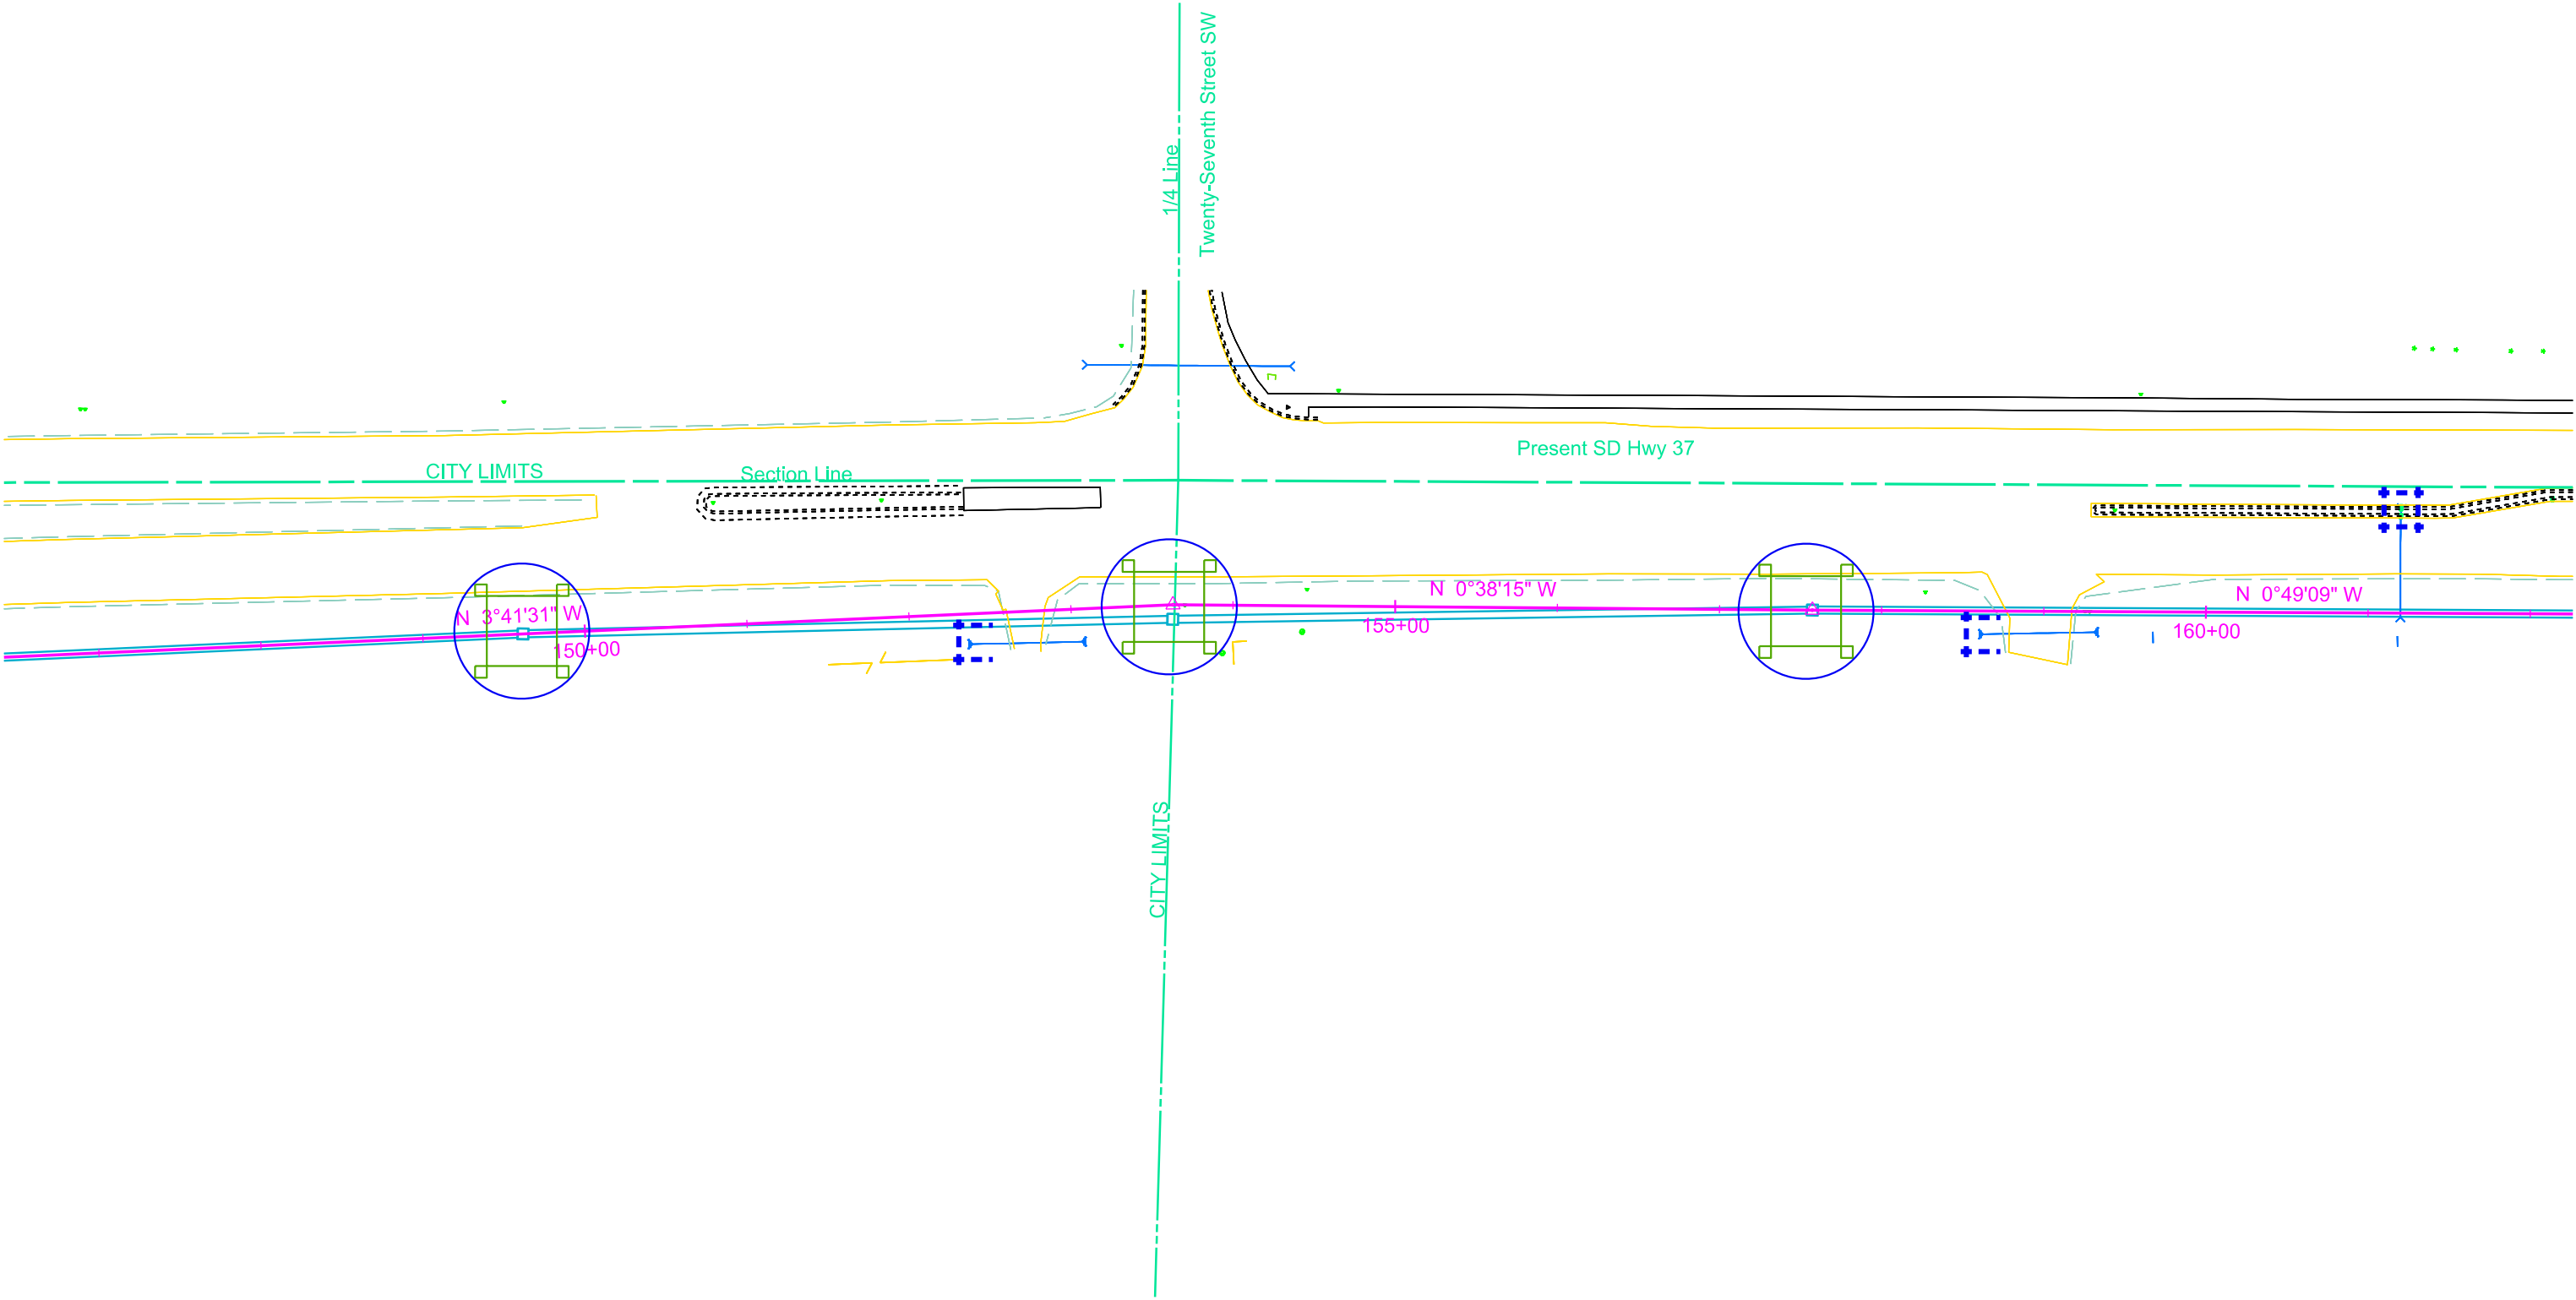


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D16	D30

Plotting Date: 07/29/2026

Install Interim Sediment Control at Inlets, Manholes, and Junction
Boxes at the following locations:
163+57-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
169+57-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
173+72-0' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install Sediment Control at
Inlets with Frames and Grates
at the following locations:
163+57-0' L 1 Each
169+57-0' L 1 Each
173+72-0' L 1 Each

Install High Flow Silt Fence at the following locations:
164+16-8' R Inlet end of pipe 18 Ft

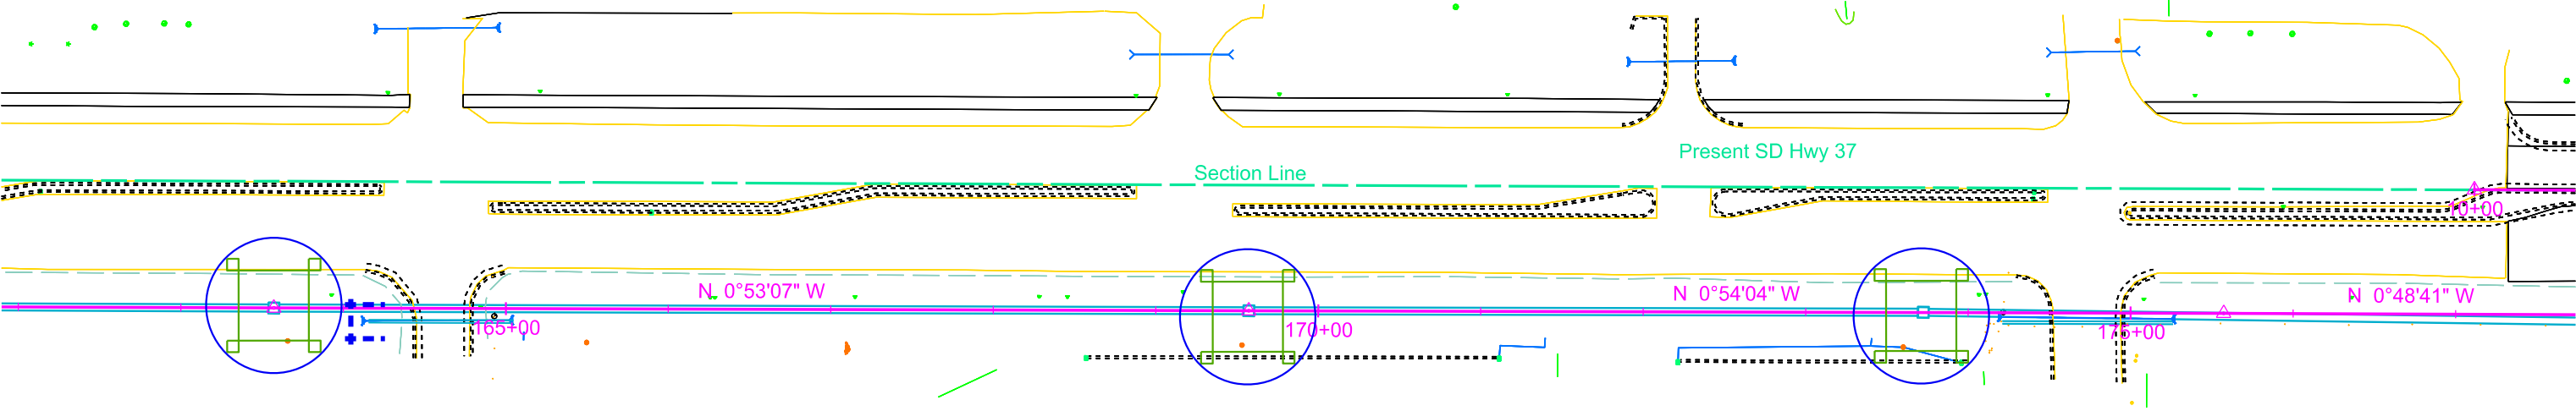

Plot Scale - 1"=100'

Plotted From - TRPR317200

File - ...\\rd\\proj\\bead06\\JA002s_SSsec.dgn

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D17	D30

Plotting Date: 07/29/2026




Install High Flow Silt Fence at the following locations:
177+87-4 L Inlet end of pipe 30 Ft
178+55-CL Inlet end of pipe 30 Ft

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
177+87-4' R 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
178+56-0' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
179+82-02' L 42 Ft High Flow Silt Fence 52 Ft Sediment Filter Bags
180+50-0' L 42 Ft High Flow Silt Fence 52 Ft Sediment Filter Bags
12+61-92' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
14+05-40.17' L 30 Ft High Flow Silt Fence 40 Ft Sediment Filter Bags
14+05-43.67' R 30 Ft High Flow Silt Fence 40 Ft Sediment Filter Bags
14+90-40.17' L 25 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
14+90-42.52' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
177+87-4' R 1 Each
178+56-0' L 1 Each
12+61-92' R 1 Each
14+05-40.17' L 1 Each
14+05-43.67' R 1 Each
14+90-40.17' L 1 Each
14+90-42.52' R 1 Each

BEGIN NH 0037(156)125
BEGIN GRADING
Station 14+00.00

HURON

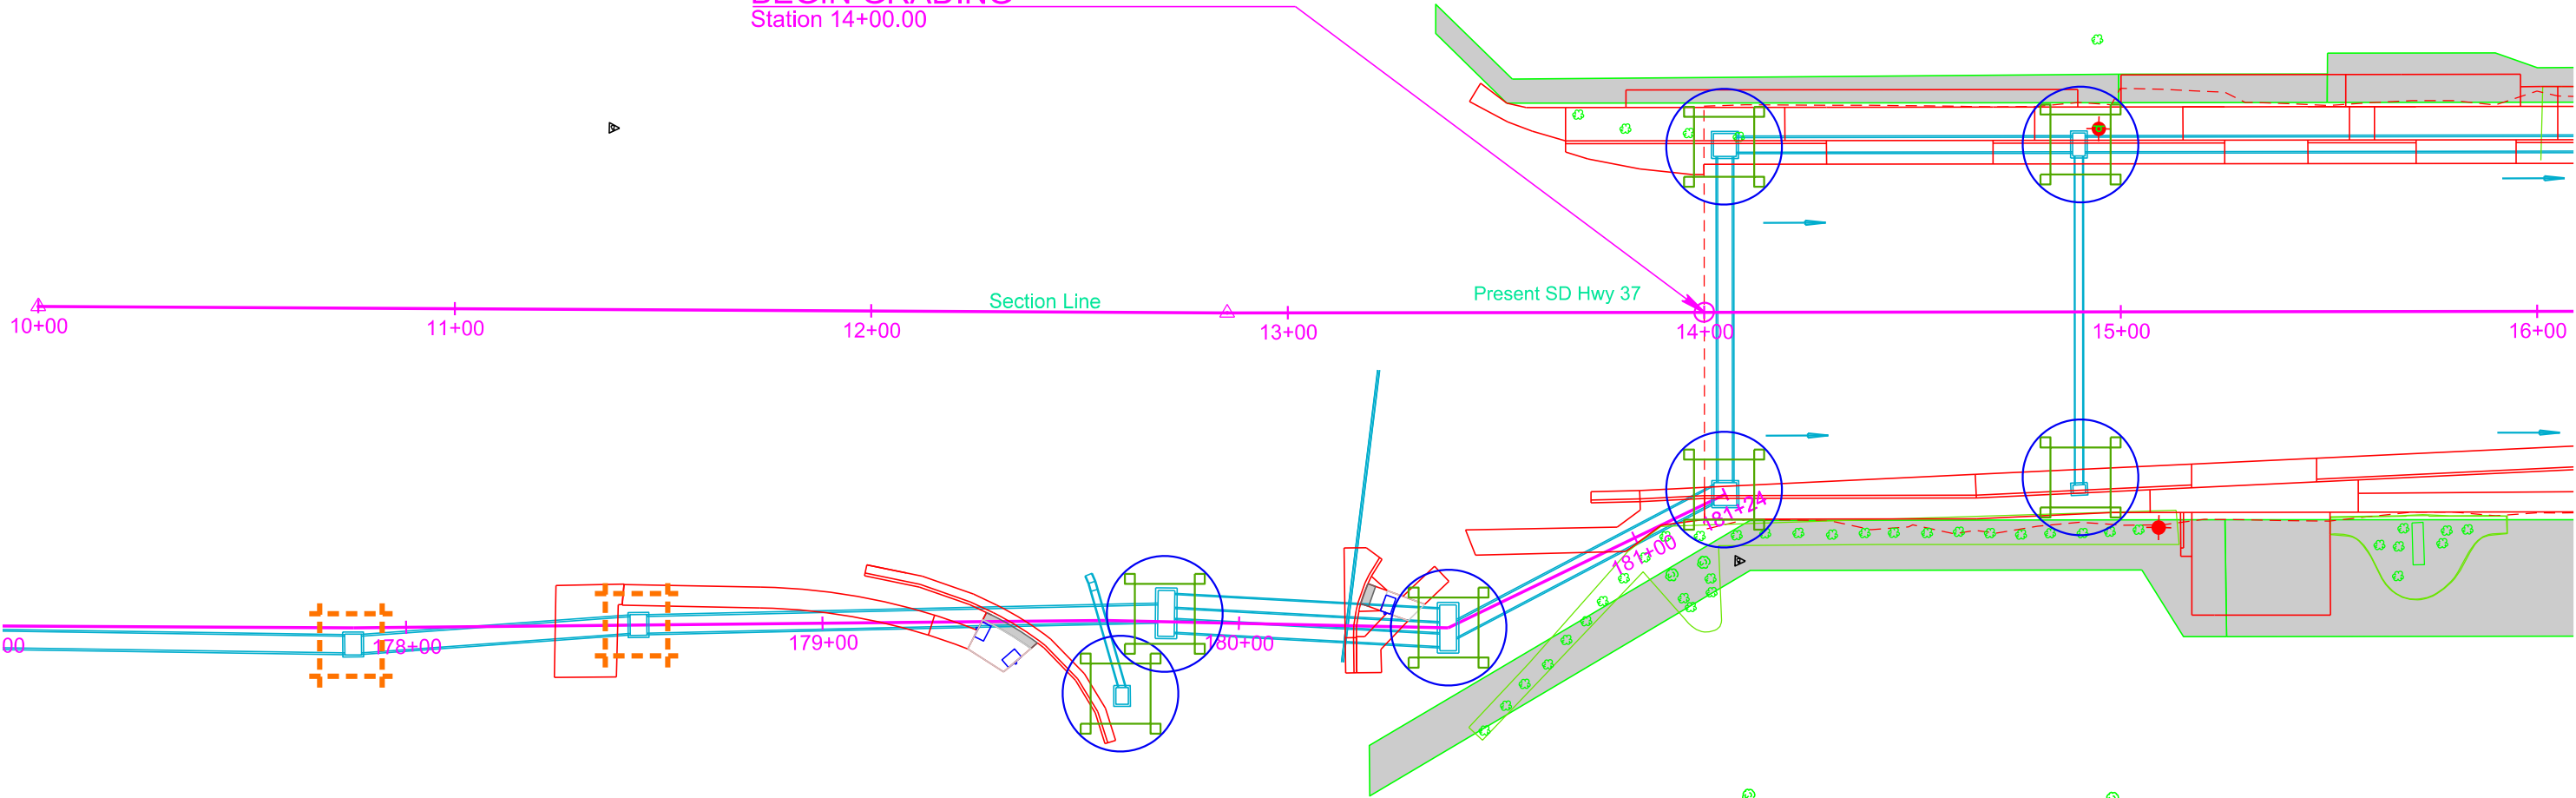

Plot Scale - 1:40

Plotted From - TRPR17200

Plot Scale - 1:40

Plotted From - TRPR17200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D18	D30


Plotting Date: 07/29/2026



Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
16+84-40.17' L 25 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
16+84-33.57' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
19+20-40.17' L 25 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
19+20-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
21+36-42.63' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
21+29-34.63' R 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
16+84-40.17' L 1 Each
16+84-33.57' R 1 Each
19+20-40.17' L 1 Each
19+20-32.17' R 1 Each

Install Sediment Control at Type S Drop Inlets after the placement of surfacing at the following locations:
21+36-42.63' L 8 Ft
21+29-34.63' R 8 Ft

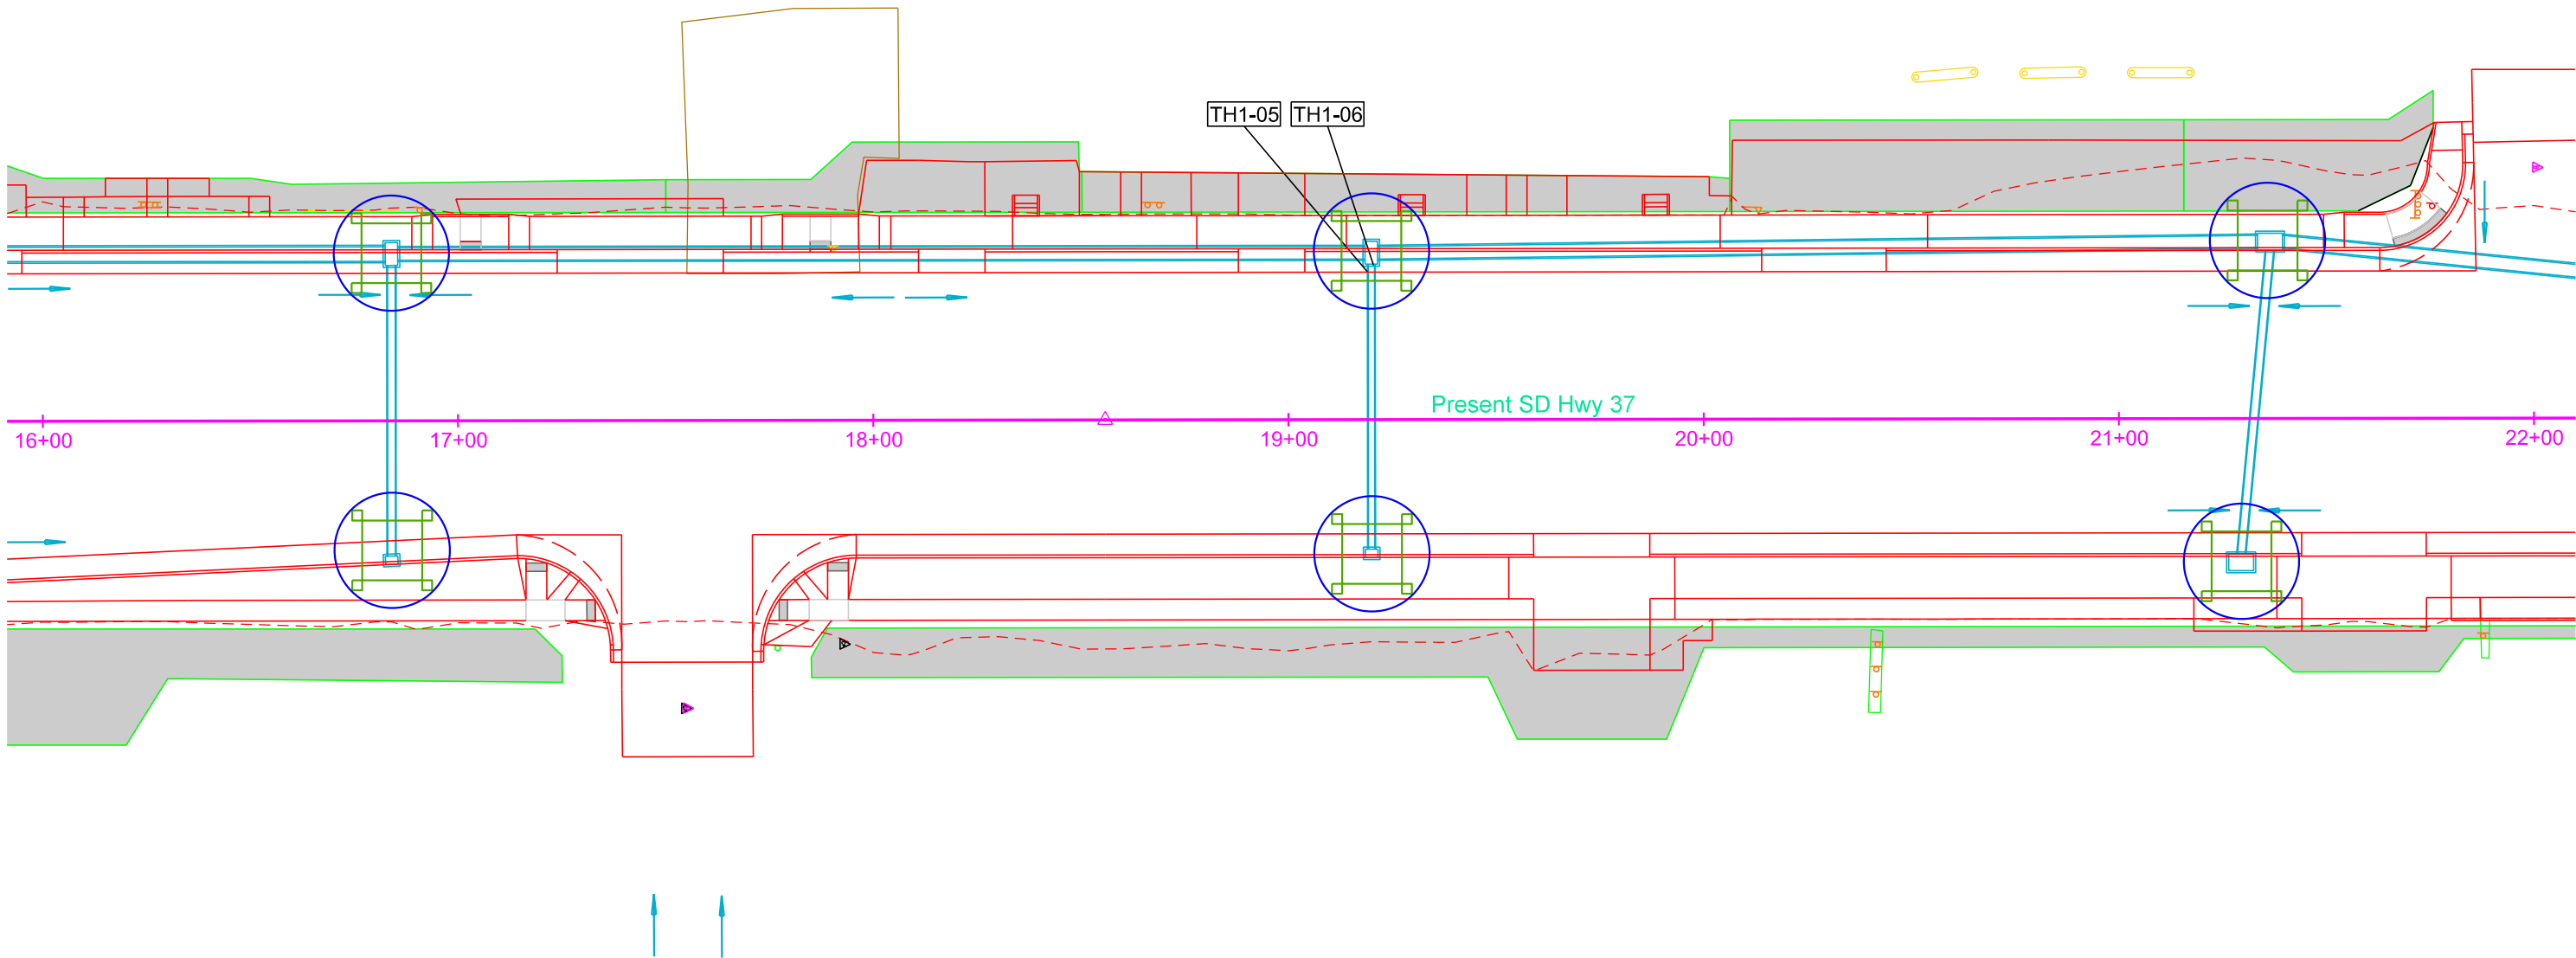

Plot Scale - 1:40

Plotted From - TRPR17200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D19	D30

Plotting Date: 07/29/2026



Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
22+30-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
22+45-32.17' L 24 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
23+82-32.17' L 24 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
25+70-32.17' R 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
25+99-32.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
27+08-48.00' L 24 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
27+10-32.17' L 24 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
22+30-32.17' R 1 Each
22+45-32.17' L 1 Each
23+82-32.17' L 1 Each
25+70-32.17' R 1 Each
25+99-32.17' L 1 Each
27+08-48.00' L 1 Each
27+10-32.17' L 1 Each

HURON

Present SD Hwy 37

22+00

23+00

24+00

25+00

26+00

27+00

28+00

File - U:\trp\j\bead06\JA022ec.dgn

Plot Scale - 1:40

Plotted From - TRPR17200


Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
28+66-32.17' L 24 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
28+66-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
30+79-55.28' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
31+17-56.48' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
31+50-32.17' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
31+60-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
33+30-32.17' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
33+30-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
30+53-34.63' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
30+55-42.63' R 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install Sediment Control at Type S Drop Inlets after the placement of surfacing at the following locations:
30+53-34.63' L 8 Ft
30+55-34.63' R 8 Ft

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
28+66-32.17' L 1 Each
28+66-32.17' R 1 Each
30+79-55.28' L 1 Each
31+17-56.48' L 1 Each
31+50-32.17' L 1 Each
31+60-32.17' R 1 Each
33+30-32.17' L 1 Each
33+30-32.17' R 1 Each

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D20	D30

Plotting Date: 07/29/2026

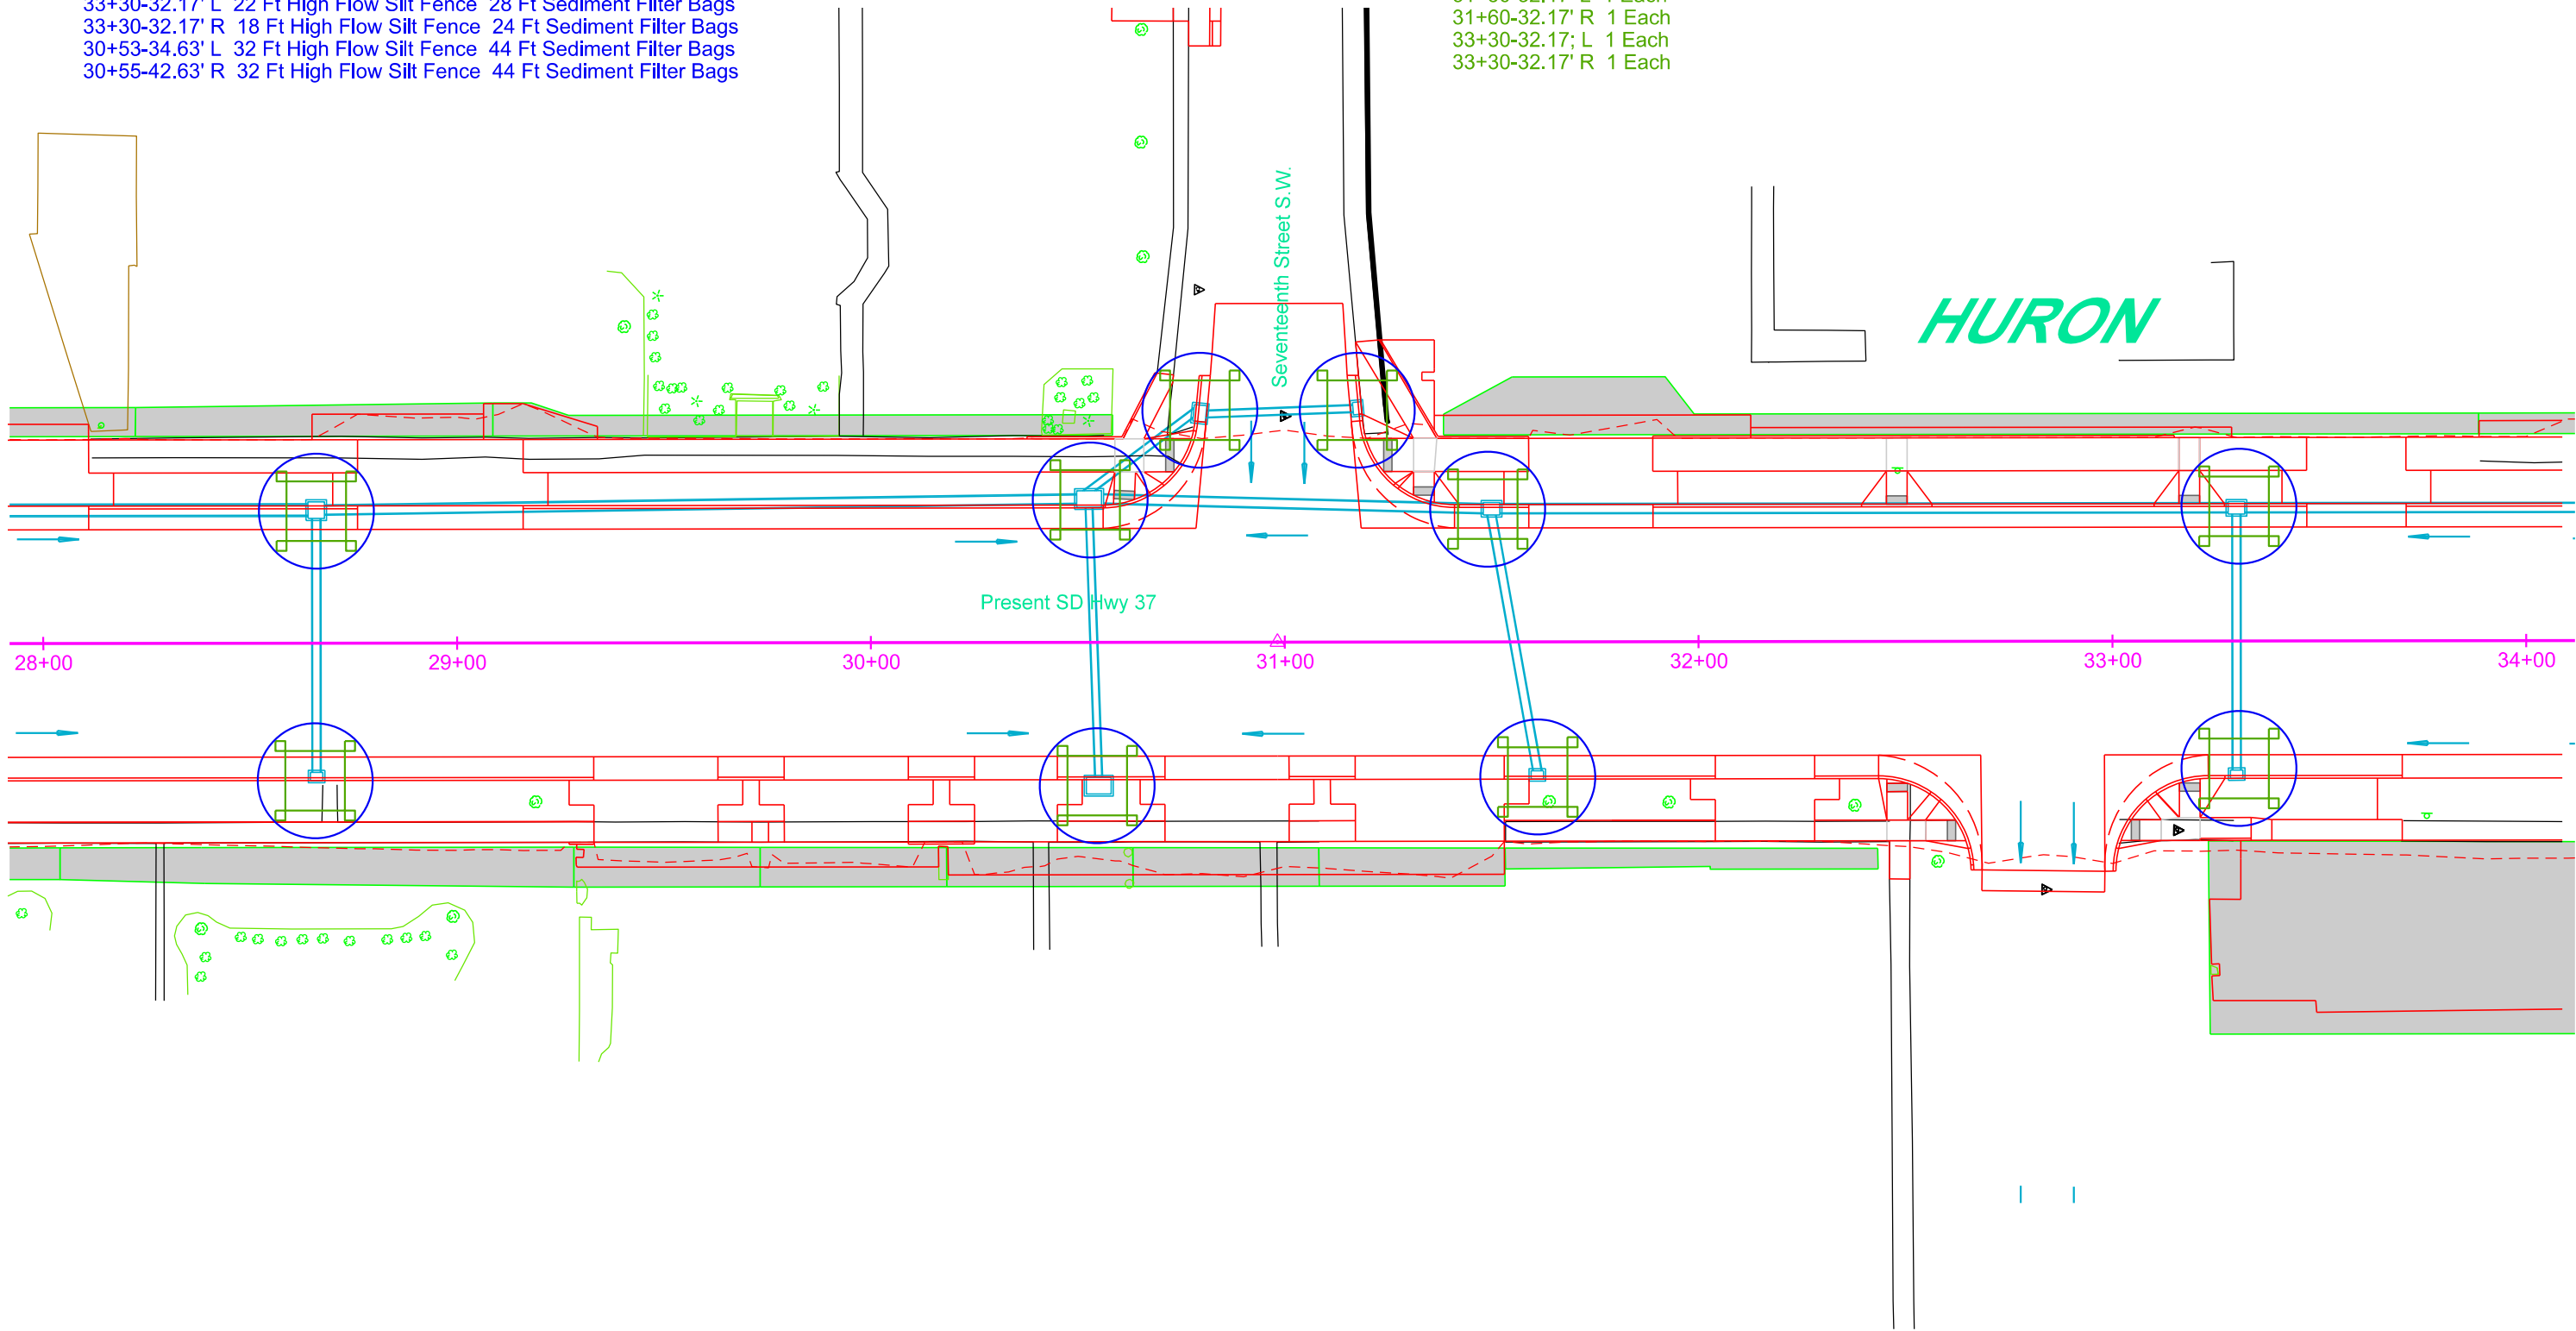



Property Line

Fifteenth Street S.W.

Fifteenth Street S.E.

Install Sediment Control at
Inlets with Frames and Grates
after the placement of surfacing
at the following locations:
34+77-46.67' R 1 Each
35+01-46.67' R 1 Each
35+33-32.17' L 1 Each
35+46-32.17' R 1 Each
35+47-46.67' R 1 Each
36+04-46.67' R 1 Each
36+90-32.17' L 1 Each
36+90-32.17' R 1 Each

Install Sediment Control
at Type S Drop Inlets after
the placement of surfacing
at the following locations:
38+56-34.63' R 8 Ft
38+65-34.63' L 8 Ft

Install Interim Sediment Control at Inlets, Manholes, and Junction
Boxes before the placement of surfacing at the following locations:
34+77-46.67' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
35+01-46.67' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
35+33-32.17' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
35+46-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
35+47-46.67' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
36+04-46.67' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
36+90-32.17' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
36+90-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
38+56-34.63' R 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags
38+65-34.63' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Sixteenth Street S.W.

Present SD Hwy 37

HURON

Plot Scale - 1"=40'

Plotted From - TRPR17200


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D22	D30

Plotting Date: 07/29/2026



Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
40+45-32.17' R 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
40+55-32.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
43+78-32.17' L 25 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
43+78-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
44+22-56.94' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
44+55-57.83' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
40+45-32.17' R 1 Each
40+55-32.17' L 1 Each
43+78-32.17' L 1 Each
43+78-32.17' R 1 Each
44+22-56.94' L 1 Each
44+55-57.83' R 1 Each

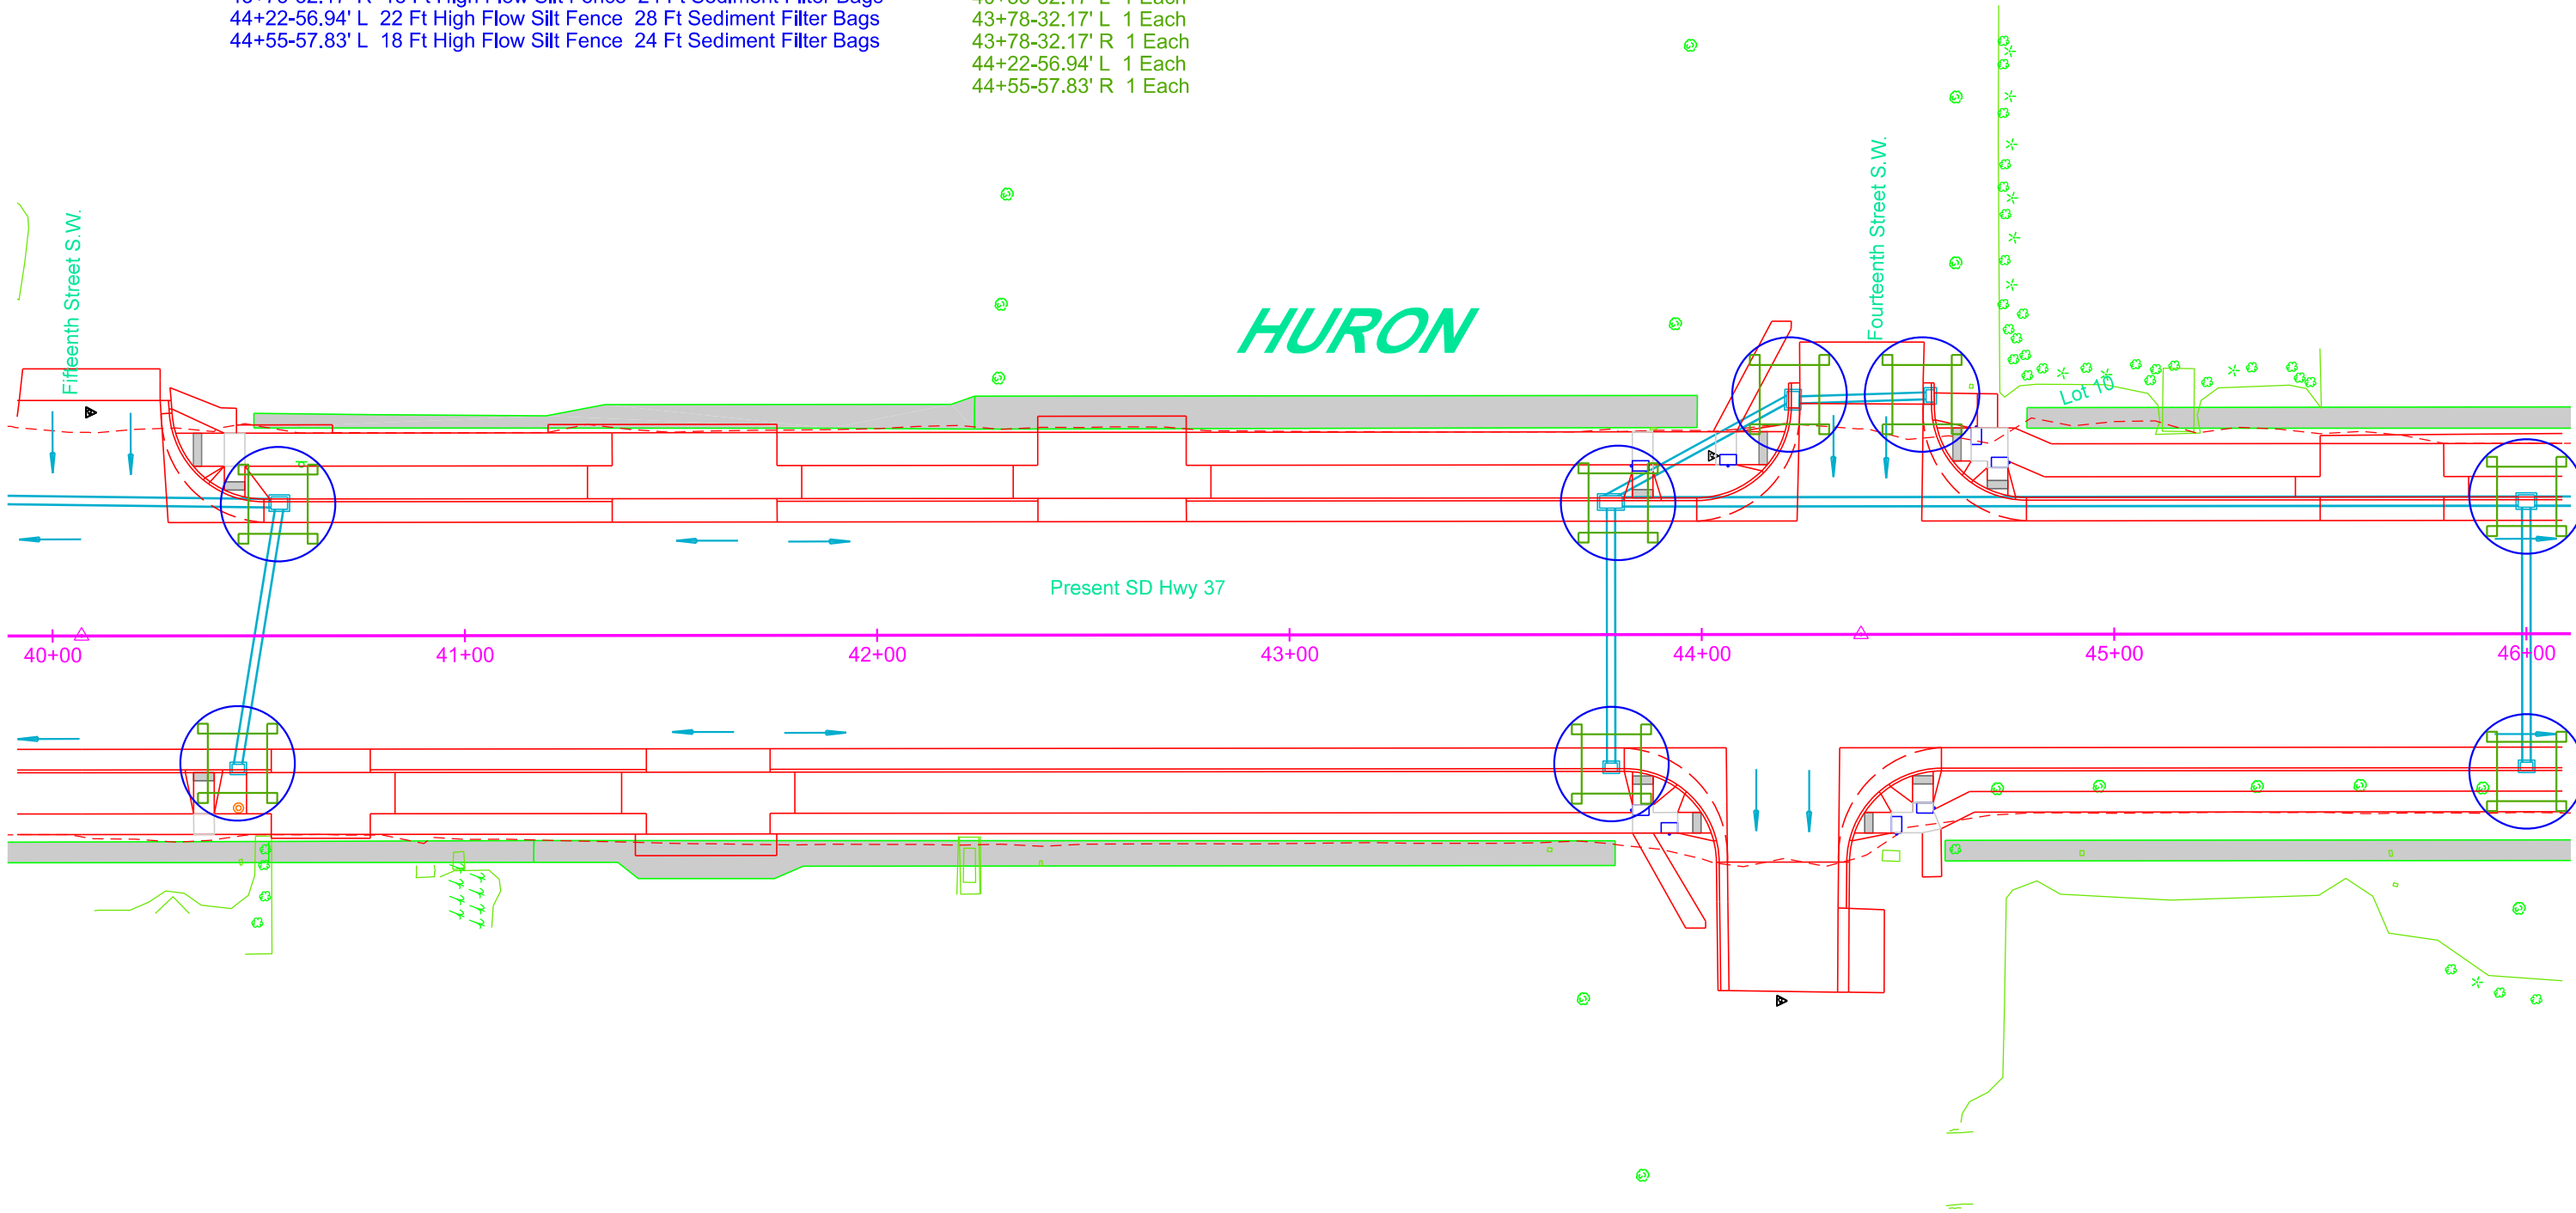

Plot Scale - 1"=40'

Plotted From - TRPR17200

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:


46+00-32.17' R	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
46+00-32.17' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
47+50-32.17' L	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
47+50-32.17' R	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
48+25-32.17' L	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
48+55-59.07' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
48+84-59.53' L	25 Ft High Flow Silt Fence	32 Ft Sediment Filter Bags
49+14-32.17' L	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
49+14-32.17' R	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
50+70-32.17' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
50+70-32.17' R	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:

46+00-32.17' R	1 Each
46+00-32.17' L	1 Each
47+50-32.17' L	1 Each
47+50-32.17' R	1 Each
48+25-32.17' L	1 Each
48+55-59.07' L	1 Each
48+84-59.53' L	1 Each
49+14-32.17' L	1 Each
49+14-32.17' R	1 Each
50+70-32.17' L	1 Each
50+70-32.17' R	1 Each

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D23	D30

Plotting Date: 07/29/2026

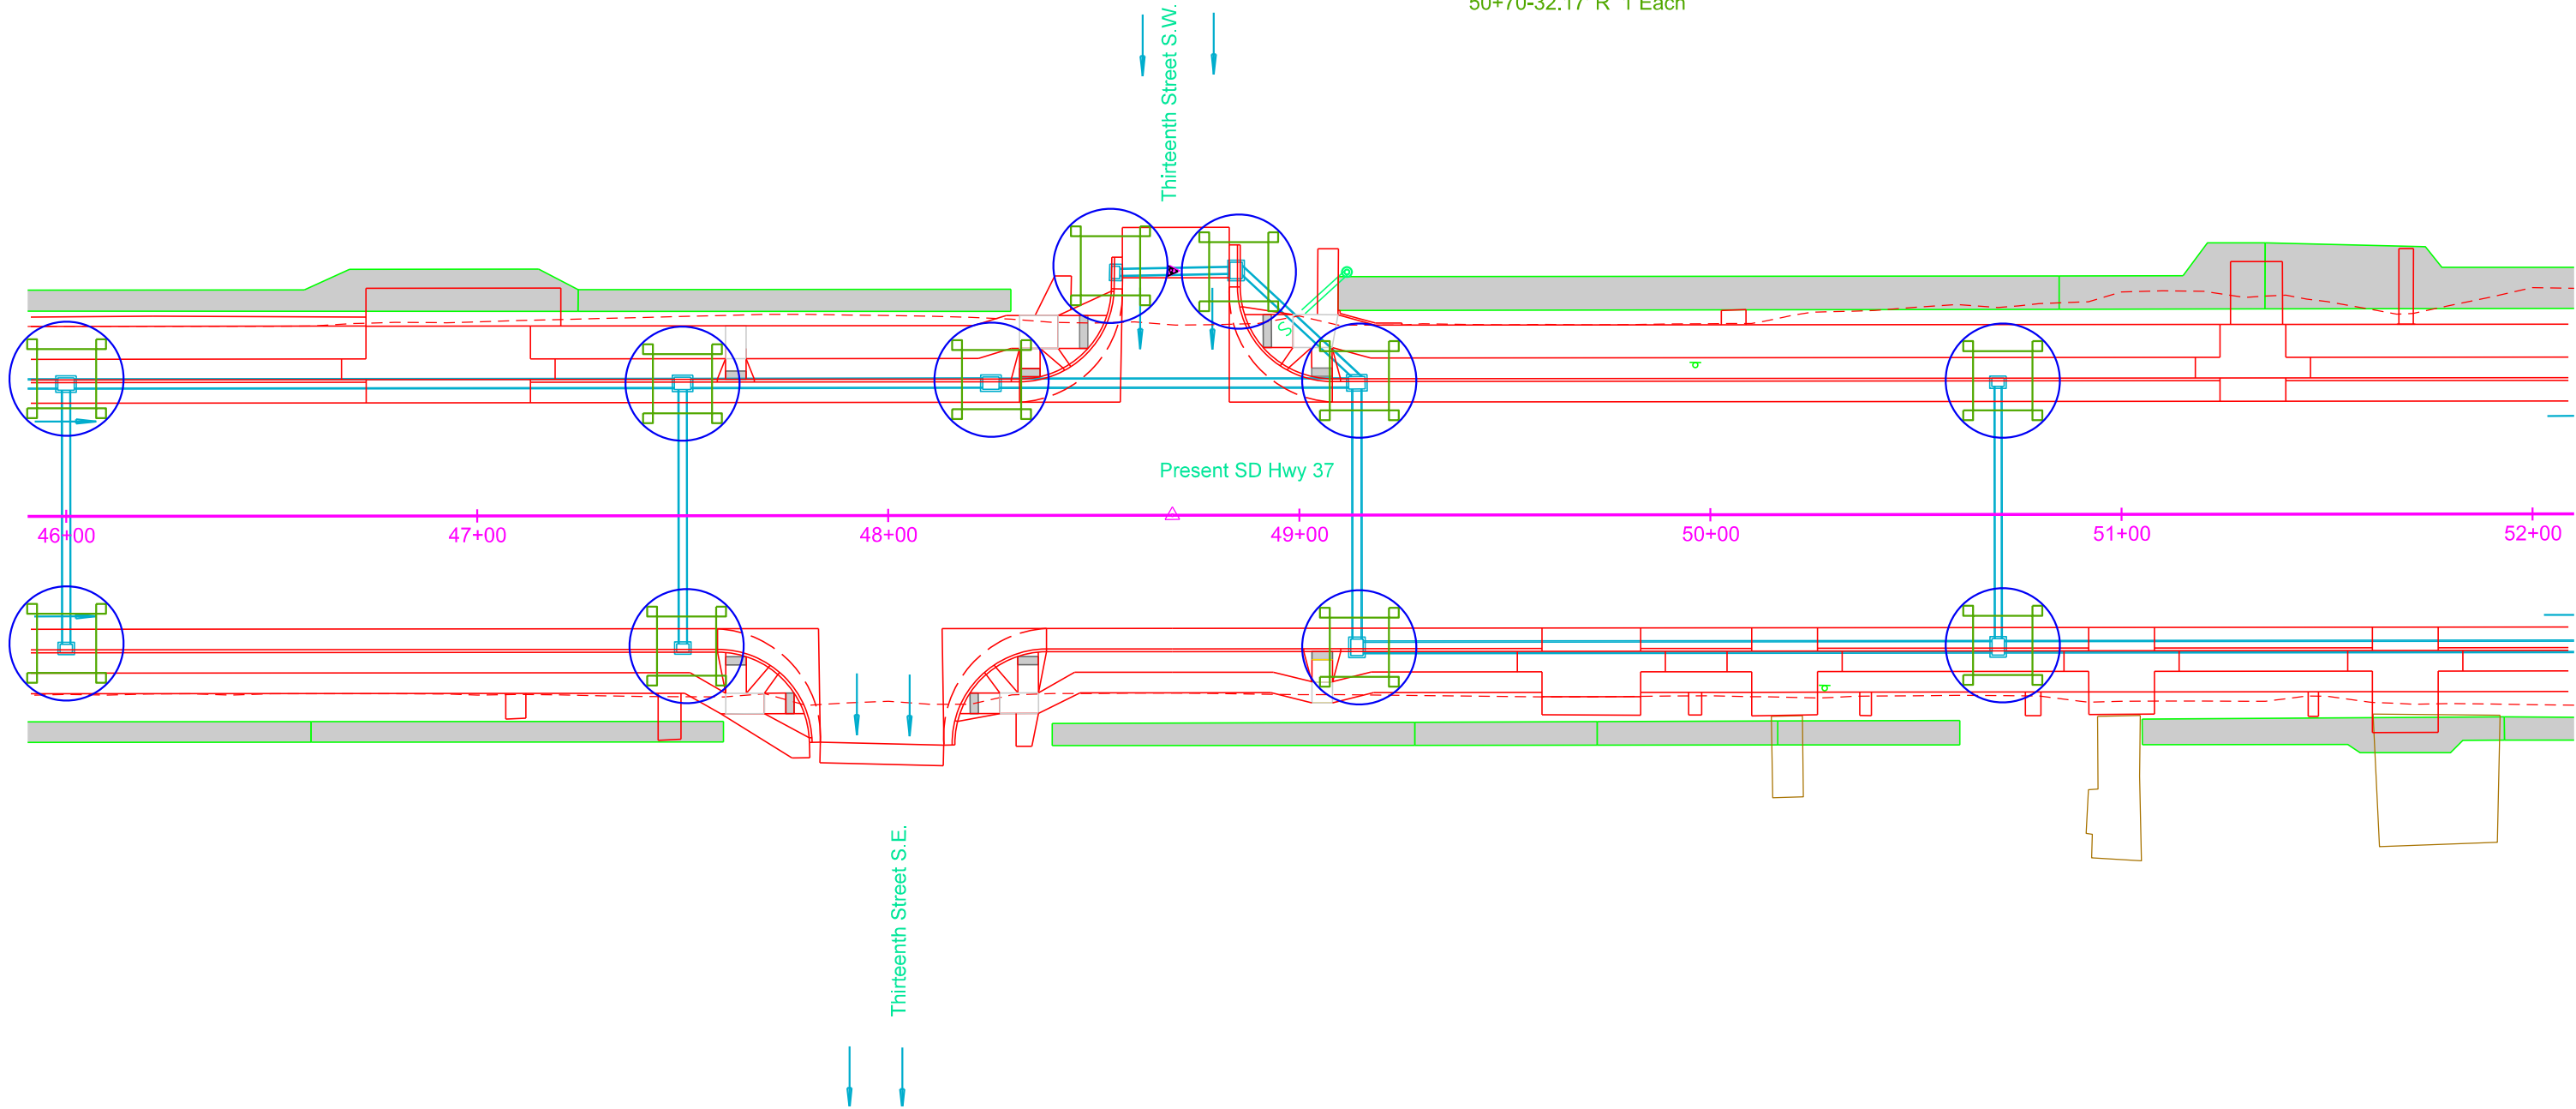

Plot Scale - 1:40

Plotted From - TRPR17200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D24	D30

Plotting Date: 07/29/2026



Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:


52+30-32.17' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
52+30-32.17' R	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
52+86-57.25' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
53+14-57.76' L	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
55+10-32.17' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
55+10-32.17' R	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
56+85-32.17' L	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
56+85-32.17' R	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
57+16-57.31' L	22 Ft High Flow Silt Fence	28 Ft Sediment Filter Bags
57+45-57.71' L	18 Ft High Flow Silt Fence	24 Ft Sediment Filter Bags
52+64-36.00' R	28 Ft High Flow Silt Fence	36 Ft Sediment Filter Bags
53+45-34.63' L	32 Ft High Flow Silt Fence	44 Ft Sediment Filter Bags
53+45-34.63' R	32 Ft High Flow Silt Fence	44 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:

52+30-32.17' L	1 Each
52+30-32.17' R	1 Each
52+86-57.25' L	1 Each
53+14-57.76' L	1 Each
55+10-32.17' L	1 Each
55+10-32.17' R	1 Each
56+85-32.17' L	1 Each
56+85-32.17' R	1 Each
57+16-57.31' L	1 Each
57+45-57.71' L	1 Each

Install Sediment Control at Type S Drop Inlets after the placement of surfacing at the following locations:

53+45-34.63' L	8 Ft
53+45-34.63' R	8 Ft

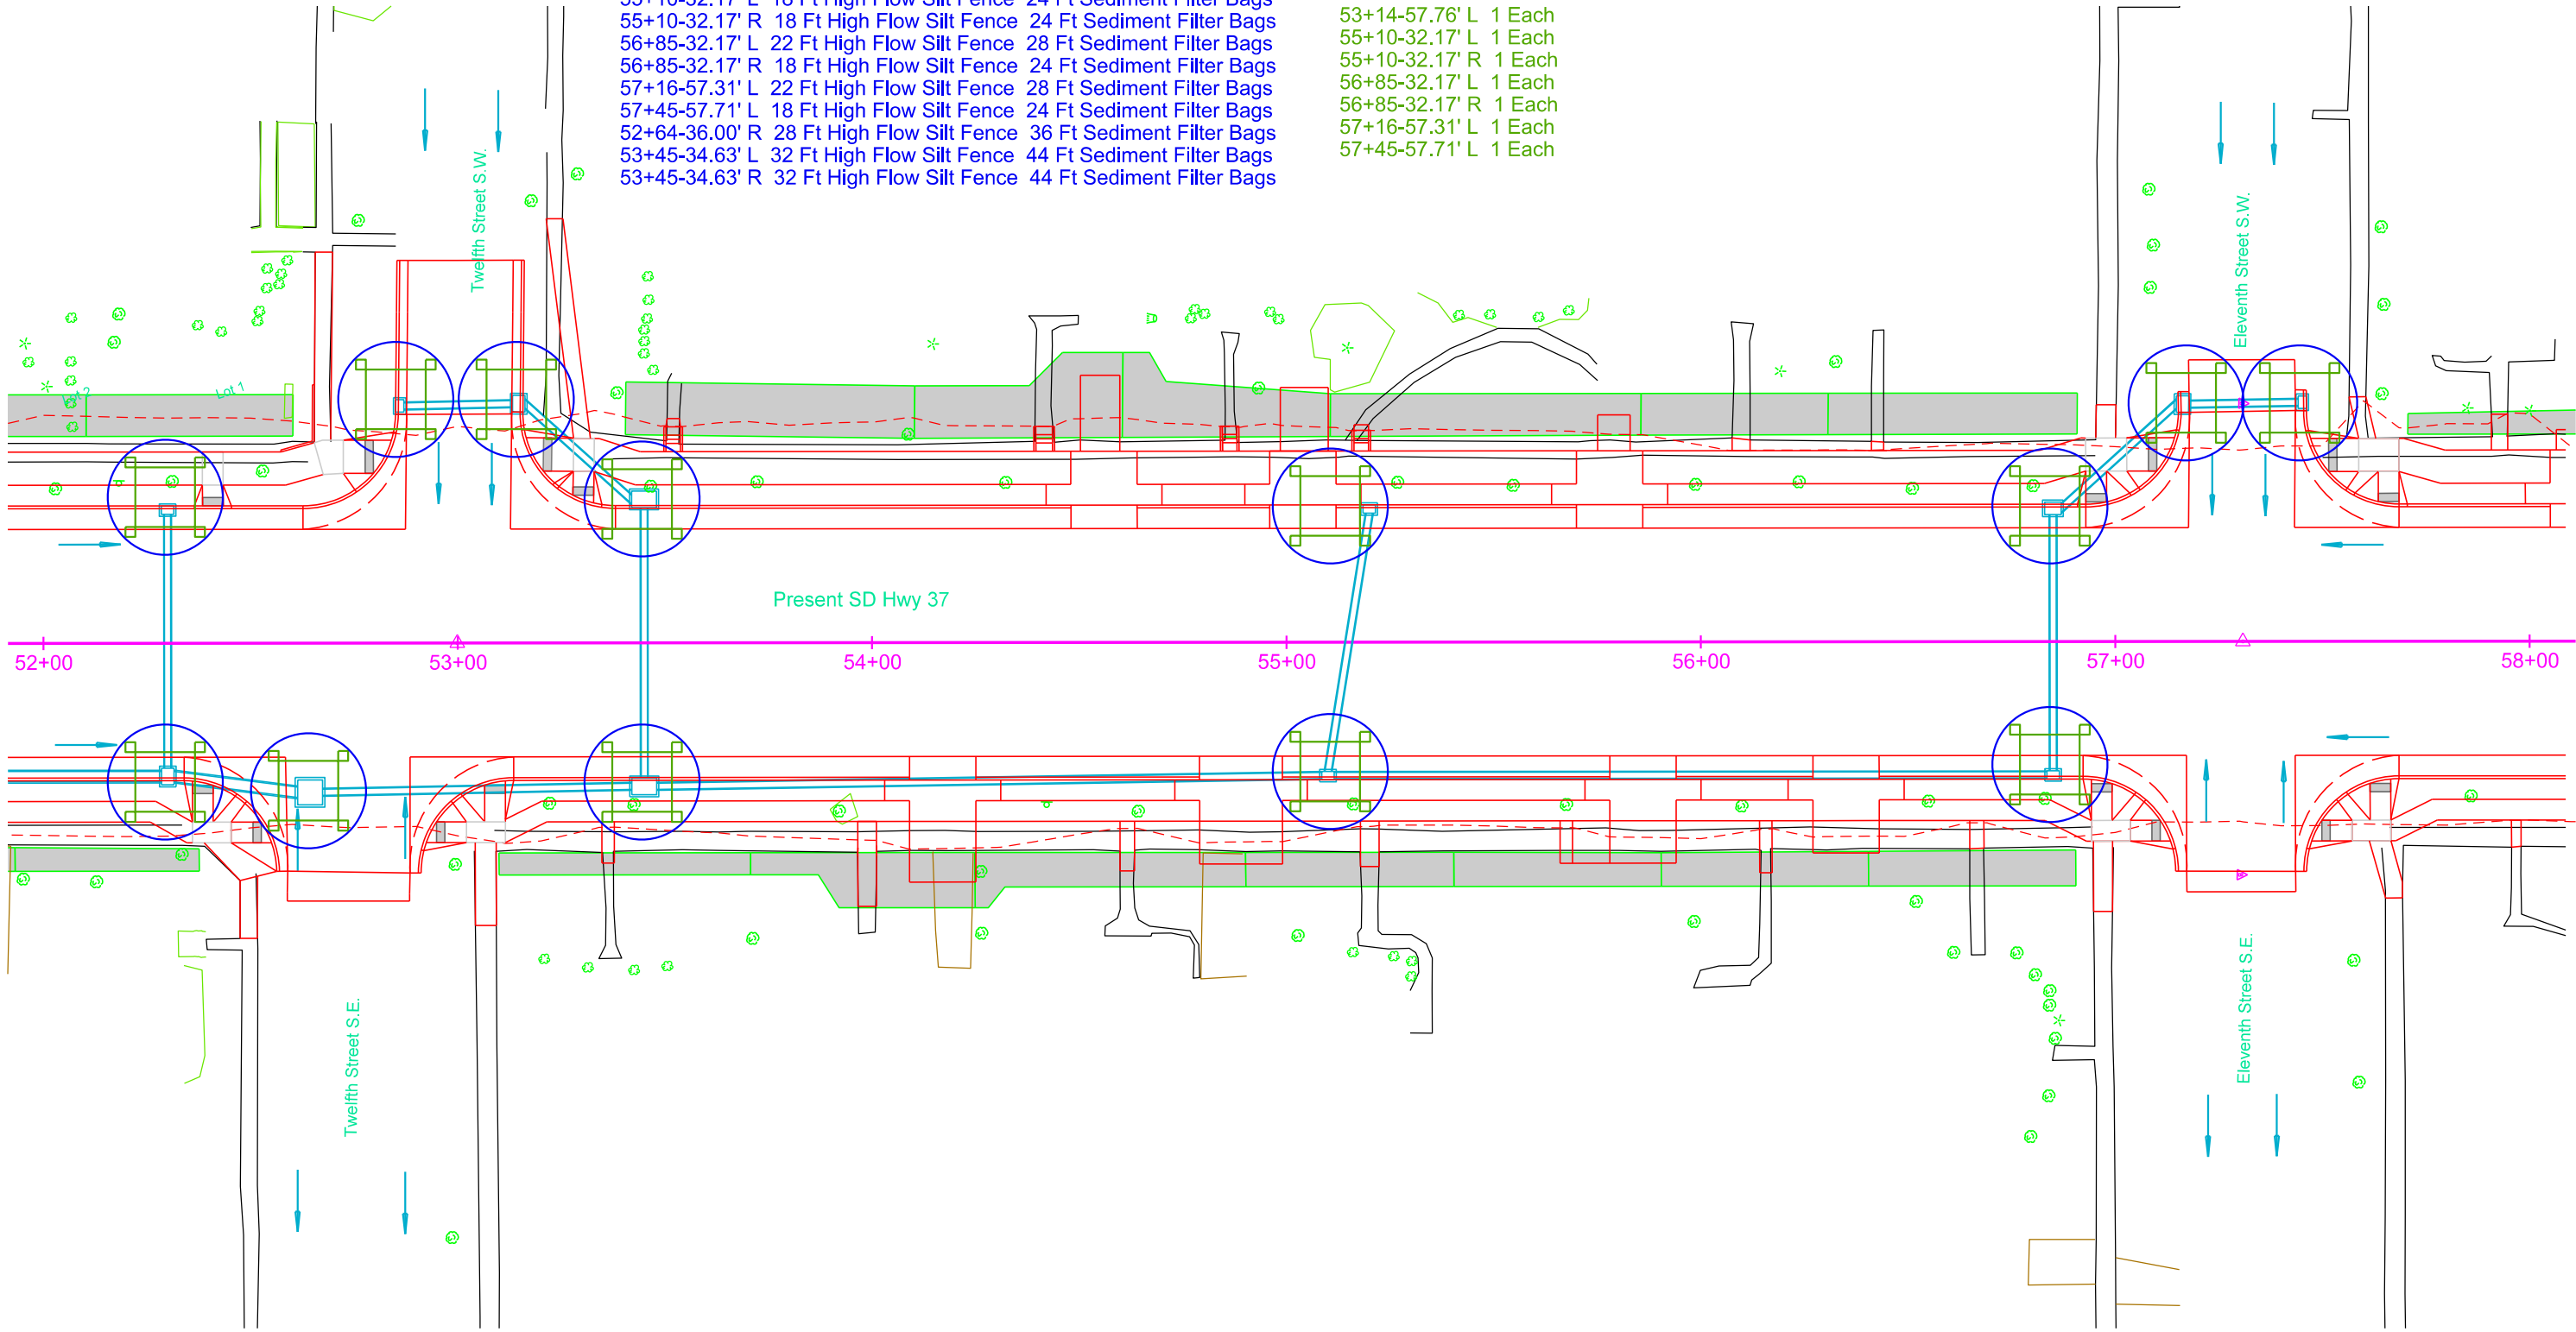

Plot Scale - 1:40

Plotted From - TRPR17200


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D25	D30

Plotting Date: 07/29/2026



Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
61+20-32.17' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
61+20-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
61+47-57.32' L 22 Ft High Flow Silt Fence 28 Ft Sediment Filter Bags
61+76-57.66' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
63+40-32.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
63+40-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
61+20-32.17' L 1 Each
61+20-32.17' R 1 Each
61+47-57.32' L 1 Each
61+76-57.66' L 1 Each
63+40-32.17' L 1 Each
63+40-32.17' R 1 Each

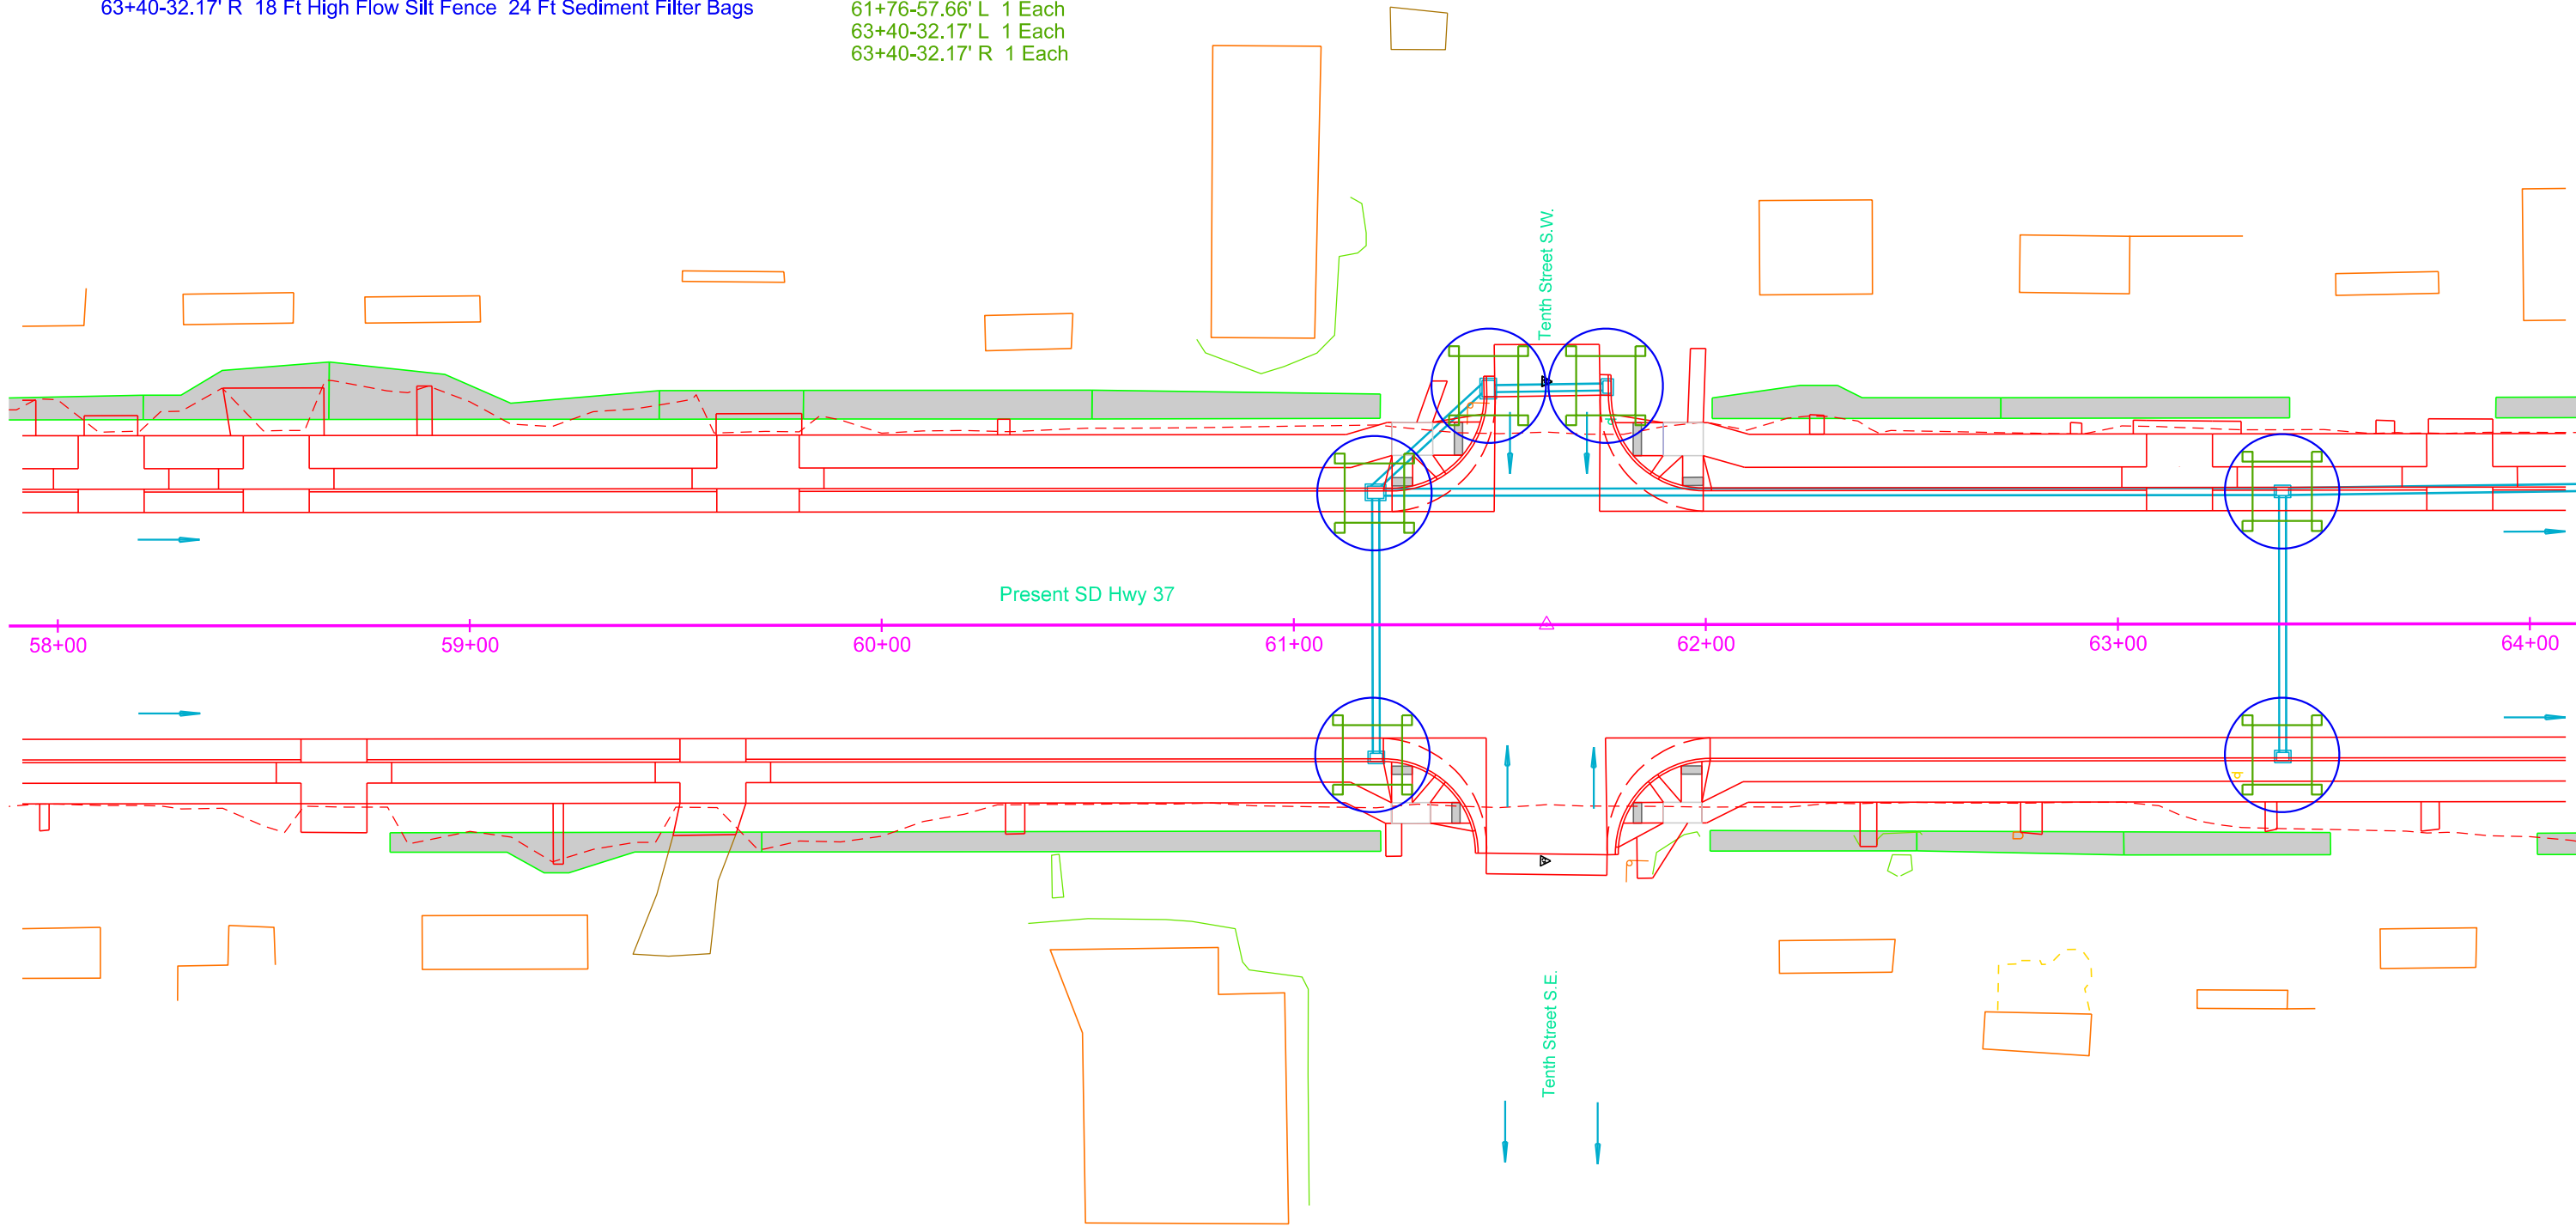

Plot Scale - 1:40

Plotted From - TRPR17200


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D26	D30

Plotting Date: 07/29/2026



Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
65+45-32.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
65+45-32.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
65+73-57.37' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
66+10-54.61' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
65+84-31.94' L 32 Ft High Flow Silt Fence 44 Ft Sediment Filter Bags

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
65+45-32.17' L 1 Each
65+45-32.17' R 1 Each
65+73-57.37' L 1 Each
66+10-54.61' L 1 Each

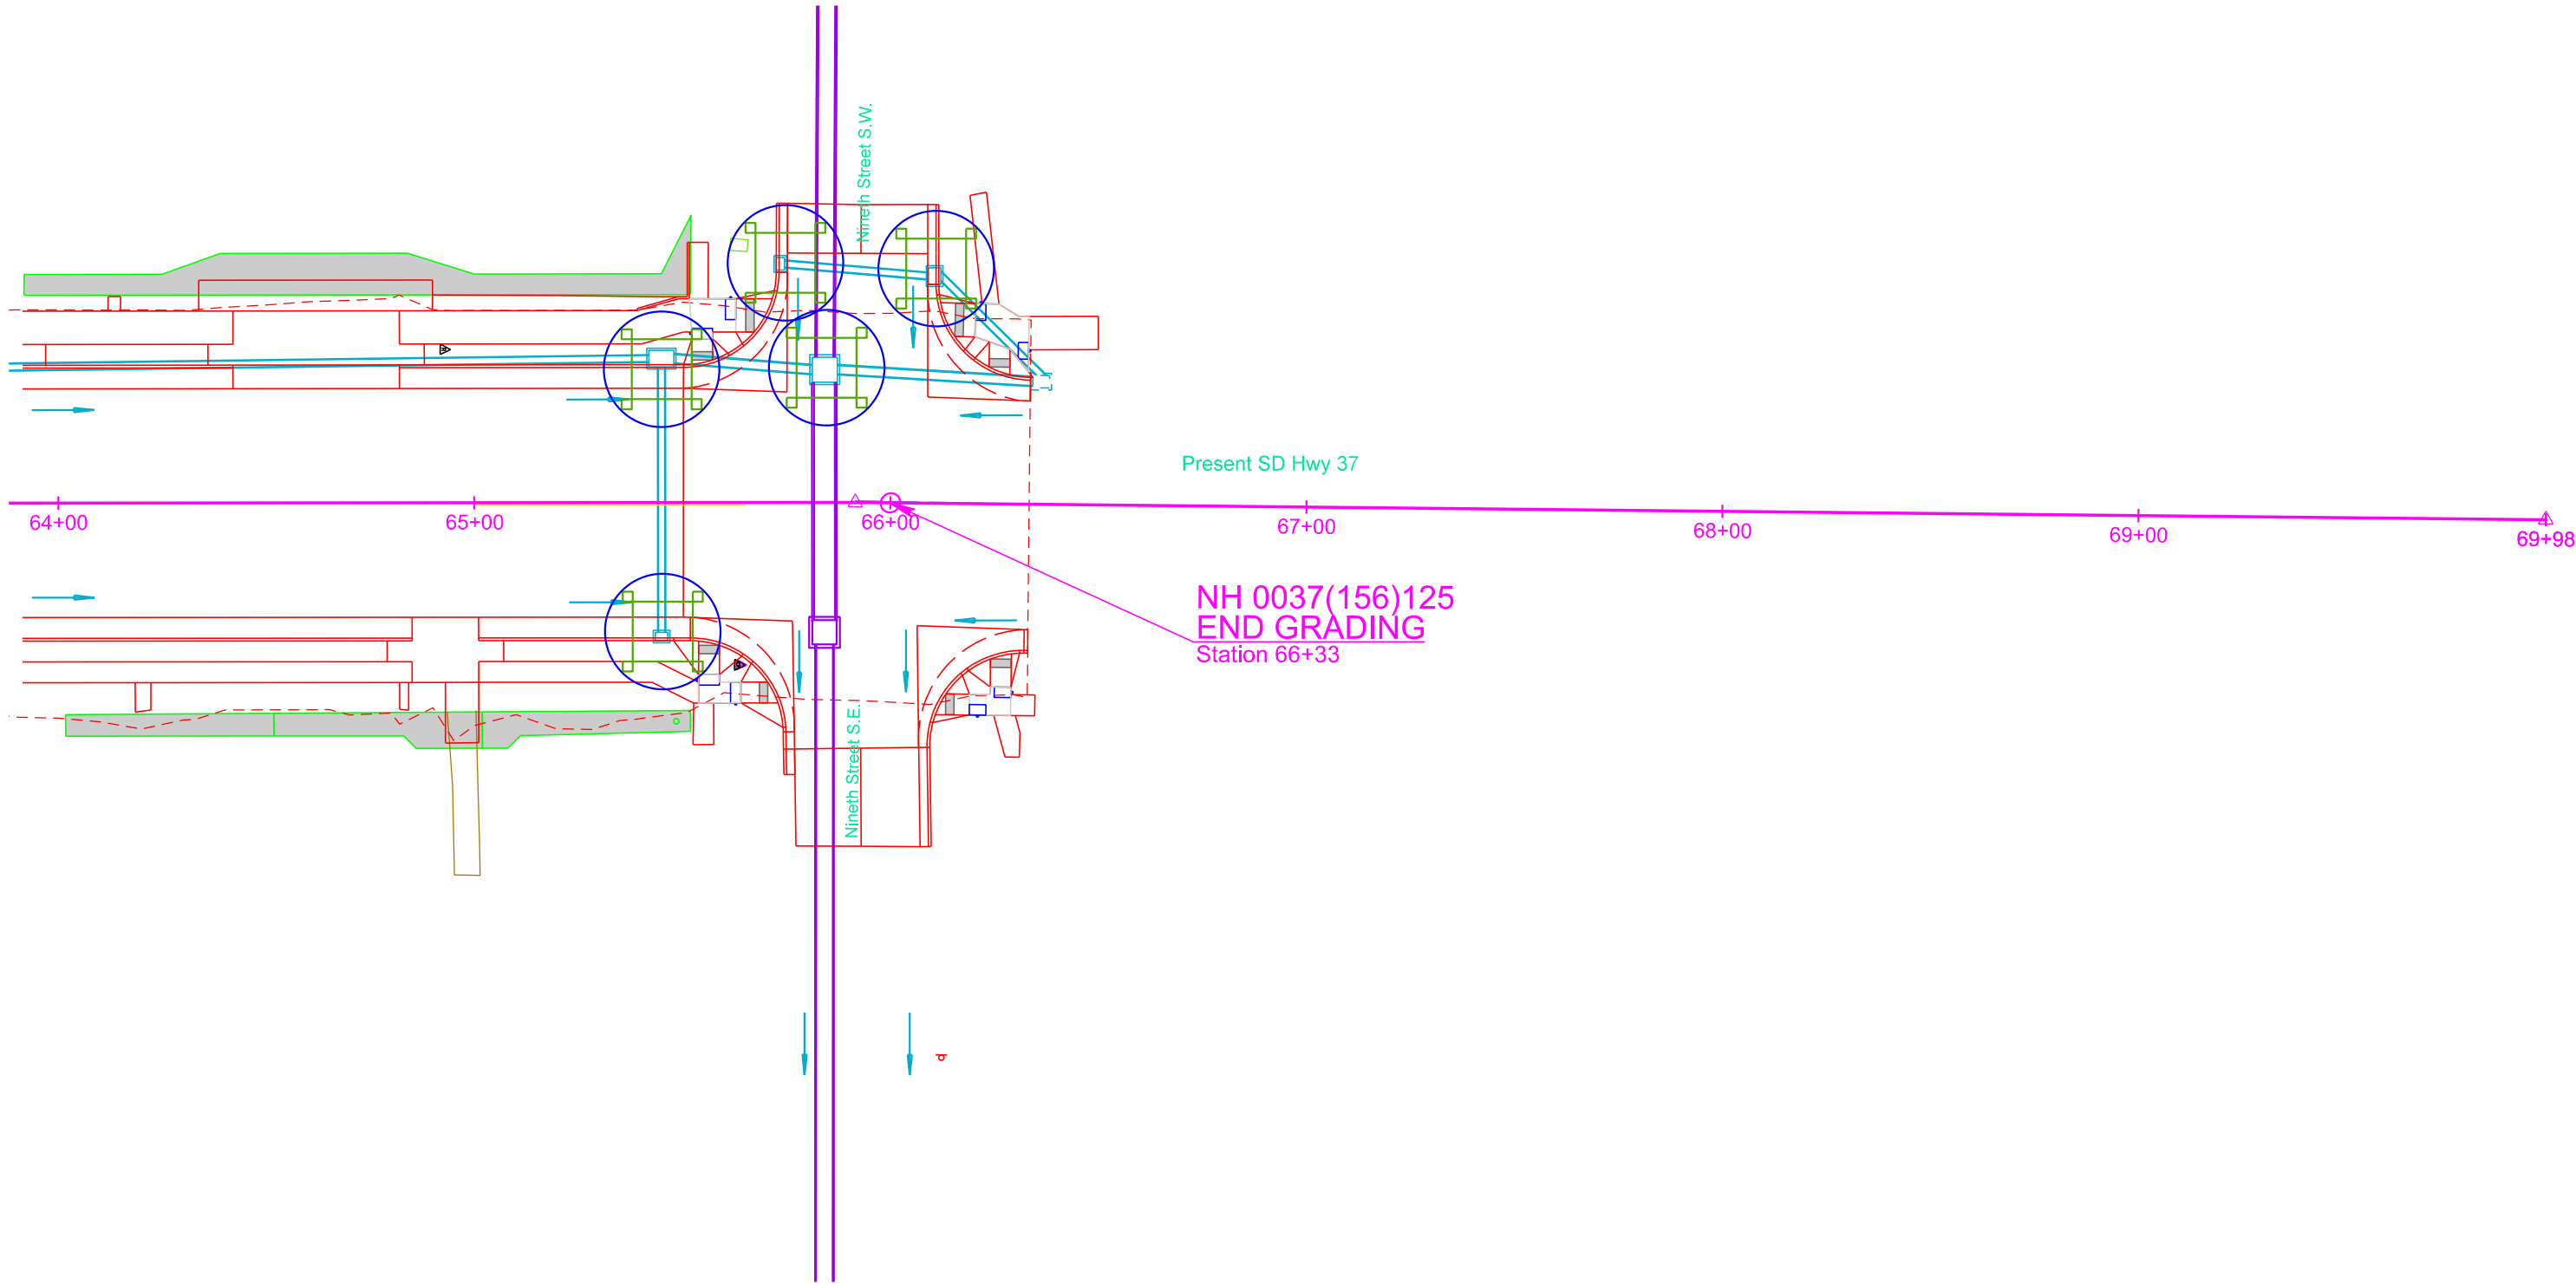

1:300
Plot Scale -

OPTIONS FOR DEWATERING AND SEDIMENT COLLECTING

OPTIONS ARE NOT LIMITED TO WHAT IS SHOWN ON THIS SHEET

NO MATTER THE SYSTEM OR METHOD USED, THE CONTRACTOR MUST MEET THE TERMS OF THE TEMPORARY DISCHARGE PERMIT AND THE STORMWATER PERMIT FOR CONSTRUCTION ACTIVITIES.

Various systems, devices, and products are shown on this sheet to give the Contractor ideas of what may be used for water treatment. Other systems, devices, and products are available and can be used with approval from the Engineer.

The Contractor may elect to block a portion of storm sewer near the outfall with sand bags and pump the water out to be treated with a flocculent or allow the water to set in a lined dumpster until sediment to falls out of suspension before discharging the water. Drop inlet protection devices could also be used as part of a treatment train. The Contractor may pump dirty water into a hydroseeder and mix it with a flocculent, and spray the mixture back onto a sediment pond.

PURPOSE

The purpose of a dewatering and sediment collection system is to collect turbid storm water on the project, treat it with flocculents as needed, and capture the sediment that falls out of suspension before the water is discharged into "Waters of the US" or "Waters of the State". Refer to the Environmental Commitments for the specific requirements for each body of water on this project.

The Contractor will need to create a Pollution Prevention Plan (PPP) for dewatering and sediment collection if the Contractor choses to discharge the water into "Waters of the US" or "Waters of the State" instead of disposing of the water off-site, using it for irrigation, or using it for hydroseeding. The Contractor will also need to obtain a Temporary Discharge Permit from the South Dakota Department of Environment & Natural Resources (DENR) on all projects outside of Indian Reservation boundaries.

Suggestions for dewatering and sediment collection may be shown on the plan sheets. It is the Contractor's responsibility to dewater and collect sediment. The Contractor will have to intercept and treat the stormwater before storm sewer outfalls into "Waters of the US" or "Waters of the State". The Contractor may need more than one dewatering and sediment collection system to capture and treat stormwater at multiple outfalls and/or locations simultaneously during each phase of the project.

PAYMENT

Dewatering and Sediment Collecting will be paid for via lump sum bid item.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D27	D30

Plotting Date: 07/29/2026

DEWATERING BAGS AND SOCKS capture sediment and should be placed on pavement, vegetated areas, or gravel.

Dandy Dewatering Bag
Dandy Products, Inc.
Powell, OH
Phone: 1.800.591.2284
www.dandyproducts.com

Non-woven Sediment Filter Bags
Indian Valley Industries, Inc.
Johnson City, NY
Phone: 1.800.659.5111
www.iviindustries.com

Taurus Dewatering Bags/Socks
SolHuTec Group, Inc.
Sebastian, FL
Phone: 1.888.703.9889
www.solhutech.com

Ultra-Dewatering Bag
UltraTech International, Inc
Jacksonville, FL
Phone: 1.800.764.9563
www.spillcontainment.com

Heavy Duty Dirtbag 55
ACF Environmental
Richmond, VA
Phone: 1.800.223.9021
www.acfenvironmental.com

Pump-It Tube
Flo-Water, LLC
West Des Moines, IA
Phone: 1.515.577.6763
www.flo-water.net

FLOCCULENTS listed below are considered to be safe for the environment, if used as directed:

APS 700 Series Floc Logs
Applied Polymer Systems, Inc.
Woodstock, GA
Phone: 1.866.200.9868
http://www.siltstop.com

Floc, Floc Soc, Floc Bag
Innovative Turf Solutions Products
Cincinnati, OH
Phone: 1.513.317.8311
http://www.innovativeturfproducts.com

Biostar CH
Hild & Associates, Inc.
Stillwater, MN
Phone: 1.715.426.5131
www.biostar-ch.com

Terra-Tubes
ACF Environmental
Buffalo Grove, IL
Phone: 1.800.366.1180
www.terratubes.com

FI-3500 Tablets
JRM Chemical, Inc.
Cleveland, OH
Phone: 1.216.475.8488
http://www.soilmoist.com

Tigerfloc
Floc Systems Inc.
Surrey, British Columbia
Phone: 1.604.343.2046
www.flocsystems.com

PORTABLE FLOCCULENT SYSTEMS


Eco Pond Rescue Water Wagon
Eco Pond Rescue LLC
Seminole, Florida
Phone: 1.727.412.4323
www.ecopondrescue.com

WTS2000 Portable Sediment Tank
Aqualet Industries, LLC
Ocean, New Jersey
Phone: 1.732.695.6336
http://aqualetindustries.com

Dry Flocculent Mixing System
Innovative Equipment Solutions
Hot Springs, Arkansas
Phone: 1.501.525.8484
http://www.neptunewash.com

THE CASCADE SYSTEM


The cascade system is shown below and to the right for conceptual purposes only; however, the cascade system will at a minimum incorporate the use of 2 flocculent housing units and 2 water and sediment storage units. Design and construction of the water and sediment storage units are project site specific and will be the Contractor's responsibility. A water and sediment storage unit may consist of a storage bin lined with plastic, the bed of a dump truck lined with plastic, a sediment basin, or other Engineer approved unit. The treatment flocculent bag may be from the list or an approved equal.

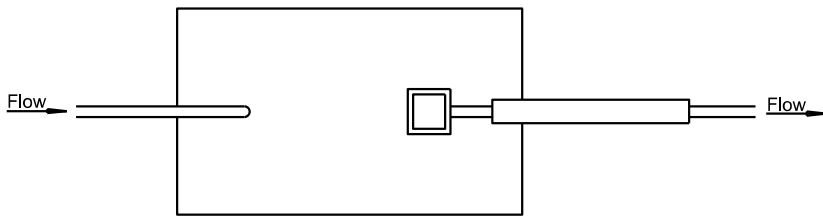

VIEW A-A


FLOCCULENT HOUSING UNIT (estimated quantities for information only)			
NO.	DESCRIPTION	QUANTITY	UNIT
1	4" or 6" Dia. Sch. 40 Gate Valve	1	Each
2	4" X 6" or 6" X 8" Sch. 40 PVC Bushing	2	Each
3	6" or 8" Dia. Sch. 40 PVC "Y"	1	Each
4	6" or 8" Dia. Sch. 40 PVC Female Threaded Cap	1	Each
5	1" Dia. Sch. 80 PVC Drain Valve	1	Each
6	1/2" Eye Bolt with Wing Nut and Rubber Gromets	1	Each
7	6" or 8" Dia. Sch. 40 PVC Pipe	10	Ft.
8	6" or 8" Dia. Sch. 40 PVC Male Adapter	1	Each
9	4" or 6" Dia. Sch. 40 PVC Swing Check Valve	1	Each

FLOW RATE ESTIMATE	
Pump Type	Flow Rate (gpm)
2"	50-250
3" Gas	250-350
4" Diesel	500-750
6" Diesel	750-1000

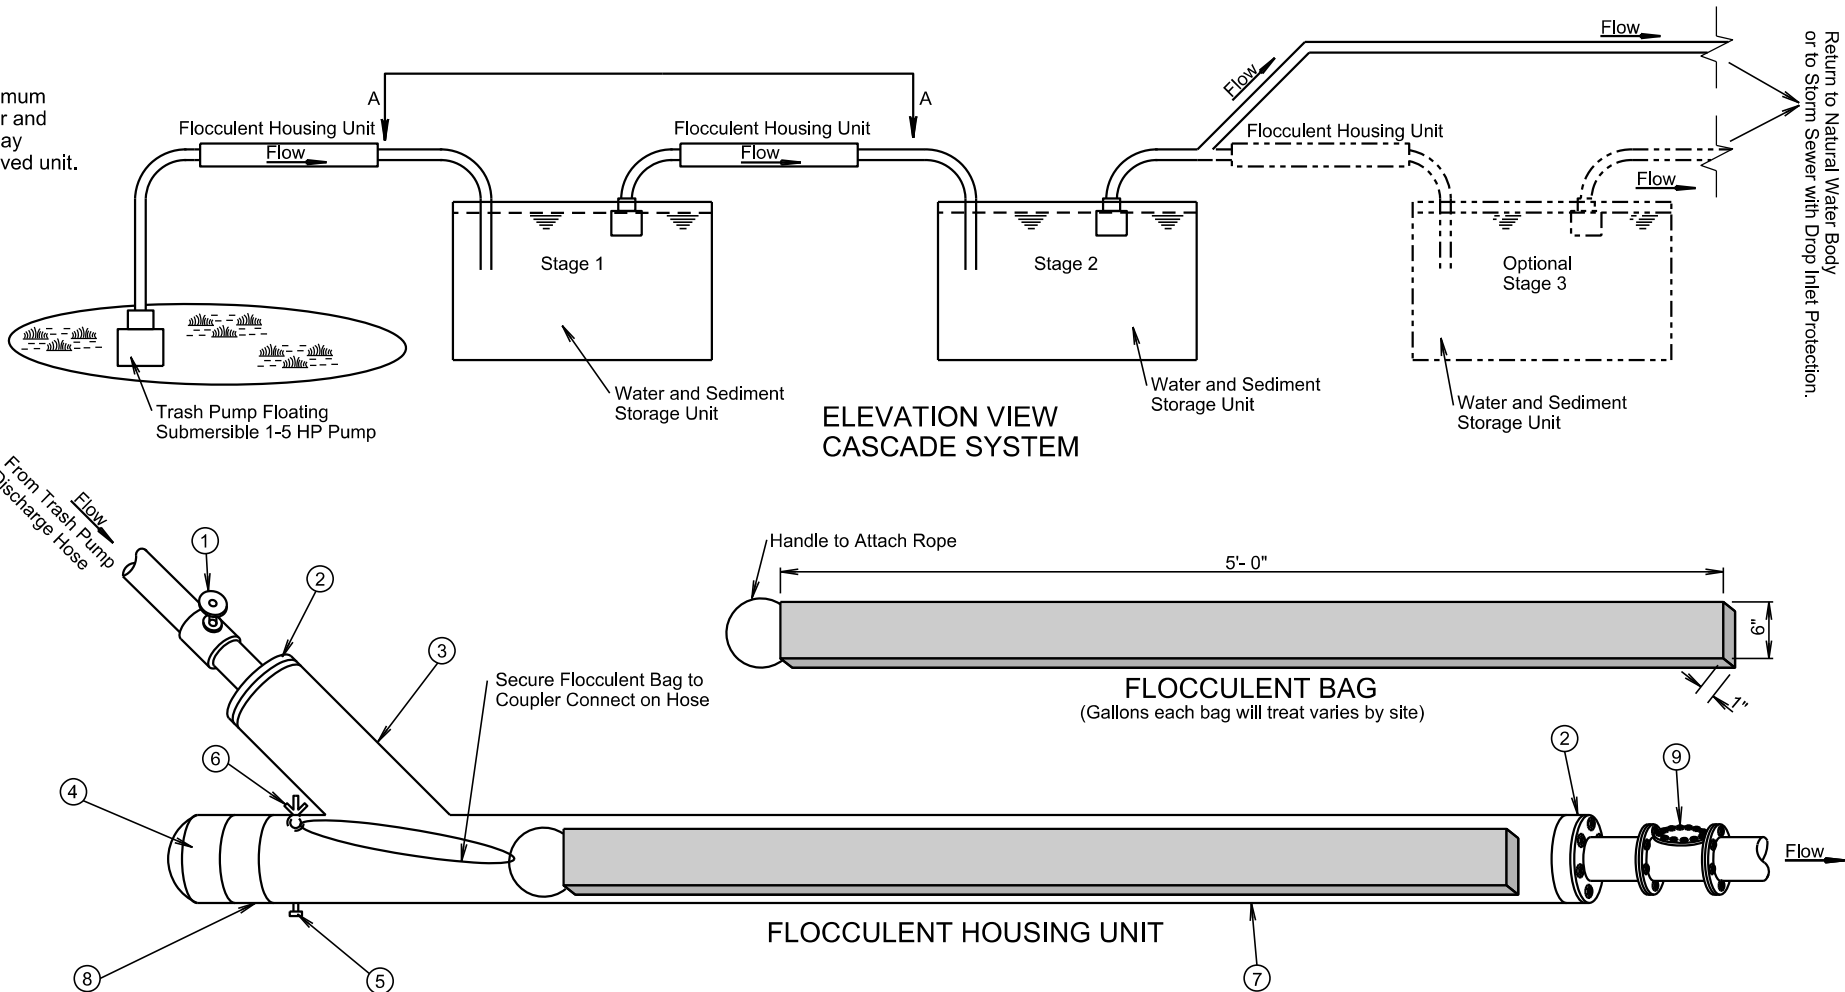

Plotted From - TRPR17200

File - ...rd\p\bead06\A\DeWatering.dgn

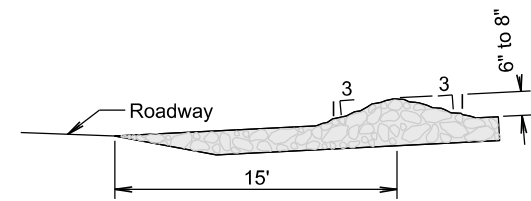

15' (Min.)

12" of Granular Material

12" Pit Run Material

Reinforcement Fabric (MSE)

SECTION B-B

If embankment is necessary it must be pit run material.

[illegible]

SECTION A-A

10'

50' (Min.)

Work Area

12" of Granular material

12" Pit Run Material

Reinforcement Fabric (MSE)

Existing Surface

Existing Surface

15' (Min.)

12" of Granular Material

12" Pit Run Material


Reinforcement Fabric (MSE)

PARALLEL TO ROADWAY

1:200
Plot Scale -
1:200
Plotted From -
TRPR17200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH-CR 0037(156)125	D30	D30

Plotting Date: 07/29/2026

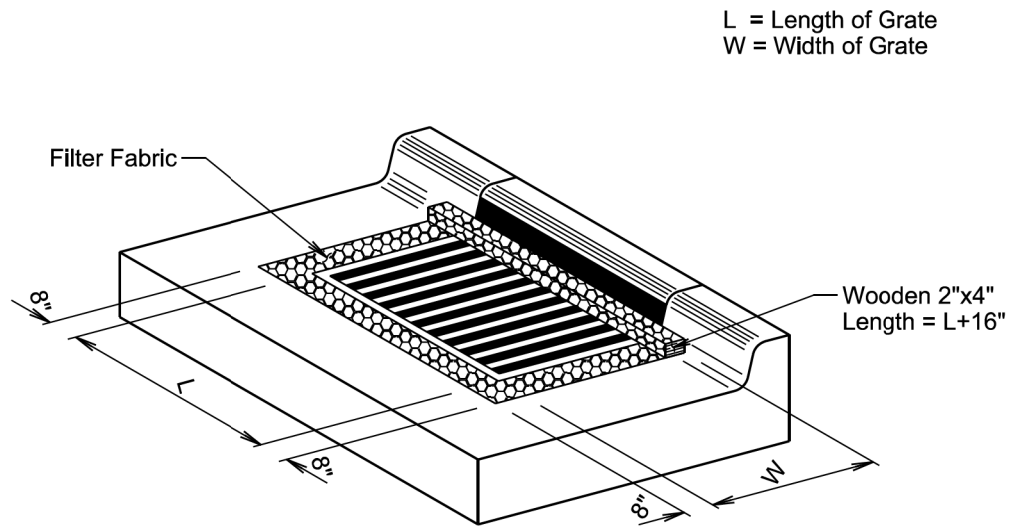

ISOMETRIC VIEW

GENERAL NOTES:

The grate and curb and gutter shown are for illustrative purposes only.

The sediment control at inlet with frame and grate will be placed at locations stated in the plans or at locations determined by the Engineer.

The filter fabric will be the type specified in the plans.

The filter fabric will be placed in the inlet opening prior to placing the grate. Approximately 18 inches of excess filter fabric will be wrapped around the 2"x4" and stapled securely to the 2"x4" after the grate has been placed.


The Contractor and Engineer will inspect the sediment control device in accordance with the storm water permit. The Contractor will maintain the sediment control device by removing accumulated sediment and replacing torn filter fabric with new filter fabric.

The removed sediment will be placed at a location away from the drop inlet where the sediment will not be washed back into the drop inlet or other storm sewer system.

All costs for furnishing, installing, inspecting, maintaining, removing, and replacing the sediment control device at the inlet including labor, equipment, and materials will be incidental to the contract unit price per each for "Sediment Control at Inlet with Frame and Grate".

February 14, 2020

<i>Published Date: 2027</i>	S D D O T	SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES	PLATE NUMBER 734.10
			Sheet 1 of 1

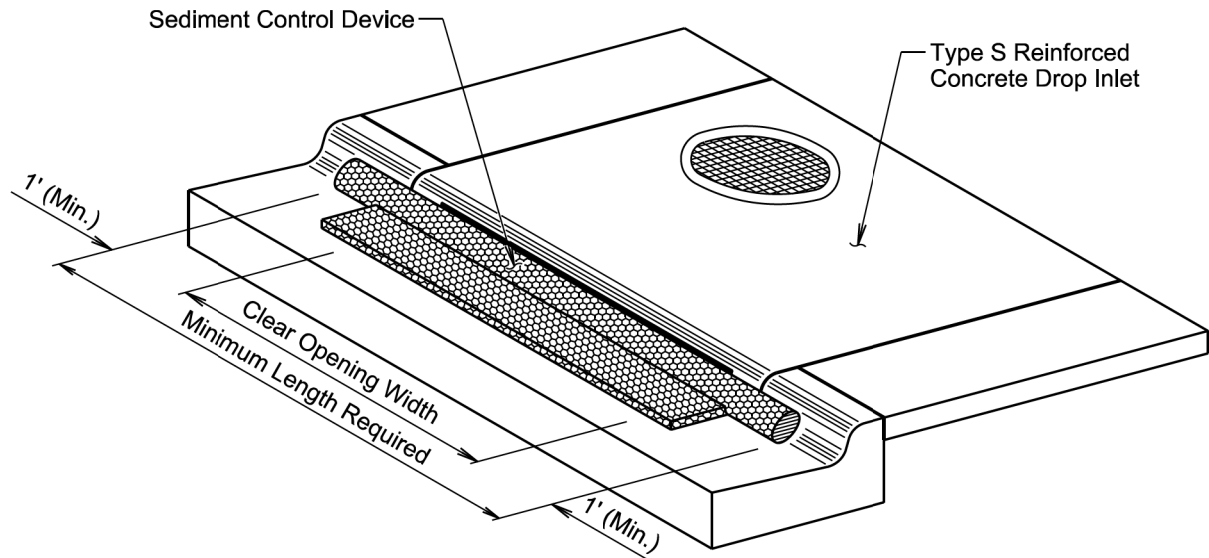

ISOMETRIC VIEW

GENERAL NOTES:

The type of sediment control device shown is for illustrative purposes only.

The type of sediment control device used will be one of the types as specified in the plans.

The sediment control device will be placed at the drop inlets according to the manufacturer's installation instructions.

The sediment control at inlet for type S reinforced concrete drop inlet will be placed at locations stated in the plans or at locations determined by the Engineer.

The Contractor and Engineer will inspect the sediment control device in accordance with the storm water permit. The Contractor will maintain the sediment control device by removing the device, removing accumulated sediment, and resetting the device.

The removed sediment will be placed at a location away from the drop inlet where the sediment will not be washed back into the drop inlet or other storm sewer system.

Payment for the "Sediment Control at Type S Drop Inlet" will be based on the minimum length required at the drop inlets. Some of the sediment control devices specified in the plans will have to be longer due to available length.

All costs for furnishing, installing, inspecting, maintaining, removing, and resetting the sediment control device at the drop inlet including labor, equipment, and materials will be incidental to the contract unit price per foot for "Sediment Control at Type S Reinforced Concrete Drop Inlet".

February 14, 2020

<i>Published Date: 2027</i>	S D D O T	SEDIMENT CONTROL AT INLETS FOR TYPE S REINFORCED CONCRETE DROP INLETS	PLATE NUMBER 734.11
			Sheet 1 of 1

File - ...rd\p\bead06\A\573411_01.dgn