

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0044(227)40	B1	B13



Plotting Date: 4/17/2025

SECTION B: GRADING

INDEX OF SHEETS

- B1 General Layout with Index
- B2-B7 Plan Notes and Estimate of Quantities
- B8 Horizontal Alignment Data
- B9 Control Data
- B10 Legend
- B11 Plan Sheet
- B12 Typical Section for Grading along Slope Mesh
- B13 Standard Plate

PROJECT NH 0044(227)40
MRM 40.46 + 0.04 to MRM 40.46 + 0.34

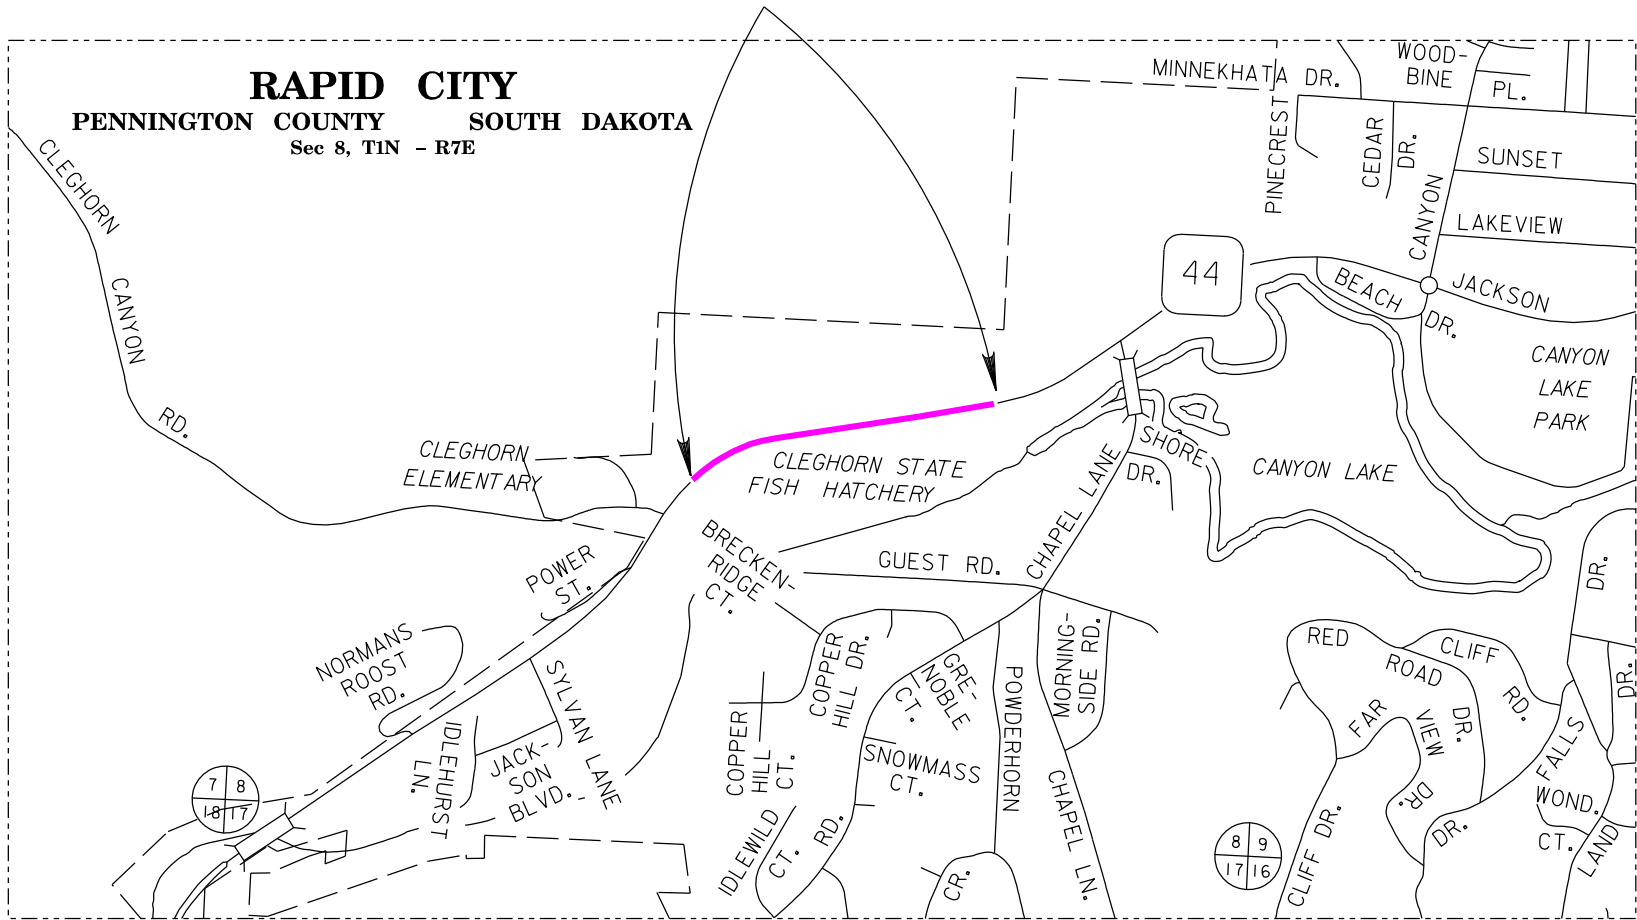

8

October 1, 2025

SECTION B ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
009E0010	Mobilization	Lump Sum	LS
009E3220	Reestablish Right-of-Way and Property Corner	19	Each
009E4200	Construction Schedule, Category II	Lump Sum	LS
100E0020	Clear and Grub Tree	20	Each
110E1700	Remove Silt Fence	550	Ft
120E0010	Unclassified Excavation	400	CuYd
120E1100	Unclassified/Rock Excavation	1,474	CuYd
230E0100	Remove and Replace Topsoil	Lump Sum	LS
730E0208	Type E Permanent Seed Mixture	20	Lb
731E0100	Fertilizing	1,500	Lb
732E0250	Fiber Mulching	2,000	Lb
734E0154	12" Diameter Erosion Control Wattle	550	Ft
910E0510	Rock Scaling and Rigging	360	Hour

UTILITIES

The Contractor will be aware that the existing utilities shown in the plans were surveyed prior to the design of this project and might have been relocated or replaced by a new utility facility prior to construction of this project, might be relocated or replaced by a new utility facility during the construction of this project, or might not require adjustment and may remain in its current location. The Contractor will contact each utility owner and confirm the status of all existing and new utility facilities. The utility contact information is provided elsewhere in the plans or bidding documents.

CONTACT INFORMATION

Please refer to the list of utilities found in the Special Provisions for description of utility impacts and contact information.

CLEARING AND DISPOSAL OF TIMBER

The Contractor will dispose of removed timber in accordance with the Waste Disposal Site note as shown in these plans.

Trees along the edge of the rock slope that have the potential to create rockfall will be removed as determined by the Project Engineer.

TABLE OF CLEAR AND GRUB TREE

Station	L/R	Quantity (Each)
1+90 to 12+16	L	5
12+16 to 16+45	L	15
Total:		20

PUBLIC LANDS SURVEY SYSTEM, RIGHT OF WAY, AND PROPERTY CORNERS

The Contractor will have a Land Surveyor, licensed in the State of South Dakota, to set, reestablish or verify public land survey system (PLSS) corners, right of way (ROW) corners, and property corners as directed by the appropriate SDDOT Region Land Surveyor. It is estimated that 0 PLSS corners and 19 ROW and property corners will be set, reestablished, or verified for this project. The Contractor's Land Surveyor, under the direction of the Region Land Surveyor, will set, reestablish, or verify all corner monuments after surfacing and fencing operations are completed in accordance with the PUBLIC LANDS SURVEY SYSTEM CORNERS section and the RIGHT OF WAY AND PROPERTY CORNERS section in Chapter 8 of the SDDOT Survey Manual.

Installation of corners at unsafe locations will not be required. The SDDOT Region Land Surveyor will determine which locations are unsafe. The Contractor will coordinate with the SDDOT Region Land Surveyor to determine these locations during construction.

< <https://dot.sd.gov/doing-business/engineering/design-services/surveyors> >

All costs associated with furnishing and installing PLSS caps, rebar, and all other materials associated with setting, reestablishing, or verifying PLSS, ROW corners, and property corners in accordance with the SDDOT Survey Manual will be incidental to the contract unit price per each for "Reestablish Public Land Survey System Corner" and/or "Reestablish Right-of-Way and Property Corner".

GENERAL GEOLOGY

The Minnelusa Formation forms the canyon walls within the project area. Quaternary Terrace Gravel overlies the formation on the East end of the project. Each is described by the South Dakota Geological Survey as:

The *Minnelusa Formation* consists of variegated, yellow to red, gray to brown, pink to purple, and black, interbedded sandstone, siltstone, shale, limestone, dolomite, calcarenite, chert, and brecciated beds.

Quaternary Terrace Gravel consists of clay to boulder sized clasts deposited as pediments, paleochannels, and terrace fills of former flood plains.

UNCLASSIFIED/ROCK EXCAVATION

Unclassified/Rock Excavation will be required to remove undermined and unstable rock. The locations are 5+00 (1,111 cuysd) and 14+00 to 16+00 (363 cuysd.). This work will be performed prior to installation of slope mesh and rockfall fences. Excavation of bedded sandstone, dolomite, and limestone with open fractures along planar failure planes will be required.

Extra effort beyond normal manual scaling will be required to excavate areas classified as Unclassified/Rock Excavation. Blasting will not be allowed. It is anticipated that mechanical means such as airbags, hydraulic splitting, drilling, expansive materials, or other methods approved by the Engineer will be utilized to complete excavation and scaling activities. Excavated materials will be wasted off site.

The rock slope at approximately Station 14+75 has been undermined by rockfall creating an overhang approximately 25 feet above the left ditch. Remove the overhang by drilling a series of carefully spaced and aligned drill holes to produce a planar face or shear plane in the rock. Utilize expanding materials, hydraulic splitters, or other methods as approved by the Engineer to trim off the overhang. Blasting will not be allowed. All costs associated with the removal of the rock overhang will be incidental to contract unit price for Unclassified/Rock Excavation.

All costs associated with the excavation and subsequent disposal of materials generated from designated Unclassified/Rock Excavation areas will be paid for at the contract unit price for Unclassified/Rock Excavation. Plans quantity will be the basis of payment, and no separate field measurement will be made.

SCALING

Scaling will be required to remove loose rock and debris from areas shown on the plans and as directed by the Engineer prior to installation of slope mesh and rockfall fences. See Special Provision for Rock Scaling.

A quantity of 4 scalers @ 90 for a total of 360 hours is provided in the estimate of quantities for performing this work.

PROTECTION OF EXISTING ASPHALT SURFACING

The Contractor will protect the existing asphalt surfacing from rocks that roll down the slope during rock excavation and rock scaling work. The Contractor will provide a method of protection to ensure the asphalt surfacing is not damaged during rock removal work. All costs associated with protecting the asphalt surfacing will be incidental to the various bid items on the project.

UNCLASSIFIED EXCAVATION

A quantity of 400 CuYds of Unclassified Excavation is provided to remove rockfall that has accumulated in front of the bedrock from 12+00 to 17+50. This material will be handled as Waste. All costs associated with this work will be incidental to the contract unit price per cubic yard for Unclassified Excavation.

REMOVE AND REPLACE TOPSOIL

Prior to beginning grading work from 12+00 to 17+50 existing topsoil will be salvaged in a windrow. Following completion of grading, topsoil will be spread evenly over the disturbed areas.

All costs associated with removing and replacing the topsoil along areas to be resurfaced will be incidental to the contract lump sum price for "Remove and Replace Topsoil".

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum will consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier will provide certification of the fungal species claimed and the live propagule count. The inoculum will include a minimum 25% the fungal species *Rhizophagus intraradices*. The remaining 75% may include other endomycorrhizal fungal species.

All seed will be inoculated by the seed supplier with a minimum of 100,000 live propagules of mycorrhizal fungi per acre. All costs of inoculating the seed will be incidental to the contract unit price per pound for the corresponding permanent seed mixture.

The Mycorrhizal Inoculum provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<https://apps.sd.gov/HC60ApprovedProducts/main.aspx>

FERTILIZING

The Contractor will apply an all-natural slow release fertilizer prior to seeding or placing sod. The all-natural fertilizer will have a minimum guaranteed analysis of 4-4-4 and be USDA Certified BioBased. It should provide a minimum of 4% (N) nitrogen with a minimum water insoluble nitrogen (WIN) fraction of 2.07%, a minimum of 4% (P2O5) available phosphate, a minimum of 4% (K2O) soluble potash, and a maximum carbon to nitrogen ratio (C:N ratio) of 5:1. The all-natural fertilizer will be free of weed-seed and pathogens accomplished through thermophilic composting, and not mechanical or chemical sterilization, to assure presence of beneficial soil microbiology. The fertilizer will have a near neutral pH, a low salt index, a low biological oxygen demand, contain organic humic and fulvic acids, and have high aerobic organism counts. The fertilizer will also be stable, free of bad odors, and be unattractive as a food source for animals. It should also be in a granular form that is easily spread.

The fertilizer will be applied at a rate of 1,500 pounds per acre in accordance with the manufacturer's recommended method of application.

The all-natural slow release fertilizer will be as shown below or an approved equal:

Product	Manufacturer
Sustane	Sustane Corporate Headquarters Cannon Falls, Minnesota Phone: 1-800-352-9245 www.sustane.com
Perfect Blend	Perfect Blend, LLC Bellevue, WA Phone: 1-866-456-8890 www.perfect-blend.com
Nature Safe	Nature Safe Fertilizers Irving, TX Phone: 1-605-759-5622 www.naturesafe.com

Type E Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	7
Green Needlegrass	Lodorm, AC Mallard Ecovar	4
Sideoats Grama	Butte, Pierre	3
Blue Grama	Bad River	2
Canada Wildrye	Mandan	2
Wildflowers		
Dotted Gayfeather (<i>Liatris punctata</i>)		0.5
Black-eyed Susan (<i>Rudbeckia hirta</i>)		0.5
Blue Flax (<i>Linum lewisii</i>)		0.5
Pale Purple Coneflower (<i>Echinacea angustifolia</i>)		0.5
Total:		20

FIBER MULCHING

Fiber mulch will be applied in a separate operation following permanent seeding.

An additional 2% by weight of tackifier will be added to the fiber mulch product selected from the approved product list. If the product selected has guar gum tackifier included, then the additional 2% of tackifier will be guar gum. If the product selected has synthetic tackifier included, then the additional 2% of tackifier will be synthetic.

The Contractor will allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

All costs for the additional tackifier added to the fiber mulch including labor, equipment, and materials will be incidental to the contract unit price per pound for "Fiber Mulching".

The fiber mulch provided will be from the approved product list. The approved product list for fiber mulch may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

EROSION CONTROL WATTLE

Erosion control wattles for restraining the flow of runoff and sediment will be installed along the curb and gutter from 12+00 to 17+50. They will be used for final stabilization. Refer to Standard Plate 734.06 for details.

The Contractor will provide certification that the erosion control wattles do not contain noxious weed seeds.

Erosion control wattles will remain on the project to decompose.

The erosion control wattle provided will be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

<https://apps.sd.gov/HC60ApprovedProducts/main.aspx>

STORMWATER POLLUTION PREVENTION PLAN CHECKLIST

(The numbers left of the title headings are **reference numbers** to the GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES (Stormwater Permit))

5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION

To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES

- 5.3 (3a): Project Limits (See Title Sheet)
- 5.3 (3a): Project Description (See Title Sheet)
- 5.3 (4): Site Map(s) (See Title Sheet and Plans)
- Major Soil Disturbing Activities (check all that apply)

☐Clearing and grubbing

☐Excavation/borrow

☐Grading and shaping

☐Filling

☐Other (describe):
- 5.3 (3b): Total Project Area 4.2 acres
- 5.3 (3b): Total Area to be Disturbed 2.0 acres
- 5.3 (3c): Maximum Area Disturbed at One Time 2.0 acres
- 5.3 (3d): Existing Vegetative Cover (%) 50%
- 5.3 (3d): Description of Vegetative Cover Sparse, Dry, South Facing
- 5.3 (3e): Soil Properties:
- 5.3 (3f): Name of Receiving Water Body/Bodies
- 5.3 (3g): Location of Construction Support Activity Areas

5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES

The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date

5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES

All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)

Description	Estimated Start Date
<input checked="" type="checkbox"/> Natural Buffers (within 50 ft of Waters of State)	
<input checked="" type="checkbox"/> Silt Fence	
<input type="checkbox"/> Erosion Control Wattles	
<input checked="" type="checkbox"/> Temporary Berm / Windrow	
<input type="checkbox"/> Floating Silt Curtain	
<input type="checkbox"/> Stabilized Construction Entrances	
<input type="checkbox"/> Entrance/Exit Equipment Tire Wash	
<input type="checkbox"/> Other:	

Structural Erosion and Sediment Controls

Description	Estimated Start Date
<input checked="" type="checkbox"/> Silt Fence	
<input checked="" type="checkbox"/> Temporary Berm/Windrow	
<input type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Sediment Barriers	
<input type="checkbox"/> Erosion Bales	
<input type="checkbox"/> Temporary Slope Drain	
<input type="checkbox"/> Turf Reinforcement Mat	
<input type="checkbox"/> Riprap	
<input type="checkbox"/> Gabions	
<input type="checkbox"/> Rock Check Dams	
<input type="checkbox"/> Sediment Traps/Basins	
<input type="checkbox"/> Culvert Inlet Protection	
<input type="checkbox"/> Transition Mats	
<input type="checkbox"/> Median/Area Drain Inlet Protection	
<input type="checkbox"/> Curb Inlet Protection	
<input type="checkbox"/> Interceptor Ditch	
<input type="checkbox"/> Concrete Washout Facility	
<input type="checkbox"/> Work Platform	
<input type="checkbox"/> Temporary Water Barrier	
<input type="checkbox"/> Temporary Water Crossing	
<input type="checkbox"/> Permanent Stormwater Ponds	
<input type="checkbox"/> Permanent Open Vegetated Swales	
<input type="checkbox"/> Natural Depressions to allow for Infiltration	
<input type="checkbox"/> Sequential Systems that combine several practices	
<input type="checkbox"/> Other:	

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0044(227)40	B4	B13

Dust Controls

Description	Estimated Start Date
<input type="checkbox"/> Tarps & Wind impervious fabrics	
<input type="checkbox"/> Watering	
<input type="checkbox"/> Stockpile location/orientation	
<input type="checkbox"/> Dust Control Chlorides	
<input type="checkbox"/> Other	

Dewatering BMPs

Description	Estimated Start Date
<input type="checkbox"/> Sediment Basins	
<input type="checkbox"/> Dewatering bags	
<input type="checkbox"/> Weir tanks	
<input type="checkbox"/> Temporary Diversion Channel	
<input type="checkbox"/> Other:	

Stabilization Practices (See Detail Plan Sheets)

(Stabilization measures will begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization will be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities (3.18))

Description	Estimated Start Date
<input checked="" type="checkbox"/> Vegetation Buffer Strips	
<input checked="" type="checkbox"/> Temporary Seeding (Cover Crop Seeding)	
<input checked="" type="checkbox"/> Permanent Seeding	
<input type="checkbox"/> Sodding	
<input type="checkbox"/> Planting (Woody Vegetation for Soil Stabilization)	
<input checked="" type="checkbox"/> Mulching (Grass Hay or Straw)	
<input type="checkbox"/> Fiber Mulching (Wood Fiber Mulch)	
<input type="checkbox"/> Soil Stabilizer	
<input type="checkbox"/> Bonded Fiber Matrix	
<input type="checkbox"/> Fiber Reinforced Matrix	
<input type="checkbox"/> Erosion Control Blankets	
<input type="checkbox"/> Surface Roughening (e.g. tracking)	
<input type="checkbox"/> Other:	

Wetland Avoidance

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☐ No ☒ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure’s capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor’s Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in “DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES” above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

- **Material Management**
 - Housekeeping
 - Only needed products will be stored on-site by the Contractor.
 - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
 - Products must be stored in original containers and labeled.
 - Material mixing will be conducted in accordance with the manufacturer’s recommendations.
 - When possible, all products will be completely used before properly disposing of the container off-site.
 - The manufacturer’s directions for disposal of materials and containers will be followed.
 - The Contractor’s site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
 - Dust generated will be controlled in an environmentally safe manner.
 - Hazardous Materials
 - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
 - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
 - If surplus product must be disposed of, manufacturer’s label directions for disposal will be followed.

- Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
- Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
- Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ **Spill Control Practices**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer’s recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor’s site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ **Spill Response**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor’s site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.

- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent’s designee will be responsible for completing the spill reporting form and for reporting the spill to SDDANR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor’s site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

➤ **Waste Disposal**

- All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.

➤ **Hazardous Waste**

- All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.

➤ **Sanitary Waste**

- Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading “POLLUTION PREVENTION PROCEDURES” (check all that apply).

- ☐ Concrete and Portland Cement
- ☐ Detergents
- ☐ Paints
- ☐ Metals
- ☐ Bituminous Materials
- ☐ Petroleum Based Products
- ☐ Diesel Exhaust Fluid
- ☐ Cleaning Solvents
- ☐ Wood
- ☐ Cure
- ☐ Texture
- ☐ Chemical Fertilizers
- ☐ Other:

Product Specific Practices

- **Petroleum Products**
All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- **Fertilizers**
Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- **Paints**
All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer’s instructions and any applicable state and local regulations.
- **Concrete Trucks**
Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- ☐ Discharges from water line flushing.
- ☐ Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- ☐ Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor’s site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDANR immediately **if any one of the following** conditions exists:
 - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
 - The release or spill causes an immediate danger to human health or safety
 - The release or spill exceeds 25 gallons
 - The release or spill causes a sheen on surface water
 - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
 - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
 - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
 - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDANR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDANR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge will be sent to SDDANR within 14 days of the discharge.

5.4: SWPPP CERTIFICATIONS

➤ Certification of Compliance with Federal, State, and Local Regulations

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

➤ South Dakota Department of Transportation

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature (See the General Permit, Section 7.4 (1))

➤ Prime Contractor

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

➤ **Contractor Information:**

- Prime Contractor Name: _____
- Contractor Contact Name: _____
- Address: _____
- _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ **Erosion Control Supervisor**

- Name: _____
- Address: _____
- _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ **SDDOT Project Engineer**

- Name: _____
- Business Address: _____
- Job Office Location: _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ **SDDANR Contact Spill Reporting**

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

➤ **SDDANR Contact for Hazardous Materials.**

- (605) 773-3153

➤ **National Response Center Hotline**

- (800) 424-8802.

➤ **SDDANR Stormwater Contact Information**

- SDDANR Stormwater (800) 737-8676
- Surface Water Quality Program (605) 773-3351

5.5: REQUIRED SWPPP MODIFICATIONS

➤ **5.5 (1): Conditions Requiring SWPPP Modification**

The SWPPP must be modified, including the site map(s), in response to any of the following conditions:

- When a new operator responsible for implementation of any part the SWPPP begins work on the site.
- When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
- To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
- If inspections by site staff, local officials, SDDANR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
- To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
- If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.

➤ **5.5 (2): Deadlines for SWPPP Modification**

Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.

➤ **5.5 (3): Documentation of Modifications to the Plan**

All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.

➤ **5.5 (4): Certification Requirements**

All modifications made to the SWPPP must be signed and certified as required in Section 7.4.

➤ **5.5 (5): Required Notice to Other Operators**

If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form.

HORIZONTAL ALIGNMENT DATA

MAINLINE

Type	Station			Northing	Easting
POB	-1+17.00			642323.654	1187720.825
		TL= 83.43	N 31°31'14" E		
PC	-0+33.57			642394.776	1187764.444
PI	3+51.94	R = 850.00	Delta = 48°47'34" R	642723.407	1187965.992
PT	6+90.29			642788.273	1188346.008
		TL= 1091.14	N 80°18'48" E		
PC	17+81.43			642971.867	1189421.593
PI	20+89.80	R = 1220.00	Delta = 28°22'14" L	643023.753	1189725.571
PT	23+85.53			643213.850	1189968.384
		TL= 8.66	N 51°56'34" E		
POE	23+94.19			643219.191	1189975.206

CONTROL DATA

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0044(227)40	B9	B13

HORIZONTAL AND VERTICAL CONTROL POINTS						
POINT	STATION	OFFSET	DESCRIPTION	NORTHING	EASTING	ELEVATION
#1	3+14	218' L	Rebar	642824.216	1187875.909	3521.64
#2	16+22	86' L	Rebar	643029.756	1189249.671	3437.51
#3	15+98	51' R	Rebar	642888.046	1189231.537	3376.14
#4	15+58	46' R	Rebar	642754.718	1188421.564	3388.20
#5	3+46	81' R	Rebar	642596.135	1188070.927	3389.51
#6	1+72	77' R	Rebar	642374.352	1187842.924	3397.69

The coordinates shown on this sheet are based on the South Dakota State Plane Coordinate System. South Zone NAD 83/96; epoch 2010
Geoid12A (CONUS); SF = 0.9998877
The elevations shown on this sheet are based on NAVD 88.

1:200
Plot Scale -
TRRC11951
Plotted From -

LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0044(227)40	B10	B13

Plotting Date: 10/20/2021

Anchor		Mailbox		Subsurface Utility Exploration Test Hole		State and National Line	
Antenna		Manhole Electric		Telephone Fiber Optics		County Line	
Approach		Manhole Gas		Telephone Junction Box		Section Line	
Assumed Corner		Manhole Miscellaneous		Telephone Pole		Quarter Line	
Azimuth Marker		Manhole Sanitary Sewer		Television Cable Jct Box		Sixteenth Line	
BBQ Grill/ Fireplace		Manhole Storm Sewer		Television Tower		Property Line	
Bearing Tree		Manhole Telephone		Test Wells/Bore Holes		Construction Line	
Bench Mark		Manhole Water		Traffic Sign Double Face		ROW Line	
Box Culvert		Merry-Go-Round		Traffic Sign One Post		New ROW Line	
Bridge		Microwave Radio Tower		Traffic Sign Two Post		Cut and Fill Limits	
Brush/Hedge		Miscellaneous Line		Traffic Signal		Control of Access	
Buildings		Miscellaneous Property Corner		Trash Barrel		New Control of Access	
Bulk Tank		Miscellaneous Post		Tree Belt		Proposed ROW	
Cattle Guard		Overhang Or Encroachment		Tree Coniferous		(After Property Disposal)	
Cemetery		Overhead Utility Line		Tree Deciduous			
Centerline		Parking Meter		Tree Stumps		Drainage Arrow	
Cistern		Pedestrian Push Button Pole		Triangulation Station			
Clothes Line		Pipe With End Section		Underground Electric Line		Remove Concrete Pavement	
Concrete Symbol		Pipe With Headwall		Underground Gas Line		Remove Concrete Driveway Pavement	
Control Point		Pipe Without End Section		Underground High Pressure Gas Line		Remove Asphalt Concrete Pavement	
Creek Edge		Playground Slide		Underground Sanitary Sewer		Remove Concrete Sidewalk	
Curb/Gutter		Playground Swing		Underground Storm Sewer		Remove Concrete Median Pavement	
Curb		Power And Light Pole		Underground Tank		Remove Concrete Curb and/or Gutter	
Dam Grade/Dike/Levee		Power And Telephone Pole		Underground Telephone Line			
Deck Edge		Power Meter		Underground Television Cable		Detectable Warning	
Ditch Block		Power Pole		Underground Water Line		Pedestrian Push Button Pole	
Doorway Threshold		Power Pole And Transformer		Water Fountain		and 30" x 48" Clear Space	
Drainage Profile		Power Tower Structure		Water Hydrant		with 1.5% slope	
Drop Inlet		Propane Tank		Water Meter			
Edge Of Asphalt		Property Pipe		Water Tower			
Edge Of Concrete		Property Pipe With Cap		Water Valve			
Edge Of Gravel		Property Stone		Water Well			
Edge Of Other		Public Telephone		Weir Rock			
Edge Of Shoulder		Railroad Crossing Signal		Windmill			
Electric Transformer/Power Junction Box		Railroad Milepost Marker		Wingwall			
Fence Barbwire		Railroad Profile		Witness Corner			
Fence Chainlink		Railroad ROW Marker					
Fence Electric		Railroad Signs					
Fence Miscellaneous		Railroad Switch					
Fence Rock		Railroad Track					
Fence Snow		Railroad Trestle					
Fence Wood		Rebar					
Fence Woven		Rebar With Cap					
Fire Hydrant		Reference Mark					
Flag Pole		Retaining Wall					
Flower Bed		Riprap					
Gas Valve Or Meter		River Edge					
Gas Pump Island		Rock And Wire Baskets					
Grain Bin		Rockpiles					
Guardrail		Satellite Dish					
Gutter		Septic Tank					
Guy Pole		Shrub Tree					
Haystack		Sidewalk					
Highway ROW Marker		Sign Face					
Interstate Close Gate		Sign Post					
Iron Pin		Slough Or Marsh					
Irrigation Ditch		Spring					
Lake Edge		Stream Gauge					
Lawn Sprinkler		Street Marker					

2+00 to 3+20 - 48' L min.
Rockfall Fence
(See Section E)


3+75 to 10+24 - 48' L min.
Rockfall Fence
(See Section E)

10+60 to 12+32 - 48' L min.
Rockfall Fence
(See Section E)

1+90 to 12+16 L
Remove Trees as needed
for Rock Scaling
5 Trees estimated for removal

12+16 to 16+45 L
Remove Trees as needed
for installation of Rockfall Mesh
15 Trees estimated for removal

RAPID CITY

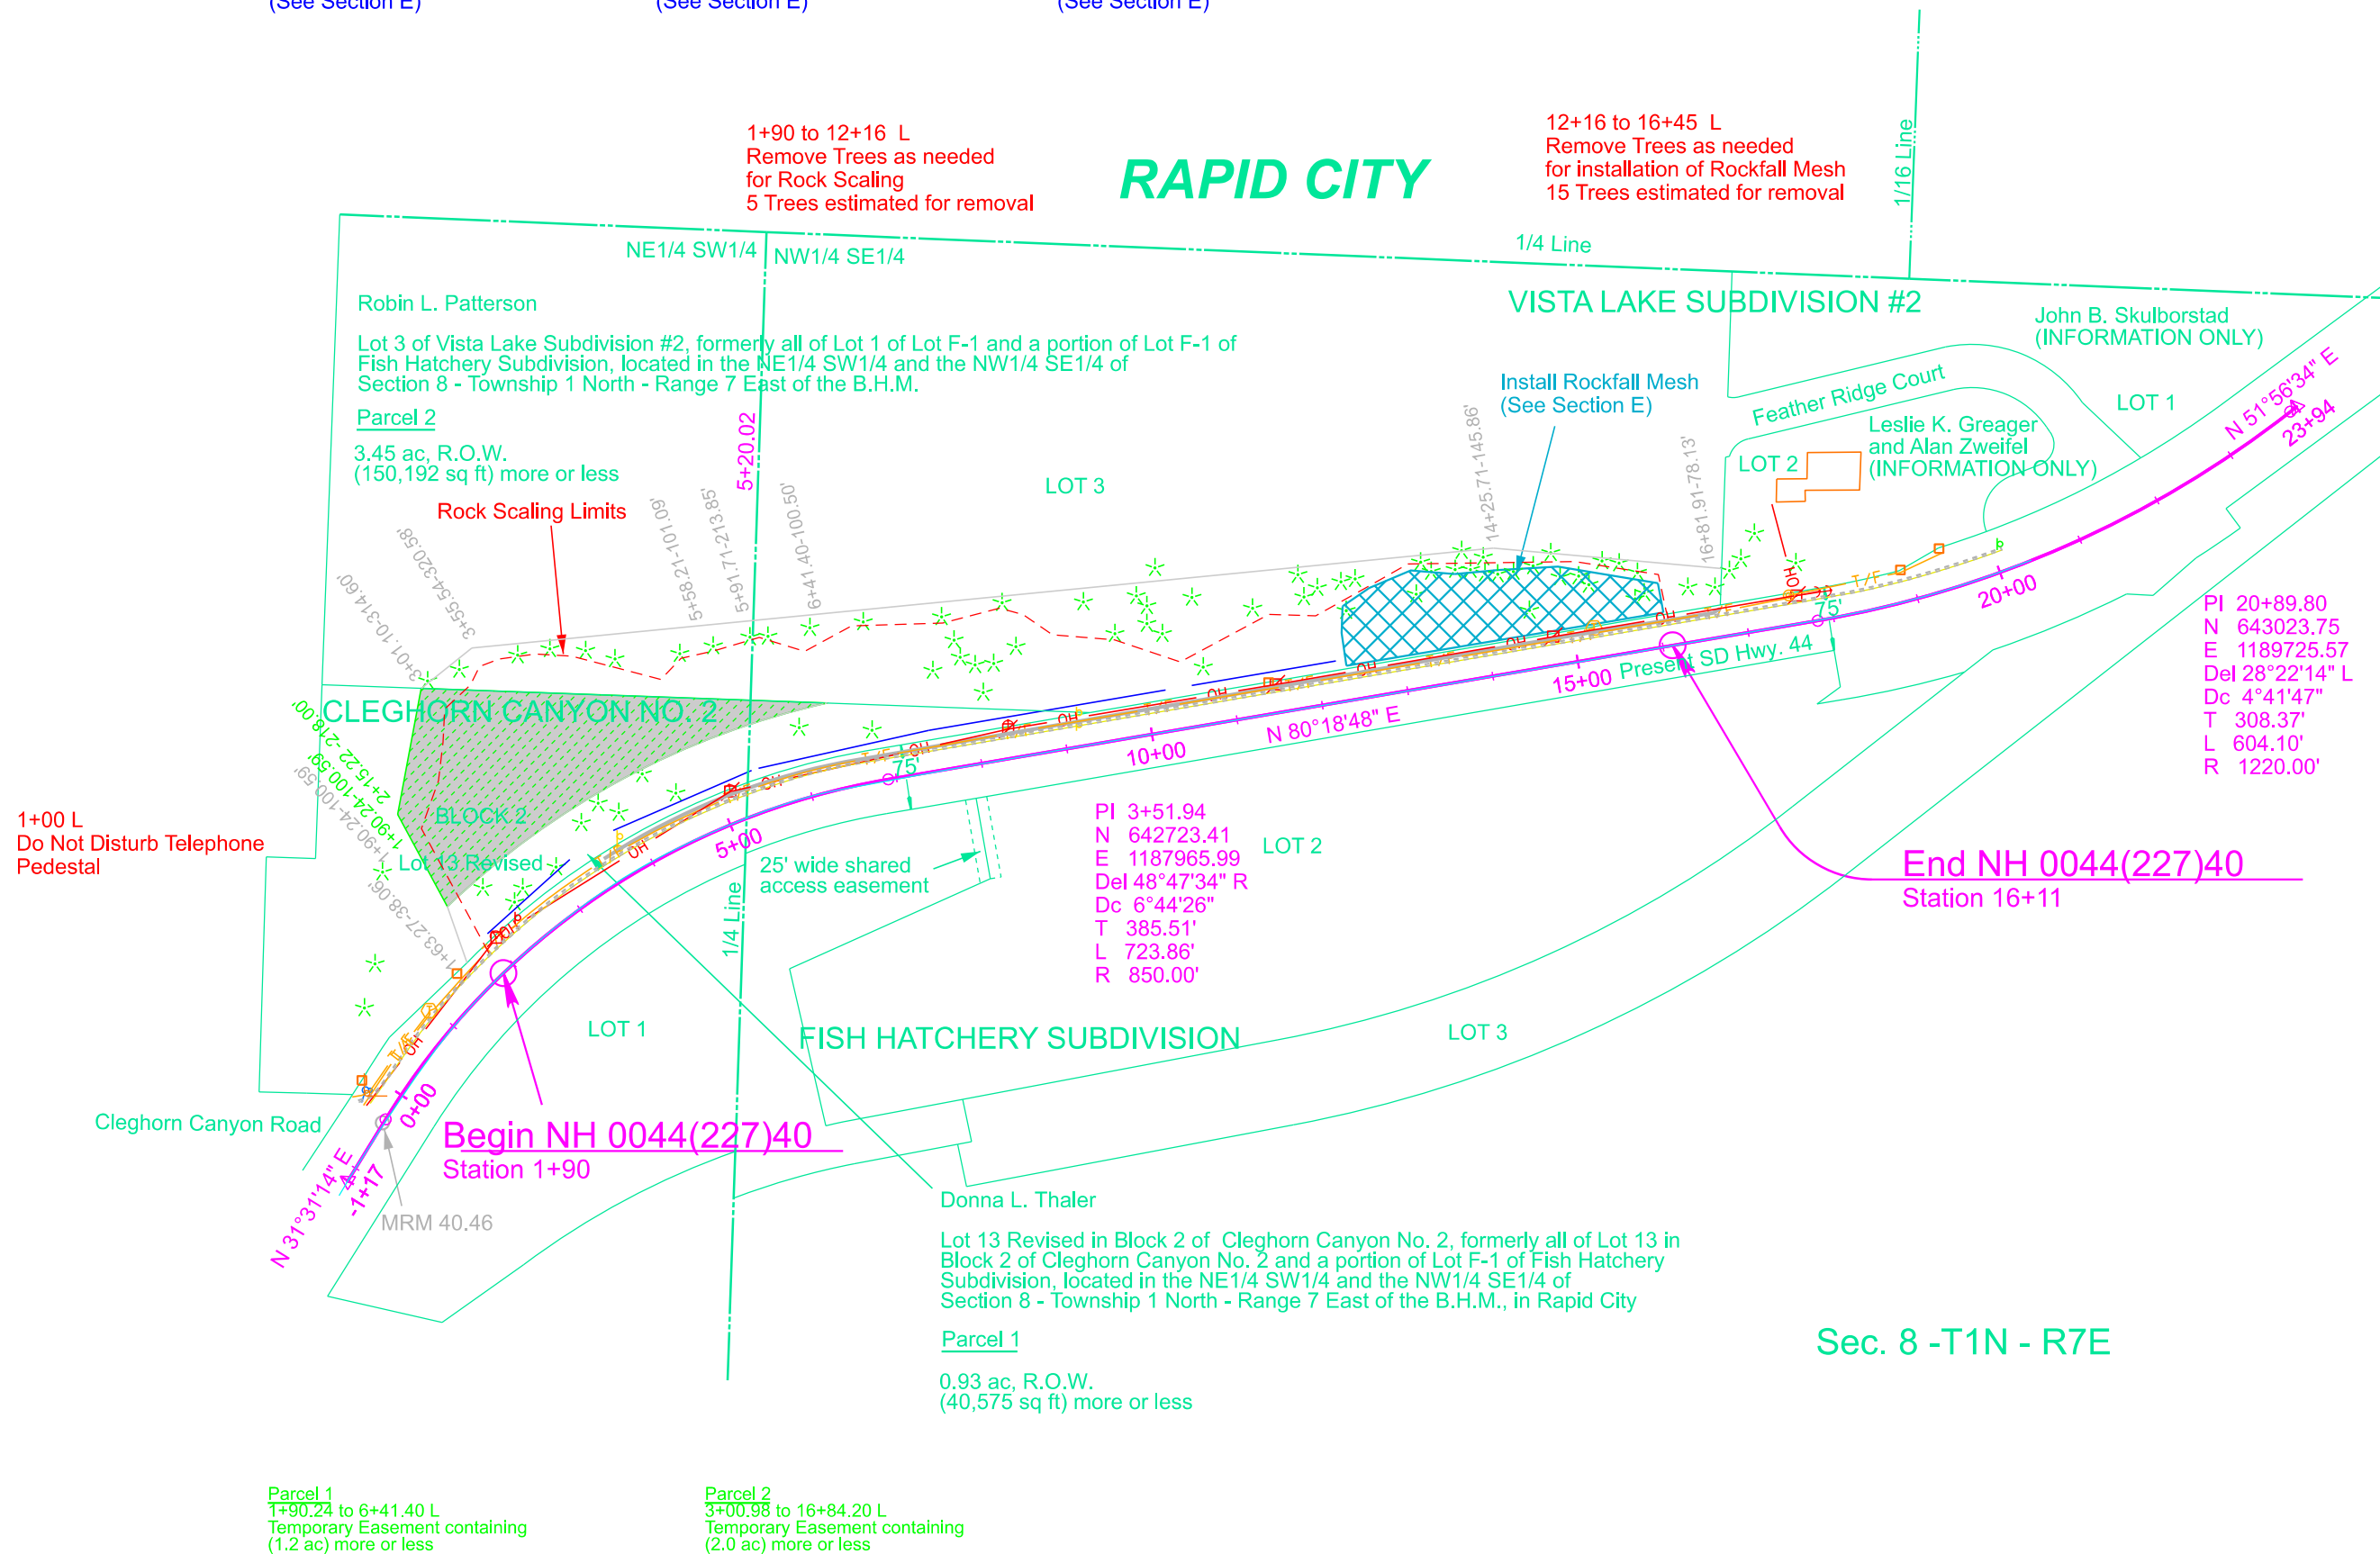

Grading along Slope Mesh

