



Planning & Engineering
Office of Project Development
700 East Broadway Avenue
Pierre, South Dakota 57501-2586
O: 605.773.3275
dot.sd.gov

September 11, 2026

To Whom it May Concern,

Beginning with the 10/7/2026 letting, the SDDOT will be using the new Electronic Standard Specifications for Roads and Bridges, 10-7-26 Version. The Standard Specifications for Roads and Bridges is available for download and viewing at <https://dot.sd.gov/doing-business/contractors/standard-specifications> . A printed version of the Standard Specifications for Roads and Bridges will not be provided.

A revised Buy America specification is in effect beginning with the 10/7/26 letting, which aligns with the expiration of the Federal Manufactured Products General Waiver. Contractors should be aware that new provisions for manufactured products, along with updates to material classifications, documentation requirements, and compliance procedures, are included in Section 6.9 of the Standard Specifications (10/07/2026 version). All contractors and suppliers are strongly encouraged to review the updated specification in full. Contractors are encouraged to attend the Buy America Informational Webinar being put on by the SDDOT and AGC. Information on the webinar can be found at:

<https://dot.sd.gov/doing-business/contractors/webinars/>

FHWA has updated the FHWA-1273 commonly known as the "Pink Sheets". The new FHWA-1273 will be incorporated into all contracts awarded after 10/7/26. Additional information regarding the updated FHWA-1273 can be found at:


<https://www.fhwa.dot.gov/construction/cqit/form1273.cfm>

Sincerely,
SDDOT – Bid Letting Office

Plot Scale - 1:9607

trp25289

Plotted From -

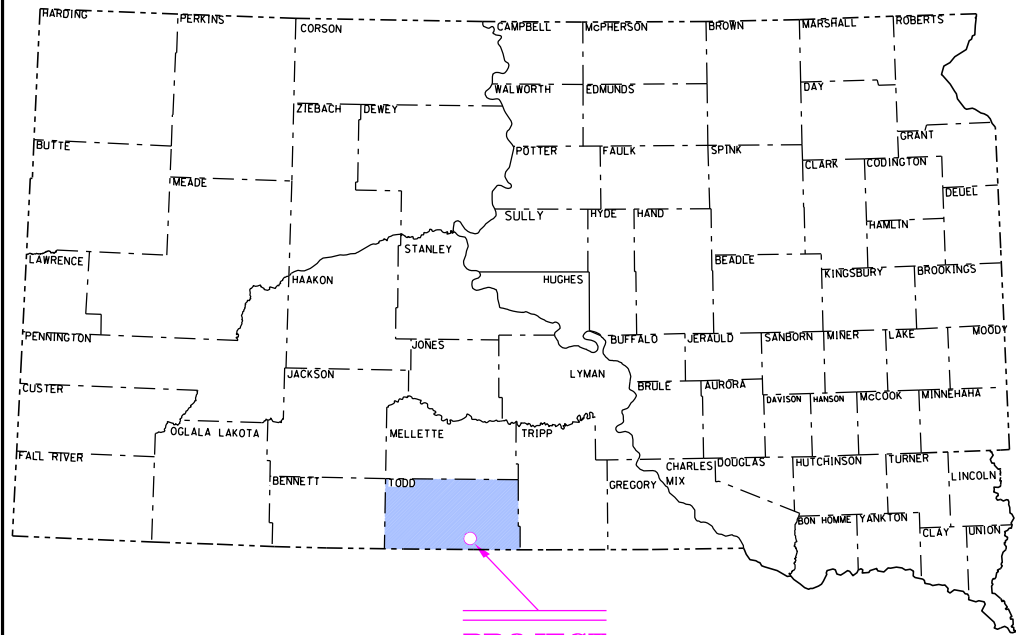


STATE OF SOUTH DAKOTA
DEPARTMENT OF TRANSPORTATION
PLANS FOR PROPOSED
PROJECT PT 0183(28)2
US HIGHWAY 183
TRIPP COUNTY

SCOUR PROTECTION
PCNS 09AC

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	PT 0183(28)2	1	43

Plotting Date: 05/19/2026



INDEX OF SECTIONS	
SECTION A:	Estimate of Quantities & Environmental Commitment Notes
SECTION C:	Traffic Control Plans
SECTION D:	Erosion Control Plans
SECTION E:	Structure Plans


DESIGN DESIGNATION

US183 - (STR.No. 62-235-518)

ADT (2024)	314
ADT (2044)	426
DHV	50
D	50%
T DHV	13.8%
T ADT	30.3%
V	65 MPH

STORM WATER PERMIT

Major Receiving
Body of Water: Keya Paha River
Area Disturbed: 0.63 Acres
Total Project Area: 2.33 Acres
Approx. Begin Lat,Lng: 43° 1'37.74"N, 99°46'51.22"W

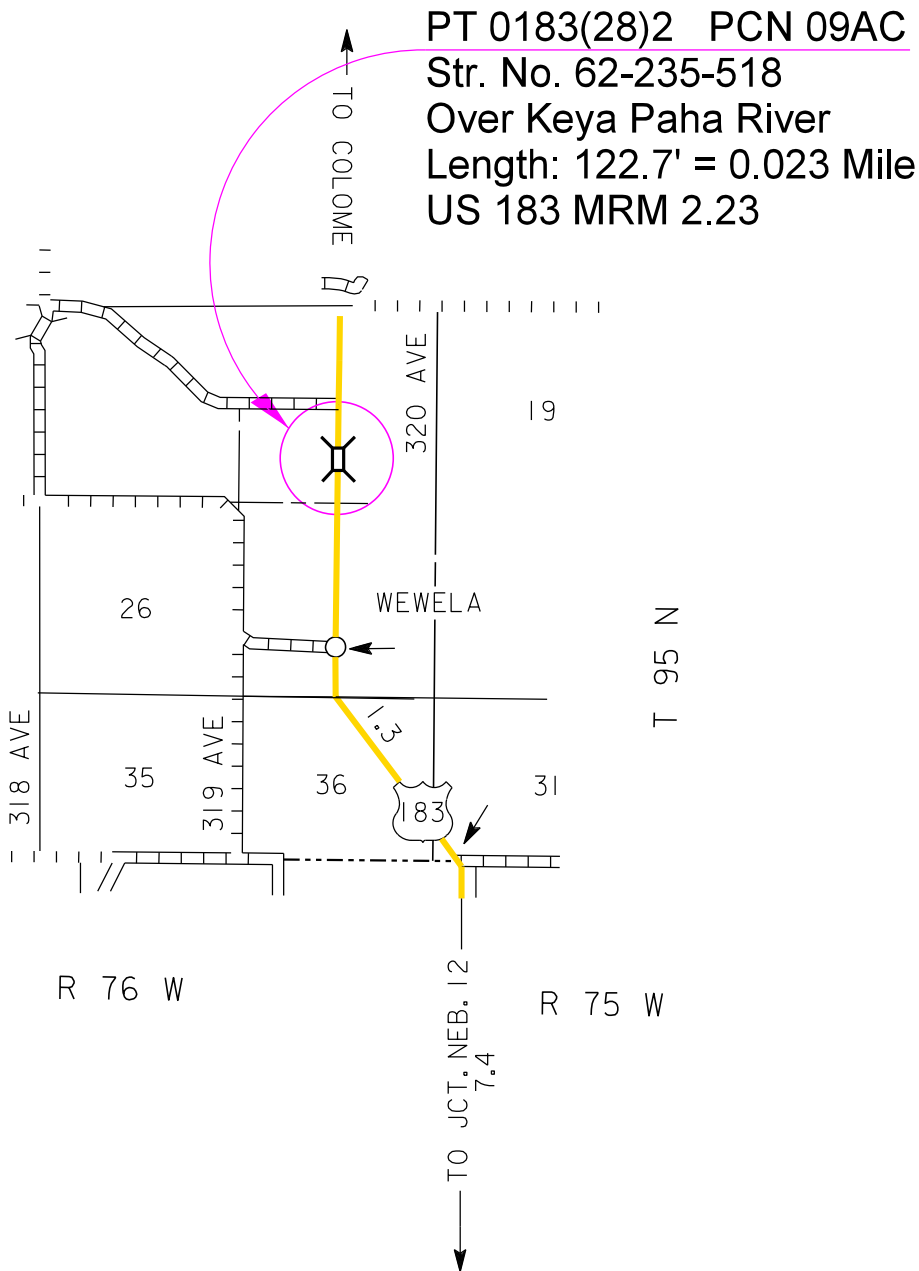

Estimate of Quantities and Environmental Commitments

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	PT 0183(28)2	A1	A4

Revised 7/23/26 SML

Section C – Traffic Control

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
009E0010	Mobilization	Lump Sum	LS
009E3200	Construction Staking	Lump Sum	LS
009E4100	Construction Schedule, Category I	Lump Sum	LS
634E0010	Flagging	40.0	Hour
634E0110	Traffic Control Signs	266.0	SqFt
634E0120	Traffic Control, Miscellaneous	Lump Sum	LS
634E0275	Type 3 Barricade	2	Each
634E0310	Temporary Flexible Vertical Markers (Tabs)	2,200	Ft
634E0560	Remove Pavement Marking, 4" or Equivalent	3,344	Ft
634E0600	4" Temporary Pavement Marking Tape Type I	1,144	Ft

Section D – Erosion Control

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E0600	Remove Fence	192	Ft
110E1700	Remove Silt Fence	200	Ft
620E0020	Type 2 Right-of-Way Fence	192	Ft
620E0515	Type 1A Temporary Fence	627	Ft
620E0520	Type 2 Temporary Fence	450	Ft
620E1020	2 Post Panel	4	Each
620E1030	3 Post Panel	4	Each
734E0010	Erosion Control	Lump Sum	LS
734E0154	12" Diameter Erosion Control Wattle	120	Ft
734E0604	High Flow Silt Fence	200	Ft
734E0630	Floating Silt Curtain	900	Ft

Section E – Str. No. 62-235-518

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
120E0010	Unclassified Excavation	1,347	CuYd
120E0600	Contractor Furnished Borrow Excavation	82	CuYd
700E0210	Class B Riprap	347.0	Ton
831E0110	Type B Drainage Fabric	3,377	SqYd
900E5147	Articulated Concrete Mattress	3,190.0	SqYd

UTILITIES

The Contractor will contact the involved utility companies through South Dakota One Call (1-800-781-7474) prior to starting work. It will be the responsibility of the Contractor to coordinate work with the utility owners to avoid damage to existing facilities.

If utilities are identified near the improvement area through the SD One Call Process as required by South Dakota Codified Law 49-7A and Administrative Rule Article 20:25, the Contractor will contact the Project Engineer to determine modifications that will be necessary to avoid utility impacts.

Construction Staking

The Contractor and Surveyor will be aware that while the work is intended to be completed in the "dry" there may be times that that the survey will need to provide services in an active river.

INDEX OF SHEETS

A1 Estimate of Quantities for Section C, D, and E
A2 to A4 Environmental Commitments

Estimate of Quantities and Environmental Commitments

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	PT 0183(28)2	A2	A4

ENVIRONMENTAL COMMITMENTS

The SDDOT is committed to protecting the environment and uses Environmental Commitments as a communication tool for the Engineer and Contractor to ensure that attention is given to avoid, minimize, and/or mitigate an environmental impact. Environmental commitments to various agencies and the public have been made to secure approval of this project. An agency with permitting authority can delay a project if identified environmental impacts have not been adequately addressed. Unless otherwise designated, the Contractor's primary contact regarding matters associated with these commitments will be the Project Engineer. During construction, the Project Engineer will verify that the Contractor has met Environmental Commitment requirements. These environmental commitments are not subject to change without prior written approval from the SDDOT Environmental Office.

Additional guidance on SDDOT's Environmental Commitments can be accessed through the Environmental Procedures Manual found at: <<https://dot.sd.gov/doing-business/environmental/about-environmental/>>

For questions regarding change orders in the field that may have an effect on an Environmental Commitment, the Project Engineer will contact the Environmental Engineer at 605-773-3180 or 605-773-4336 to determine whether an environmental analysis and/or resource agency coordination is necessary.

Once construction is complete, the Project Engineer will review all environmental commitments for the project and document their completion.

COMMITMENT A: AQUATIC RESOURCES

COMMITMENT A1: WETLANDS

All efforts to avoid and minimize wetland impacts from the project have resulted in approximately 0.03 acres of wetlands (includes temporary and permanent) becoming impacted.

Table of Impacted Wetlands

Wetland No.	Station	Permanent Impact (Acres)	Temporary Impact (Acres)	Total Impact (Acres)
1a	1+70 - 3+00 R	0.00	0.011	0.011
1b	1+70 - 3+00 L	0.00	0.005	0.005
1c	0+70 - 1+30 R	0.00	0.011	0.011
1d	0+20 - 0+60 R	0.00	0.00	0.00
1e	0+35 - 1+20 L	0.00	0.004	0.004
1f	0+00 - 0+30 L	0.00	0.00	0.00

Action Taken/Required:

Temporary impacts identified in the Table of Impacted Wetlands will not be mitigated as original contours and elevations will be re-established as designated in Section B – Grading Plans. Prior to initiating temporary work in wetlands, the Contractor will submit a plan to the Project Engineer in accordance with Section 7.18 of the Specifications.

The Contractor will notify the Project Engineer if additional easement is needed to complete work adjacent to any wetland. The Project Engineer will

obtain an appropriate course of action from the Environmental Office before proceeding with construction activities that affect any wetlands beyond the work limits and easements shown in the plans.

COMMITMENT A2: STREAMS

All efforts to avoid and minimize stream impacts from the project have resulted in approximately 0.183 acres of stream (includes temporary and permanent) becoming impacted.

Table of Impacted Streams

Stream Name	Station	Permanent Impact (Acres)	Temporary Impact (Acres)	Total Impact (Acres)
OW 1 (Keya Paha River)	0+00 - 3+00 L & R	0.183	0.00	0.183

Action Taken/Required:

It has been determined that project impacts do not require mitigation. Temporary impacts identified in the Table of Impacted Streams will not be mitigated as the finished ground under the bridge will be shaped to match the upstream channel and flood plain and the existing low water channel will be maintained as near as practical to the existing location as designated in the plans.

The contractor will complete excavation after temporary diversion is in place, if required, with minimal standing water to create the profile of slope protection specified in plans. Once the instream work is completed, the removed material will be placed on top of the riprap to match the natural ground, proposed groundline, or specified shape and elevations shown in plans. When overburden extends into the streambed it will form the channel bottom and profile as specified in plans. The finished ground under the bridge will be shaped to match the upstream and downstream channel and flood plain. See Overburden Excavation for Riprap note within structure sheets.

The Contractor will notify the Project Engineer if additional easement is needed to complete work adjacent to any stream. The Project Engineer will obtain an appropriate course of action from the Environmental Office before proceeding with construction activities that affect any streams beyond the work limits and easements shown in the plans.

COMMITMENT B: FEDERALLY THREATENED, ENDANGERED, AND PROTECTED SPECIES

COMMITMENT B2: WHOOPING CRANE

The Whooping Crane is a spring and fall migratory bird in South Dakota that is about 5 feet tall and typically stops on wetlands, rivers, and agricultural lands along their migration route. An adult Whooping Crane is white with a red crown and a long, dark, pointed bill. Immature Whooping Cranes are cinnamon brown. While in flight, their long necks are kept straight, and their long dark legs trail behind. Adult Whooping Cranes' black wing tips are visible during flight.

Action Taken/Required:

Harassment or other measures to cause the Whooping Crane to leave the site is a violation of the Endangered Species Act. If a Whooping Crane is

sighted roosting in the vicinity of the project, borrow pits, or staging areas associated with the project, cease construction activities in the affected area until the Whooping Crane departs and immediately contact the Project Engineer. The Project Engineer will contact the Environmental Office so that the sighting can be reported to USFWS.

COMMITMENT B5: NORTHERN LONG-EARED AND TRI-COLORED BAT

This project is within the range of suitable habitat for the Northern Long-Eared Bat (NLEB) and/ or the Tri-Colored Bat (TCB) and project work will avoid conflicts with NLEB and/or TCB roosting habitat.

Action Taken/Required:

Ensure all operators, employees, and contractors are aware the project occurs adjacent to NLEB or TCB suitable habitat and tree trimming/clearing is limited to that designated in the plans.

If bats are observed roosting on trees or infrastructure within the project area prior to and/or during construction, the contractor will halt all on-site activities. The contractor will notify the Project Engineer and the Environmental Office (605-773- 3309 or 605-773-5679) of the observed bat presence.

COMMITMENT C: WATER SOURCE

If a Contractor needs access to state waters for extraction, the Contractor must obtain a water right, through the application of a Temporary Permit to Use Public Waters before work begins.

The Contractor will not withdraw water with equipment previously used outside the State of South Dakota or previously used in aquatic invasive species (AIS) positive waters within South Dakota without prior approval from the SDDOT Environmental Office. To prevent and control the introduction and spread of invasive species into the project vicinity, all equipment will be power washed with hot water (≥140 °F) and completely dried for a minimum of 7 days prior to subsequent use. South Dakota administrative rule 41:10:04:02 forbids the possession and transport of AIS; therefore, all attached dirt, mud, debris and vegetation must be removed and all compartments and tanks capable of holding standing water must be drained. This includes, but is not limited to, all equipment, pumps, lines, hoses and holding tanks.

Action Taken/Required:

The Contractor will obtain the necessary permits from the regulatory agencies such as the South Dakota Department of Agriculture and Natural Resources (SDDANR) and the United States Army Corps of Engineers (USACE) prior to water extraction activities.

Temporary permit to use public waters for highway construction purposes application can be found on the SDDANR website: <https://danr.sd.gov/OfficeOfWater/WaterRights/PermitForms/default.aspx>

Additional information and mapping of water sources impacted by Aquatic Invasive Species in South Dakota can be accessed at: < <https://sdleastwanted.sd.gov/maps/default.aspx> >

South Dakota Administrative Rule 41:10:04 Aquatic Invasive Species: < <https://sdlegislature.gov/rules/DisplayRule.aspx?Rule=41:10:04> >

Estimate of Quantities and Environmental Commitments

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	PT 0183(28)2	A3	A4

COMMITMENT D: WATER QUALITY STANDARDS

COMMITMENT D1: SURFACE WATER QUALITY

The Keya Paha River is classified as a warmwater semi-permanent fishery with a total suspended solids standard of less than 90 mg/L 30-day average, less than 158 mg/L daily maximum.

Action Taken/Required:

The Contractor is advised that the South Dakota Surface Water Quality Standards, administered by the South Dakota Department of Agriculture and Natural Resources (DANR), apply to this project. Special construction measures will be taken to ensure the above standard(s) of the surface waters are maintained and protected.

COMMITMENT D2: SURFACE WATER DISCHARGE

The DANR General Permit for Temporary Discharge Activities is required for temporary dewatering and discharges to waters of the state. The effluent limit for total suspended solids will be 90 mg/L 30-day average. The effluent limit applies to discharges to all waters of the state except discharges to waters classified as coldwater permanent fish life propagation waters according to the ARSD 74:51:01:45. For discharges to waters of the state classified as coldwater permanent fish life propagation waters, the effluent limit for total suspended solids will be 53 mg/L daily maximum.

The permittee has the option of completing effluent testing or implementing a pollution prevention plan for compliance with this permit. If the permittee develops a pollution prevention plan instead of total suspended solids sampling, the plan must be developed and implemented prior to discontinuing total suspended solids sampling. Refer to Section 4.0 of the permit. If any pollutants are suspected of being discharged, a sample must be taken for those parameters listed in Section 3.4 of the permit.

Refer to Commitment D1: Surface Water Quality for stream classification.

Action Taken/Required:

If construction dewatering is required and this project is not required to be covered under a General Permit for Stormwater Discharges Associated with Construction Activities, the Contractor will obtain the General Permit for Temporary Discharge Activities from the DANR Water Quality Program, 605-773-3351.
<
https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/docs/DANR_TemporaryDischargeNOI2018Fillable.pdf >

If construction dewatering is required and this project is currently covered under a General Permit for Stormwater Discharges Associated with Construction Activities, the contractor will need to submit the dewatering information to the Project Engineer using the following SDDOT Dewatering Info CDX form:

<<https://dot.sd.gov/doing-business/environmental/forms/>>

The Contractor will provide a copy of the approved permit or the submitted dewatering information to the Project Engineer prior to proceeding with any dewatering activities. The approved permit or submitted dewatering information must be kept on-site and as part of the project records.

Effluent monitoring, as a result of dewatering activities, will be summarized for each month and recorded on a separate Discharge Monitoring Report (DMR) and submitted to DANR monthly. Additional information can be found at:
<
<https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/swdpermitting/Ereporting.aspx> >

COMMITMENT E: STORM WATER

Construction activities constitute 1 acre or more of earth disturbance and/or work in a waterway.

Action Taken/Required:

The DANR General Permit for Stormwater Discharges Associated with Construction Activities is required for construction activity disturbing one or more acres of earth and work in a waterway. The SDDOT is the owner of this permit and will submit the NOI to DANR 15 days prior to project start in order to obtain coverage under the General Permit. Work can begin once the DANR letter of approval is received.

The Contractor must adhere to the “Special Provision Regarding Storm Water Discharges to Waters of the State.”

The Contractor will complete the DANR Contractor Authorization Form prior to the pre-construction meeting. The form certifies under penalty of law that the Contractor understands and will comply with the terms and conditions of the permit for this project. Work may not begin on this project until this form is signed and submitted to DANR.

The form can be found at:
<
https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/docs/DANR_CGPAppendixCCA2023Fillable.pdf >

The Contractor is advised that permit coverage may also be required for off-site activities, such as borrow and staging areas, which are the responsibility of the Contractor.

Storm Water Pollution Prevention Plan

The Storm Water Pollution Prevention Plan (SWPPP) will be developed prior to the submittal of the NOI and will be implemented for all construction activities for compliance with the permit. The SWPPP must be kept on-site and updated as site conditions change. Erosion control measures and best management practices will be implemented in accordance with the SWPPP.

The DOT 298 Form will be used for site inspections and to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents and retained for a minimum of three years.

The inspection will include disturbed areas of the construction site that have not been finally stabilized, areas used for storage materials, structural control measures, and locations where vehicles enter or exit the site. These areas will be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the SWPPP will be observed to ensure that they are operating correctly, and sediment is not tracked off the site.

Information on storm water permits and SWPPPs are available on the following websites:

SDDOT: < <https://dot.sd.gov/doing-business/environmental/stormwater> >

DANR:<
<https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/stormwater/default.aspx> >

EPA: < <https://www.epa.gov/npdes> >

COMMITMENT H: WASTE DISPOSAL SITE

The Contractor will furnish a site(s) for the disposal of construction and/or demolition debris generated by this project.

Action Taken/Required:

Construction and/or demolition debris may not be disposed of within the Public ROW.

The waste disposal site(s) will be managed and reclaimed in accordance with the following from the General Permit for Construction/Demolition Debris Disposal Under the South Dakota Waste Management Program issued by the Department of Agriculture and Natural Resources.

The waste disposal site(s) will not be located in a wetland, within 200 feet of surface water, or in an area that adversely affects wildlife, recreation, aesthetic value of an area, or any threatened or endangered species, as approved by the Environmental Office and the Project Engineer.

If the waste disposal site(s) is located such that it is within view of any ROW, the following additional requirements will apply:

1. Construction and/or demolition debris consisting of concrete, asphalt concrete, or other similar materials will be buried in a trench separate from wood debris. The final cover over the construction and/or demolition debris will consist of a minimum of 1 foot of soil capable of supporting vegetation. Waste disposal sites provided outside of the Public ROW will be seeded in accordance with Natural Resources Conservation Service recommendations. The seeding recommendations may be obtained through the appropriate County NRCS Office. The Contractor will control the access to waste disposal sites not within the Public ROW with fences, gates, and placement of a sign or signs at the entrance to the site stating, “No Dumping Allowed”.
2. Concrete and asphalt concrete debris may be stockpiled within view of the ROW for a period not to exceed the duration of the project. Prior to project completion, the waste will be removed from view of the ROW or buried, and the waste disposal site reclaimed as noted above.

The above requirements will not apply to waste disposal sites that are covered by an individual solid waste permit as specified in SDCL 34A-6-58, SDCL 34A-6-1.13, and ARSD 74:27:10:06. Failure to comply with the requirements stated above may result in civil penalties in accordance with South Dakota Solid Waste Law, SDCL 34A-6-1.31.

All costs associated with furnishing waste disposal site(s), disposing of waste, maintaining control of access (fence, gates, and signs), and reclamation of the waste disposal site(s) will be incidental to the various contract items.

Estimate of Quantities and Environmental Commitments

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	PT 0183(28)2	A4	A4

COMMITMENT I: HISTORIC PRESERVATION OFFICE CLEARANCES

The SDDOT has obtained concurrence with the State Historic Preservation Office (SHPO or THPO) for all work included within the project limits and all department designated sources and designated option material sources, stockpile sites, storage areas, and waste sites provided within the plans.

Action Taken/Required:

All earth disturbing activities not designated within the plans require a cultural resource review prior to scheduling the pre-construction meeting. This work includes but is not limited to: Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas.

The Contractor will arrange and pay for a record search and when necessary, a cultural resource survey. The Contractor has the option to contact the state Archaeological Research Center (ARC) at 605-394-1936 or another qualified archaeologist, to obtain either a records search or a cultural resources survey. A record search might be sufficient for review if the site was previously surveyed; however, a cultural resources survey may need to be conducted by a qualified archaeologist.

The Contractor will provide ARC with the following: a topographical map or aerial view in which the site is clearly outlined, site dimensions, project number, and PCN. If applicable, provide evidence that the site has been previously disturbed by farming, mining, or construction activities with a landowner statement that artifacts have not been found on the site.

The Contractor will submit the cultural resources survey report to SDDOT Environmental Office, 700 East Broadway Avenue, Pierre, SD 57501-2586. SDDOT will submit the information to the appropriate SHPO/THPO. Allow **30 Days** from the date this information is submitted to the Environmental Engineer for SHPO/THPO review.

In the event of an inadvertent discovery of human remains, funerary objects, or if evidence of cultural resources is identified during project construction activities, then such activities within 150 feet of the inadvertent discovery will immediately cease and the Project Engineer will be immediately notified. The Project Engineer will contact the SDDOT Environmental Office, who will contact the appropriate SHPO/THPO within 48 hours of the discovery to determine an appropriate course of action.

SHPO review does not relieve the Contractor of the responsibility for obtaining any additional permits and clearances for Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas that affect wetlands, threatened and endangered species, or waterways. The Contractor will not utilize a site known or suspected of having contaminated soil or water. The Contractor will provide the required permits and clearances to the Project Engineer at the preconstruction meeting.

COMMITMENT J: CONSTRUCTION PRACTICES FOR TEMPORARY WORKS IN WATERWAYS OF THE U.S.

The Contractor is advised that special construction measures must be taken to ensure that the waterways of the U.S. are not impacted.

Action Taken/Required:

Excavation will not occur below the ordinary high-water elevation in waterways outside of caissons, cribs, cofferdams, steel piling, or sheeting.

The natural streambed will not be disturbed unless specified by the plans and under the observation of the Project Engineer. Refer to the Table of U.S. Waterways to Protect for ordinary high-water elevations. Any structure work over or within the waterway will be constructed according to Section 7.18 C of the Specifications.

All dredged or excavated materials will be placed at a site above the ordinary high-water elevation in a confined area (not classified as a wetland) that is a minimum of 50 feet away from concentrated flows of storm water, drainage courses, and inlets to prevent return of such material to the waterway.

The construction of temporary work platforms, crossings, or berms below the ordinary high-water elevation will be allowed if all material placed below the ordinary high-water elevation consists of Class B or larger riprap.

All temporary caissons, cribs, cofferdams, steel piling, sheeting, work platforms, crossings, and berms will be removed with minimal disturbance to the streambed. Proper construction practices will be used to minimize increases in suspended solids and turbidity in the waterway. Bridge berms, wing dams, traffic diversions, channel reconstruction, stream diversions, grading, etc. will be constructed in close conformity with the plans to ensure that the hydraulic capacity of the waterway is not changed.

Temporary waterway crossings required for the Contractor's construction operations will be constructed with an adequate drainage structure size and minimum fill height to reduce the potential for upstream flooding. The Contractor will be responsible for sizing the temporary drainage structure for these crossings.

All temporary works in waterways of the US are required to be covered in the Corp of Engineers 404 Permit. At the time of the preconstruction meeting, the Contractor will submit documentation for all temporary works for the purpose of complying with the 404 Permit requirements in accordance with Section 423.3 A of the Specifications.

If an on-site construction crossing is used, the temporary crossing will need to be designed so it will not increase the Q₁₀₀ water surface elevation. The Contractor will submit the proposed temporary crossing geometric layout and structure size to the Project Engineer during the preconstruction meeting. This information will be forwarded to the SDDOT Hydraulics Office and Environmental Office for review. Construction of the temporary crossing is not allowed until approval of the proposal is obtained from the SDDOT Hydraulics Office and Environmental Office.

Table of U.S. Waterways to Protect

Station	Waterway	Ordinary High-Water Elevation
0+00 to 3+00 L/R	Keya Paha River	2055.0' (bank elevation)

Stream channel excavation within "Waters of the US" is subject to USACE regulatory jurisdiction. Stream channel excavation cannot exceed the permitted quantities and/or surface area. The 404 Permit is included in the Special Provisions.

The Contractor will take all precautions necessary to prevent any incidental discharges associated with the excavation and hauling of material from the stream channel. This pertains to any excavation operations such as, foundation, pier, or abutment excavation, channel cleanout, excavation for riprap protection, and removal of any temporary fill associated with construction activities.

COMMITMENT N: SECTION 404 PERMIT

The SDDOT has obtained a Section 404 Permit from the USACE for the permanent actions associated with this project.

Action Taken/Required:

The Contractor will comply with all requirements contained in the Section 404 Permit.

The Contractor will also be responsible for obtaining a Section 404 Permit for any dredge, excavation, or fill activities associated with material sources, storage areas, waste sites, and Contractor work sites outside the plan work limits that affect wetlands, floodplains, or waters of the United States.