



Planning & Engineering
Office of Project Development
700 East Broadway Avenue
Pierre, South Dakota 57501-2586
O: 605.773.3275
dot.sd.gov

September 11, 2026

To Whom it May Concern,

Beginning with the 10/7/2026 letting, the SDDOT will be using the new Electronic Standard Specifications for Roads and Bridges, 10-7-26 Version. The Standard Specifications for Roads and Bridges is available for download and viewing at <https://dot.sd.gov/doing-business/contractors/standard-specifications> . A printed version of the Standard Specifications for Roads and Bridges will not be provided.


A revised Buy America specification is in effect beginning with the 10/7/26 letting, which aligns with the expiration of the Federal Manufactured Products General Waiver. Contractors should be aware that new provisions for manufactured products, along with updates to material classifications, documentation requirements, and compliance procedures, are included in Section 6.9 of the Standard Specifications (10/07/2026 version). All contractors and suppliers are strongly encouraged to review the updated specification in full. Contractors are encouraged to attend the Buy America Informational Webinar being put on by the SDDOT and AGC. Information on the webinar can be found at:

<https://dot.sd.gov/doing-business/contractors/webinars/>

FHWA has updated the FHWA-1273 commonly known as the "Pink Sheets". The new FHWA-1273 will be incorporated into all contracts awarded after 10/7/26. Additional information regarding the updated FHWA-1273 can be found at:

<https://www.fhwa.dot.gov/construction/cqit/form1273.cfm>

Sincerely,
SDDOT – Bid Letting Office

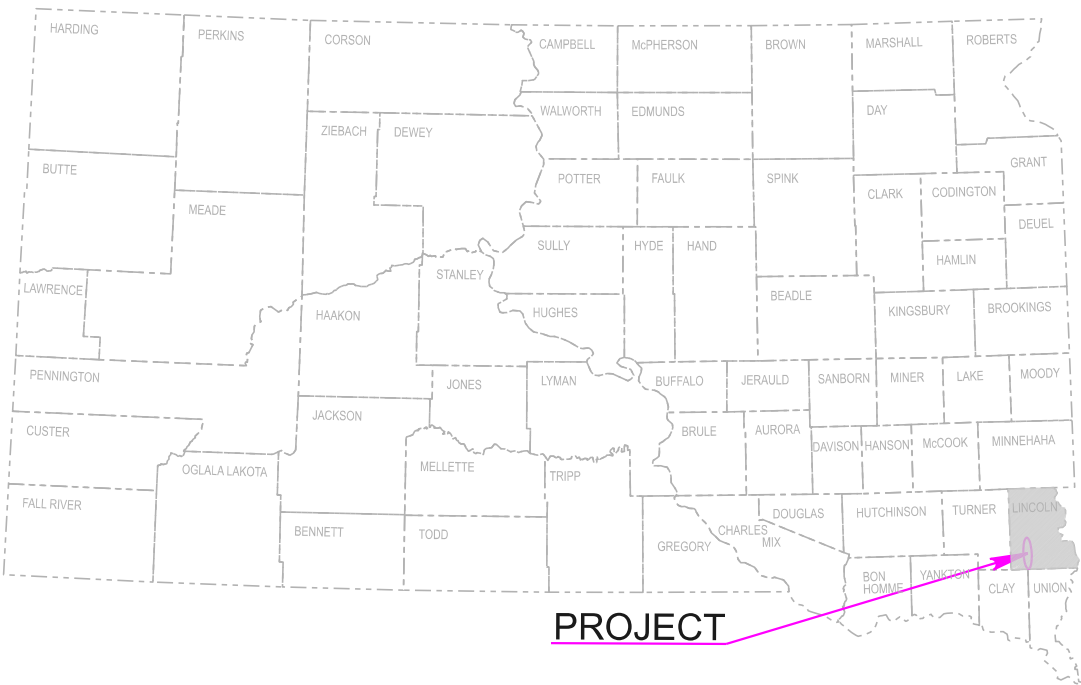


STATE OF SOUTH DAKOTA
DEPARTMENT OF TRANSPORTATION
PLANS FOR PROPOSED
IM 0292(100)55
INTERSTATE 29 NBL & SBL
LINCOLN COUNTY
CONSTRUCT MEDIAN CROSSOVERS
PCN 09TY

PROJECT	SECTION	SHEET
	1	51

Plotting Date: 5/6/2026

INDEX OF SECTIONS

Section A:	Estimate of Quantities and Environmental Commitments
Section C:	Traffic Control Plans
Section D:	Erosion and Sediment Control Plans
Section F:	Surfacing Plans

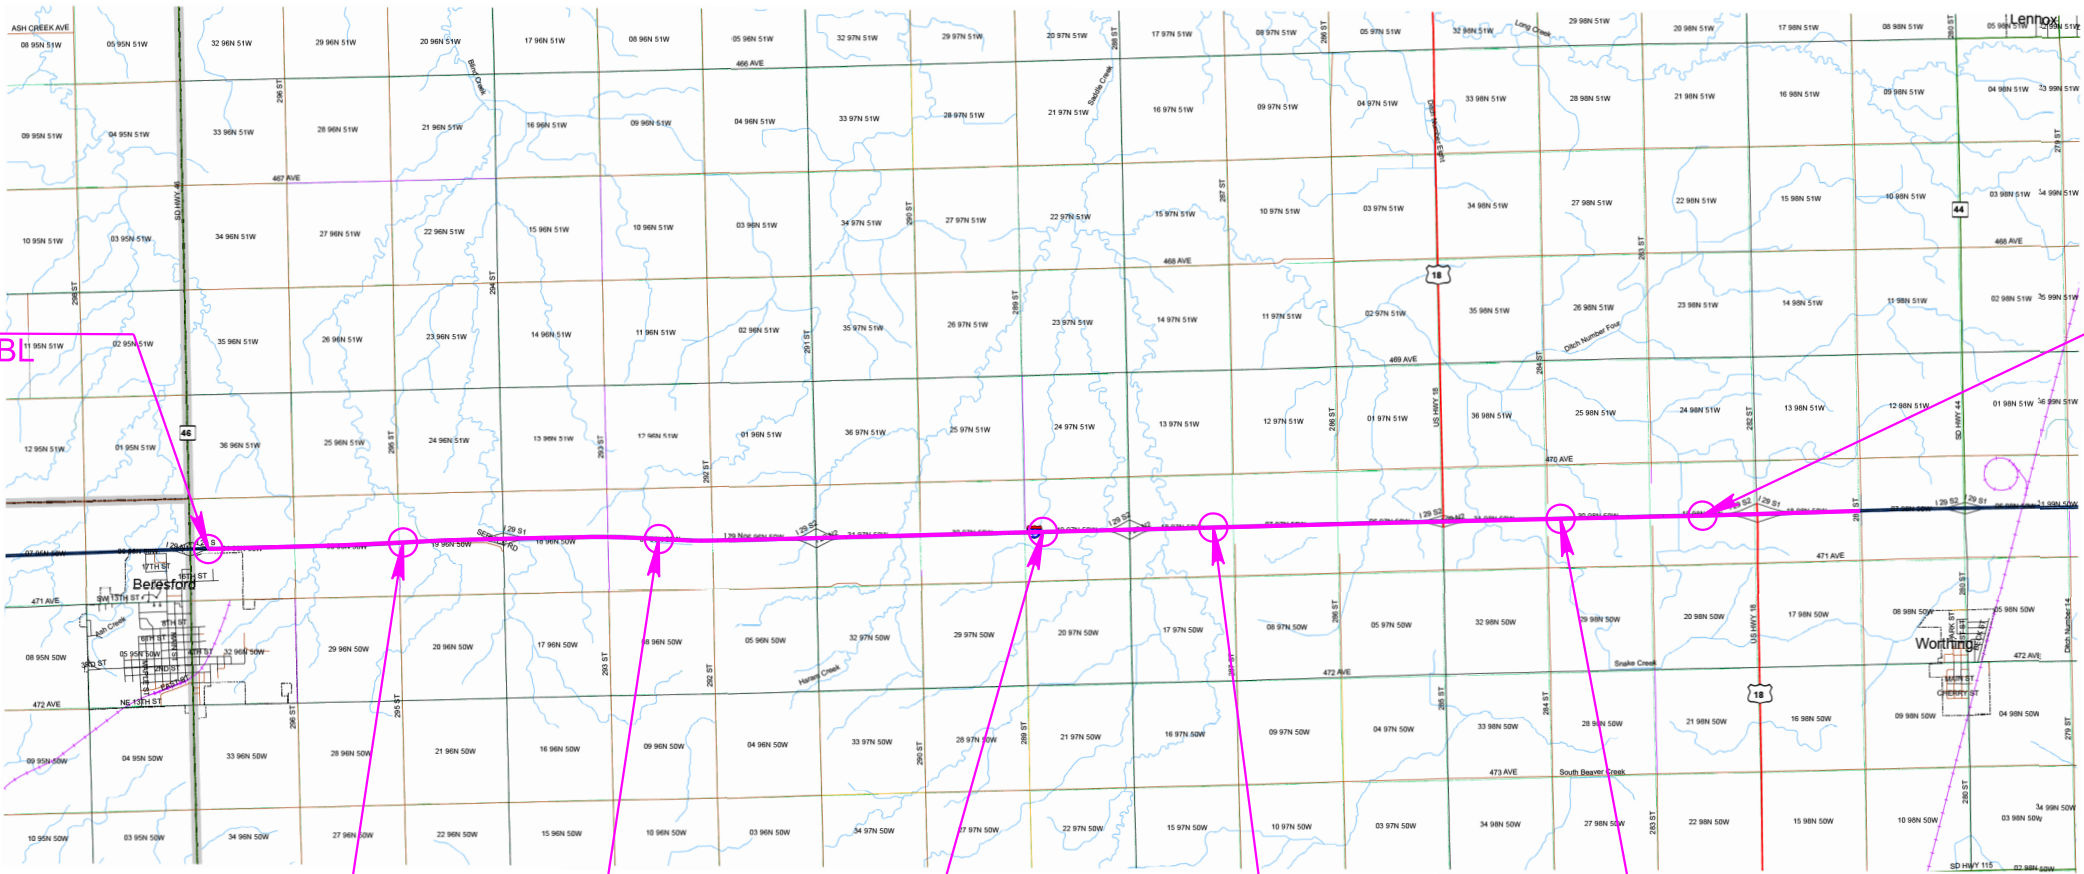

BEGIN IM 0292(100)55
BEGIN Project
MRM 48.00+0.00 SBL & NBL
Existing Median Crossover

End IM 0292(100)55
End Project
MRM 61.00+0.90 SBL & NBL
Existing Median Crossover

DESIGN DESIGNATION SBL

ADT (2025)	10340
ADT (2045)	16671
DHV	1857
D	50%
T DHV	12.2%
T ADT	26.9%

DESIGN DESIGNATION NBL

ADT (2025)	10339
ADT (2045)	16605
DHV	1850
D	50%
T DHV	12.2%
T ADT	26.9%

STORM WATER PERMIT

Major Receiving
Body of Water: Saddle & Snake Creek
Area Disturbed: 7 Acres
Total Project Area: 13 Acres
Approx. Begin Lat,Long: 43.093635, - 96.796180

Note:
This project encompasses four future projects.
PCN 0814, 075E, 08PK.

Install Median Crossover
MRM 60.00+0.40

Inventory Management ATR
MRM 49.00+0.326

Install Median Crossover
MRM 51.00+0.80

Install Median Crossover
MRM 55.00+0.40

Install Median Crossover
MRM 57.00+0.30

8

October 7, 2026

ESTIMATE OF QUANTITIES AND ENVIRONMENTAL COMMITMENTS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	IM 0292(100)55	A1	A3

Section C – Traffic Control

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
633E1220	High Build Waterborne Pavement Marking Paint, 4" White	500	Ft
633E1222	High Build Waterborne Pavement Marking Paint, 4" Yellow	2,500	Ft
634E0010	Flagging	160.0	Hour
634E0110	Traffic Control Signs	840.0	SqFt
634E0120	Traffic Control, Miscellaneous	Lump Sum	LS
634E0275	Type 3 Barricade	10	Each
634E0330	Temporary Raised Pavement Markers	7,680	Ft
634E0420	Type C Advance Warning Arrow Board	4	Each
634E1215	Contractor Furnished Portable Changeable Message Sign	2	Each
634E1255	Contractor Furnished Vehicle Speed Feedback Sign	2	Each

Section D - Erosion and Sediment Control

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
110E1700	Remove Silt Fence	500	Ft
230E0100	Remove and Replace Topsoil	Lump Sum	LS
730E0100	Cover Crop Seeding	4.0	Bu
730E0202	Type B Permanent Seed Mixture	97	Lb
731E0200	Fertilizing	2.70	Ton
732E0100	Mulching	10.8	Ton
734E0602	Low Flow Silt Fence	500	Ft
734E0610	Mucking Silt Fence	35	CuYd
734E0620	Repair Silt Fence	125	Ft

Section F – Surfacing

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
009E0010	Mobilization	Lump Sum	LS
009E3230	Grade Staking	1.592	Mile
009E3301	Engineer Directed Surveying/Staking	40.0	Hour
009E4200	Construction Schedule, Category II	Lump Sum	LS
110E7020	Remove Interim Crossover Closure for Reset	280	Ft
120E0010	Unclassified Excavation	4,606	CuYd
120E6200	Water for Granular Material	253.6	MGal
120E9000	Pit Run	12,675.0	Ton
260E1010	Base Course	8,476.0	Ton
320E1200	Asphalt Concrete Composite	6,566.0	Ton
332E0010	Cold Milling Asphalt Concrete	3,419	SqYd
450E4749	15" CMP 16 Gauge, Furnish	1,000	Ft
450E4750	15" CMP, Install	1,000	Ft
450E5005	15" CMP Elbow, Furnish	8	Each
450E5006	15" CMP Elbow, Install	8	Each
450E5100	CMP Tee, Furnish	2	Each
450E5101	CMP Tee, Install	2	Each
450E5402	15" CMP Safety End, Furnish	6	Each
450E5403	15" CMP Safety End, Install	6	Each
450E6119	15" Slotted CMP 16 Gauge, Furnish	900	Ft
450E6120	15" Slotted CMP, Install	900	Ft
462E0100	Class M6 Concrete	78.9	CuYd
464E0100	Controlled Density Fill	66.6	CuYd
600E0200	Type II Field Laboratory	1	Each
629E9010	Interim Crossover Closure	1,350	Ft
629E9060	Reset Interim Crossover Closure	280	Ft
831E0210	Non-woven Separator Fabric	13,817	SqYd

Revised: 06-03-2026 LLA

INDEX OF SHEETS

A1 Estimate of Quantities for Sections C, D and F
A2 to A3 Environmental Commitments

ESTIMATE OF QUANTITIES AND ENVIRONMENTAL COMMITMENTS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	IM 0292(100)55	A2	A3

ENVIRONMENTAL COMMITMENTS

The SDDOT is committed to protecting the environment and uses Environmental Commitments as a communication tool for the Engineer and Contractor to ensure that attention is given to avoid, minimize, and/or mitigate an environmental impact. Environmental commitments to various agencies and the public have been made to secure approval of this project. An agency with permitting authority can delay a project if identified environmental impacts have not been adequately addressed. Unless otherwise designated, the Contractor's primary contact regarding matters associated with these commitments will be the Project Engineer. During construction, the Project Engineer will verify that the Contractor has met Environmental Commitment requirements. These environmental commitments are not subject to change without prior written approval from the SDDOT Environmental Office.

Additional guidance on SDDOT's Environmental Commitments can be accessed through the Environmental Procedures Manual found at: <<https://dot.sd.gov/doing-business/environmental/about-environmental/>>

For questions regarding change orders in the field that may have an effect on an Environmental Commitment, the Project Engineer will contact the Environmental Engineer at 605-773-3180 or 605-773-4336 to determine whether an environmental analysis and/or resource agency coordination is necessary.

Once construction is complete, the Project Engineer will review all environmental commitments for the project and document their completion.

COMMITMENT C: WATER SOURCE

If a Contractor needs access to state waters for extraction, the Contractor must obtain a water right, through the application of a Temporary Permit to Use Public Waters before work begins.

The Contractor will not withdraw water with equipment previously used outside the State of South Dakota or previously used in aquatic invasive species (AIS) positive waters within South Dakota without prior approval from the SDDOT Environmental Office. To prevent and control the introduction and spread of invasive species into the project vicinity, all equipment will be power washed with hot water (≥140 °F) and completely dried for a minimum of 7 days prior to subsequent use. South Dakota administrative rule 41:10:04:02 forbids the possession and transport of AIS; therefore, all attached dirt, mud, debris and vegetation must be removed and all compartments and tanks capable of holding standing water must be drained. This includes, but is not limited to, all equipment, pumps, lines, hoses and holding tanks.

The Contractor will not withdraw water directly from streams of the James, Big Sioux, and Vermillion watersheds without prior approval from the SDDOT Environmental Office.

Action Taken/Required:

The Contractor will obtain the necessary permits from the regulatory agencies such as the South Dakota Department of Agriculture and Natural Resources (SDDANR) and the United States Army Corps of Engineers (USACE) prior to water extraction activities.

Temporary permit to use public waters for highway construction purposes application can be found on the SDDANR website:
<https://danr.sd.gov/OfficeOfWater/WaterRights/PermitForms/default.aspx>

Additional information and mapping of water sources impacted by Aquatic Invasive Species in South Dakota can be accessed at:
< <https://sdleastwanted.sd.gov/maps/default.aspx> >

South Dakota Administrative Rule 41:10:04 Aquatic Invasive Species:
< <https://sdlegislature.gov/rules/DisplayRule.aspx?Rule=41:10:04> >

COMMITMENT D: WATER QUALITY STANDARDS

COMMITMENT D1: SURFACE WATER QUALITY

This project may be in the vicinity of multiple streams and wetlands. These waters are considered waters of the state and are protected under Administrative Rules of South Dakota (ARSD) Chapter 74:51. Special construction measures may have to be taken to ensure that this water body is not impacted.

Action Taken/Required:

The Contractor is advised that the South Dakota Surface Water Quality Standards, administered by the South Dakota Department of Agriculture and Natural Resources (DANR), apply to this project. Special construction measures will be taken to ensure the above standard(s) of the surface waters are maintained and protected.

COMMITMENT E: STORM WATER

Construction activities constitute 1 acre or more of earth disturbance and/or work in a waterway.

Action Taken/Required:

The DANR General Permit for Stormwater Discharges Associated with Construction Activities is required for construction activity disturbing one or more acres of earth and work in a waterway. The SDDOT is the owner of this permit and will submit the NOI to DANR 15 days prior to project start in order to obtain coverage under the General Permit. Work can begin once the DANR letter of approval is received.

The Contractor must adhere to the "Special Provision Regarding Storm Water Discharges to Waters of the State."

The Contractor will complete the DANR Contractor Authorization Form prior to the pre-construction meeting. The form certifies under penalty of law that the Contractor understands and will comply with the terms and conditions of the permit for this project. Work may not begin on this project until this form is signed and submitted to DANR.

The form can be found at:
<
https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/docs/DANR_CGPAppendixCCA2023Fillable.pdf >

The Contractor is advised that permit coverage may also be required for off-site activities, such as borrow and staging areas, which are the responsibility of the Contractor.

Storm Water Pollution Prevention Plan

The Storm Water Pollution Prevention Plan (SWPPP) will be developed prior to the submittal of the NOI and will be implemented for all construction activities for compliance with the permit. The SWPPP must be kept on-site and updated as site conditions change. Erosion control measures and best management practices will be implemented in accordance with the SWPPP.

The DOT 298 Form will be used for site inspections and to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents and retained for a minimum of three years.

The inspection will include disturbed areas of the construction site that have not been finally stabilized, areas used for storage materials, structural control measures, and locations where vehicles enter or exit the site. These areas will be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the SWPPP will be observed to ensure that they are operating correctly, and sediment is not tracked off the site.

Information on storm water permits and SWPPPs are available on the following websites:

SDDOT: < <https://dot.sd.gov/doing-business/environmental/stormwater> >

DANR:<
<https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/stormwater/default.aspx> >

EPA: < <https://www.epa.gov/npdes> >

ESTIMATE OF QUANTITIES AND ENVIRONMENTAL COMMITMENTS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	IM 0292(100)55	A3	A3

COMMITMENT H: WASTE DISPOSAL SITE

The Contractor will furnish a site(s) for the disposal of construction and/or demolition debris generated by this project.

Action Taken/Required:

Construction and/or demolition debris may not be disposed of within the Public ROW.

The waste disposal site(s) will be managed and reclaimed in accordance with the following from the General Permit for Construction/Demolition Debris Disposal Under the South Dakota Waste Management Program issued by the Department of Agriculture and Natural Resources.

The waste disposal site(s) will not be located in a wetland, within 200 feet of surface water, or in an area that adversely affects wildlife, recreation, aesthetic value of an area, or any threatened or endangered species, as approved by the Environmental Office and the Project Engineer.

If the waste disposal site(s) is located such that it is within view of any ROW, the following additional requirements will apply:

1. Construction and/or demolition debris consisting of concrete, asphalt concrete, or other similar materials will be buried in a trench separate from wood debris. The final cover over the construction and/or demolition debris will consist of a minimum of 1 foot of soil capable of supporting vegetation. Waste disposal sites provided outside of the Public ROW will be seeded in accordance with Natural Resources Conservation Service recommendations. The seeding recommendations may be obtained through the appropriate County NRCS Office. The Contractor will control the access to waste disposal sites not within the Public ROW with fences, gates, and placement of a sign or signs at the entrance to the site stating, “No Dumping Allowed”.
2. Concrete and asphalt concrete debris may be stockpiled within view of the ROW for a period not to exceed the duration of the project. Prior to project completion, the waste will be removed from view of the ROW or buried, and the waste disposal site reclaimed as noted above.

The above requirements will not apply to waste disposal sites that are covered by an individual solid waste permit as specified in SDCL 34A-6-58, SDCL 34A-6-1.13, and ARSD 74:27:10:06. Failure to comply with the requirements stated above may result in civil penalties in accordance with South Dakota Solid Waste Law, SDCL 34A-6-1.31.

All costs associated with furnishing waste disposal site(s), disposing of waste, maintaining control of access (fence, gates, and signs), and reclamation of the waste disposal site(s) will be incidental to the various contract items.

COMMITMENT I: HISTORIC PRESERVATION OFFICE CLEARANCES

The SDDOT has obtained concurrence with the State Historic Preservation Office (SHPO or THPO) for all work included within the project limits and all department designated sources and designated option material sources, stockpile sites, storage areas, and waste sites provided within the plans.

Action Taken/Required:

All earth disturbing activities not designated within the plans require a cultural resource review prior to scheduling the pre-construction meeting. This work includes but is not limited to: Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas.

The Contractor will arrange and pay for a record search and when necessary, a cultural resource survey. The Contractor has the option to contact the state Archaeological Research Center (ARC) at 605-394-1936 or another qualified archaeologist, to obtain either a records search or a cultural resources survey. A record search might be sufficient for review if the site was previously surveyed; however, a cultural resources survey may need to be conducted by a qualified archaeologist.

The Contractor will provide ARC with the following: a topographical map or aerial view in which the site is clearly outlined, site dimensions, project number, and PCN. If applicable, provide evidence that the site has been previously disturbed by farming, mining, or construction activities with a landowner statement that artifacts have not been found on the site.

The Contractor will submit the cultural resources survey report to SDDOT Environmental Office, 700 East Broadway Avenue, Pierre, SD 57501-2586. SDDOT will submit the information to the appropriate SHPO/THPO. Allow **30 Days** from the date this information is submitted to the Environmental Engineer for SHPO/THPO review.

In the event of an inadvertent discovery of human remains, funerary objects, or if evidence of cultural resources is identified during project construction activities, then such activities within 150 feet of the inadvertent discovery will immediately cease and the Project Engineer will be immediately notified. The Project Engineer will contact the SDDOT Environmental Office, who will contact the appropriate SHPO/THPO within 48 hours of the discovery to determine an appropriate course of action.

SHPO review does not relieve the Contractor of the responsibility for obtaining any additional permits and clearances for Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas that affect wetlands, threatened and endangered species, or waterways. The Contractor will not utilize a site known or suspected of having contaminated soil or water. The Contractor will provide the required permits and clearances to the Project Engineer at the preconstruction meeting.