

PLOT SCALE - 1:5600

PLOTTED FROM - TRM111118

STATE OF SOUTH DAKOTA
DEPARTMENT OF TRANSPORTATION


PLANS FOR PROPOSED
PROJECT ER 0019(56)55
SD HIGHWAY 19
TURNER COUNTY
BERM REPAIR & RIPRAP
PCN 0A2P

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	ER 0019(56)55	1	22

Plotting Date: 08/31/2026

INDEX OF SHEETS

Sheet 1	Layout Map & Index of Sheets
Sheet 2	Estimate of Quantities
Sheets 3-4	Environmental Commitments
Sheets 5-10	Plan Notes & SWPPP
Sheets 11-13	Traffic Control
Sheets 14-21	Bridge Work at Str. No. 63-140-062
Sheet 22	Standard Plates

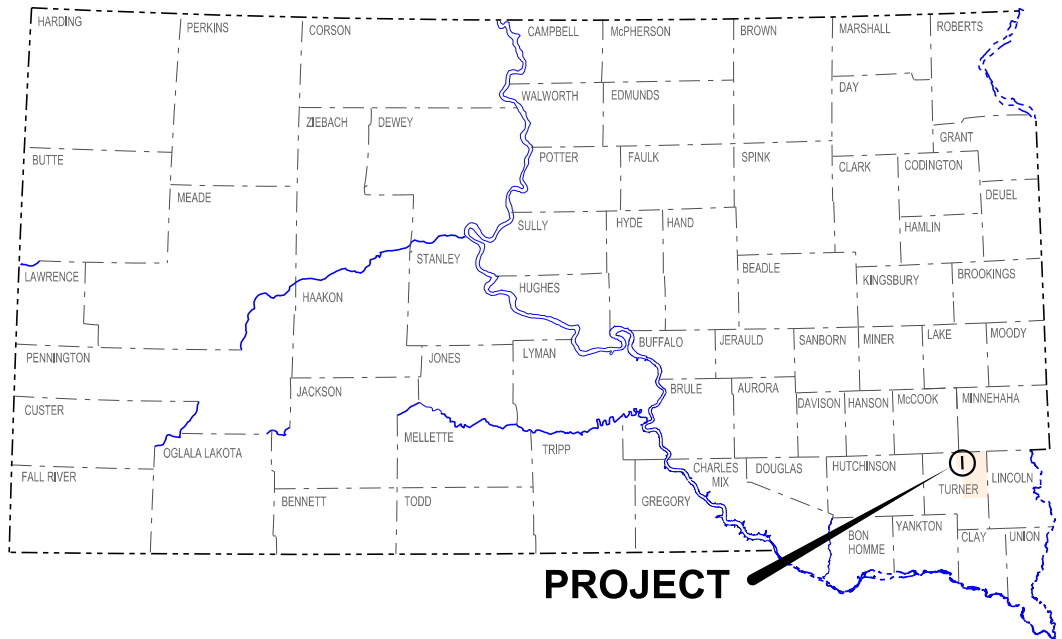

PROJECT


STR. NO. 63-140-062
Continuous Concrete Bridge
125'-6"=0.024 Mile
MRM 55.13

DESIGN DESIGNATION

ADT(2025)	1,528
ADT(2045)	2,556
DHV	295
D	51%
T DHV	4.9%
T ADT	10.7%
V	65 MPH

STORM WATER PERMIT

Receiving Waters:
West Fork Vermillion River
Area Disturbed: 0.3 Acre
Total Project Area: 0.7 Acre
Latitude: 43.4133 to 43.4139
Longitude: -97.1219 to -97.1225

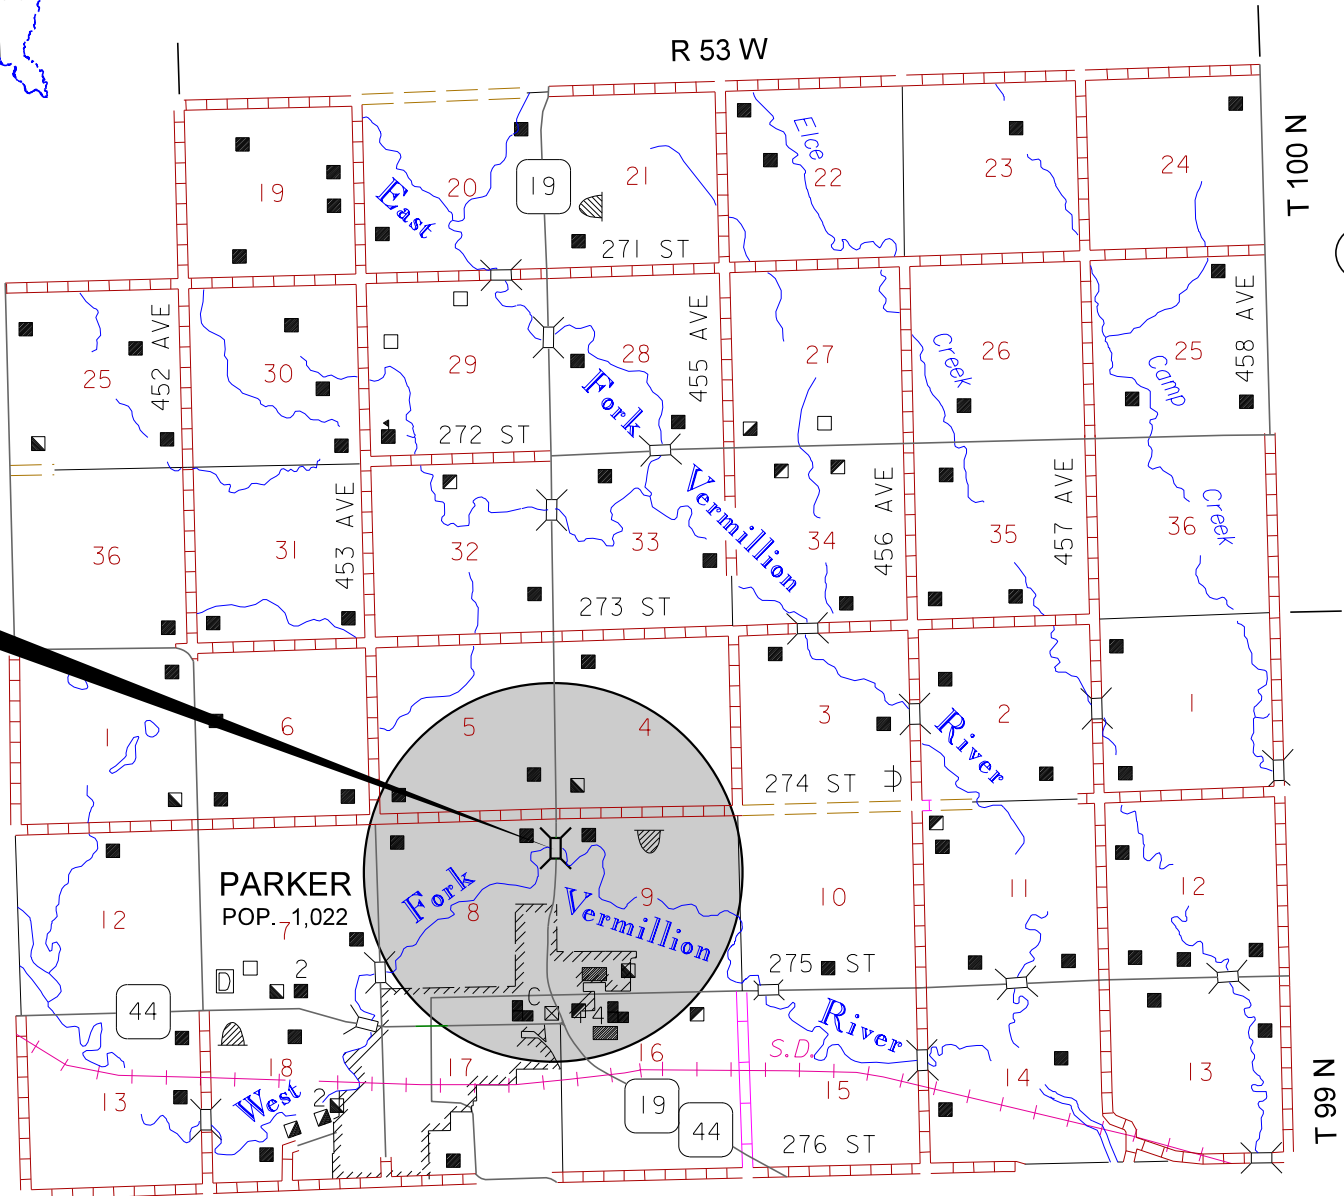

PLOT NAME - 1

FILE - ... \BRIDGE\TURN0A2P\T1TL0A2P.DGN

ESTIMATE OF QUANTITIES

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	ER 0019(56)55	2	22

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
009E0010	Mobilization	Lump Sum	LS
009E4100	Construction Schedule, Category I	Lump Sum	LS
634E0010	Flagging	80.0	Hour
634E0110	Traffic Control Signs	169.0	SqFt
634E0120	Traffic Control, Miscellaneous	Lump Sum	LS
734E0010	Erosion Control	Lump Sum	LS
734E0150	6" Diameter Erosion Control Wattle	100	Ft
734E0630	Floating Silt Curtain	336	Ft

Str. No. 63-140-062

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
120E3120	Bridge Berm Repair	2	Each
120E7000	Select Granular Backfill	13.2	Ton
464E0100	Controlled Density Fill	1.7	CuYd
700E0210	Class B Riprap	869.1	Ton
734E0090	Perforated Geocell	389	SqFt
831E0110	Type B Drainage Fabric	850	SqYd

ENVIRONMENTAL COMMITMENTS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	ER 0019(56)55	3	22

ENVIRONMENTAL COMMITMENTS

The SDDOT is committed to protecting the environment and uses Environmental Commitments as a communication tool for the Engineer and Contractor to ensure that attention is given to avoid, minimize, and/or mitigate an environmental impact. Environmental commitments to various agencies and the public have been made to secure approval of this project. An agency with permitting authority can delay a project if identified environmental impacts have not been adequately addressed. Unless otherwise designated, the Contractor's primary contact regarding matters associated with these commitments will be the Project Engineer. During construction, the Project Engineer will verify that the Contractor has met Environmental Commitment requirements. These environmental commitments are not subject to change without prior written approval from the SDDOT Environmental Office.

Additional guidance on SDDOT's Environmental Commitments can be accessed through the Environmental Procedures Manual found at: <https://dot.sd.gov/doing-business/environmental/about-environmental/>

For questions regarding change orders in the field that may have an effect on an Environmental Commitment, the Project Engineer will contact the Environmental Engineer at 605-773-3180 or 605-773-4336 to determine whether an environmental analysis and/or resource agency coordination is necessary.

Once construction is complete, the Project Engineer will review all environmental commitments for the project and document their completion.

COMMITMENT B: FEDERALLY THREATENED, ENDANGERED, AND PROTECTED SPECIES

COMMITMENT B1: CONSTRUCTION PRACTICES FOR STREAMS INHABITED BY THE TOPEKA SHINER

The SDDOT Environmental Office has identified the following as Topeka Shiner streams.

Table of Topeka Shiner Streams

Station	Stream Name	Ordinary High-Water Elevation
314+39.5 to 315+65	Vermillion River West Fork	1315.00'

Action Taken/Required:

The Contractor will adhere to the "Special Provision for Construction Practices in Streams Inhabited by the Topeka Shiner".

Stream turbidity will be monitored during all stages of the project. Turbidity measurements are to be taken in conjunction with normal storm water inspections but can also be taken at the Project Engineer's discretion during construction activities that may result in increased turbidity (e.g., placing riprap or installing a coffer dam).

Prior to the pre-construction meeting the Contractor will produce and provide the SDDOT Environmental Office a comprehensive Construction Plan that includes all products, materials, and methods of installation and removal for temporary water barriers, cofferdams, and diversion channels including de-watering, handling, storage, and disposal of excavated material and pumped effluent throughout all phases of construction, including post-construction stabilization. Work will not proceed on any of the streams identified in the Table of Topeka Shiner Streams without approval of the Construction Plan by the SDDOT Environmental Office. Upon plan approval, the Construction Plan will be amended to the SWPPP. Fish rescue and seining activities cannot be conducted in freezing conditions or during inclement weather events.

COMMITMENT B2: WHOOPING CRANE

The Whooping Crane is a spring and fall migratory bird in South Dakota that is about 5 feet tall and typically stops on wetlands, rivers, and agricultural lands along their migration route. An adult Whooping Crane is white with a red crown and a long, dark, pointed bill. Immature Whooping Cranes are cinnamon brown. While in flight, their long necks are kept straight, and their long dark legs trail behind. Adult Whooping Cranes' black wing tips are visible during flight.

Action Taken/Required:

Harassment or other measures to cause the Whooping Crane to leave the site is a violation of the Endangered Species Act. If a Whooping Crane is sighted roosting in the vicinity of the project, borrow pits, or staging areas associated with the project, cease construction activities in the affected area until the Whooping Crane departs and immediately contact the Project Engineer. The Project Engineer will contact the Environmental Office so that the sighting can be reported to USFWS.

COMMITMENT C: WATER SOURCE

If a Contractor needs access to state waters for extraction, the Contractor must obtain a water right, through the application of a Temporary Permit to Use Public Waters before work begins.

The Contractor will not withdraw water with equipment previously used outside the State of South Dakota or previously used in aquatic invasive species (AIS) positive waters within South Dakota without prior approval from the SDDOT Environmental Office. To prevent and control the introduction and spread of invasive species into the project vicinity, all equipment will be power washed with hot water ($\geq 140^{\circ}\text{F}$) and completely dried for a minimum of 7 days prior to subsequent use. South Dakota administrative rule 41:10:04:02 forbids the possession and transport of AIS; therefore, all attached dirt, mud, debris and vegetation must be removed and all compartments and tanks capable of holding standing water must be drained. This includes, but is not limited to, all equipment, pumps, lines, hoses and holding tanks.

The Contractor will not withdraw water directly from streams of the James, Big Sioux, and Vermillion watersheds without prior approval from the SDDOT Environmental Office.

Action Taken/Required:

The Contractor will obtain the necessary permits from the regulatory agencies such as the South Dakota Department of Agriculture and Natural Resources (SDDANR) and the United States Army Corps of Engineers (USACE) prior to water extraction activities.

Temporary permit to use public waters for highway construction purposes application can be found on the SDDANR website: <https://danr.sd.gov/OfficeOfWater/WaterRights/PermitForms/default.aspx>

Additional information and mapping of water sources impacted by Aquatic Invasive Species in South Dakota can be accessed at: <https://sdleastwanted.sd.gov/maps/default.aspx>

South Dakota Administrative Rule 41:10:04 Aquatic Invasive Species: <https://sdlegislature.gov/rules/DisplayRule.aspx?Rule=41:10:04>

COMMITMENT D: WATER QUALITY STANDARDS

COMMITMENT D1: SURFACE WATER QUALITY

The Vermillion River West Fork is classified as warmwater, marginal fishery with a total suspended solids standard of less than 150 mg/L 30-day average, less than 263 mg/L daily maximum.

Action Taken/Required:

The Contractor is advised that the South Dakota Surface Water Quality Standards, administered by the South Dakota Department of Agriculture and Natural Resources (DANR), apply to this project. Special construction measures will be taken to ensure the above standard(s) of the surface waters are maintained and protected.

COMMITMENT D2: SURFACE WATER DISCHARGE

The DANR General Permit for Temporary Discharge Activities is required for temporary dewatering and discharges to waters of the state. The effluent limit for total suspended solids will be 90 mg/L 30-day average. The effluent limit applies to discharges to all waters of the state except discharges to waters classified as coldwater permanent fish life propagation waters according to the ARSD 74:51:01:45. For discharges to waters of the state classified as coldwater permanent fish life propagation waters, the effluent limit for total suspended solids will be 53 mg/L daily maximum.

The permittee has the option of completing effluent testing or implementing a pollution prevention plan for compliance with this permit. If the permittee develops a pollution prevention plan instead of total suspended solids sampling, the plan must be developed and implemented prior to discontinuing total suspended solids sampling. Refer to Section 4.0 of the permit. If any pollutants are suspected of being discharged, a sample must be taken for those parameters listed in Section 3.4 of the permit.

Refer to Commitment D1: Surface Water Quality for stream classification.

Action Taken/Required:

If construction dewatering is required and this project is not required to be covered under a General Permit for Stormwater Discharges Associated with Construction Activities, the Contractor will obtain the General Permit for Temporary Discharge Activities from the DANR Water Quality Program, 605-773-3351.

https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/docs/DANR_TemporaryDischargeNOI2018Fillable.pdf

The Contractor will provide a copy of the approved permit or the submitted dewatering information to the Project Engineer prior to proceeding with any dewatering activities. The approved permit or submitted dewatering information must be kept on-site and as part of the project records.

Effluent monitoring, as a result of dewatering activities, will be summarized for each month and recorded on a separate Discharge Monitoring Report (DMR) and submitted to DANR monthly. Additional information can be found at: <https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/swdpermitting/Ereporting.aspx>

ENVIRONMENTAL COMMITMENTS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	ER 0019(56)55	4	22

COMMITMENT E: STORM WATER

Construction activities constitute less than 1 acre of disturbance.

Action Taken/Required:

At a minimum and regardless of project size, appropriate erosion and sediment control measures must be installed to control the discharge of pollutants from the construction site.

COMMITMENT H: WASTE DISPOSAL SITE

The Contractor will furnish a site(s) for the disposal of construction and/or demolition debris generated by this project.

Action Taken/Required:

Construction and/or demolition debris may not be disposed of within the Public ROW.

The waste disposal site(s) will be managed and reclaimed in accordance with the following from the General Permit for Construction/Demolition Debris Disposal Under the South Dakota Waste Management Program issued by the Department of Agriculture and Natural Resources.

The waste disposal site(s) will not be located in a wetland, within 200 feet of surface water, or in an area that adversely affects wildlife, recreation, aesthetic value of an area, or any threatened or endangered species, as approved by the Environmental Office and the Project Engineer.

If the waste disposal site(s) is located such that it is within view of any ROW, the following additional requirements will apply:

1. Construction and/or demolition debris consisting of concrete, asphalt concrete, or other similar materials will be buried in a trench separate from wood debris. The final cover over the construction and/or demolition debris will consist of a minimum of 1 foot of soil capable of supporting vegetation. Waste disposal sites provided outside of the Public ROW will be seeded in accordance with Natural Resources Conservation Service recommendations. The seeding recommendations may be obtained through the appropriate County NRCS Office. The Contractor will control the access to waste disposal sites not within the Public ROW with fences, gates, and placement of a sign or signs at the entrance to the site stating, “No Dumping Allowed”.
2. Concrete and asphalt concrete debris may be stockpiled within view of the ROW for a period not to exceed the duration of the project. Prior to project completion, the waste will be removed from view of the ROW or buried, and the waste disposal site reclaimed as noted above.

The above requirements will not apply to waste disposal sites that are covered by an individual solid waste permit as specified in SDCL 34A-6-58, SDCL 34A-6-1.13, and ARSD 74:27:10:06.

Failure to comply with the requirements stated above may result in civil penalties in accordance with South Dakota Solid Waste Law, SDCL 34A-6-1.31.

All costs associated with furnishing waste disposal site(s), disposing of waste, maintaining control of access (fence, gates, and signs), and reclamation of the waste disposal site(s) will be incidental to the various contract items.

COMMITMENT I: HISTORIC PRESERVATION OFFICE CLEARANCES

State Historic Preservation Office (SHPO or THPO) concurrence has not been obtained for this project.

Action Taken/Required:

All earth disturbing activities require a cultural resource review prior to scheduling the pre-construction meeting. This work includes but is not limited to: Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas.

The Contractor will arrange and pay for a record search and when necessary, a cultural resource survey. The Contractor has the option to contact the state Archaeological Research Center (ARC) at 605-394-1936 or another qualified archaeologist, to obtain either a records search or a cultural resources survey. A record search might be sufficient for review if the site was previously surveyed; however, a cultural resources survey may need to be conducted by a qualified archaeologist.

The Contractor will provide ARC with the following: a topographical map or aerial view in which the site is clearly outlined, site dimensions, project number, and PCN. If applicable, provide evidence that the site has been previously disturbed by farming, mining, or construction activities with a landowner statement that artifacts have not been found on the site.

The Contractor will submit the cultural resources survey report to SDDOT Environmental Office, 700 East Broadway Avenue, Pierre, SD 57501-2586. SDDOT will submit the information to the appropriate SHPO/THPO. Allow **30 Days** from the date this information is submitted to the Environmental Engineer for SHPO/THPO review.

In the event of an inadvertent discovery of human remains, funerary objects, or if evidence of cultural resources is identified during project construction activities, then such activities within 150 feet of the inadvertent discovery will immediately cease and the Project Engineer will be immediately notified. The Project Engineer will contact the SDDOT Environmental Office, who will contact the appropriate SHPO/THPO within 48 hours of the discovery to determine an appropriate course of action.

The Contractor is responsible for obtaining any additional permits and clearances for Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas that affect wetlands, threatened and endangered species, or waterways. The Contractor will not utilize a site known or suspected of having contaminated soil or water. The Contractor will provide the required permits and clearances to the Project Engineer at the preconstruction meeting.

COMMITMENT N: SECTION 404 PERMIT

The SDDOT has obtained a Section 404 Permit from the USACE for the permanent actions associated with this project.

Action Taken/Required:

The Contractor will comply with all requirements contained in the Section 404 Permit.

The Contractor will also be responsible for obtaining a Section 404 Permit for any dredge, excavation, or fill activities associated with material sources, storage areas, waste sites, and Contractor work sites outside the plan work limits that affect wetlands, floodplains, or waters of the United States.

UTILITIES

The Contractor will contact the involved utility companies through South Dakota One Call (1-800-781-7474) prior to starting work. It will be the responsibility of the Contractor to coordinate work with the utility owners to avoid damage to existing facilities.

If utilities are identified near the improvement area through the SD One Call process as required by South Dakota Codified Law 49-7A and Administrative Rule Article 20:25; the Contractor will contact the Project Engineer to determine if project changes are necessary to avoid utility impacts.

Gathered Utility Contacts:

Jeff Hove
Alliance Communications Cooperative, Inc.
1400 E Aspen Blvd
Brandon, SD 57005
O: 605-582-6311
C: 605-941-7035
E: jeffh@alliance.coop

Jordan Huber
Bluepeak
5100 S Broadband Rd
Sioux Falls, SD 57108
O: 605-498-4922
C: 605-366-1360
E: jordan.huber@mybluepeak.com

John Euchner
Southeastern Electric Cooperative, Inc.
47077 276th St
Lennox, SD 57039
O: 800-333-2859
C: 605-310-2684
E: johne@southeastern.coop
E: duane@southeastern.coop

Jay Jorgensen
TM Rural Water District
PO Box 445
110 N Main Ave
Parker, SD 57053-0445
O: 605-297-3334
E: jay.jorgensen@tmruralwater.com

SEQUENCE OF OPERATIONS

The Contractor will submit a sequence of operations for approval two weeks prior to the preconstruction meeting. If changes to the sequence of operations are proposed during the project, these must be submitted for review a minimum of one week prior to potential implementation. Approval for changes to the sequence of operations will only be allowed when the proposed changes meet with the Department’s intent for traffic control and sequencing of the work.

GENERAL TRAFFIC CONTROL

Existing guide, route, informational logo, regulatory, and warning signs will be temporarily reset and maintained during construction. Removing, relocating, covering, salvaging, and resetting of existing traffic control devices, including delineation, will be the responsibility of the Contractor. Cost for this work will be incidental to the contract unit prices for the various items unless otherwise specified in the plans. Any delineators and signs damaged or lost will be replaced by the Contractor at no cost to the State.

All temporary traffic control sign locations will be set in the field by the Contractor and verified by the Engineer prior to installation.

All temporary speed limit signs will have a minimum mounting height of 5 feet in rural locations, even when mounted on portable supports.

Portable sign supports will not be located on sidewalks, bicycle facilities, or other areas designated for pedestrian or bicycle traffic.

If there is a discrepancy between the traffic control plans, standard plates, and the MUTCD, whichever is more stringent will be used, as determined by the Engineer.

Unless otherwise stated in these plans, work will not be allowed during hours of darkness.

Fixed location signing placed more than 4 calendar days prior to the start of construction will be covered or laid down until the time of construction. The covers must be approved by the Engineer prior to installation. The cost of materials, labor, and equipment necessary to complete this work will be incidental to other contract items. No separate payment will be made.

All fixed location signs, sign posts, and breakaway bases will be removed within 7 calendar days following pavement marking.

All haul trucks will be equipped with an additional flashing amber light that is visible from the backside of the haul truck. The costs for the flashing amber lights will be incidental to the various related contract items.

The Contractor will furnish, install, maintain, and remove TRUCK CROSSING (W8-6) signs daily. The TRUCK CROSSING signs will be displayed always when haul vehicles are hauling material. When hauling conditions no longer exist, the signs will be covered or removed from view. The exact number and location will be determined during construction. Payment for additional signs will be based on the contract unit price per square foot for “Traffic Control Signs”.

FLAGGING

Operations will be conducted so that the traveling public will not have to wait longer than 15 minutes at the flagger station.

It is required that the flaggers and pilot car operators be able to communicate with one another. If an emergency vehicle needs to pass through the project, the Contractor will be required to expedite traffic movement. All costs associated with this will be incidental to the contract unit price per hour for “Flagging”.

TRAFFIC CONTROL SIGNS

Traffic control signs have been included in a table for each site. Payment will only be for those signs used on each site.

ITEMIZED LIST FOR TRAFFIC CONTROL SIGNS

SIGN CODE	SIGN DESCRIPTION	CONVENTIONAL ROAD			
		NUMBER	SIGN SIZE	SQFT PER SIGN	SQFT
W8-6	TRUCK CROSSING	2	48" x 48"	16.0	32.0
W20-1	ROAD WORK AHEAD	2	48" x 48"	16.0	32.0
W20-4	ONE LANE ROAD AHEAD	2	48" x 48"	16.0	32.0
W20-7	FLAGGER (symbol)	2	48" x 48"	16.0	32.0
W21-5	SHOULDER WORK	2	48" x 48"	16.0	32.0
G20-2	END ROAD WORK	2	36" x 18"	4.5	9.0
		CONVENTIONAL ROAD TRAFFIC CONTROL SIGNS SQFT			
		169.0			

EROSION CONTROL

The estimated area requiring erosion control is 0.7 acres. All costs for the erosion control work for furnishing, placing, and maintaining erosion control including equipment, labor, seeding, fertilizing, and mulching will be incidental to the contract lump sum price for “Erosion Control”.

The limits of erosion control work will be determined by the Engineer during construction.

The areas to be seeded and mulched consist of disturbed areas within the right-of-way resulting from the work required by this contract.

Type G Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	7
Switchgrass	Dacotah, Forestburg, Nebraska 28, Pathfinder, Summer, Sunburst, Trailblazer	3
Indiangrass	Holt, Tomahawk, Chief, Nebraska 54	3
Big Bluestem	Bison, Bonilla, Champ, Sunnyview, Rountree, Bonanza	3
Oats or Spring Wheat: April through May; Winter Wheat: August through November		10
Total:		26

FLOATING SILT CURTAIN

Floating silt curtains will be installed at locations noted in the table and at locations determined by the Engineer during construction.

The Contractor will determine the water depth and other waterway characteristics such as stream flow velocity and seek technical advice from the manufacturer before ordering the floating silt curtain so that the floating silt curtain installed is the correct type for the individual sites.

The Contractor will install the floating silt curtain in accordance with the manufacturer’s installation instructions or as directed by the Engineer.

The Contractor will maintain the floating silt curtains for the duration of the project to ensure continuous protection of the waterway.

The Floating Silt Curtain provided will be from the approved product list. The approved product list may be viewed at the following internet site:

<https://apps.sd.gov/HC60ApprovedProducts/main.aspx>

TABLE OF FLOATING SILT CURTAIN

Station	Location	Quantity (Ft)
Along both banks	West Fork Vermillion River	336

EROSION CONTROL WATTLE

Erosion control wattles for restraining the flow of runoff and sediment will be installed at locations determined by the Engineer during construction. Refer to Standard Plate 734.06 for details.

The Contractor will provide certification that the erosion control wattles do not contain noxious weed seeds.

Erosion control wattles will remain on the project to decompose.

The erosion control wattle provided will be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

<https://apps.sd.gov/HC60ApprovedProducts/main.aspx>

STORMWATER POLLUTION PREVENTION PLAN CHECKLIST
*(The numbers left of the title headings are **reference numbers** to the GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES (Stormwater Permit))*

5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION

To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES

- **5.3 (3a): Project Limits** (See Title Sheet)
- **5.3 (3a): Project Description** (See Title Sheet)
- **5.3 (4): Site Map(s)** (See Title Sheet and Plans)
- **Major Soil Disturbing Activities** (check all that apply)
 - ☐ Clearing and grubbing
 - ☒ Excavation/borrow
 - ☒ Grading and shaping
 - ☒ Filling
 - ☐ Other (describe):
- **5.3 (3b): Total Project Area** 0.7 Acre
- **5.3 (3b): Total Area to be Disturbed** 0.3 Acre
- **5.3 (3c): Maximum Area Disturbed at One Time** 0.3 Acre
- **5.3 (3d): Existing Vegetative Cover (%)** 70-80
- **5.3 (3d): Description of Vegetative Cover** Typical Eastern SD native and introduced grasses and forbs
- **5.3 (3e): Soil Properties:** AASHTO Soil or USDA-NRCS Soil Series Classification
- **5.3 (3f): Name of Receiving Water Body/Bodies** West Fork Vermillion River
- **5.3 (3g): Location of Construction Support Activity Areas**

5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES

The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date
Divert water from work area	
Remove existing Riprap	
Bridge Berm Repair operations	
Place Riprap.	
Reseed areas disturbed by removal activities.	

5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES

All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)	
Description	Estimated Start Date
☐ Natural Buffers (within 50 ft of Waters of State)	
☐ Silt Fence	
☐ Erosion Control Wattles	
☐ Temporary Berm / Windrow	
☐ Floating Silt Curtain	
☐ Stabilized Construction Entrances	
☐ Entrance/Exit Equipment Tire Wash	
☐ Other:	

Structural Erosion and Sediment Controls	
Description	Estimated Start Date
☐ Silt Fence	
☐ Temporary Berm/Windrow	
☐ Erosion Control Wattles	
☐ Temporary Sediment Barriers	
☐ Erosion Bales	
☐ Temporary Slope Drain	
☐ Turf Reinforcement Mat	
☒ Riprap	
☐ Gabions	
☐ Rock Check Dams	
☐ Sediment Traps/Basins	
☐ Culvert Inlet Protection	
☐ Transition Mats	
☐ Median/Area Drain Inlet Protection	
☐ Curb Inlet Protection	
☐ Interceptor Ditch	
☐ Concrete Washout Facility	
☐ Work Platform	
☐ Temporary Water Barrier	
☐ Temporary Water Crossing	
☐ Permanent Stormwater Ponds	
☐ Permanent Open Vegetated Swales	
☐ Natural Depressions to allow for Infiltration	
☐ Sequential Systems that combine several practices	
☐ Other:	

Dust Controls

Description	Estimated Start Date
☐ Tarps & Wind impervious fabrics	
☐ Watering	
☐ Stockpile location/orientation	
☐ Dust Control Chlorides	
☐ Other	

Dewatering BMPs

Description	Estimated Start Date
☐ Sediment Basins	
☐ Dewatering bags	
☐ Weir tanks	
☐ Temporary Diversion Channel	
☐ Other:	

Stabilization Practices (See Detail Plan Sheets)

(Stabilization measures will begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization will be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities (**3.18**))

Description	Estimated Start Date
☐ Vegetation Buffer Strips	
☐ Temporary Seeding (Cover Crop Seeding)	
☒ Permanent Seeding	
☐ Sodding	
☐ Planting (Woody Vegetation for Soil Stabilization)	
☐ Mulching (Grass Hay or Straw)	
☐ Fiber Mulching (Wood Fiber Mulch)	
☐ Soil Stabilizer	
☐ Bonded Fiber Matrix	
☐ Fiber Reinforced Matrix	
☐ Erosion Control Blankets	
☐ Surface Roughening (e.g. tracking)	
☐ Other:	

Wetland Avoidance

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☒ No ☐ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure's capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor's Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in "DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES" above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

- **Material Management**
 - Housekeeping
 - Only needed products will be stored on-site by the Contractor.
 - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
 - Products must be stored in original containers and labeled.
 - Material mixing will be conducted in accordance with the manufacturer's recommendations.
 - When possible, all products will be completely used before properly disposing of the container off-site.
 - The manufacturer's directions for disposal of materials and containers will be followed.
 - The Contractor's site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
 - Dust generated will be controlled in an environmentally safe manner.

- Hazardous Materials
 - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
 - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
 - If surplus product must be disposed of, manufacturer's label directions for disposal will be followed.
 - Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
 - Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
 - Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ **Spill Control Practices**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer's recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor's site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ **Spill Response**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor's site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.
- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent's designee will be responsible for completing the spill reporting form and for reporting the spill to SDDANR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor's site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

➤ **Waste Disposal**

- All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.

➤ **Hazardous Waste**

- All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.

➤ **Sanitary Waste**

- Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading “POLLUTION PREVENTION PROCEDURES” (check all that apply).

- ☒ Concrete and Portland Cement
- ☐ Detergents
- ☐ Paints
- ☐ Metals
- ☐ Bituminous Materials
- ☐ Petroleum Based Products
- ☒ Diesel Exhaust Fluid
- ☐ Cleaning Solvents
- ☒ Wood
- ☐ Cure
- ☐ Texture
- ☐ Chemical Fertilizers
- ☐ Other:

Product Specific Practices

- **Petroleum Products**
All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- **Fertilizers**
Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- **Paints**
All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer’s instructions and any applicable state and local regulations.
- **Concrete Trucks**
Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- ☐ Discharges from water line flushing.
- ☐ Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- ☒ Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor’s site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDANR immediately **if any one of the following** conditions exists:
 - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
 - The release or spill causes an immediate danger to human health or safety
 - The release or spill exceeds 25 gallons
 - The release or spill causes a sheen on surface water
 - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
 - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
 - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
 - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDANR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDANR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge will be sent to SDDANR within 14 days of the discharge.

5.4: SWPPP CERTIFICATIONS

➤ Certification of Compliance with Federal, State, and Local Regulations

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

➤ South Dakota Department of Transportation

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Authorized Signature (See the General Permit, Section 7.4 (1))

➤ Prime Contractor

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

➤ Contractor Information:

- Prime Contractor Name: _____
- Contractor Contact Name: _____
- Address: _____
- _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ Erosion Control Supervisor

- Name: _____
- Address: _____
- _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ SDDOT Project Engineer

- Name: _____
- Business Address: _____
- Job Office Location: _____
- City: _____ State: _____ Zip: _____
- Office Phone: _____ Field: _____
- Cell Phone: _____ Fax: _____

➤ SDDANR Contact Spill Reporting

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

➤ SDDANR Contact for Hazardous Materials.

- (605) 773-3153

➤ National Response Center Hotline

- (800) 424-8802.

➤ SDDANR Stormwater Contact Information

- SDDANR Stormwater (800) 737-8676
- Surface Water Quality Program (605) 773-3351

5.5: REQUIRED SWPPP MODIFICATIONS

➤ 5.5 (1): Conditions Requiring SWPPP Modification

The SWPPP must be modified, including the site map(s), in response to any of the following conditions:

- When a new operator responsible for implementation of any part the SWPPP begins work on the site.
- When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
- To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
- If inspections by site staff, local officials, SDDANR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
- To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
- If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.

➤ 5.5 (2): Deadlines for SWPPP Modification

Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.

➤ 5.5 (3): Documentation of Modifications to the Plan

All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.

➤ 5.5 (4): Certification Requirements

All modifications made to the SWPPP must be signed and certified as required in Section 7.4.

➤ 5.5 (5): Required Notice to Other Operators

If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form.

Plot Scale: 1"=200' File - ...16XU_177WStd Plates 08RD.dgn

Plotting Date: 07/15/2026


The signs illustrated are not required if the work space is behind a barrier, more than 2 feet behind the curb, or 15 feet or more from the edge of any roadway.

The signs illustrated will be used where there are distracting situations; such as: vehicles parked on shoulder, vehicles accessing the work site via the highway, and equipment traveling on or crossing the roadway to perform work operations.


The ROAD WORK AHEAD sign may be replaced with other appropriate signs, such as the SHOULDER WORK sign. The SHOULDER WORK sign may be used for work adjacent to the shoulder.

* If the work space is on a divided highway, an advance warning sign should also be placed on the left side of the directional roadway.


For short term, short duration, or mobile operations, all signs and channelizing devices may be eliminated if a vehicle with an activated flashing or revolving yellow light is used.

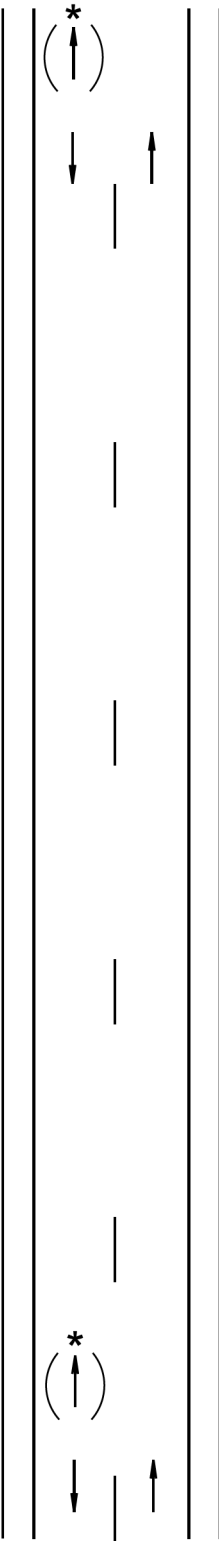

Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)
0 - 30	200
35 - 40	350
45 - 50	500
55	750
60 - 80	1000

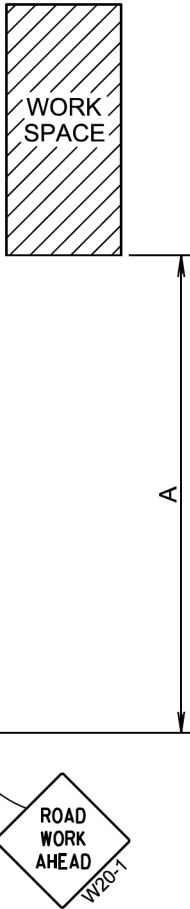


January 22, 2021

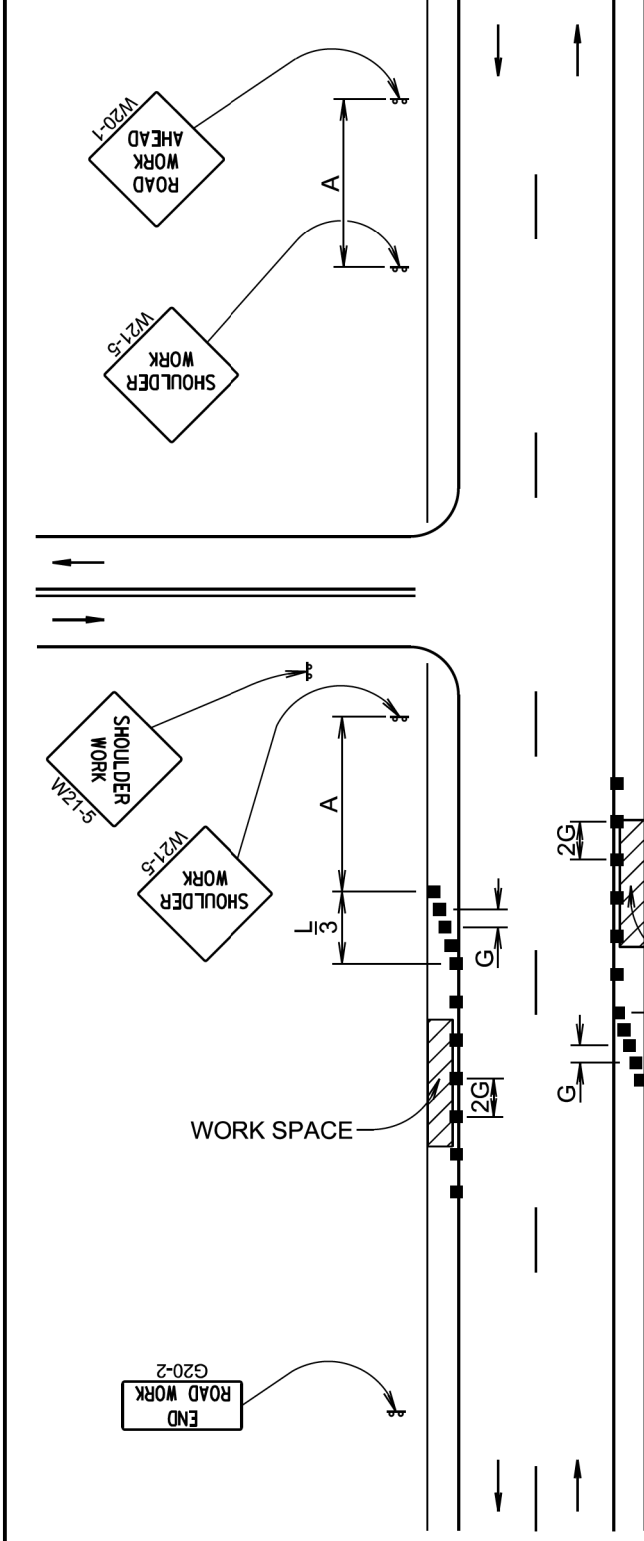

Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)	Taper Length (Feet) (L)	Spacing of Channelizing Devices (Feet) (G)
0 - 30	200	180	25
35 - 40	350	320	25
45	500	600	25
50	500	600	50
55	750	660	50
60 - 65	1000	780	50

Channelizing Device



The channelizing devices will be drums or 42" cones if traffic control must remain overnight.


For short duration operations (1 hour or less) all channelizing devices may be eliminated if a vehicle with an activated flashing or revolving yellow light is used.

Worker signs (W21-1 or W21-1a) may be used instead of SHOULDER WORK signs.

A SHOULDER WORK sign should be placed on the left side of a divided or one-way roadway only if the left shoulder is affected.

The SHOULDER WORK sign on an intersecting roadway is not required if drivers emerging from that roadway will encounter another advance warning sign before they reach a work activity area.

WORK SPACE

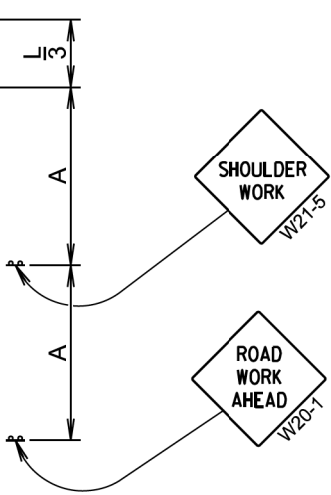

January 22, 2021

Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)	Spacing of Channelizing Devices (Feet) (G)
0 - 30	200	25
35 - 40	350	25
45	500	25
50	500	50
55	750	50
60 - 65	1000	50

- Flagger
- Channelizing Device

For low-volume traffic situations with short work zones on straight roadways where the flagger is visible to road users approaching from both directions, a single flagger may be used.

The ROAD WORK AHEAD and the END ROAD WORK signs may be omitted for short duration operations (1 hour or less).

For tack and/or flush seal operations, when flaggers are not being used, the FRESH OIL sign (W21-2) will be displayed in advance of the liquid asphalt areas.

Flashing warning lights and/or flags may be used to call attention to the advance warning signs.

The channelizing devices will be drums or 42" cones.

Channelizing devices are not required along the centerline adjacent to work area when pilot cars are utilized for escorting traffic through the work area.


END ROAD WORK G20-2

Channelizing devices and flaggers will be used at intersecting roads to control intersecting road traffic as required.

The buffer space should be extended so that the two-way traffic taper is placed before a horizontal or vertical curve to provide adequate sight distance for the flagger and queue of stopped vehicles.


The length of A may be adjusted to fit field conditions.

Warning sign sequence in opposite direction same as below.

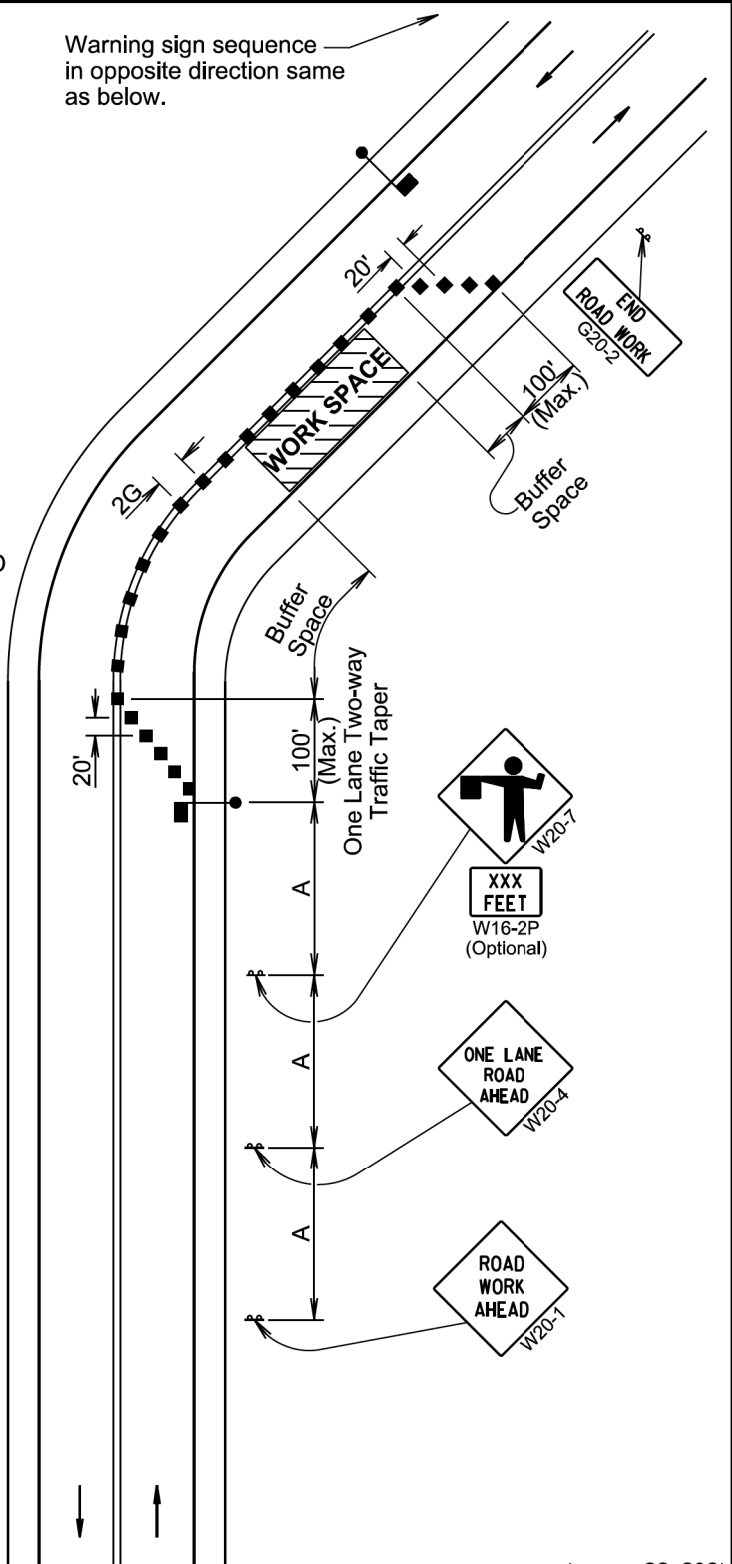


January 22, 2021


Published Date: 2027	S D D O T	LANE CLOSURE WITH FLAGGER PROVIDED	PLATE NUMBER 634.23
			Sheet 1 of 1

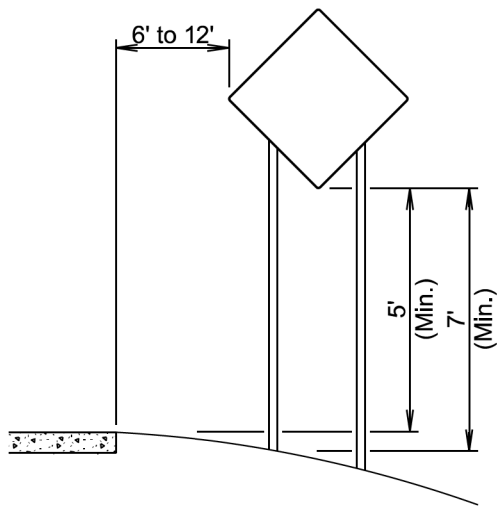


RURAL DISTRICT

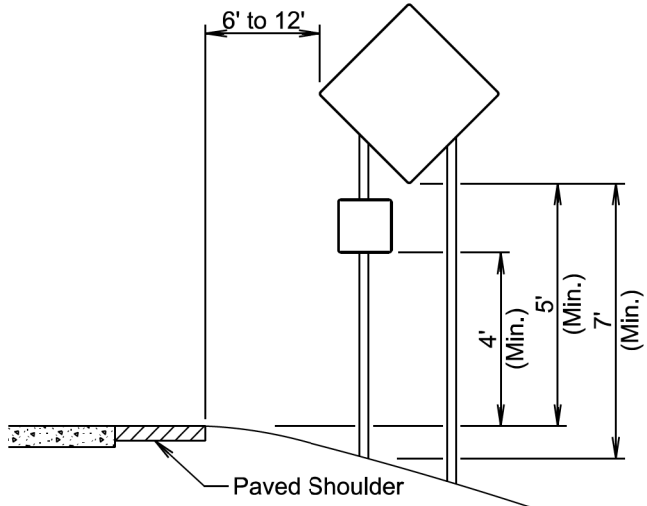

RURAL DISTRICT WITH SUPPLEMENTAL PLATE

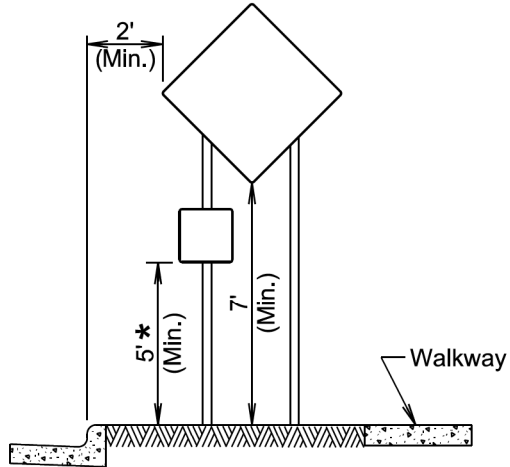

URBAN DISTRICT

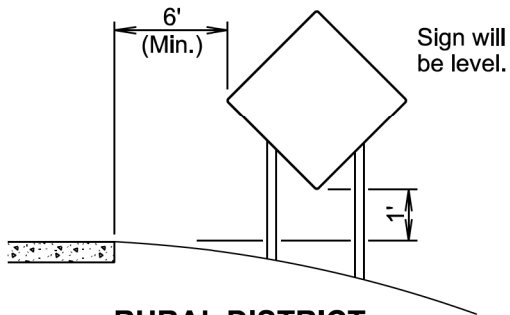

RURAL DISTRICT 3 DAY MAXIMUM

(Not applicable to regulatory signs)


* If the bottom of supplemental plate is mounted lower than 7 feet above a pedestrian walkway, the supplemental plate should not project more than 4" into the pedestrian facility.

January 22, 2021

Published Date: 2027	S D D O T	CRASHWORTHY SIGN SUPPORTS (Typical Construction Signing)	PLATE NUMBER 634.85
			Sheet 1 of 1

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	ER 0019(56)55	13	22

Plotting Date: 07/15/2026

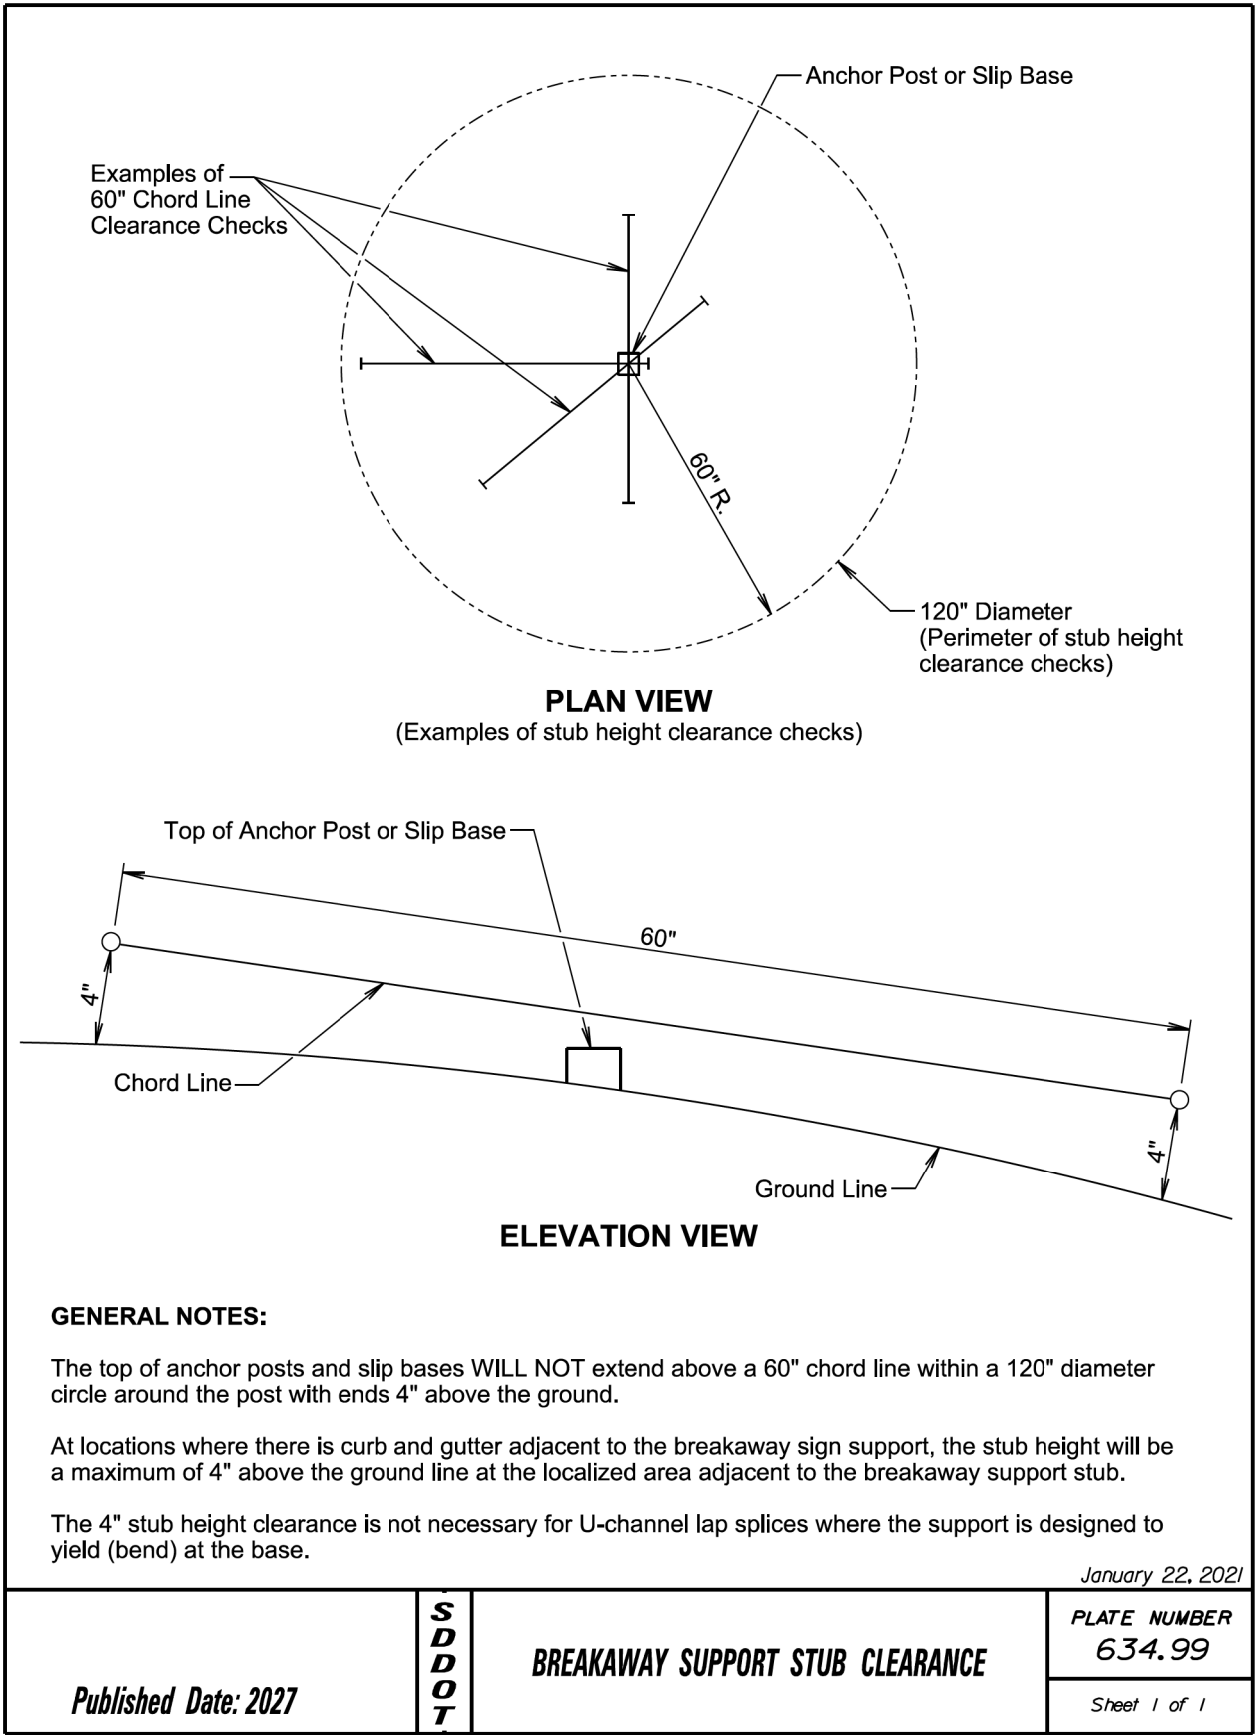

ESTIMATE OF STRUCTURE QUANTITIES

ITEM NO.	DESCRIPTION	QUANTITY	UNIT
120E3120	Bridge Berm Repair	2	Each
120E7000	Select Granular Backfill	13.2	Ton
464E0100	Controlled Density Fill	1.7	CuYd
700E0210	Class B Riprap	869.1	Ton
734E0090	Perforated Geocell	389	SqFt
831E0110	Type B Drainage Fabric	850	SqYd

SPECIFICATIONS

Construction Specifications: Standard Specifications for Roads and Bridges, 10-7-26 Version; Required Provisions; and Special Provisions as included in the Proposal. The Standard Specifications for Roads and Bridges is available for download and viewing at <https://dot.sd.gov/doing-business/contractors/standard-specifications>.

DETAILS AND DIMENSIONS OF EXISTING BRIDGE

- All details and dimensions of the existing bridge, contained in these plans, are based on the original construction plans and shop plans. It is the Contractor's responsibility to inspect and verify the actual field conditions and any necessary as-built dimensions affecting the satisfactory completion of the work required for this project.
- The stationing shown in the original construction plans is reversed from the current project. As such, labels for the begin and end of bridge as well as the substructure units are reversed.

SCOPE OF BRIDGE WORK & SEQUENCE OF OPERATIONS

All work on this structure will be accomplished with the traffic control shown in the plans. Alternate sequence of operations may be submitted by the Contractor for approval by the Engineer two weeks prior to the pre-construction meeting.

- Place Controlled Density Fill in voids under the abutment.
- Repair Bridge Berm and inslopes at the abutments.
- Place Type B drainage fabric and Class B Riprap.
- Place Perforated Geocell filled with Select Granular Backfill on the berm top.

BRIDGE BERM REPAIR

- The bridge berms have material loss due to a flood event and will need rebuilt and shaped to their original template with Class B Riprap incorporated into the berm slope.
- Reconstruct the berms with at least 6" of fill material and 6" of geocell above the bottom of the abutment backwall. The berm slope will be benched into stable embankment during reshaping and reconstruction. The soil will be placed in horizontal lifts perpendicular to the centerline of the abutment.

- Fill voids under the abutments using Controlled Density Fill. The quantity for Controlled Density Fill is an estimate. The actual quantity of material may vary.
- Due to material loss at the site, borrow is to be provided to rebuild the berm and fill any erosion features on the berm slope. Reconstruct the berms to at least 1-foot above the bottom of the abutment backwall. The berm slope will be benched into stable embankment during reshaping and reconstruction. The soil will be placed in horizontal lifts perpendicular to the centerline of the abutment. For informational purposes the estimated borrow material required is 220 cubic yards.
- Shape the fill in front of the wing walls to divert runoff from the inslopes away from the face of the berm slope. Reshape the inslopes near the wing walls to approximately 20 feet out from the bridge.
- At the upper part of the berm slope, clearance between the structure and berm will prohibit the use of large compaction equipment. The soil in this area will be compacted using hand operated compaction equipment. Berm material will be placed in reduced lift thicknesses with adequate moisture to obtain density requirements.
- Soil used to reconstruct the berm slope will be furnished by the Contractor and approved by the Engineer. The soil will have 100% passing the 1 1/2 inch sieve, a maximum of 70% passing the #4 sieve, have a maximum Liquid Limit (LL) of 45 and a Plastic Index (PI) greater than 10 but less than 25. The Contractor will be responsible for one gradation, LL and PI test for each borrow source for berm reconstruction. The test results will be supplied to the Engineer in writing.
- Compaction of the reconstructed berm, spill cones, and inslopes will be governed by the Ordinary Compaction Method.
- Quantities provided are an estimate for this work. It is the responsibility of the Contractor to visit the site prior to starting construction to determine quantities needed.
- The cost of the berm and stream channel reconstruction will be incidental to the contract unit price per each for Bridge Berm Repair. This payment will be full compensation for furnishing all materials, labor, tools, channel diversion, removal material outside the riprap limits, and equipment necessary or incidental to the reconstruction of the bridge berm.

RIPRAP

- The cross section shown in this plan set is provided as a guide for riprap placement and are based on the existing ground locations at the time of inspection. The location of the toe of the riprap may vary to suit local site conditions provided the following items are adhered to:
 - The opening provided under the structure for water flow is not reduced from what is shown on the cross section.
 - Any changes in the riprap configuration are approved by the Engineer.
- All material excavated to allow for riprap placement will be disposed of by the Contractor.
- A factor of 1.4 tons/CuYd was used to convert the riprap quantity from CuYd to Tons.

ESTIMATE OF STRUCTURE QUANTITIES AND NOTES


FOR
125' - 6" CONTINUOUS CONCRETE BRIDGE

STR. NO. 63-140-062


JULY 2026

2 OF 8


STATE OF	PROJECT	SHEET NO.	TOTAL SHEETS
	ER 0019(56)55	16	22

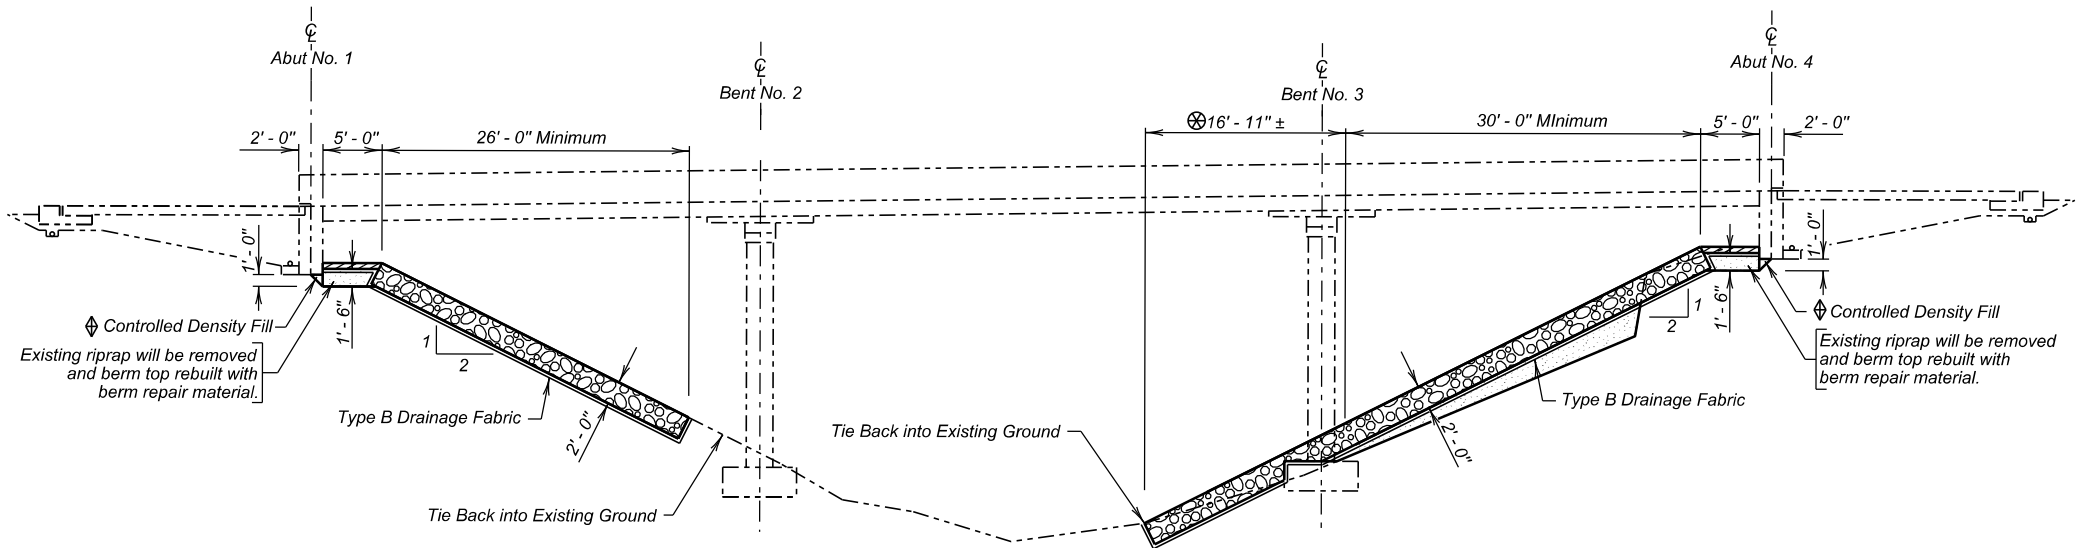

SECTION A - A

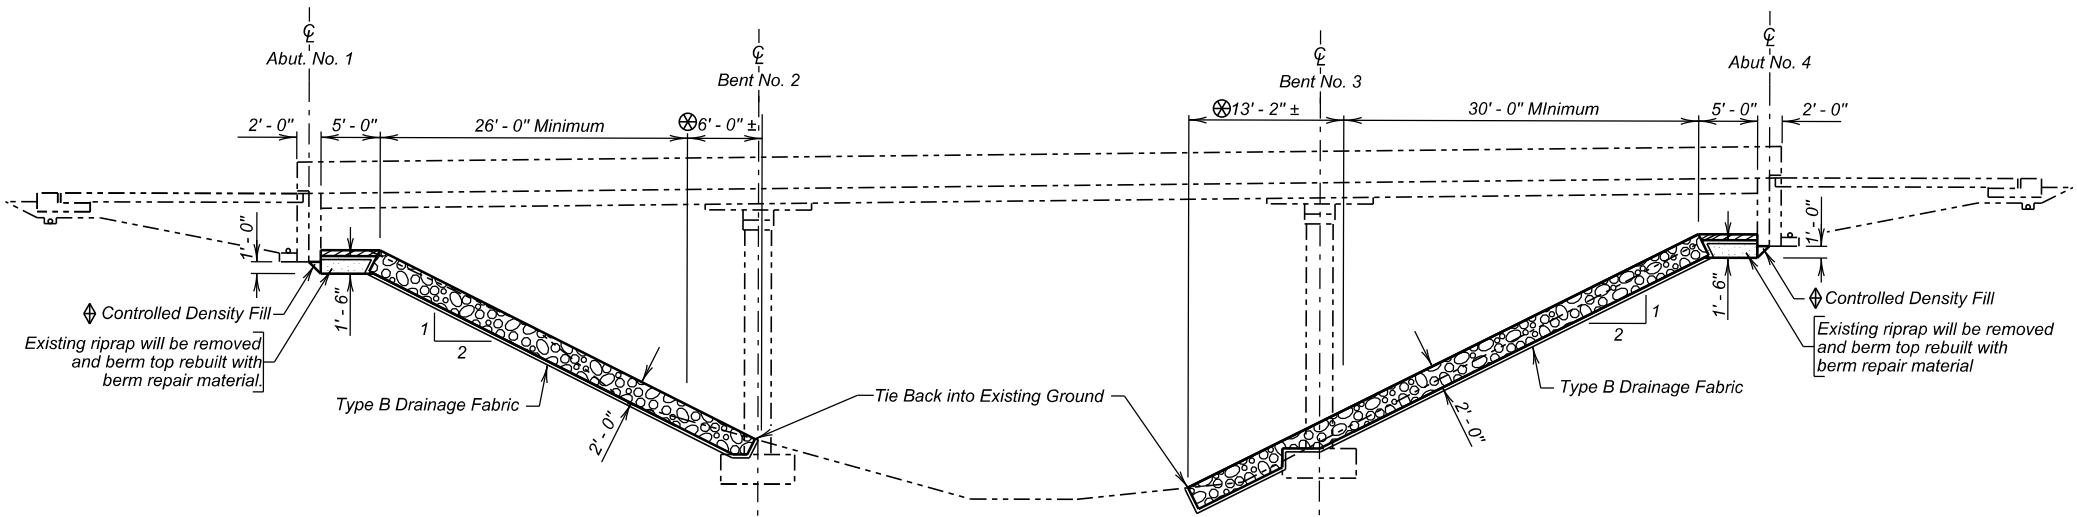

SECTION B - B

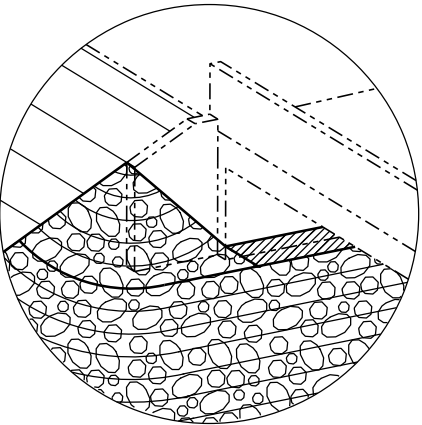

SPILL CONE DETAIL AT EMBANKMENT

⊕ Dimension will vary based on channel conditions, fill as required to tie into the existing channel. Slope to not exceed 2:1.

⊕ Assumes a void 1' - 0" deep, 1' - 0" wide, and full width of the abutment with the triangular shape shown, actual void may vary.


LEGEND:

-  Class B Riprap
-  Perforated Geocell
-  Berm Repair


BRIDGE BERM REPAIR (A)
 FOR
125' - 6" CONTINUOUS CONCRETE BRIDGE
 36' - 0" ROADWAY 0° SKEW
 OVER W. FORK VERMILLION RIVER SEC. 8/9 -T99N-R53W
 STR. NO. 63-140-062 ER 0019(56)55

TURNER COUNTY
 S. D. DEPT. OF TRANSPORTATION

JULY 2026

DESIGNED BY TJM TURN0A2P	CK. DES. BY CMM 0A2PMA03	DRAFTED BY TJM	 BRIDGE ENGINEER
--------------------------------	--------------------------------	-------------------	--

STATE OF	PROJECT	SHEET NO.	TOTAL SHEETS
S.D.	ER 0019(56)55	17	22

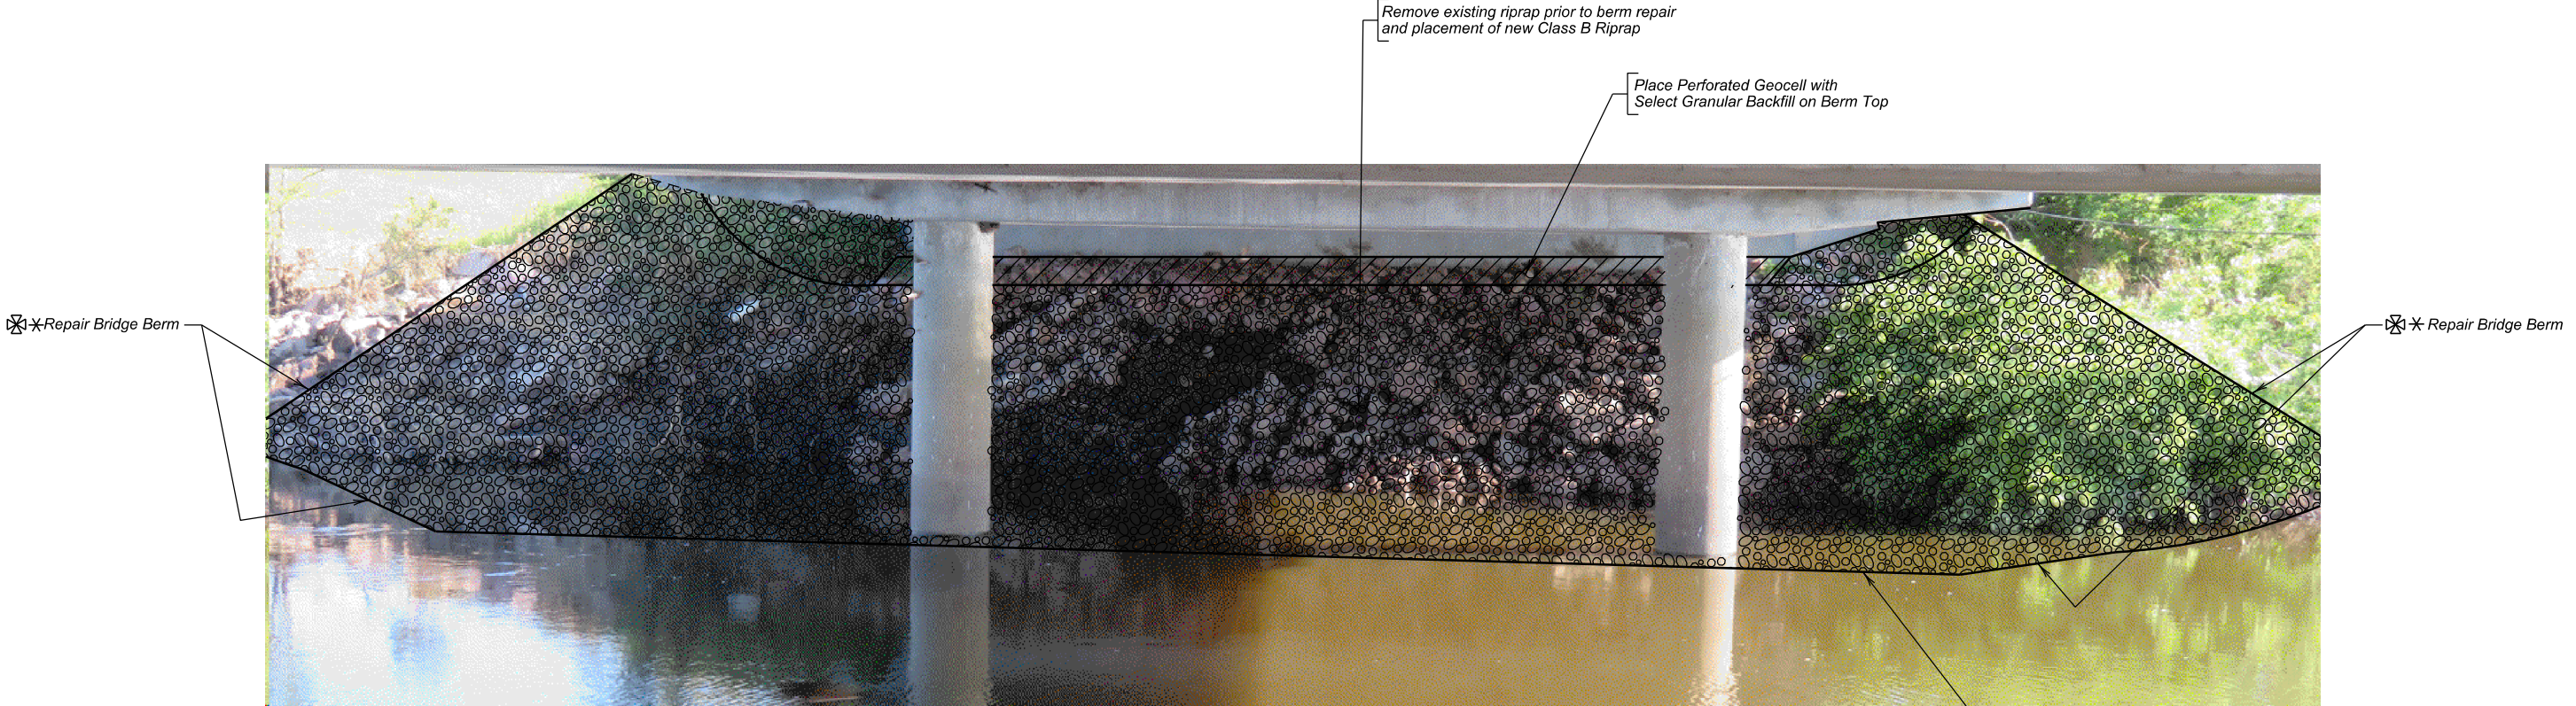

SECTION C - C

LEGEND:


-  Class B Riprap
-  Perforated Geocell
-  Berm Repair

* Edge of riprap and protected berm top will need to tie into existing ground. Reshape the edges and provide material as needed to create smooth transitions.
* Material will be required to shape slope based on current channel condition.

BRIDGE BERM REPAIR (B)
FOR
125' - 6" CONTINUOUS CONCRETE BRIDGE
36' - 0" ROADWAY 0° SKEW
OVER W. FORK VERMILLION RIVER SEC. 8/9 -T99N-R53W
STR. NO. 63-140-062 ER 0019(56)55

TURNER COUNTY
S. D. DEPT. OF TRANSPORTATION
JULY 2026

DESIGNED BY TJM TURN0A2P	CK. DES. BY CMM 0A2PMA04	DRAFTED BY TJM	 BRIDGE ENGINEER
--------------------------------	--------------------------------	-------------------	--

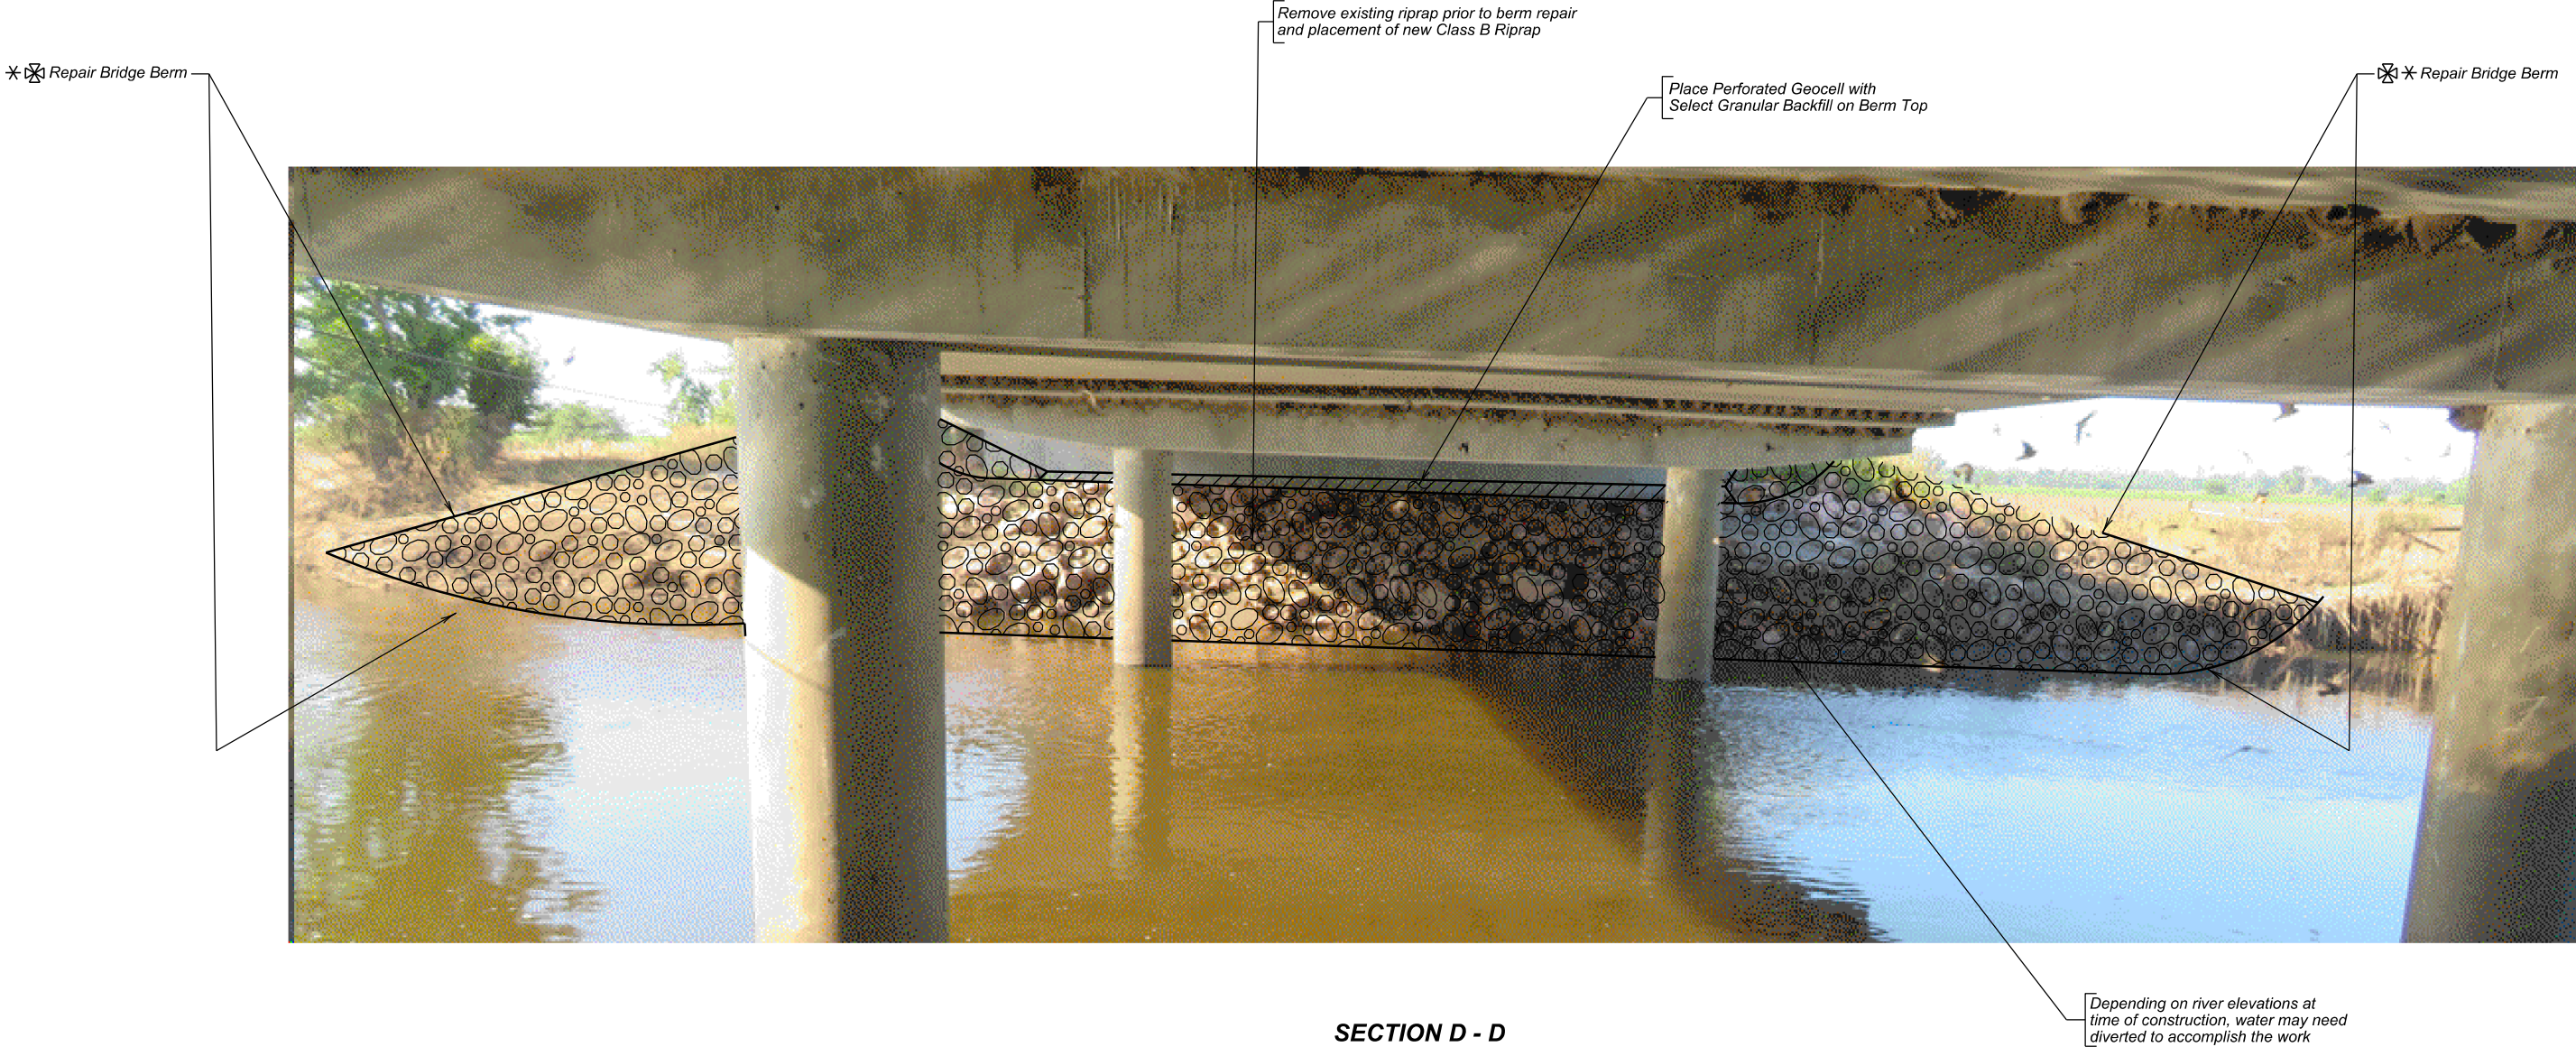

BRIDGE BERM REPAIR (C)
FOR
125' - 6" CONTINUOUS CONCRETE BRIDGE
36' - 0" ROADWAY 0° SKEW
OVER W. FORK VERMILLION RIVER SEC. 8/9 -T99N-R53W
STR. NO. 63-140-062 ER 0019(56)55

- LEGEND:
- Class B Riprap
 - Perforated Geocell
 - Berm Repair


* Edge of riprap and protected berm top will need to tie into existing ground. Reshape the edges and provide material as needed to create smooth transitions.
* Material will be required to shape slope based on current channel condition.

TURNER COUNTY
S. D. DEPT. OF TRANSPORTATION


JULY 2026 5 OF 8

B.M. # 18 El. 1351.92
Rebar & Grds. - 50.5' L.I.
Sta. 305+37


B.M. # 20 El. 1324.61
Rebar & Grds. 51' L.I.
Sta. 331+41

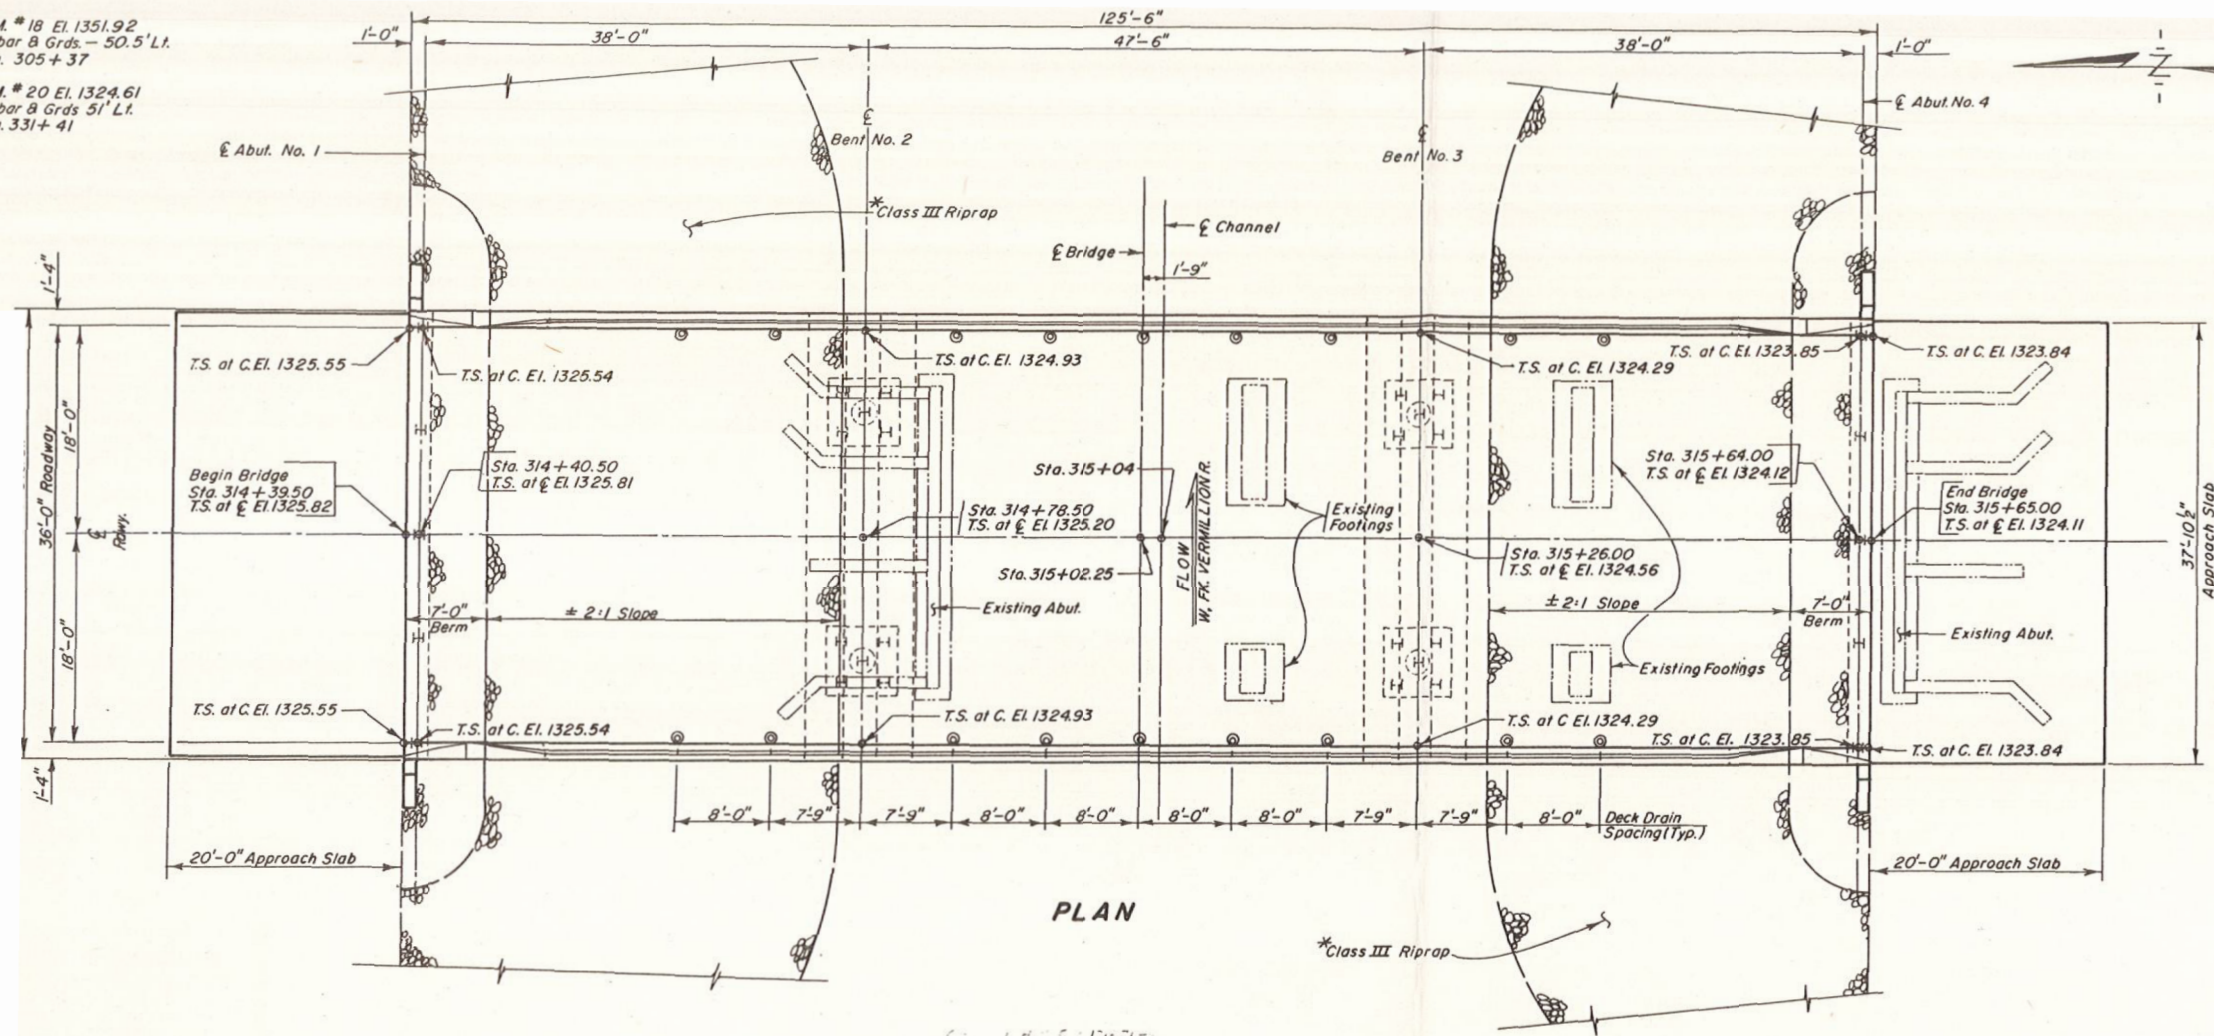

PLAN

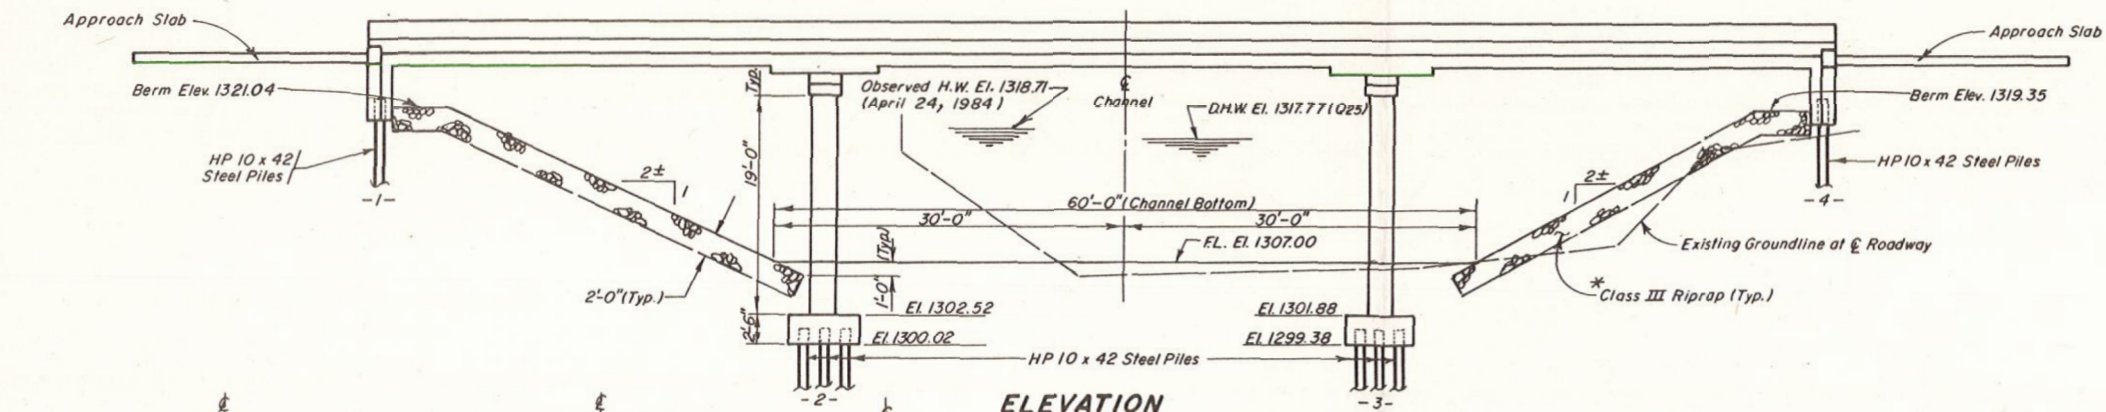

ELEVATION

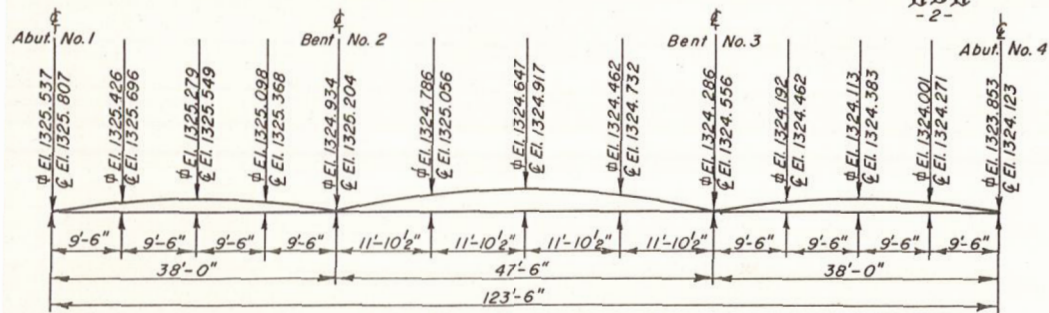

CURB & ELEVATION

Elevations Indicated with ϕ are Top of Finished Slab at Curbs; with ϵ are Top of Finished Slab at Center Line of Roadway. Camber for Dead Load Deflection PLUS Plastic Flow, shown on Sheet No. 6 of 12, have been included in the elevations shown above.

Q_d	4731 cfs.
A_d	776.3 sq. ft.
V_d	6.09 fps.
Q_F	4731 cfs.
Q_{100}	9831 cfs.

Q_d = DESIGN DISCHARGE FOR THE PROPOSED BRIDGE BASED ON 25 YEAR FREQUENCY; EL. 1317.77.

Q_F = DESIGNATED PEAK DISCHARGE FOR THE BASIN APPROACHING PROPOSED PROJECT BASED ON 25 YEAR FREQUENCY.

Q_{100} = COMPUTED DISCHARGE FOR THE BASIN APPROACHING PROPOSED PROJECT, BASED ON 100 YEAR FREQUENCY, EL. 1321.89.

HYDRAULICS DATA


PLANS BY
OFFICE OF BRIDGE DESIGN, S.D. DEPT. OF TRANSPORTATION

-X020- INDEX OF BRIDGE SHEETS-

- Sheet No. 1 General Drawing
- Sheet No. 2 Estimate of Structure Quantities and Notes
- Sheet No. 3 Subsurface Investigation
- Sheet No. 4 Abutment Details
- Sheet No. 5 Bent Details
- Sheet No. 6 Superstructure Details
- Sheet No. 7 End Block, Barrier Curb & Drain Details
- Sheet No. 8 Details of Bridge End Backfill
- Sheet No. 9 Details of Approach Slab
- Sheet No. 10 Details of Riprap
- Sheet No. 11 Details of Standard Plate No. 305 and No. 302
- Sheet No. 12 Details of Standard Plate No. 308 and 4-Bolt Insert Assembly.

*NOTE: See Sheet 10 of 12 for Riprap Details.

NOTE: T.S. at ϵ = Top of Slab at Center Line Elevation.
T.S. at C = Top of Slab at Curb Elevation.

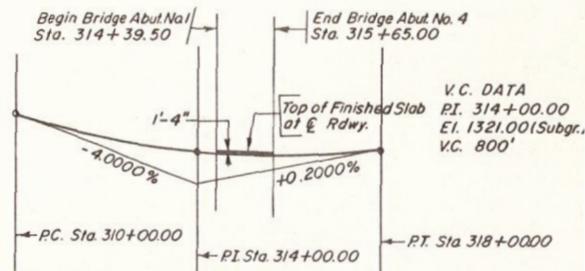

VERTICAL CURVE DATA

ORIGINAL CONSTRUCTION PLANS

GENERAL DRAWING
FOR

125'-6" CONTINUOUS CONCRETE BRIDGE

36'-0" ROADWAY 0° SKEW

OVER W. FK. VERMILLION RIVER SEC. 8/9-T99N-R53W

STA. 314+39.50 TO 315+65.00 BRFO019(1)55



STR. NO. 63-140-062 HS 20-44

TURNER COUNTY (8 ALT.)

S. D. DEPT. OF TRANSPORTATION

PCEMS 0029 JULY 1984

DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED
S.J./K.G.	L.A.K.	K.N.G.	BRIDGE ENGINEER

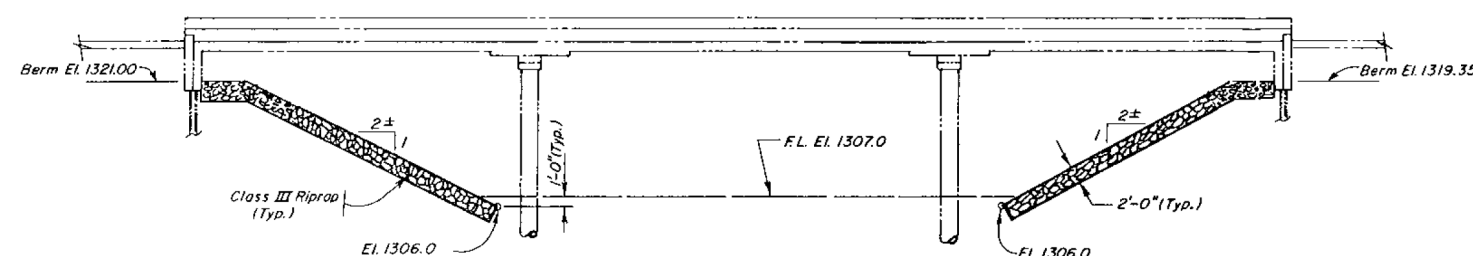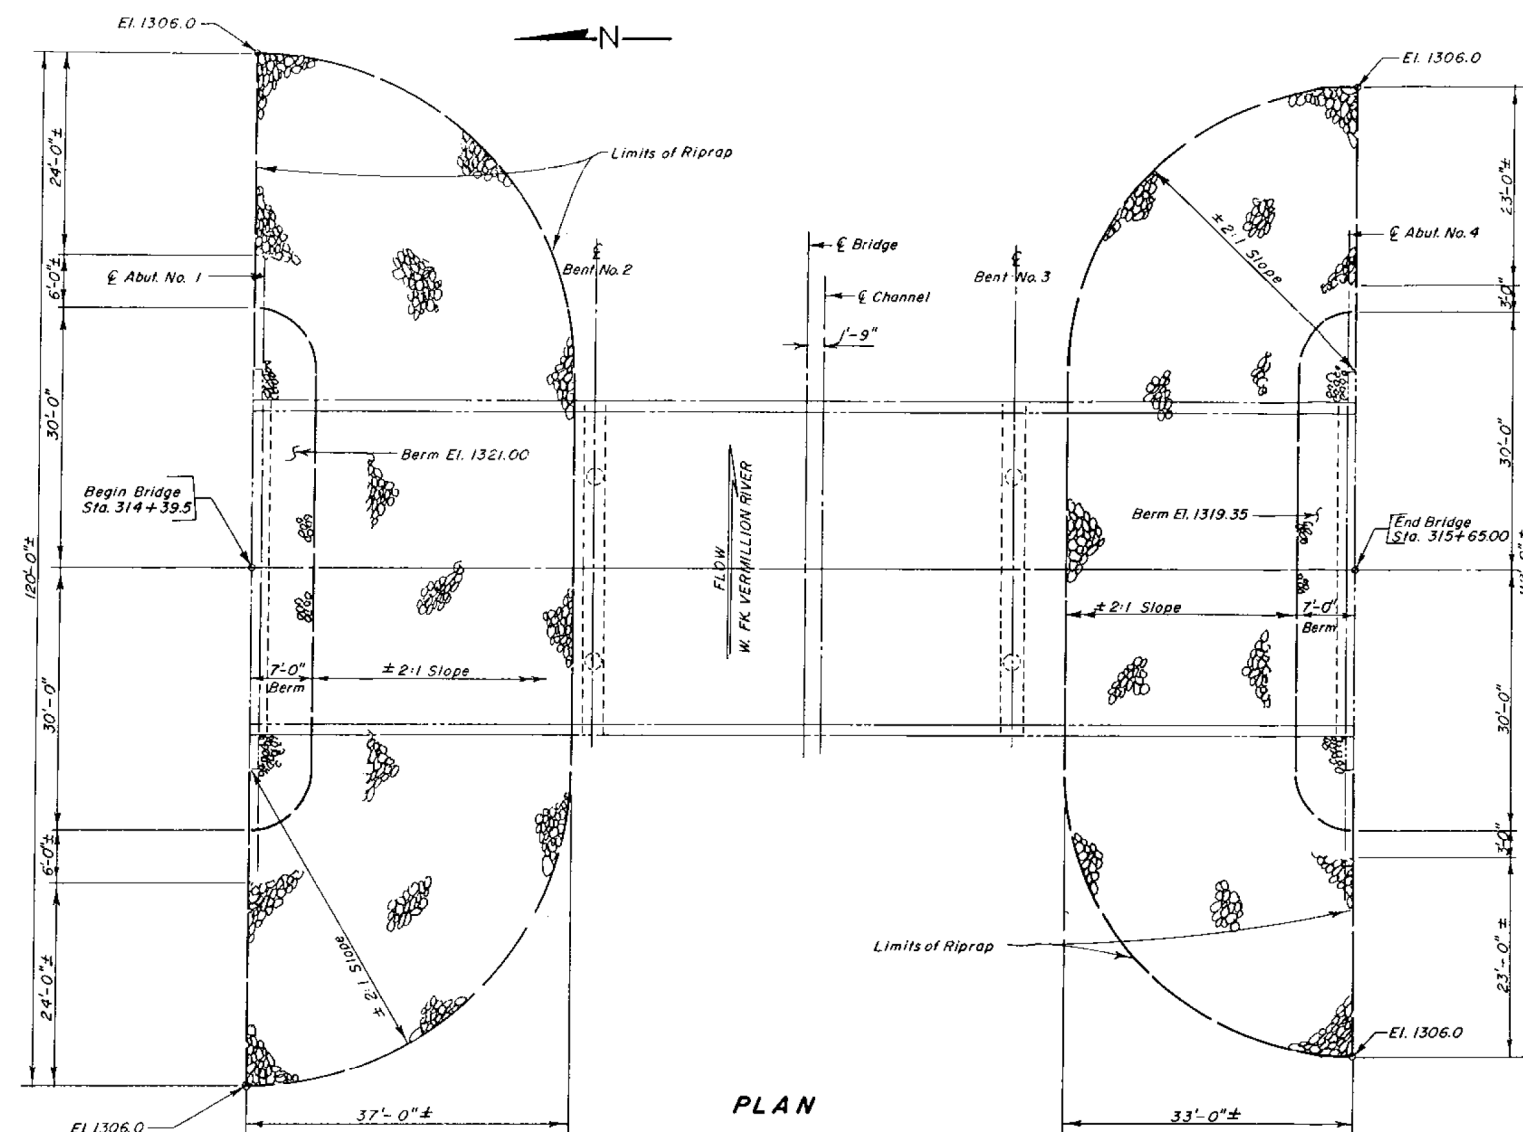

NOTES —

1. *The Riprap used on this project shall be Class III.*
2. *The Class III Riprap shall be constructed to the configuration, limits, and elevations shown on this sheet. The stream banks shall be reconstructed to their original alignment and elevations and warped in to match the 2:1 berm slopes, as directed by the Engineer. The intent is to bury some of the riprap on the upstream and downstream sides. The cost of reconstructing the stream banks shall be absorbed in the unit price bid for Slope Protection.*

[illegible]

* A factor of 1.4 was used to convert cu. yds. to tons.

ORIGINAL CONSTRUCTION PLANS

DETAILS OF RIPRAP
FOR

125'-6" CONTINUOUS CONCRETE BRIDGE

36'-0" ROADWAY 0° SKEW

OVER W. FK. VERMILLION RIVER SEC. 8/9-T99N-R53W

STA. 314+39.50 TO 315+65.00 BRF0019 (01)55

STR. NO.63-140-062 HS 20-44
(& ALT.)

TURNER COUNTY

S. D. DEPT. OF TRANSPORTATION

JULY 1984 (7) OF (8)

DESIGNED BY <u>S.J./KG.</u>	DRAWN BY <u>L.A.K.</u>	CHECKED BY <u>S.J.</u>	APPROVED _____ BRIDGE ENGINEER
--------------------------------	---------------------------	---------------------------	--

PLOT SCALE - 1:200


.PLOTTED FROM - TRM111118

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	ER 0019(56)55	22	22

Plotting Date: 08/18/2026

PLOT NAME - 2

FILE - ... \STANDARDPLATES_0A2P.DGN

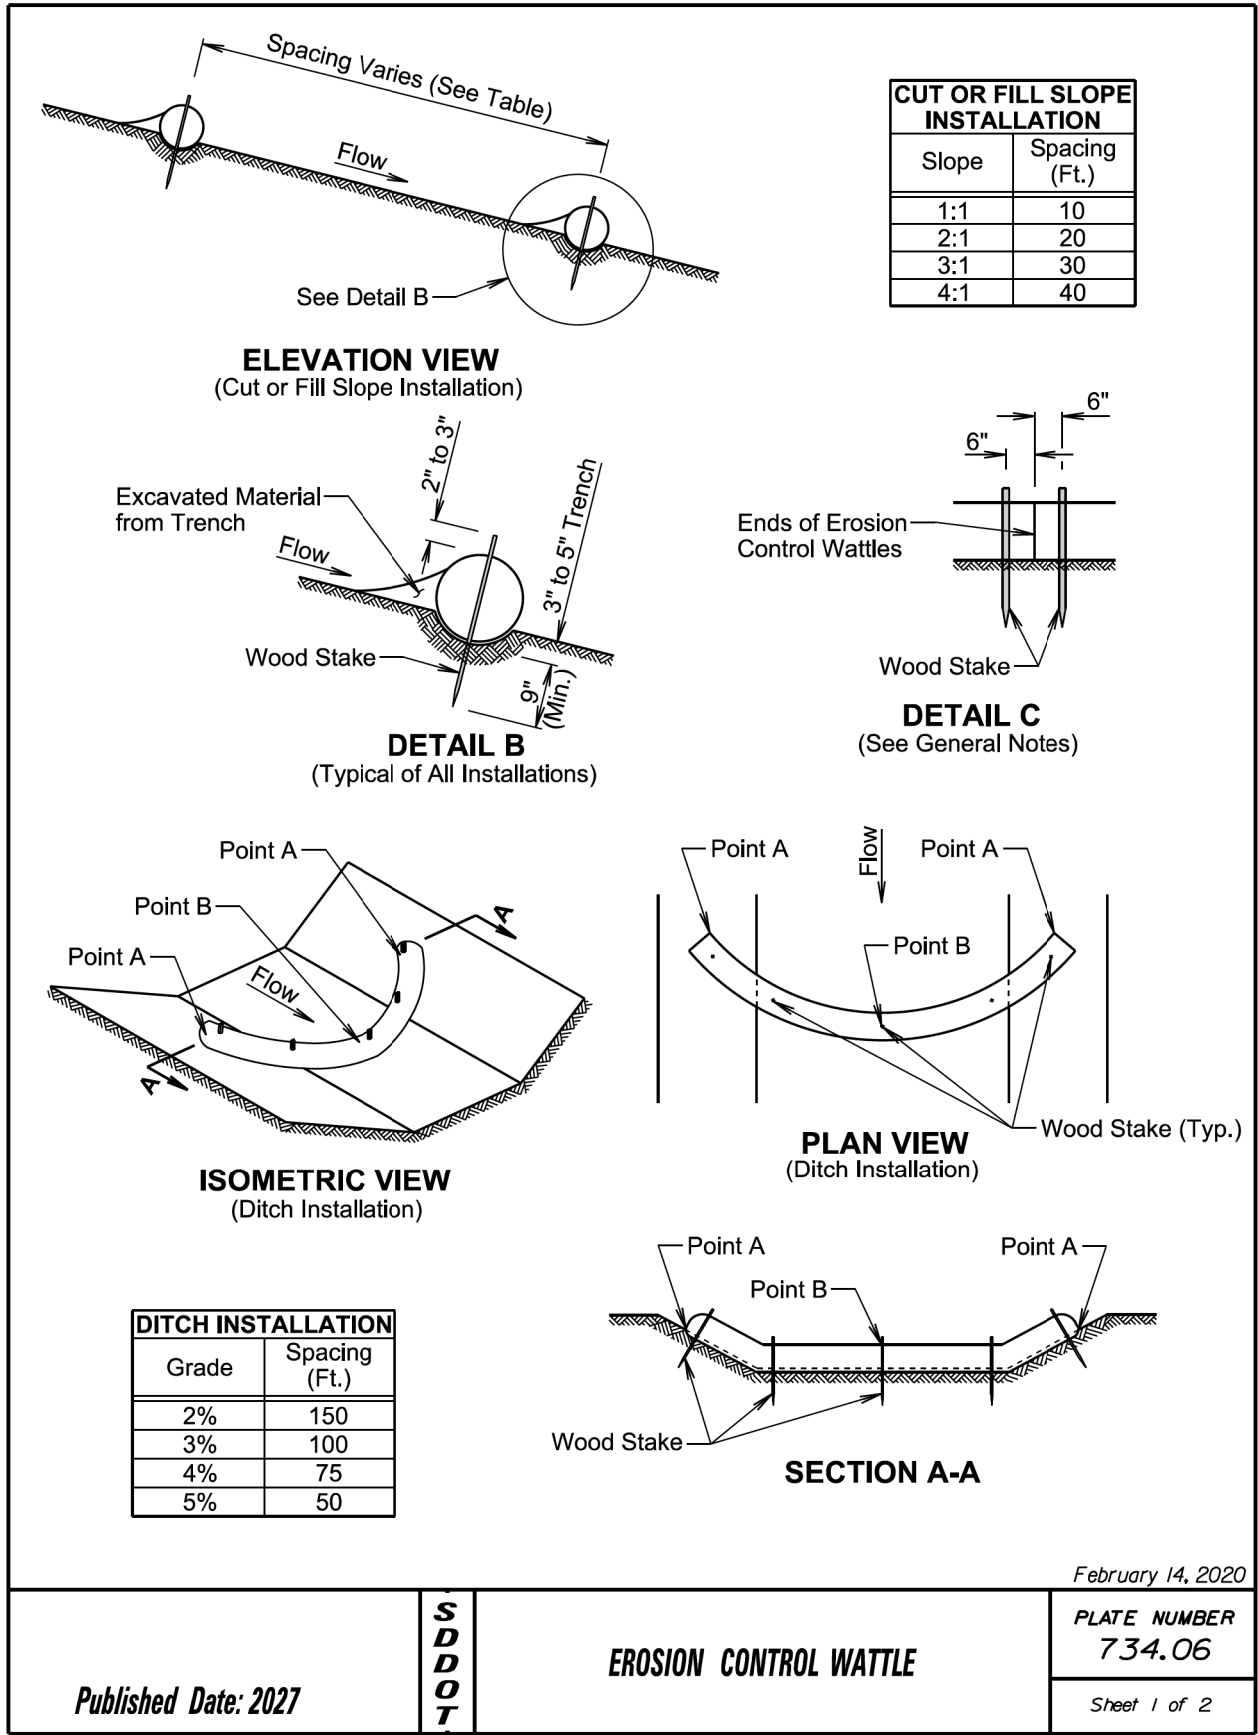

GENERAL NOTES:

At cut or fill slope installations, wattles will be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor will dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes will be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes will be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles will be 3' to 4'.

Where installing running lengths of wattles, the Contractor will butt the second wattle tightly against the first and will not overlap the ends. See Detail C.

The Contractor and Engineer will inspect the erosion control wattles in accordance with the storm water permit. The Contractor will remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping will be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping will be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials will be incidental to the contract unit price per foot for the corresponding erosion control wattle contract item.

All costs for removing the erosion control wattle from the project including labor, equipment, and materials will be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".

February 14, 2020

Published Date: 2027	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 2 of 2