

**STATE OF SOUTH DAKOTA  
DEPARTMENT OF TRANSPORTATION  
MITCHELL REGION**

**PLANS FOR PROPOSED PROJECTS**

**YEAR 2026  
P 00SW(00)7 - PCN 0A9P**


**YEAR 2027  
P 00SW(00)8 - PCN 0A9Q**

**YEAR 2028  
P 00SW(00)9 - PCN 0AKC**

**TURNER COUNTY  
WETLAND BANK  
SITE MANAGEMENT**

**STORM WATER PERMIT  
(None required)**

**WETLAND BANK SITE MANAGEMENT  
In the E½ Section 36 - T 98 N - R 52 W**

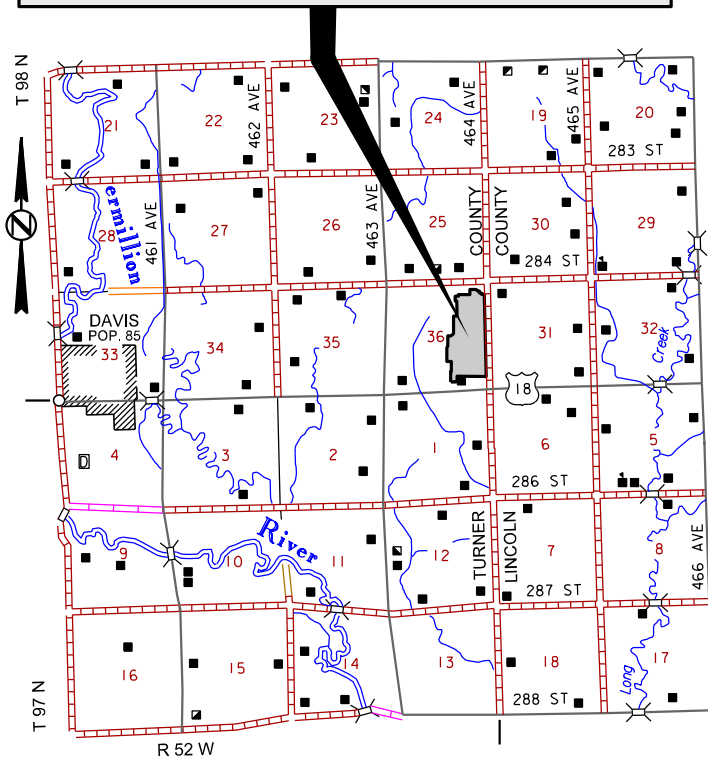


**YEAR 2026  
000I-271 - PCN I879  
000P-271 - PCN I87A  
000N-271 - PCN I87C**

**YEAR 2027  
000I-271 - PCN I87D  
000P-271 - PCN I87E  
000N-271 - PCN I87F**

**YEAR 2028  
000I-271 - PCN I87G  
000P-271 - PCN I87H  
000N-271 - PCN I87J**

**SIoux FALLS  
AREAWIDE  
WEED SPRAYING**

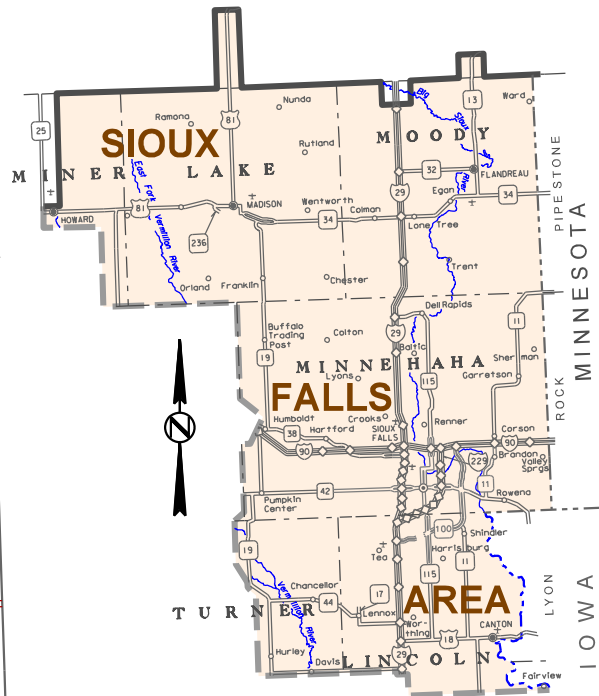

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
 2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
 2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

## INDEX OF SHEETS

Sheet 1	Layout Map
Sheet 2	Index of Sheets & Estimate of Quantities
Sheets 3 - 5	Environmental Commitments
Sheets 6 - 10	Plan Notes
Sheet 11	Table of Vegetative Control & Timing
Sheet 12	Exhibit A – Management Zones
Sheet 13	Sioux Falls Area Unit 271 Map

## ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	YEAR 2026	YEAR 2027	YEAR 2028	UNIT
		P 00SW(00)7 PCN 0A9P QUANTITY	P 00SW(00)8 PCN 0A9Q QUANTITY	P 00SW(00)9 PCN 0AKC QUANTITY	
009E0197	Mobilization 1	7	-	-	Each
009E0198	Mobilization 2	-	7	-	Each
009E0199	Mobilization 3	-	-	7	Each
900E2300	Mow ing	155	155	155	Acre
910E0071	Rodeo	3	3	3	Gal
910E0086	Milestone	5	5	5	Gal
910E0197	Surfactant	250	250	250	Oz
910E1050	ATV \ Sprayer	65	65	65	Hour
910E1060	Labor	65	65	65	Hour

BID ITEM NUMBER	ITEM	YEAR 2026			UNIT
		000I-271 PCN I879 QUANTITY	000P-271 PCN I87A QUANTITY	000N-271 PCN I87C QUANTITY	
009E0197	Mobilization 1	3	3	3	Each
910E1000	Equipment Truck \ Sprayer	300	150	150	Hour
910E1050	ATV \ Sprayer	300	150	150	Hour

BID ITEM NUMBER	ITEM	YEAR 2027			UNIT
		000I-271 PCN I87D QUANTITY	000P-271 PCN I87E QUANTITY	000N-271 PCN I87F QUANTITY	
009E0198	Mobilization 2	3	3	3	Each
910E1000	Equipment Truck \ Sprayer	300	150	150	Hour
910E1050	ATV \ Sprayer	300	150	150	Hour

BID ITEM NUMBER	ITEM	YEAR 2028			UNIT
		000I-271 PCN I87G QUANTITY	000P-271 PCN I87H QUANTITY	000N-271 PCN I87J QUANTITY	
009E0199	Mobilization 3	3	3	3	Each
910E1000	Equipment Truck \ Sprayer	300	150	150	Hour
910E1050	ATV \ Sprayer	300	150	150	Hour

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

## **ENVIRONMENTAL COMMITMENTS**

The SDDOT is committed to protecting the environment and uses Environmental Commitments as a communication tool for the Engineer and Contractor to ensure that attention is given to avoid, minimize, and/or mitigate an environmental impact. Environmental commitments to various agencies and the public have been made to secure approval of this project. An agency with permitting authority can delay a project if identified environmental impacts have not been adequately addressed. Unless otherwise designated, the Contractor's primary contact regarding matters associated with these commitments will be the Project Engineer. During construction, the Project Engineer will verify that the Contractor has met Environmental Commitment requirements. These environmental commitments are not subject to change without prior written approval from the SDDOT Environmental Office.

Additional guidance on SDDOT's Environmental Commitments can be accessed through the Environmental Procedures Manual found at: <<https://dot.sd.gov/media/documents/EnvironmentalProceduresManual.pdf> >

For questions regarding change orders in the field that may have an effect on an Environmental Commitment, the Project Engineer will contact the Environmental Engineer at 605-773-3180 or 605-773-4336 to determine whether an environmental analysis and/or resource agency coordination is necessary.

Once construction is complete, the Project Engineer will review all environmental commitments for the project and document their completion.

## **COMMITMENT B: FEDERALLY THREATENED, ENDANGERED, AND PROTECTED SPECIES**

### **COMMITMENT B2: WHOOPING CRANE**

The Whooping Crane is a spring and fall migratory bird in South Dakota that is about 5 feet tall and typically stops on wetlands, rivers, and agricultural lands along their migration route. An adult Whooping Crane is white with a red crown and a long, dark, pointed bill. Immature Whooping Cranes are cinnamon brown. While in flight, their long necks are kept straight and their long dark legs trail behind. Adult Whooping Cranes' black wing tips are visible during flight.

#### **Action Taken/Required:**

Harassment or other measures to cause the Whooping Crane to leave the site is a violation of the Endangered Species Act. If a Whooping Crane is sighted roosting in the vicinity of the project, borrow pits, or staging areas associated with the project, cease construction activities in the affected area until the Whooping Crane departs and immediately contact the Project Engineer. The Project Engineer will contact the Environmental Office so that the sighting can be reported to USFWS.

## **COMMITMENT E: STORM WATER**

Construction activities constitute less than 1 acre of disturbance.

#### **Action Taken/Required:**

At a minimum and regardless of project size, appropriate erosion and sediment control measures must be installed to control the discharge of pollutants from the construction site.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

#### **COMMITMENT H: WASTE DISPOSAL SITE**

The Contractor will furnish a site(s) for the disposal of construction and/or demolition debris generated by this project.

#### **Action Taken/Required:**

Construction and/or demolition debris may not be disposed of within the Public ROW.

The waste disposal site(s) will be managed and reclaimed in accordance with the following from the General Permit for Construction/Demolition Debris Disposal Under the South Dakota Waste Management Program issued by the Department of Agriculture and Natural Resources.

The waste disposal site(s) will not be located in a wetland, within 200 feet of surface water, or in an area that adversely affects wildlife, recreation, aesthetic value of an area, or any threatened or endangered species, as approved by the Environmental Office and the Project Engineer.

If the waste disposal site(s) is located such that it is within view of any ROW, the following additional requirements will apply:

1. Construction and/or demolition debris consisting of concrete, asphalt concrete, or other similar materials will be buried in a trench separate from wood debris. The final cover over the construction and/or demolition debris will consist of a minimum of 1 foot of soil capable of supporting vegetation. Waste disposal sites provided outside of the Public ROW will be seeded in accordance with Natural Resources Conservation Service recommendations. The seeding recommendations may be obtained through the appropriate County NRCS Office. The Contractor will control the access to waste disposal sites not within the Public ROW with fences, gates, and placement of a sign or signs at the entrance to the site stating, No Dumping Allowed.
2. Concrete and asphalt concrete debris may be stockpiled within view of the ROW for a period not to exceed the duration of the project. Prior to project completion, the waste will be removed from view of the ROW or buried, and the waste disposal site reclaimed as noted above.

The above requirements will not apply to waste disposal sites that are covered by an individual solid waste permit as specified in SDCL 34A-6-58, SDCL 34A-6-1.13, and ARSD 74:27:10:06.

Failure to comply with the requirements stated above may result in civil penalties in accordance with South Dakota Solid Waste Law, SDCL 34A-6-1.31.

Cost associated with furnishing waste disposal site(s), disposing of waste, maintaining control of access (fence, gates and signs), and reclamation of the waste disposal site(s) will be incidental to the various contract items.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

## **COMMITMENT I: HISTORIC PRESERVATION OFFICE CLEARANCES**

The SDDOT has obtained concurrence with the State Historic Preservation Office (SHPO) for all work included within the project limits and all department designated sources and designated option material sources, stockpile sites, storage areas, and waste sites provided within the plans.

### **Action Taken/Required:**

All earth disturbing activities not designated within the plans require a cultural resource review prior to scheduling the pre-construction meeting. This work includes but is not limited to: Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas.

The Contractor will arrange and pay for a record search and when necessary, a cultural resource survey. The Contractor has the option to contact the state Archaeological Research Center (ARC) at 605-394-1936 or another qualified archaeologist, to obtain either a records search or a cultural resources survey. A record search might be sufficient for review if the site was previously surveyed; however, a cultural resources survey may need to be conducted by a qualified archaeologist.

The Contractor will provide ARC with the following: a topographical map or aerial view in which the site is clearly outlined, site dimensions, project number, and PCN. If applicable, provide evidence that the site has been previously disturbed by farming, mining, or construction activities with a landowner statement that artifacts have not been found on the site.

The Contractor will submit the cultural resources survey report to SDDOT Environmental Office, 700 East Broadway Avenue, Pierre, SD 57501-2586. SDDOT will submit the information to the appropriate SHPO/THPO. Allow **30 Days** from the date this information is submitted to the Environmental Engineer for SHPO/THPO review.

In the event of an inadvertent discovery of human remains, funerary objects, or if evidence of cultural resources is identified during project construction activities, then such activities within 150 feet of the inadvertent discovery will immediately cease and the Project Engineer will be immediately notified. The Project Engineer will contact the SDDOT Environmental Office, who will contact the appropriate SHPO/THPO within 48 hours of the discovery to determine an appropriate course of action.

SHPO review does not relieve the Contractor of the responsibility for obtaining any additional permits and clearances for Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas that affect wetlands, threatened and endangered species, or waterways. The Contractor will not utilize a site known or suspected of having contaminated soil or water. The Contractor will provide the required permits and clearances to the Project Engineer at the preconstruction meeting.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

## **SPECIFICATIONS**

Standard Specifications for Roads and Bridges, 10-1-25 Version, Required Provisions, and Special Provisions as included in the Proposal. The Standard Specifications for Roads and Bridges are available for download and viewing at <https://dot.sd.gov/doing-business/contractors/standard-specifications>. The Specifications will apply except that a Construction Schedule is not required.

## **PROJECT REQUIREMENTS**

1. The Contractor does hereby agree to furnish the necessary equipment and labor to control the growth of declared noxious weeds within the right-of-way of state highway routes as shown on the attached map (Exhibit A). The South Dakota Department of Transportation (SDDOT) will provide the chemical and water to be applied.
2. The spraying will consist of spot treatments and will be accomplished by using herbicides at applicable rates as recommended by the manufacturer. The estimated value of the chemicals provided by the SDDOT for bidding tax purposes is \$37,179.92. Following is a list of those chemicals to be provided by the SDDOT:

2-4-D=417 gal	Tordon 22K=196 gal
Crop oil=8 gal	Ranger pro Round up=107 gal
Pramitol=70 gal	Sun wet=5 gal
Embark= 3.5 gal	Alligare pomoramic=9 gal
Escort xp=34 lbs	Aqua net=5 gal
Tank cleaner=3 lbs	Mile stone=6 gal
Perspective=4 lbs	Method=9 gal
Buccaneer Plus=20 gal	Reign=19 gal
Brewer 90-10=5 Gal	Sterling Blue DGA=2.5 gal

3. This is a three year contract for 2026, 2027 and 2028.
4. The Contractor agrees to indemnify, save and hold harmless, the SDDOT and all its employees and agents, from any and all claims, demands, actions or causes of action of whatsoever nature or character arising out of or by reasons of, the execution or performance of the work provided for under this contract whether or not the Contractor is itself negligent or otherwise culpable, and further agrees to defend at its own sole cost and expense any action or proceeding commenced for the purpose of asserting any claim of whatsoever nature or character arising under this contract whether or not the Contractor is itself negligent or otherwise culpable. This section does not require the Contractor to be responsible for or defend against claims or damages arising solely from acts or omissions of the State, its officers or employees.
5. The spraying will be accomplished by personnel properly licensed by the South Dakota Department of Agriculture.
6. The Contractor will conduct GPS Mapping which will be completed with GPS units with standard 3-5 meter accuracy. Infestations will be mapped in point, line, or polygon, depending on location, size, or other environmental factors. Infestations will be recorded by species, and size of infestation GPS data will be exported in shape file for use in standard geographical Information Systems such as ESRI ARC-VIEW. At the completion of the project the contractor will provide the Department with geographic maps depicting the type, location and size of the infestations.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
 2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
 2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

**PROJECT REQUIREMENTS (CONTINUED)**

7. The Contractor will not stop their vehicles on the roadway, driving lanes, or shoulders on the Interstate System.
8. All Contractor spraying vehicles will be equipped with a flashing amber warning light which will be equipped with and will be operation while spraying highway right-of-way.
9. ATV & UTV equipment will be equipped with and operated with Flow Control GPS Spray System controls. The ATV & UTV spray equipment will be capable of applying a spray pattern from 20 to 30 feet. ATV & UTV equipment will be equipped with a minimum 80 to 100 gallon chemical tank. The ATV & UTV will also be equipped a hand wand.
10. The Sioux Falls Area Maintenance Supervisors will advise the Contractor 48 hours in advance of areas and routes to be sprayed.
11. The Contractor will complete the attached daily form DOT-820 Contract Daily Pesticide Application Record after the completion of a specific route and each day of spraying. The Contractor will provide the Maintenance Supervisor with a completed copy of the DOT-820 within one week after completing the spraying. Failure to submit the DOT-820 in a timely manner may result in a price adjustment for the contract.
12. Cost of work will not exceed the total dollar amount shown on this contract without prior approval of the SDDOT.
13. The herbicides selected for use by the SDDOT will dictate frequency and timing of the application. If several operations are required per growing season, the Maintenance Supervisor will specify the beginning and ending date. For herbicides requiring a single application, the applications will be made in accordance with the label for the product. Typically, a spring and fall application of chemicals will be required.
14. Failure to comply with any of these requirements will result in non-payment for work performed.
15. Equipment – Truck \ Sprayer and the ATV / Sprayer will be paid to the nearest ½ hour. The Contractor will record the information specified on the DOT-820 form for each piece of equipment and locations where the equipment was operated. The hourly rate of the equipment will include cost for the equipment and labor.

**TABLE OF ESTIMATED ANNUAL EQUIPMENT HOURS**

<u>Project</u>	<u>Truck Hours</u>	<u>ATV/UTV Hours</u>
000I-271	300	300
000P-271	150	150
000N-271	150	150

Mobilization 1, 2 or 3 (for Years 2026, 2027 or 2028, respectively) will be paid each time the Contractor mobilizes equipment or personnel to conduct spraying activities but will not exceed plans quantity.

Truck / Sprayer will be paid for when Truck Boom Spraying.

ATV / Sprayer will be paid for when ATV / UTV Boom Spraying.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

## **VERMILLION SITE 1 VEGETATION MANAGEMENT SCOPE OF WORK**

The Vermillion Site 1 (VS1) is a wetland mitigation bank site developed by SDDOT in Turner County. Approximately 60 acres of wetlands are being restored on the property. As part of this restoration, management is required to control invasive vegetation. VS1 is located within the east ½ of Section 36 of Township 98N and Range 52W. VS1 management should be responsive to the most current site conditions and allow for adaptive timelines for management activities. Invasive weed control will consist of controlling populations of invasive weeds within VS1 by the following methods of mechanical and chemical treatments. The total size of VS1 is approximately 160 acres which has been designated in four separate management zones (See Exhibit A). Management requirements and timing will differ depending on the designated zone. The boundary of the entire property is fenced, but each identified management zone is not physically marked on the property. An ArcGIS shapefile of the management zones can be provided. Management activities should not require the use of any heavy earth-disturbing equipment or require significant soil disturbance.

### **General Items**

- A project kick-off meeting with the awarded Contractor is recommended prior to any management activities to review the work plan, applicable environmental requirements and project considerations. Recommended parties to be present include: the Contractor, assigned Engineer, and SDDOT Environmental Wetland Scientists.
- The Contractor must notify the Engineer prior to any subsequent management visits to discuss changes in site conditions and changes to management needs. This coordination will allow the contractor to perform the most meaningful management activities on VS1.
- The Contractor should have a basic knowledge of desirable and undesirable species for native prairie and wetland plantings, which will be valuable to the Contractor during required herbicide application(s).
- Management activities will not occur on driveway and small acreage on site (See Exhibit A).

### **Chemical Treatments**

- Chemical treatment of VS1 will consist of spot treatments and/or broadcast spraying of recommended zones. Table 1 outlines an estimated schedule and methods for application, along with a recommended herbicide. The Contractor may substitute other common industry herbicides which meet or exceed those listed in Table 1 but must be approved by the Engineer prior to use. The Contractor will submit his intended list of herbicides to the Engineer at least 3 weeks prior to commencing work or at the kickoff meeting for approval.
- Care must be taken when using broadcast spraying. Broadcast spraying should not occur when wind speeds are greater than 5 miles per hour (mph) and by using low pressure applicators. The Contractor will advise the Engineer of his intent to spray, 48 hours prior to doing so.
- The Contractor will complete the DOT-820 after each day of herbicide application. The DOT-820 will be provided to the Engineer within 3 days of herbicide application.
- Rates of applications should be determined from product labeling and should be based on vegetation being between 6 and 12 inches.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

### **Chemical Treatments (Continued)**

- To ensure adequate leaf surface and herbicide absorption, herbicide application should be applied at least 3 days before mowing. After herbicide application, allow three to four days to pass before mowing. This allows sufficient time absorption of the herbicide and translocate it to their roots.
- All herbicide applications must follow application rates and procedures identified on the packaging label. Herbicides will be applied with properly calibrated equipment and by personnel properly licensed by the South Dakota Department of Agriculture. A copy of the license(s) will be presented to the Engineer prior to herbicide application.

### **Mowing Activities**

- A flail mower or sickle mower should be used to cut vegetation to minimize clumping of cut vegetation and prevent windrowing of downed vegetation. Removing canopy cover is essential for establishing warm season vegetation.
- Early mowing (late April or early May) should occur to begin to remove establishment of weedy growth. Early mowing should cut vegetation to 3-4 inches. This will remove as much as the undesirable species as possible while avoiding warm season plants that have yet to emerge.
- Mowing should be done before vegetation reaches approximately 12 inches in height. Mowing should occur often to slow the growth and seed set of undesirable species and prevent thatch build-up that may smother native seedlings. Table 1 estimates the mowing frequency at VS1.
- Weed-eating may be required in areas that are not reachable by vehicle-mounted mowers. Suggested cutting devices for heavy vegetation under, in or near the water not accessible by mower are various weed-eater attachments and include a steel blade or hedge trimmer attachment.
- Rutting, tracking, or furrowing should be avoided when performing all activities, including mowing. If soil characteristics are resulting in excessive soil disturbance when performing mechanical mowing or spraying, other means of management involving either foot traffic or lighter footprint equipment may be required.

### **Species-Specific Control Information:**

Two invasive species in particular are anticipated to be prevalent on the VS1 site during the first year. In upland and transition areas, Canada thistle is anticipated to be prolific. In wetter areas, cattails are likely to establish and can easily form a monoculture in wetland areas. Species specific information is included below. If other noxious weeds are observed on site, best management practices to include mowing or proper herbicide application should be taken. These species will be reported on the DOT-820 provided to the Engineer within 3 days of herbicide application.

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C

2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F

2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

### **Cattails**

Cattails prefer shallow, flooded conditions and are easily established in ponded areas less than 18-inches deep. On VS1, cattails will primarily be found in the pool zone as shown in Exhibit A, though may establish in the wet meadow zones in wetter years.

- Mechanical Control - Mowing ponded areas should occur in winter when the ground is frozen. Cattails should be mowed as close to the ground or ice surface as possible. In spring, high water levels will cover cut stems to eliminate air exchange pathways during growing season. Do not cut cattails in spring, as this will only stimulate cattail growth.
- Chemical Control - In the wetland pools, apply a wetland approved herbicide such as Rodeo® , or similar equivalent glyphosate with a nonionic surfactant to aid penetration and coverage.

### **Canada Thistle**

Canada thistle is a perennial noxious weed that spreads by both seeds and root shoots. The root shoots emerge in early spring while the bud and flowering stages occurring in June. Canada thistle is a common and persistent invasive species in eastern South Dakota. Control techniques are constrained by the need to minimize damage to desirable species

- Mechanical Control – Mowing just prior to flowering inhibits seed production and long-distance seed colonization. However, establishment of new plants can still occur by creeping lateral roots. Timing of mowing is critical to prevent seed production. Mowing to reduce biomass and minimize seed production should occur in late spring, during bud to early blooming. During this time, the mower should be as low to the ground as possible. Mowing can also occur in September to help inhibit development of shoots. Height of mowing in fall should be no less than 6 inches.
- Chemical Control – Large patches (at least greater than ¼ acre) of Canada thistle can be controlled by broadcast methods if applied in early spring, when the species has aboveground growth, but more desirable broadleaf species have not emerged. Spring application should occur prior to the bud stage, which is between late May and mid-June. An additional spot treatment should be done in the fall when Canada thistle is recharging its root systems, and when native plants are dormant. Spot herbicide treatments should also be used for anything in late spring or summer when other desirable broadleaves have emerged. A broadleaf herbicide should be used and can be used for spot or broadcast treatments. Care should be taken to preserve desirable broadleaf species.

### **Measurement and Payment**

The contract unit price will be nonnegotiable regardless of changes in contract quantity.

Mobilization 1, 2 or 3 (for Years 2026, 2027 or 2028, respectively) will be paid each time the Contractor mobilizes equipment or personnel to conduct mowing and/or spraying activities but will not exceed plans quantity.

ATV / Sprayer will be paid for when ATV Boom Spraying and/or Wicking.


Labor will be paid for when performing mowing, hand spray/wicking and/or when operating motorized spraying equipment.

Table 1. Recommended vegetative control methods and timing.

	May	June	July	August	September	October	November	December	January
<b>Mowing or Weed Eating</b>									
<b>Zone 1</b>	Mow all areas to 3-4 inches where accessible. Do not cut cattails	Mow all areas to 6-8 inches where accessible	Mow weedy areas	Mow all areas to 6-8 inches	Mow weedy areas to 6-8 inches				
<b>Zone 2</b>									
<b>Zone 3</b>			Mow/weed-eat weedy areas where accessible	Mow all areas to 6-8 inches where accessible	Mow all areas to 6-8 inches where accessible				Mow cattails where present if ground/water frozen and site accessible.
<b>Zone 4</b>									
<b>Spot or Broadcast Spraying</b>									
<b>Zone 1</b>	Broadcast spray Milestone®	Spot spray patches Canada thistle Milestone®				Spot spray patches Canada thistle. Broadcast spray may be used for large patches (>0.25 acres) Milestone®			
<b>Zone 2</b>									
<b>Zone 3</b>	Broadcast spray if accessible, otherwise spot spray Milestone®	Spot spray Rodeo® or Milestone®				Spot spray Rodeo® or Milestone®			
<b>Zone 4</b>	Spot spray fringes Milestone® or Rodeo®	Spot spray fringes Milestone® or Rodeo®							

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, 1879, 187A & 187C  
 2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, 187D, 187E & 187F  
 2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, 187G, 187H & 187J

Exhibit A. VS1 Management Zones

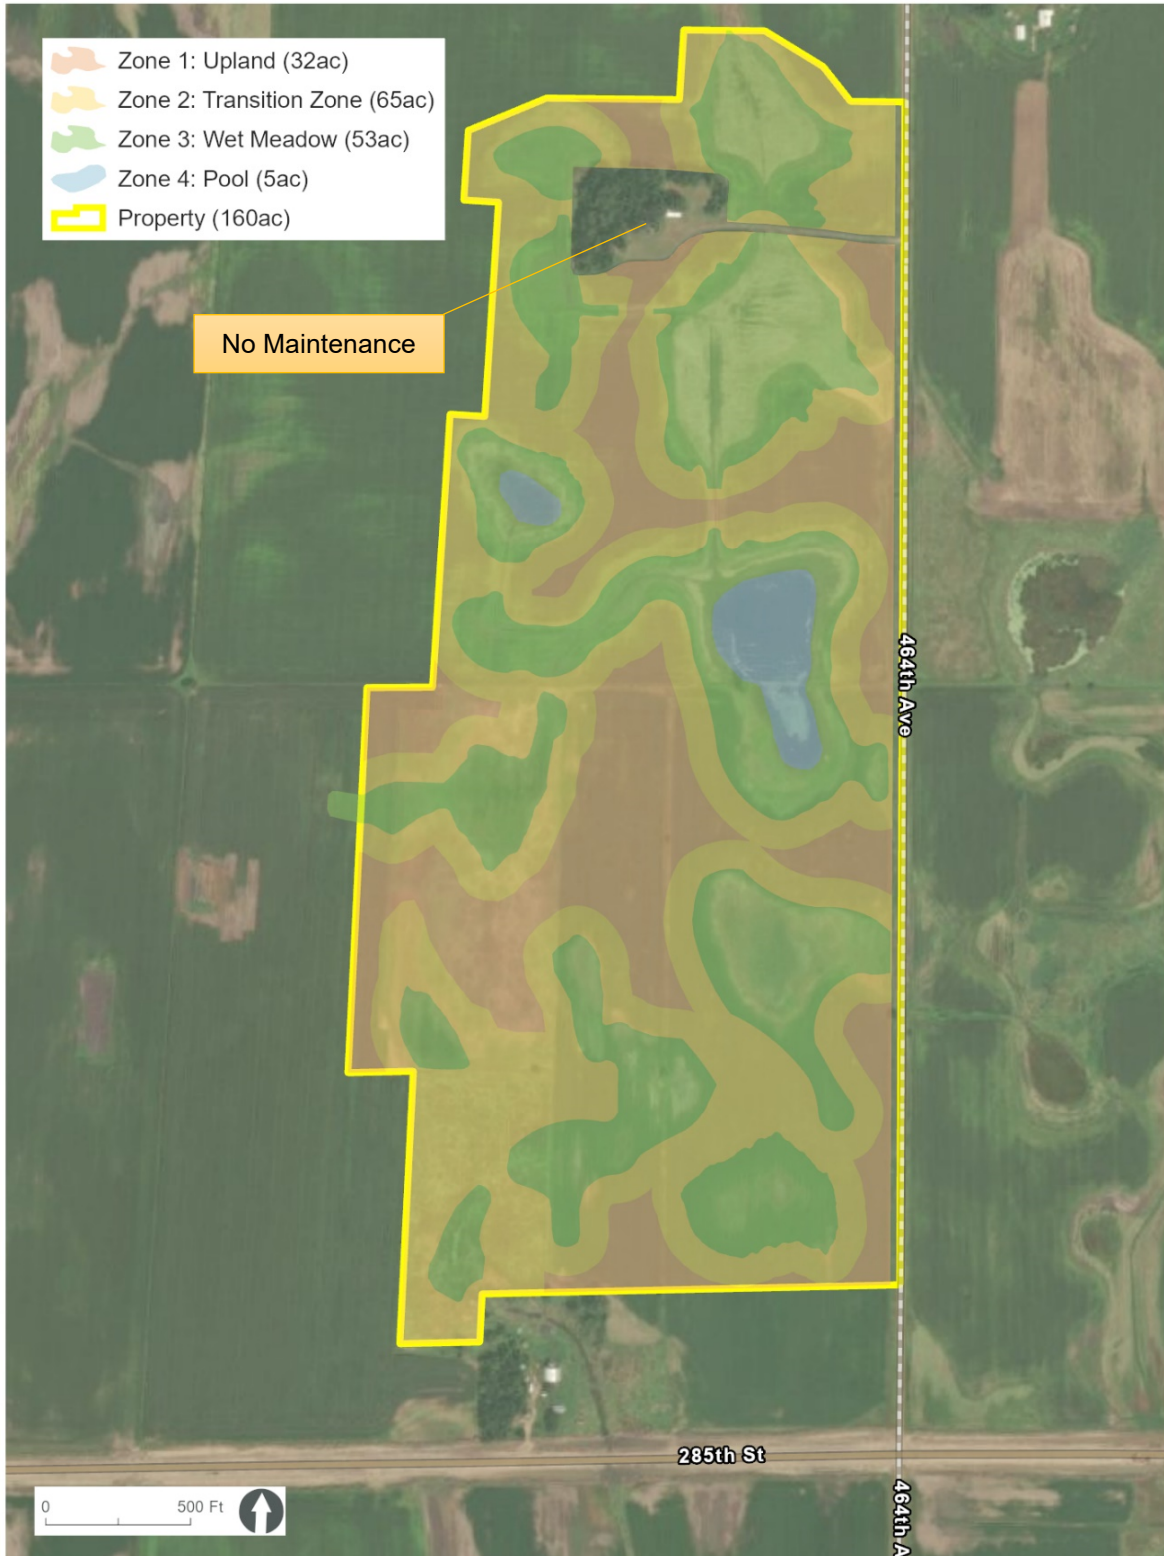

2026 – P 00SW(00)7, 000I-271, 000P-271 & 000N-271 - PCN 0A9P, I879, I87A & I87C  
 2027 – P 00SW(00)8, 000I-271, 000P-271 & 000N-271 - PCN 0A9Q, I87D, I87E & I87F  
 2028 – P 00SW(00)9, 000I-271, 000P-271 & 000N-271 - PCN 0AKC, I87G, I87H & I87J

# Mitchell Region Maintenance Unit 271

