


Plot Scale - 1:200

Plotted From - TRMOINT04

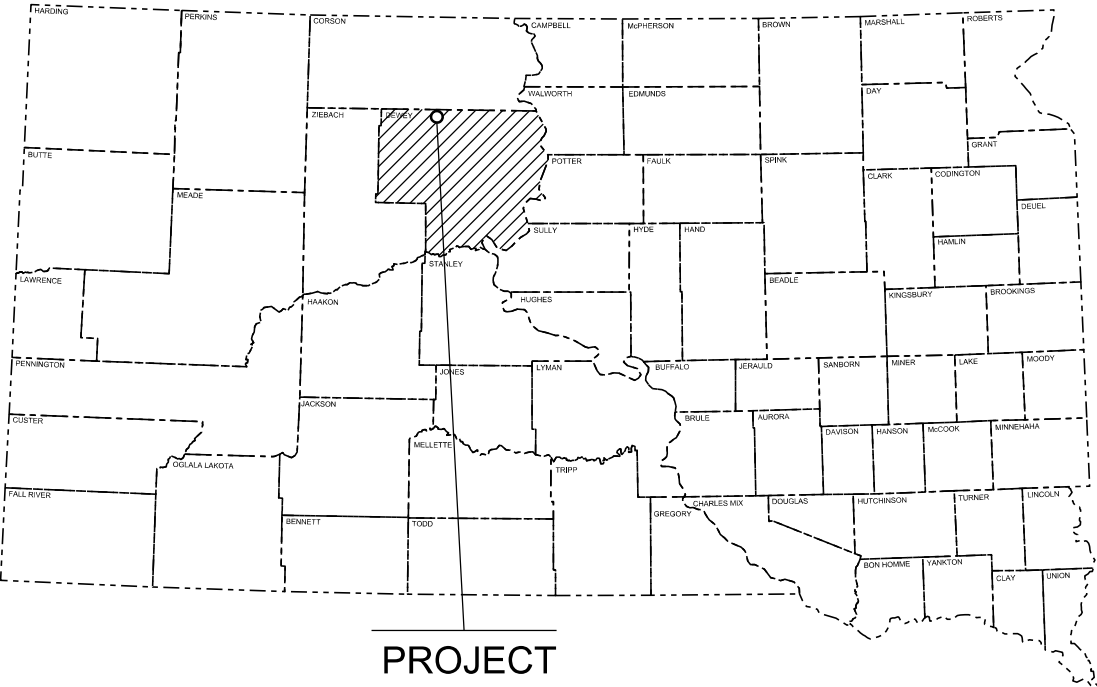

PROJECT

STATE OF SOUTH DAKOTA  
DEPARTMENT OF TRANSPORTATION

PLANS FOR PROPOSED

PROJECT 020-372  
S.D. HIGHWAY 20  
DEWEY COUNTY

BANK STABILIZATION  
PCN I4YW

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	1	25

Plotting Date: 08/01/2023

INDEX OF SHEETS


1	General Layout with Index
2-11	Estimate with General Notes & Tables
12	Typical Grading Section
13	Control Data and Horizontal Alignment
14	Legend
15	Plan Sheets
16	ES&C Legend
17	Erosion Control Plan Sheet
21-22	Standard Plates
23-25	Cross Sections Sheets

R25E

020-372

MRM 160.9 to 161.1  
East side of road only

T17N

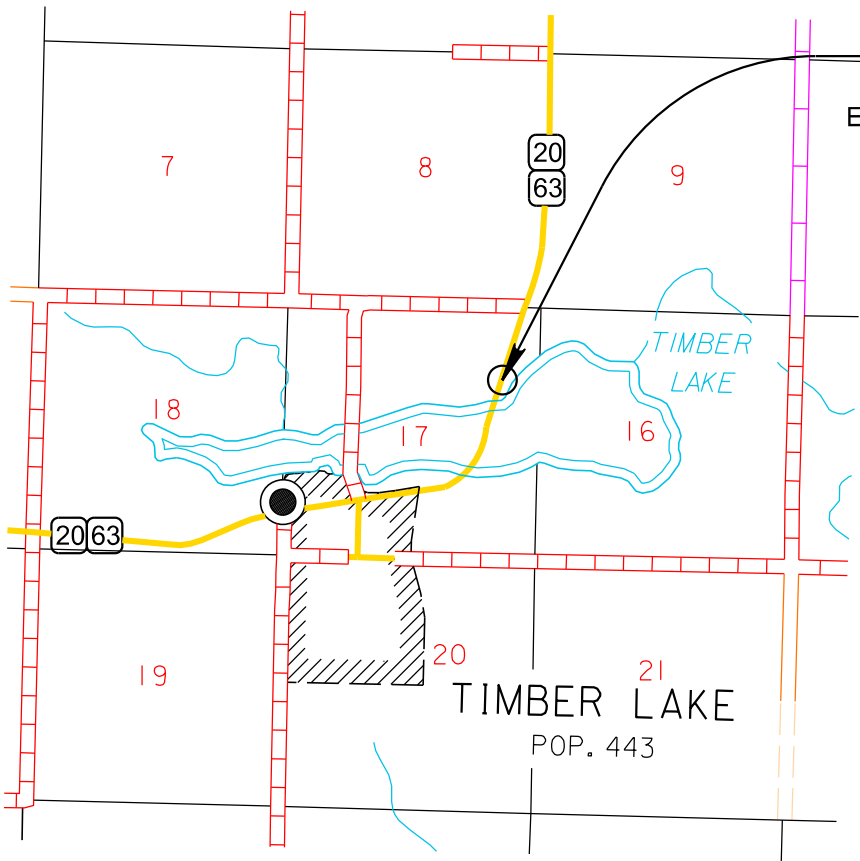

DESIGN DESIGNATION

AADT (2022)	1009
AADT (2042)	1471
DHV	179
D	50%
DHV T%	7.6%
AADT T%	16.8%
V	65 mph

STORM WATER PERMIT

Major Receiving  
Body of Water: Timber Lake  
Area Disturbed: 1.3 acres  
Total Project Area: 2.3 acres  
Approx. Begin Lat,Long: 45.439382, -101.062391

Gross Length	900 Feet	0.2 Miles
Length of Exceptions	0 Feet	0 Miles
Net Length	900 Feet	0.2 Miles

1:200  
Plot Scale -  
TRMO\INT04  
Plotted From -

Estimate of Quantities

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
009E0010	Mobilization	Lump Sum	LS
100E0100	Clearing	Lump Sum	LS
110E1690	Remove Sediment	1.0	CuYd
110E1700	Remove Silt Fence	80	Ft
120E0010	Unclassified Excavation	4,261	CuYd
230E0010	Placing Topsoil	1,167	CuYd
634E0110	Traffic Control Signs	137.0	SqFt
634E0120	Traffic Control, Miscellaneous	Lump Sum	LS
700E0210	Class B Riprap	808.9	Ton
734E0010	Erosion Control	Lump Sum	LS
734E0133	Type 3 Turf Reinforcement Mat	1,206.0	SqYd
734E0140	Erosion Bale	8	Each
734E0154	12" Diameter Erosion Control Wattle	410	Ft
734E0165	Remove and Reset Erosion Control Wattle	100	Ft
734E0602	Low Flow Silt Fence	80	Ft
734E0610	Mucking Silt Fence	6	CuYd
734E0620	Repair Silt Fence	20	Ft
831E0110	Type B Drainage Fabric	1,012	SqYd
900E1080	Orange Plastic Safety Fence	260	Ft

SPECIFICATIONS

Standard Specifications for Roads and Bridges, 2015 Edition and Required Provisions, Supplemental Specifications, and Special Provisions as included in the Proposal.

ENVIRONMENTAL COMMITMENTS

The SDDOT is committed to protecting the environment and uses Environmental Commitments as a communication tool for the Engineer and Contractor to ensure that attention is given to avoid, minimize, and/or mitigate an environmental impact. Environmental commitments to various agencies and the public have been made to secure approval of this project. An agency with permitting authority can delay a project if identified environmental impacts have not been adequately addressed. Unless otherwise designated, the Contractor's primary contact regarding matters associated with these commitments will be the Project Engineer. During construction, the Project Engineer will verify that the Contractor has met Environmental Commitment requirements. These environmental commitments are not subject to change without prior written approval from the SDDOT Environmental Office.

Additional guidance on SDDOT's Environmental Commitments can be accessed through the Environmental Procedures Manual found at: <<https://dot.sd.gov/media/documents/EnvironmentalProceduresManual.pdf> >

For questions regarding change orders in the field that may have an effect on an Environmental Commitment, the Project Engineer will contact the Environmental Engineer at 605-773-3180 or 605-773-4336 to determine whether an environmental analysis and/or resource agency coordination is necessary.

Once construction is complete, the Project Engineer will review all environmental commitments for the project and document their completion.

COMMITMENT A: WETLANDS

All efforts to avoid and minimize wetland impacts from the project have resulted in approximately 0.07 acre of wetlands (includes temporary and permanent) becoming impacted. Refer to Plan Sheet for location and boundaries of the impacted wetlands.

Table of Impacted Wetlands

Wetland No.	Station	Perm. Impact Left (Acres)	Perm. Impact Right (Acres)	Temp. Impact Left (Acres)	Temp. Impact Right (Acres)	Total Impact (Acres)
1	429+00 to 433+00	0.00	0.07	0.00	0.00	0.07

Action Taken/Required:

Mitigation is required in accordance with the “*Statewide Finding Regarding Wetlands for South Dakota Federal-Aid Highway Projects (February 2018)*”. Replacement of 0.07 acre of permanent wetland impacts will be completed through another wetland mitigation opportunity in a manner which considers FHWA's program-wide goal of ‘net gain’ of wetlands through enhancement, creation, and preservation.

Temporary impacts identified in the Table of Impacted Wetlands will not be mitigated as original contours and elevations will be re-established as designated in the Plans. Prior to initiating temporary work in wetlands, the Contractor will submit a plan to the Project Engineer in accordance with Section 7.21 D of the Specifications.

The Contractor will notify the Project Engineer if additional easement is needed to complete work adjacent to any wetland. The Project Engineer will obtain an appropriate course of action from the Environmental Office before proceeding with construction activities that affect any wetlands beyond the work limits and easements shown in the plans.

Wetland Topsoil

Wetland topsoil will be stripped from all wetland areas which will be impacted by the project. The wetland topsoil will be stripped to a depth that sufficiently allows 6 inches of the wetland topsoil to be re-utilized as the upper stratum of wetland mitigation site(s).

The wetland topsoil will be stockpiled separately from other topsoil in a location approved by the Project Engineer. Locate wetland stockpile a minimum of 50 feet away from concentrated flows of storm water, waterways, drainage courses, and inlets. All wetland topsoil that is stripped will be spread on the mitigation site(s) so that it is evenly distributed to a minimum depth of 6 inches. Surplus wetland topsoil will be used to flatten embankment slopes or placed in other locations as approved by the Project Engineer.

Refer to the Typical Grading Section and Erosion and Sediment Control Plan in the plans.

All costs to remove and stockpile the wetland topsoil will be paid for at the contract unit price per cubic yard for “Unclassified Excavation”. All costs to place the wetland topsoil will be incidental to the contract unit price per cubic yard for “Placing Topsoil”.

COMMITMENT B: FEDERALLY THREATENED, ENDANGERED, AND PROTECTED SPECIES

COMMITMENT B2: WHOOPING CRANE

The Whooping Crane is a spring and fall migratory bird in South Dakota that is about 5 feet tall and typically stops on wetlands, rivers, and agricultural lands along their migration route. An adult Whooping Crane is white with a red crown and a long, dark, pointed bill. Immature Whooping Cranes are cinnamon brown. While in flight, their long necks are kept straight and their long dark legs trail behind. Adult Whooping Cranes' black wing tips are visible during flight.

Action Taken/Required:

Harassment or other measures to cause the Whooping Crane to leave the site is a violation of the Endangered Species Act. If a Whooping Crane is sighted roosting in the vicinity of the project, borrow pits, or staging areas associated with the project, cease construction activities in the affected area until the Whooping Crane departs and immediately contact the Project Engineer. The Project Engineer will contact the Environmental Office so that the sighting can be reported to USFWS.

COMMITMENT B4: BALD EAGLE

Bald eagles are known to occur in this area.

Action Taken/Required:

If a nest is observed within one mile of the project site, notify the Project Engineer immediately so that he/she can consult with the Environmental Office for an appropriate course of action.

1:200  
Plot Scale -  
TRMO:INT04  
Plotted From -

COMMITMENT C: WATER SOURCE

The Contractor will not withdraw water with equipment previously used outside the State of South Dakota or previously used in aquatic invasive species (AIS) positive waters within South Dakota without prior approval from the SDDOT Environmental Office. To prevent and control the introduction and spread of invasive species into the project vicinity, all equipment will be power washed with hot water (≥140 °F) and completely dried for a minimum of 7 days prior to subsequent use. South Dakota administrative rule 41:10:04:02 forbids the possession and transport of AIS; therefore, all attached dirt, mud, debris and vegetation must be removed and all compartments and tanks capable of holding standing water must be drained. This includes, but is not limited to, all equipment, pumps, lines, hoses and holding tanks.

Action Taken/Required:

The Contractor will obtain the necessary permits from the regulatory agencies such as the South Dakota Department of Agriculture and Natural Resources (DANR) and the United States Army Corps of Engineers (USACE) prior to water extraction activities.

Additional information and mapping of water sources impacted by Aquatic Invasive Species in South Dakota can be accessed at:  
< <http://sdleastwanted.com/maps/default.aspx> >

< [South Dakota Administrative Rule 41:10:04 Aquatic Invasive Species: https://sdlegislature.gov/rules/DisplayRule.aspx?Rule=41:10:04](https://sdlegislature.gov/rules/DisplayRule.aspx?Rule=41:10:04) >

COMMITMENT D: WATER QUALITY STANDARDS

COMMITMENT D1: SURFACE WATER QUALITY

The Timber Lake classified as fish and wildlife propagation, recreation, irrigation, and stock watering waters. Because of these beneficial uses, special construction measures may have to be taken to ensure that this water body is not impacted.

Action Taken/Required:

The Contractor is advised that the South Dakota Surface Water Quality Standards, administered by the South Dakota Department of Agriculture and Natural Resources (DANR), apply to this project. Special construction measures will be taken to ensure the above standard(s) of the surface waters are maintained and protected.

COMMITMENT E: STORM WATER

Construction activities constitute 1 acre or more of earth disturbance and/or work in a waterway.

Action Taken/Required:

The EPA 2017 Construction General Permit is required for this project. The SDDOT is the owner of this permit and will submit the NOI to EPA 15 days prior to project start in order to obtain coverage. Work can begin after authorization is received from the EPA. This permit provides coverage for construction and dewatering activities for this project.

The Contractor must adhere to the “Special Provision Regarding Storm Water Discharge to Waters of the United States within Indian Reservations”.

The Contractor is advised that permit coverage may also be required for off-site activities, such as borrow and staging areas, which are the responsibility of the Contractor.

Storm Water Pollution Prevention Plan

The Storm Water Pollution Prevention Plan (SWPPP) will be developed prior to the submittal of the NOI and will be implemented for all construction activities for compliance with the permit. The SWPPP must be kept on-site and updated as site conditions change. Erosion control measures and best management practices will be implemented in accordance with the SWPPP.

The DOT 298 Form will be used for site inspections and to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents and retained for a minimum of three years.

The inspection will include disturbed areas of the construction site that have not been finally stabilized, areas used for storage materials, structural control measures, and locations where vehicles enter or exit the site. These areas will be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the SWPPP will be observed to ensure that they are operating correctly, and sediment is not tracked off the site.

Information on storm water permits and SWPPPs are available on the following websites:

SDDOT: < <https://dot.sd.gov/doing-business/environmental/stormwater> >

DANR:<<https://danr.sd.gov/OfficeOfWater/SurfaceWaterQuality/stormwater/default.aspx>>

EPA: < <https://www.epa.gov/npdes> >

COMMITMENT H: WASTE DISPOSAL SITE

The Contractor will furnish a site(s) for the disposal of construction and/or demolition debris generated by this project.

Action Taken/Required:

Construction and/or demolition debris may not be disposed of within the Public ROW.

The waste disposal site(s) will be managed and reclaimed in accordance with the following from the General Permit for Construction/Demolition Debris Disposal Under the South Dakota Waste Management Program issued by the Department of Agriculture and Natural Resources.

The waste disposal site(s) will not be located in a wetland, within 200 feet of surface water, or in an area that adversely affects wildlife, recreation, aesthetic value of an area, or any threatened or endangered species, as approved by the Environmental Office and the Project Engineer.

If the waste disposal site(s) is located such that it is within view of any ROW, the following additional requirements will apply:

1. Construction and/or demolition debris consisting of concrete, asphalt concrete, or other similar materials will be buried in a trench separate from wood debris. The final cover over the construction and/or demolition debris will consist of a minimum of 1 foot of soil capable of supporting vegetation. Waste disposal sites provided outside of the Public ROW will be seeded in accordance with Natural Resources Conservation Service recommendations. The seeding recommendations may be obtained through the appropriate County NRCS Office. The Contractor will control the access to waste disposal sites not within the Public ROW with fences, gates, and placement of a sign or signs at the entrance to the site stating, “No Dumping Allowed”.
2. Concrete and asphalt concrete debris may be stockpiled within view of the ROW for a period not to exceed the duration of the project. Prior to project completion, the waste will be removed from view of the ROW or buried, and the waste disposal site reclaimed as noted above.

The above requirements will not apply to waste disposal sites that are covered by an individual solid waste permit as specified in SDCL 34A-6-58, SDCL 34A-6-1.13, and ARSD 74:27:10:06. Failure to comply with the requirements stated above may result in civil penalties in accordance with South Dakota Solid Waste Law, SDCL 34A-6-1.31.

All costs associated with furnishing waste disposal site(s), disposing of waste, maintaining control of access (fence, gates, and signs), and reclamation of the waste disposal site(s) will be incidental to the various contract items.

1:200  
Plot Scale -  
Plotted From -  
TRMO:INT04

COMMITMENT I: HISTORIC PRESERVATION OFFICE CLEARANCES

State Historic Preservation Office (SHPO or THPO) concurrence has not been obtained for this project.

Action Taken/Required:

All earth disturbing activities not designated within the plans require a cultural resource review prior to scheduling the pre-construction meeting. This work includes but is not limited to: Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas.

The Contractor will arrange and pay for a record search and when necessary, a cultural resource survey. The Contractor has the option to contact the state Archaeological Research Center (ARC) at 605-394-1936 or another qualified archaeologist, to obtain either a records search or a cultural resources survey. A record search might be sufficient for review if the site was previously surveyed; however, a cultural resources survey may need to be conducted by a qualified archaeologist.

The Contractor will provide ARC with the following: a topographical map or aerial view in which the site is clearly outlined, site dimensions, project number, and PCN. If applicable, provide evidence that the site has been previously disturbed by farming, mining, or construction activities with a landowner statement that artifacts have not been found on the site.

The Contractor will submit the cultural resources survey report to SDDOT Environmental Office, 700 East Broadway Avenue, Pierre, SD 57501-2586. SDDOT will submit the information to the appropriate SHPO/THPO. Allow **30 Days** from the date this information is submitted to the Environmental Engineer for SHPO/THPO review.

In the event of an inadvertent discovery of human remains, funerary objects, or if evidence of cultural resources is identified during project construction activities, then such activities within 100 feet of the inadvertent discovery will immediately cease and the Project Engineer will be immediately notified. The Project Engineer will contact the SDDOT Environmental Office, who will contact the appropriate SHPO/THPO within 48 hours of the discovery to determine an appropriate course of action.

The Contractor is responsible for obtaining any additional permits and clearances for Contractor furnished material sources, material processing sites, stockpile sites, storage areas, plant sites, and waste areas that affect wetlands, threatened and endangered species, or waterways. The Contractor will not utilize a site known or suspected of having contaminated soil or water. The Contractor will provide the required permits and clearances to the Project Engineer at the preconstruction meeting.

COMMITMENT M: SECTION 4(f)/6(f) RESOURCES

COMMITMENT M1: SECTION 4(f) PROPERTY

A Section 4(f) Evaluation concluded there are no feasible and prudent alternatives to avoiding Section 4(f) property located within the project.

Station	Section 4(f) Property
430+00	Timber Lake GF&P

Action Taken/Required:

The following measures are required to minimize harm to the above Section 4(f) property:

Enhancement of the affected area by salvaging the existing wetland soils, flattening the slope and seeding with a wetland seed mixture.

The Contractor will notify the Project Engineer if additional easement is needed to complete the work adjacent to any Section 4(f) property. The Project Engineer will obtain an appropriate course of action from the Environmental Office before proceeding with construction activities that affect any Section 4(f) property.

COMMITMENT N: SECTION 404 PERMIT

The SDDOT has obtained a Section 404 Permit from the USACE for the permanent actions associated with this project.

Action Taken/Required:

The Contractor will comply with all requirements contained in the Section 404 Permit.

The Contractor will also be responsible for obtaining a Section 404 Permit for any dredge, excavation, or fill activities associated with material sources, storage areas, waste sites, and Contractor work sites outside the plan work limits that affect wetlands, floodplains, or waters of the United States.

COMMITMENT O: SECTION 401 WATER QUALITY CERTIFICATION

The SDDOT has obtained a Clean Water Act Section 401 Water Quality Certification from the Environmental Protection Agency (EPA) regarding an US Army Corp of Engineers CWA Section 404 Permit for the actions associated with this project.

Action Taken/Required:

The Contractor will comply with all requirements contained in the Section 401 certification. A copy of the EPA CWA 401 Certification must be retained on-site.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	4	25

Plotting Date: 08/01/2023

1:200  
Plot Scale -  
Plotted From -

SCOPE OF WORK

Work on this project involves repairing eroded inslope areas that exist on SD Highway 20 along Timber Lake.

SEQUENCE OF OPERATIONS

Contractor requests to deviate from the sequence of operations will be submitted in writing to the Engineer for review. Approval of an alternate sequence of operations will only be allowed when the proposed changes meet with the Department’s intent for traffic control and sequencing of the work. An alternate sequence will be submitted for review a minimum of one week prior to potential implementation.

- 1. Install construction signing.
- 2. Install perimeter sediment protection prior to disturbing any dirt.
- 3. Salvage topsoil from work area.
- 4. Excavate and shape area to receive fabric and riprap.
- 5. Install drainage fabric and riprap.
- 6. Place embankment and shape embankment to final cross section.
- 7. Spread topsoil
- 8. Install erosion control (seed, mulch, turf mat).
- 9. Project cleanup and removal of construction signing.

Stockpiling of riprap will only be allowed beyond the clear zone (30 ft from edge of driving lane).

UTILITIES

The Contractor will be aware that the existing utilities shown in the plans were surveyed prior to the design of this project and might have been relocated or replaced by a new utility facility prior to construction of this project, might be relocated or replaced by a new utility facility during the construction of this project, or might not require adjustment and may remain in its current location. The Contractor will contact each utility owner and confirm the status of all existing and new utility facilities. The utility contact information is provided elsewhere in the plans or bidding documents.

Utilities are planned to be affected on this project. If utilities are identified near the improvement area through the SD One Call Process as required by South Dakota Codified Law 49-7A and Administrative Rule Article 20:25, the Contractor will contact the Engineer to determine modifications that will be necessary to avoid utility impacts.

The Contractor will coordinate directly with the contact below prior to any digging near the fiber optic line

SDN Communications -- Fiber optic Line

Contact for Construction Coordination for working around Fiber Line:

Paul Lowe  
Cell 605-390-3502

GENERAL TRAFFIC CONTROL

Existing guide, route, informational logo, regulatory, and warning signs will be temporarily reset and maintained during construction. Removing, relocating, covering, salvaging, and resetting of existing traffic control devices, including delineation, will be the responsibility of the Contractor. Cost for this work will be incidental to the contract unit prices for the various items unless otherwise specified in the plans. Any delineators and signs damaged or lost will be replaced by the Contractor at no cost to the State.

All temporary traffic control sign locations will be set in the field by the Contractor and verified by the Engineer prior to installation. All construction operations will be conducted in the general direction of traffic movement.

If there is a discrepancy between the traffic control plans, standard plates, and the MUTCD, whichever is more stringent will be used, as determined by the Engineer.

Unless otherwise stated in these plans, work will not be allowed during hours of darkness.

Fixed location signing placed more than 4 calendar days prior to the start of construction will be covered or laid down until the time of construction. The covers must be approved by the Engineer prior to installation. The cost of materials, labor, and equipment necessary to complete this work will be incidental to other contract items. No separate payment will be made.

All fixed location signs, sign posts, and breakaway bases will be removed within 7 calendar days following pavement marking.

All haul trucks will be equipped with an additional flashing amber light that is visible from the backside of the haul truck. The costs for the flashing amber lights will be incidental to the various related contract items.

The Contractor will designate an employee to be responsible for the maintenance of traffic. The Engineer must approve the employee selected. The name and phone number of person(s) will be provided to the SD Department of Transportation (605-845-3844), SD Highway Patrol ((Pierre State Radio (605-773-3536) (Huron State Radio (605-353-7132)), and Dewey County Sheriff Department (605-865-3300).

ITEMIZED LIST FOR TRAFFIC CONTROL

SIGN CODE	SIGN DESCRIPTION	NUMBER	SIGN SIZE	SQFT PER SIGN	SQFT
W20-1	ROAD WORK AHEAD	2	48" x 48"	16.0	32.0
W20-4	ONE LANE ROAD AHEAD	2	48" x 48"	16.0	32.0
W20-7	FLAGGER (symbol)	2	48" x 48"	16.0	32.0
W21-5	SHOULDER WORK	2	48" x 48"	16.0	32.0
G20-2	END ROAD WORK	2	36" x 18"	4.5	9.0
CONVENTIONAL ROAD TRAFFIC CONTROL SIGNS SQFT					137.0

UNCLASSIFIED EXCAVATION

Compaction of the fill will be to the satisfaction of the Engineer.

The unclassified material will be placed as shown in the applicable plan sheets and/or as ordered by the Engineer. All unclassified excavation material will be used on site. The slope up from the design shore line may be adjusted to gain or lose material as necessary while maintaining the maximum slope of 4:1.

6" of existing topsoil will be salvaged from all disturbed areas. An estimated 222 CuYd of wetland soils will be salvaged and stockpiled separately from the normal topsoil. The wetland topsoil will be salvaged from elevation 2153’ to 2156’. The salvaged wetland topsoil will be spread evenly over the first 30 feet along the 350 foot future shoreline after grading the embankment.

A shrinkage factor of 30% was used.

“Unclassified Excavation” will not be measured and Plans quantity will be the basis for payment.

TABLE OF UNCLASSIFIED EXCAVATION

Location	Total Excavation (CuYd)	Normal Topsoil (CuYd)	Wetland Topsoil (CuYd)	Excavation Quantity (Overburden Material) (CuYd)	Excavation Quantity (Incidental to Riprap) (CuYd)
324+80	4261	945	222	1927	626
Total:	4261	945	222	1927	626

PLACING TOPSOIL

The thickness will be approximately 6 inches within the right-of-way and on temporary easements.

The estimated amount of topsoil to be placed is as follows:

Station	to	Station	Topsoil (CuYd)
Normal Topsoil			
427+00 – 23’ R	to 110’ R	429+00 – 23’ R to 110’ R	315
429+00 – 23’ R	to 108’ R	433+00 – 23’ R to 118’ R	630
Wetland Topsoil			
429+00 – 108’ R	to 138’ R	433+00 – 118’ R to 148’ R	222
Total:			1167

Temporary Berm

The topsoil salvaged will be used to build the Temporary Berm around the stockpile areas as perimeter protection. All costs for the Temporary Berms including equipment, labor will be incidental to the contract lump sum price for “Placing Topsoil”.

RIPRAP AND DRAINAGE FABRIC

Although the Riprap will be covered by the final embankment grading the Contractor is reminded that the drainage fabric and riprap will be placed as per the Typical Section on the inslopes.

The riprap and fabric will be placed neatly, shaped and compacted as a well graded mass as shown in the Plans before placing the fill material.

An estimated quantity of 626 cy of waste material will be generated by the excavation for the riprap and used in the building the embankment.

Location	L/R	Class B Riprap (Ton)	Type B Drainage Fabric (SqYd)
429+50 to 432+50	R	808.9	1012
Totals:		808.9	1012

File - ...Dewey4\WPCN I4YW\_Notes.dgn

1:200  
Plot Scale -  
TRMO\NT04  
Plotted From -

EROSION CONTROL

The estimated area requiring erosion control is 1.4 acres. All costs for the erosion control work for furnishing, placing, and maintaining erosion control including equipment, labor, seeding, and mulching will be incidental to the contract lump sum price for “Erosion Control”.

The limits of erosion control work will be determined by the Engineer during construction. The areas disturbed as a result of work on this project will be restored and/or reshaped to the satisfaction of the Engineer. All disturbed areas will be seeded and mulched. Disturbed areas anticipated on the project include excavation for the riprap placement, stripping for the stockpile locations, shaping to finished cross section and all other areas disturbed as a result of the Contractor’s operations.

Application of fertilizer will not be required on this project.

Permanent Seeding

Type C Permanent will be used on the upland areas above approximate elevation 2156’ (Area approximately 1.0 acres)

The varieties listed for seed mixtures are preferred varieties.

Type C Permanent Seed Mixture will consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Western Wheatgrass	Arriba, Flintlock, Rodan, Rosana, Walsh	16
Canada Wildrye	Mandan	2
Total:		18

Special Permanent Seed Mixture 1 will be used on the wetland area (area approximately 0.3 acres) located in the first 30 feet of the inslope from approximate elevation 2153’.

Special Permanent Seed Mixture 1 will consist of the following:

A seed carrier will be required in the mix due to the small quantity to obtain an even distribution of the seed over the area.

Common Name	Scientific Name	Variety	Pure Live Seed (PLS) (Pounds/Acre)
Prairie Cordgrass	Spartina pectinata	Red River	1.1
American Sloughgrass	Beckmannia syzigachne	Common	0.2
Virginia Wildrye	Elymus virginicus	Omaha	2.0
Fowl Bluegrass	Poa palustris	Common	0.2
Fox Sedge	Carex vulpinoidea	Common	0.2
American Mannagrass	Glyceria grandis	Common	0.2
Fowl Mannagrass	Glyceria striata	Common	0.1
Bluejoint	Calamagrostis canadensis	Common	0.1
Total:			4.1

Mycorrhizal Inoculum

Mycorrhizal inoculum will consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier will provide certification of the fungal species claimed and the live propagule count. The inoculum will include the following fungal species:

- 25% Glomus intraradices
- 25% Glomus aggregatum or deserticola
- 25% Glomus mosseae
- 25% Glomus etunicatum

All seed will be inoculated by the seed supplier with a minimum of 100,000 live propagules of mycorrhizal fungi per acre.

The mycorrhizal inoculum will be as shown below or an approved equal:

Product	Manufacturer
MycoApply	Mycorrhizal Applications, Inc. Grants Pass, OR Phone: 1-866-476-7800 <a href="http://www.mycorrhizae.com">www.mycorrhizae.com</a>
AM 120 Multi Species Blend	Reforestation Technologies Int. Gilroy, CA Phone: 1-800-784-4769 <a href="http://www.reforest.com">www.reforest.com</a>

Fiber Mulching

Fiber mulch will be applied in a separate operation following permanent seeding.

An additional 2% by weight of tackifier will be added to the fiber mulch product selected from the approved product list. If the product selected has guar gum tackifier included, then the additional 2% of tackifier will be guar gum. If the product selected has synthetic tackifier included, then the additional 2% of tackifier will be synthetic.

The Contractor will allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

The fiber mulch provided will be from the approved product list. The approved product list for fiber mulch may be viewed at the following internet site:

<http://apps.sd.gov/HC60ApprovedProducts/main.aspx>

ORANGE PLASTIC SAFETY FENCE

Orange plastic safety fence will be provided to demarcate the Vegetated Buffer areas to exclude all traffic in the buffer area during construction.

All related costs to furnish, place and maintain the fence will be incidental to the contract unit price per foot for ORANGE PLASTIC SAFETY FENCE. There are 260 feet of orange plastic safety fence included in the estimate of quantities for the upstream sides of the vegetated Buffer area. Care must be taken installing the fence to not impede the flow of the water.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	6	25
Plotting Date:		08/01/2023	



Plotted From - TRMO:INT04 1:200 Plot Scale -

STORMWATER POLLUTION PREVENTION PLAN CHECKLIST

(The numbers left of the title headings are **reference numbers** to the GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES (Stormwater Permit))

5.3 (2): STAFF TRAINING/SWPPP IMPLEMENTATION

To promote stormwater management awareness specific for this project, the Contractor's Erosion Control Supervisor should provide correspondence of how the SWPPP will be implemented. The Contractor's Erosion Control Supervisor is responsible for providing this information at the preconstruction meeting, and subsequently completing an attendance log, which should identify site-specific implementation of the SWPPP and the names of the personnel who attended the preconstruction meeting. Documentation of the preconstruction meeting will be filed with the SWPPP documents.

5.3 (3): DESCRIPTION OF CONSTRUCTION ACTIVITIES

- 5.3 (3a): Project Limits (See Title Sheet)
- 5.3 (3a): Project Description (See Title Sheet)
- 5.3 (4): Site Map(s) (See Title Sheet and Plans)
- Major Soil Disturbing Activities (check all that apply)
  - ☐ Clearing and grubbing
  - ☒ Excavation/borrow
  - ☒ Grading and shaping
  - ☐ Filling
  - ☐ Other (describe):
- 5.3 (3b): Total Project Area: 2.3 ac.
- 5.3 (3b): Total Area to be Disturbed: 1.45 ac.
- 5.3 (3c): Maximum Area Disturbed at One Time: 1.45 ac.
- 5.3 (3d): Existing Vegetative Cover (%): 100%
- 5.3 (3d): Description of Vegetative Cover: Prairie grass
- 5.3 (3e): Soil Properties: Vebar fine Sandy Loam
- 5.3 (3f): Name of Receiving Water Body/Bodies Timber Lake
- 5.3 (3g): Location of Construction Support Activity Areas

5.3 (3h): ORDER OF CONSTRUCTION ACTIVITIES

The Contractor will enter the Estimated Start Date.

Description	Estimated Start Date
Install perimeter protection where runoff may exit site.	
Delineate vegetated buffer area and install temporary ditch diversion	
Install perimeter protection around stockpiles.	
Remove and stockpile topsoil.	
Install riprap and fabric.	
Complete final grading.	
Spread salvaged topsoil.	
Seed and mulch disturbed areas.	
Install turf reinforcing mat.	

5.3 (5): DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES

All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report. Include the technical reasoning for selecting each control. (check all that apply)

Perimeter Controls (See Detail Plan Sheets)	
Description	Estimated Start Date
<input checked="" type="checkbox"/> Natural Buffers (within 50 ft of Waters of State)	
<input checked="" type="checkbox"/> Silt Fence	
<input checked="" type="checkbox"/> Erosion Control Wattles	
<input checked="" type="checkbox"/> Temporary Berm / Windrow	
<input type="checkbox"/> Floating Silt Curtain	
<input type="checkbox"/> Stabilized Construction Entrances	
<input type="checkbox"/> Entrance/Exit Equipment Tire Wash	
<input type="checkbox"/> Other:	

Structural Erosion and Sediment Controls	
Description	Estimated Start Date
<input type="checkbox"/> Silt Fence	
<input type="checkbox"/> Temporary Berm/Windrow	
<input type="checkbox"/> Erosion Control Wattles	
<input type="checkbox"/> Temporary Sediment Barriers	
<input type="checkbox"/> Erosion Bales	
<input type="checkbox"/> Temporary Slope Drain	
<input checked="" type="checkbox"/> Turf Reinforcement Mat	
<input checked="" type="checkbox"/> Riprap	
<input type="checkbox"/> Gabions	
<input type="checkbox"/> Rock Check Dams	
<input type="checkbox"/> Sediment Traps/Basins	
<input type="checkbox"/> Culvert Inlet Protection	
<input type="checkbox"/> Transition Mats	
<input type="checkbox"/> Median/Area Drain Inlet Protection	
<input type="checkbox"/> Curb Inlet Protection	
<input type="checkbox"/> Interceptor Ditch	
<input type="checkbox"/> Concrete Washout Facility	
<input type="checkbox"/> Work Platform	
<input type="checkbox"/> Temporary Water Barrier	
<input type="checkbox"/> Temporary Water Crossing	
<input type="checkbox"/> Permanent Stormwater Ponds	
<input type="checkbox"/> Permanent Open Vegetated Swales	
<input type="checkbox"/> Natural Depressions to allow for Infiltration	
<input type="checkbox"/> Sequential Systems that combine several practices	
<input checked="" type="checkbox"/> Other: Ditch diversion to vegetated buffer strip	

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	8	25

Dust Controls 08/01/2023

Description	Estimated Start Date
<input type="checkbox"/> Tarps & Wind impervious fabrics	
<input type="checkbox"/> Watering	
<input type="checkbox"/> Stockpile location/orientation	
<input type="checkbox"/> Dust Control Chlorides	
<input type="checkbox"/> Other	

Dewatering BMPs	
Description	Estimated Start Date
<input type="checkbox"/> Sediment Basins	
<input type="checkbox"/> Dewatering bags	
<input type="checkbox"/> Weir tanks	
<input type="checkbox"/> Temporary Diversion Channel	
<input type="checkbox"/> Other:	

**Stabilization Practices (See Detail Plan Sheets)**  
(Stabilization measures will begin the following work day whenever earth disturbing activity on any portion of the site has temporarily or permanently ceased. Temporary stabilization will be completed as soon as practicable but no later than 14 days after initiating soil stabilization activities (3.18))

Description	Estimated Start Date
<input type="checkbox"/> Vegetation Buffer Strips	
<input type="checkbox"/> Temporary Seeding (Cover Crop Seeding)	
<input checked="" type="checkbox"/> Permanent Seeding	
<input type="checkbox"/> Sodding	
<input type="checkbox"/> Planting (Woody Vegetation for Soil Stabilization)	
<input type="checkbox"/> Mulching (Grass Hay or Straw)	
<input checked="" type="checkbox"/> Fiber Mulching (Wood Fiber Mulch)	
<input type="checkbox"/> Soil Stabilizer	
<input type="checkbox"/> Bonded Fiber Matrix	
<input type="checkbox"/> Fiber Reinforced Matrix	
<input type="checkbox"/> Erosion Control Blankets	
<input type="checkbox"/> Surface Roughening (e.g. tracking)	
<input type="checkbox"/> Other:	

**Wetland Avoidance**  
Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☒ No ☐ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

1:200  
Plot Scale -  
TRMO\INT04  
Plotted From -

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	9	25

Plotting Date: 08/01/2023

5.3 (6): PROCEDURES FOR INSPECTIONS

- Inspections will be conducted at least once every 7 days.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure's capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and Contractor's Erosion Control Supervisor are responsible for inspections. Maintenance and repair activities are the responsibility of the Contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

5.3 (7): POST CONSTRUCTION STORMWATER MANAGEMENT

Stormwater management will be handled by temporary controls outlined in "DESCRIPTION AND MAINTENANCE OF CONTROL MEASURES" above, and any permanent controls needed to meet permanent stormwater management needs in the post construction period will be shown in the plans and noted as permanent.

5.3 (8): POLLUTION PREVENTION PROCEDURES

5.3 (8a): Spill Prevention and Response Procedures

- **Material Management**
  - Housekeeping
    - Only needed products will be stored on-site by the Contractor.
    - Except for bulk materials the contractor will store all materials under cover and/or in appropriate containers.
    - Products must be stored in original containers and labeled.
    - Material mixing will be conducted in accordance with the manufacturer's recommendations.
    - When possible, all products will be completely used before properly disposing of the container off-site.
    - The manufacturer's directions for disposal of materials and containers will be followed.
    - The Contractor's site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
    - Dust generated will be controlled in an environmentally safe manner.

- Hazardous Materials
  - Products will be kept in original containers unless the container is not resealable and provide secondary containment as applicable.
  - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
  - If surplus product must be disposed of, manufacturer's label directions for disposal will be followed.
  - Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
  - Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any stormwater system or stormwater treatment system.
  - Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of stormwater runoff.

➤ **Spill Control Practices**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer's recommended methods for spill cleanup will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the Contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for cleanup purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The Contractor's site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator.

➤ **Spill Response**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into stormwater runoff and conveyance systems. If the release has impacted on-site stormwater, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens stormwater or surface water at the site, the spill response

procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The Contractor's site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.
- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the Contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The Contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.
- If a spill occurs the superintendent or the superintendent's designee will be responsible for completing the spill reporting form and for reporting the spill to SDDANR.
- Personnel with primary responsibility for spill response and cleanup will receive training by the Contractor's site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

5.3 (8b): WASTE MANAGEMENT PROCEDURES

➤ **Waste Disposal**

- All liquid waste materials will be collected and stored in approved sealed containers. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal and notices stating proper practices will be posted. The Contractor is responsible for ensuring waste disposal procedures are followed.

➤ **Hazardous Waste**

- All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the Contractor will be responsible for seeing that these practices are followed.

➤ **Sanitary Waste**

- Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units which must be secured to prevent tipping and serviced in a timely manner by a licensed waste management Contractor or as required by any local regulations.

1:200  
Plot Scale -

Plotted From -  
TRMO\INT04

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	10	25

Plotting Date: 08/01/2023

5.3 (9): CONSTRUCTION SITE POLLUTANTS

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the heading “POLLUTION PREVENTION PROCEDURES” (check all that apply).

- ☐ Concrete and Portland Cement
- ☐ Detergents
- ☐ Paints
- ☒ Metals
- ☐ Bituminous Materials
- ☒ Petroleum Based Products
- ☒ Diesel Exhaust Fluid
- ☐ Cleaning Solvents
- ☒ Wood
- ☐ Cure
- ☐ Texture
- ☐ Chemical Fertilizers
- ☐ Other:

Product Specific Practices

- **Petroleum Products**  
All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- **Fertilizers**  
Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to stormwater. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- **Paints**  
All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer’s instructions and any applicable state and local regulations.
- **Concrete Trucks**  
Contractors will provide designated truck washout facilities on the site. These areas must be self-contained and not connected to any stormwater outlet of the site. Upon completion of construction, the area at the washout facility will be properly stabilized.

5.3 (10): NON-STORMWATER DISCHARGES

The following non-stormwater discharges are anticipated during the course of this project (check all that apply).

- ☐ Discharges from water line flushing.
- ☐ Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- ☐ Uncontaminated ground water associated with dewatering activities.

5.3 (11): INFEASIBILITY DOCUMENTATION

If it is determined to be infeasible to comply with any of the requirements of the Stormwater Permit, the infeasibility determination must be thoroughly documented in the SWPPP.

7.0: SPILL NOTIFICATION

In the event of a spill, the Contractor’s site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to SDDANR immediately **if any one of the following** conditions exists:
  - The release or spill threatens or is able to threaten waters of the state (surface water or ground water)
  - The release or spill causes an immediate danger to human health or safety
  - The release or spill exceeds 25 gallons
  - The release or spill causes a sheen on surface water
  - The release or spill of any substance that exceeds the ground water quality standards of ARSD Chapter 74:54:01
  - The release or spill of any substance that exceeds the surface water quality standards of ARSD Chapter 74:51:01
  - The release or spill of any substance that harms or threatens to harm wildlife or aquatic life
  - The release or spill is required to be reported according to Superfund Amendments and Reauthorization Act (SARA) Title III List of Lists, Consolidated List of Chemicals Subject to Reporting Under the Emergency Planning and Community Right to Know Act, US Environmental Protection Agency.
- To report a release or spill, call SDDANR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central Standard Time). To report the release after hours, on weekends or holidays, call South Dakota Emergency Management at 605-773-3231. Reporting the release to SDDANR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, you must also contact local authorities to determine the local reporting requirements for releases. A written report of the unauthorized release of any regulated substance, including quantity discharged, and the location of the discharge will be sent to SDDANR within 14 days of the discharge.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	11	25

5.5: REQUIRED SWPPP MODIFICATIONS 08/01/2023

- **5.5 (1): Conditions Requiring SWPPP Modification**  
The SWPPP must be modified, including the site map(s), in response to any of the following conditions:
  - When a new operator responsible for implementation of any part the SWPPP begins work on the site.
  - When changes to the construction plans, sediment and erosion control measures, or any best management practices on site that are no longer accurately reflected in the SWPPP. This includes changes made in response to corrective actions triggered by inspections.
  - To reflect areas on the site map where operational control has been transferred (including the date of the transfer) or has been covered under a new permit since initiating coverage under this general permit.
  - If inspections by site staff, local officials, SDDANR, or U.S. EPA determine that SWPPP modifications are necessary for compliance with the Stormwater Permit.
  - To reflect any revisions to applicable federal, state, or local requirements that affect the control measures implemented at the site.
  - If approved by the Secretary, to reflect any changes in chemical water treatment systems or controls, including the use of a different water treatment chemical, age rates, different areas, or methods of application.
- **5.5 (2): Deadlines for SWPPP Modification**  
Any required revisions to the SWPPP must be completed within 7 calendar days following any of the items listed above.
- **5.5 (3): Documentation of Modifications to the Plan**  
All SWPPP modification records are required to be maintained showing the dates of when the modification occurred. The records must include the name of the person authorizing each change and a brief summary of all changes.
- **5.5 (4): Certification Requirements**  
All modifications made to the SWPPP must be signed and certified as required in Section 7.4.
- **5.5 (5): Required Notice to Other Operators**  
If there are multiple operators at the site, the Contractor's Erosion Control Supervisor must notify each operator that may be impacted by the change to the SWPPP within 24 hours.

When modifications as described above occur, the SWPPP will be modified to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP using the DOT 298 form and drawings on the plan will be modified to reflect the needed changes. Copies of the DOT 298 forms and the SWPPP will be retained on site in a designated place for review throughout the course of the project. A copy of the DOT 298 form will be given to the Contractor Erosion Control Supervisor and a copy will be emailed to the SDDOT Environmental Section in accordance with the DOT 298 Form

5.4: SWPPP CERTIFICATIONS

- **Certification of Compliance with Federal, State, and Local Regulations**  
The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.
- **South Dakota Department of Transportation**  
  
I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature (See the General Permit, Section 7.4 (1))

- **Prime Contractor**  
This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.  
  
I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

CONTACT INFORMATION

The following personnel are duly authorized representatives and have signatory authority for modifications made to the SWPPP:

- **Contractor Information:**
  - Prime Contractor Name: \_\_\_\_\_
  - Contractor Contact Name: \_\_\_\_\_
  - Address: \_\_\_\_\_
  - \_\_\_\_\_
  - City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
  - Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
  - Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_
- **Erosion Control Supervisor**
  - Name: \_\_\_\_\_
  - Address: \_\_\_\_\_
  - \_\_\_\_\_
  - City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
  - Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
  - Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_
- **SDDOT Project Engineer**
  - Name: \_\_\_\_\_
  - Business Address: \_\_\_\_\_
  - Job Office Location: \_\_\_\_\_
  - City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_
  - Office Phone: \_\_\_\_\_ Field: \_\_\_\_\_
  - Cell Phone: \_\_\_\_\_ Fax: \_\_\_\_\_
- **SDDANR Contact Spill Reporting**
  - Business Hours Monday-Friday (605) 773-3296
  - Nights and Weekends (605) 773-3231
- **SDDANR Contact for Hazardous Materials.**
  - (605) 773-3153
- **National Response Center Hotline**
  - (800) 424-8802.
- **SDDANR Stormwater Contact Information**
  - SDDANR Stormwater (800) 737-8676
  - Surface Water Quality Program (605) 773-3351


TYPICAL GRADING SECTION

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	12	25

Plotting Date: 08/01/2023

Plot Scale - 1:200

Plotted From - TRMO\INT04

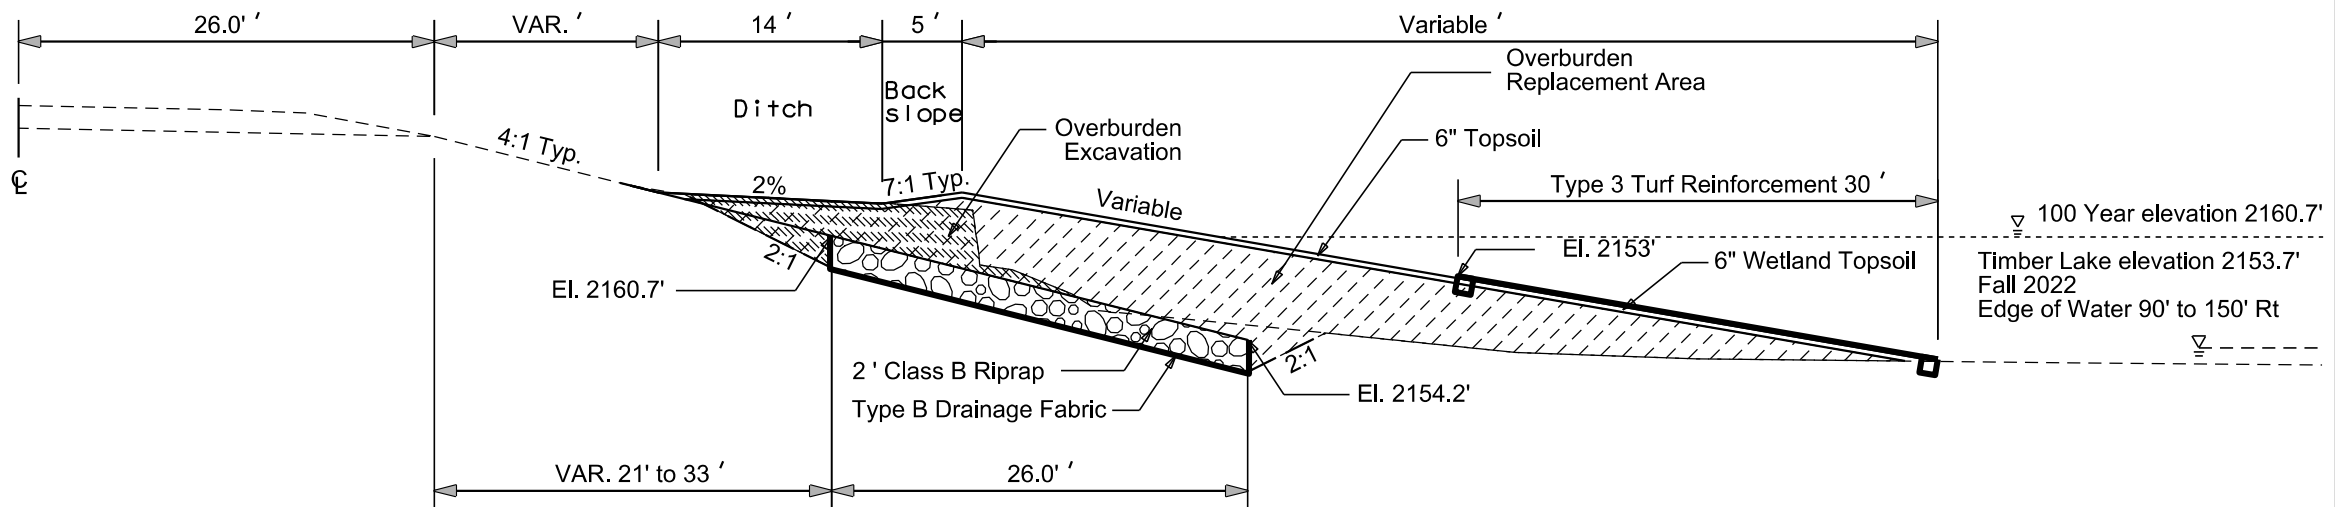

File - ...I4YWtypical.dgn

Plotted From - TRMO\NT04  
Plot Scale - 1:200

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	13	25

Plotting Date: 08/01/2023

# CONTROL DATA

HORIZONTAL AND VERTICAL CONTROL POINTS						
POINT	STATION	OFFSET	DESCRIPTION	NORTHING	EASTING	ELEVATION
20-173.10			HARN SD 20 MRM 173.10 (PID AI4122)	599109.84	1744189.90	2120.44
20-160.45			BM disk SD 20 MRM 160.45 (PID AI4109)	585120.98	1694182.89	2163.03

# HORIZONTAL ALIGNMENT DATA

## SD 20

<u>Type</u>	<u>Station</u>			<u>Northing</u>	<u>Easting</u>
POB	413+22.34			585684.17	1695208.82
		TL= 2220.68	N 17°55'20" E		
POE	440+00.00			588231.90	1696032.80

The coordinates shown on this sheet are based on the South Dakota State Plane Coordinate System. North Zone (NAD 83/2011); epoch 2010.00  
Geoid 12B; SF = 0.99986129  
The elevations shown on this sheet are based on NAVD 88.

1:200  
Plot Scale -  
Plotted From -  
TRMO\INT04

LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	14	25

Plotting Date: 08/01/2023

Anchor	
Antenna	
Approach	
Assumed Corner	
Azimuth Marker	
BBQ Grill/ Fireplace	
Bearing Tree	
Bench Mark	
Box Culvert	
Bridge	
Brush	
Buildings	
Bulk Tank	
Cattle Guard	
Cemetery	
Centerline	
Cistern	
Clothes Line	
Commercial Sign Double Face	
Commercial Sign One Post	
Commercial Sign Overhead	
Commercial Sign Two Post	
Concrete Symbol	
Creek Edge	
Curb/Gutter	
Curb	
Dam Grade/Dike/Levee	
Deck Edge	
Ditch Block	
Doorway Threshold	
Drainage Profile	
Drop Inlet	
Edge Of Asphalt	
Edge Of Concrete	
Edge Of Gravel	
Edge Of Other	
Edge Of Shoulder	
Elec. Trans./Power Jct. Box	
Fence Barbwire	
Fence Chainlink	
Fence Electric	
Fence Misc.	
Fence Rock	
Fence Snow	
Fence Wood	
Fence Woven	
Fire Hydrant	
Flag Pole	
Flower Bed	
Gas Valve Or Meter	
Gas Pump Island	
Grain Bin	
Guardrail	
Guide Sign One Post	
Guide Sign Two Post	
Gutter	
Guy Pole	
Haystack	
Hedge	


Highway R.O.W. Marker	
Interstate Close Gate	
Iron Pin	
Irrigation Ditch	
Lake Edge	
Lawn Sprinkler	
Mailbox	
Manhole Electric	
Manhole Gas	
Manhole Misc	
Manhole Sanitary Sewer	
Manhole Storm Sewer	
Manhole Telephone	
Manhole Water	
Merry-Go-Round	
Microwave Radio Tower	
Misc. Line	
Misc. Property Corner	
Misc. Post	
Overhang Or Encroachment	
Overhead Utility Line	
Parking Meter	
Pedestrian Push Button Pole	
Pipe With End Section	
Pipe With Headwall	
Pipe Without End Section	
Playground Slide	
Playground Swing	
Power And Light Pole	
Power And Telephone Pole	
Power Meter	
Power Pole	
Power Pole And Transformer	
Power Tower Structure	
Propane Tank	
Property Pipe	
Property Pipe With Cap	
Property Stone	
Public Telephone	
Railroad Crossing Signal	
Railroad Milepost Marker	
Railroad Profile	
Railroad R.O.W. Marker	
Railroad Signs	
Railroad Switch	
Railroad Track	
Railroad Trestle	
Rebar	
Rebar With Cap	
Reference Mark	
Regulatory Sign One Post	
Regulatory Sign Two Post	
Retaining Wall	
Riprap	
River Edge	
Rock And Wire Baskets	
Rockpiles	
Satellite Dish	
Septic Tank	

Shrub Tree	
Sidewalk	
Sign Face	
Sign Post	
Slough Or Marsh	
Spring	
Stream Gauge	
Street Marker	
Subsurface Utility Exploration Test Hole	
Telephone Fiber Optics	
Telephone Junction Box	
Telephone Pole	
Television Cable Jct Box	
Television Tower	
Test Wells/Bore Holes	
Traffic Signal	
Trash Barrel	
Tree Belt	
Tree Coniferous	
Tree Deciduous	
Tree Stumps	
Triangulation Station	
Underground Electric Line	
Underground Gas Line	
Underground High Pressure Gas Line	
Underground Sanitary Sewer	
Underground Storm Sewer	
Underground Tank	
Underground Telephone Line	
Underground Television Cable	
Underground Water Line	
Warning Sign One Post	
Warning Sign Two Post	
Water Fountain	
Water Hydrant	
Water Meter	
Water Tower	
Water Valve	
Water Well	
Weir Rock	
Windmill	
Wingwall	
Witness Corner	

State and National Line	
County Line	
Section Line	
Quarter Line	
Sixteenth Line	
Property Line	
Construction Line	
R. O. W. Line	
New R. O. W. Line	
Cut and Fill Limits	
Control of Access	
New Control of Access	
Proposed ROW (After Property Disposal)	
Drainage Arrow	
Remove Concrete Pavement	
Remove Concrete Driveway Pavement	
Remove Asphalt Concrete Pavement	
Remove Concrete Sidewalk	
Remove Concrete Median Pavement	
Remove Concrete Curb and/or Gutter	
Detectable Warning	
Pedestrian Push Button Pole and 30" x 48" Clear Space with 1.5% slope	

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	15	25

Plotting Date: 08/01/2023

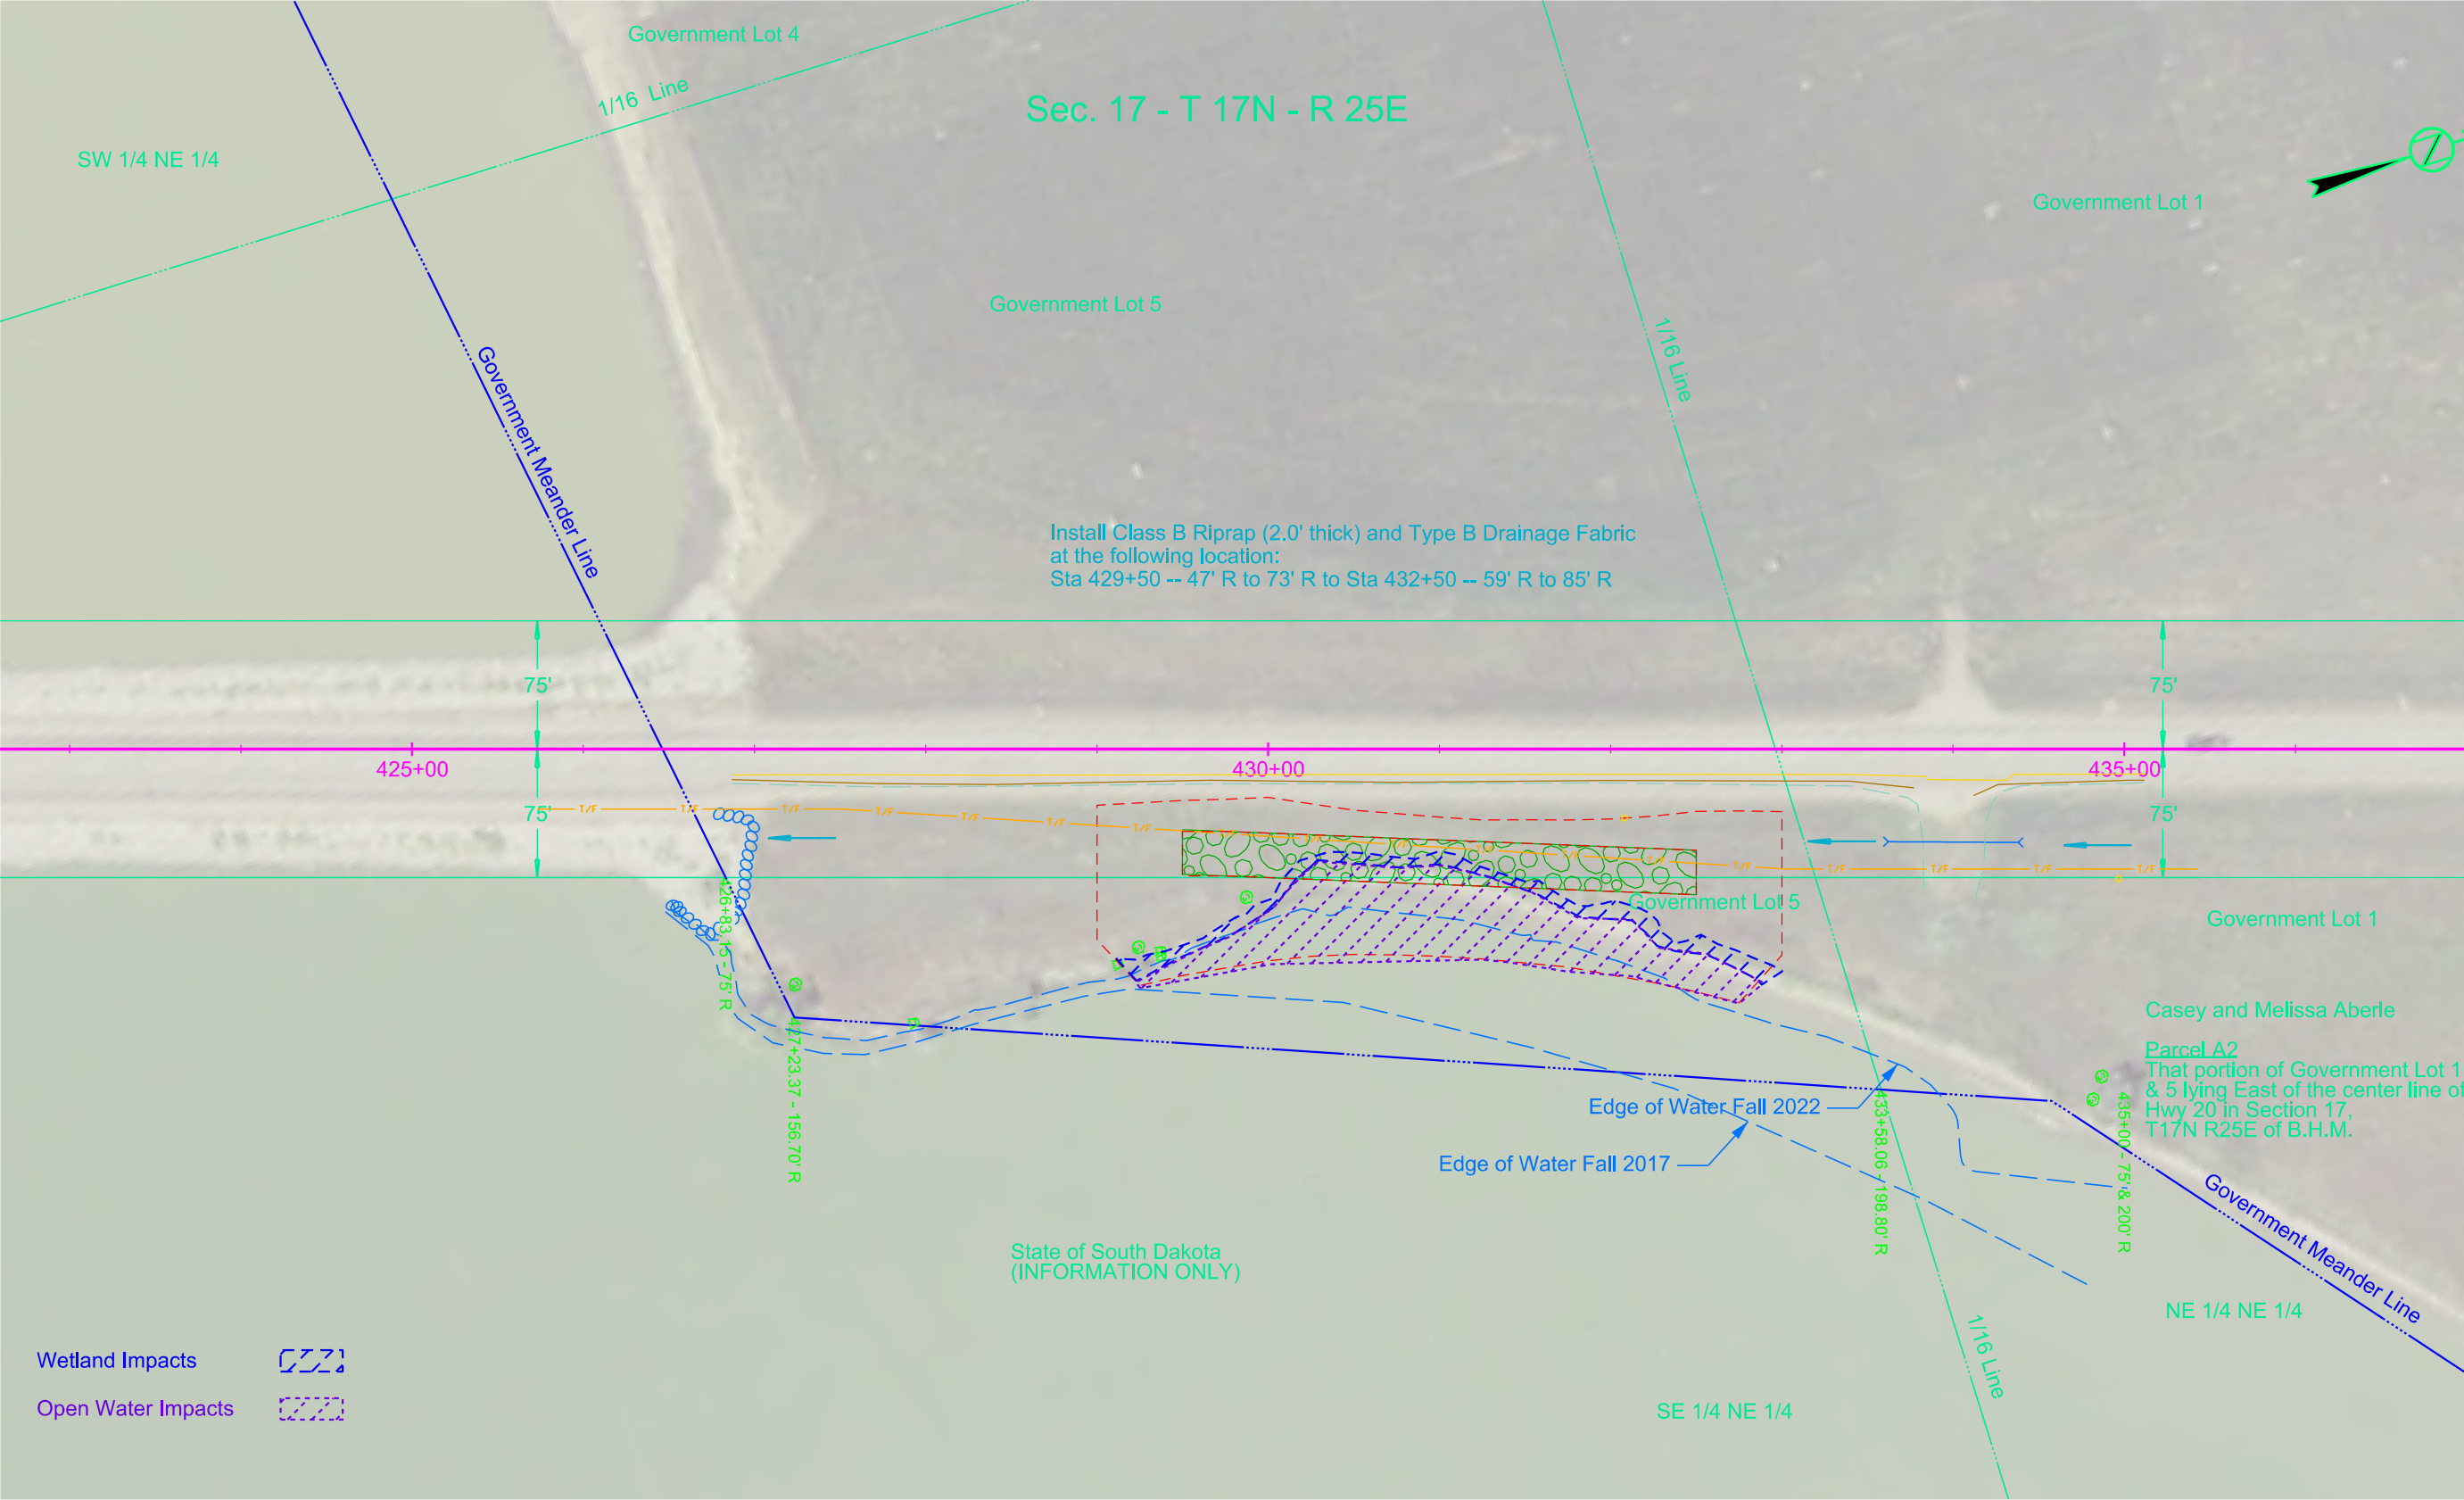

Plot Scale - 1:100

Plotted From - TRMO\NT04

File - ...422.dgn

# EROSION AND SEDIMENT CONTROL LEGEND

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	16	25

Plotting Date: 08/01/2023

- Low Flow Silt Fence
- High Flow Silt Fence
- High Flow Silt Fence at Pipe
- Sediment Control at Inlet After Placement of Surfacing
- Sediment Control at Inlet Before Placement of Surfacing
- Temporary Sediment Barrier
- Temporary Water Barrier
- Floating Silt Curtain
- Sediment Filter Bags
- Triangular Silt Barriers
- Erosion Control Wattles on Slopes
- Erosion Control Wattles at Inlets
- Erosion Control Wattles in Ditches
- Erosion Bales
- Surfacing Roughening
- Soil Stabilizer
- Temporary Grass Hay or Straw Mulch/ Soil Stabilizer
- Cut Interceptor Ditch
- Temporary Slope Drain
- Bonded Fiber Matrix/ Fiber Reinforced Matrix
- Rock Check Dam
- Type 1 Erosion Control Blanket
- Type 2 Erosion Control Blanket
- Type 3 Erosion Control Blanket
- Type 4 Erosion Control Blanket
- Type 1 Turf Reinforcement Mat
- Type 2 Turf Reinforcement Mat
- Type 3 Turf Reinforcement Mat
- Transition Mat
- Silt Trap (See Standard Plate 734.04)
- Runoff Direction

## BEST MANAGEMENT PRACTICES

Best Management Practices (BMPs) are split into three categories and are to be used throughout construction.

### INITIAL PHASE

BMPs from the Legend shown as Orange Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Initial Phase prior to earth disturbing activities and remain in place for the Intermediate Phase for temporary stabilization and in the Final Phase to achieve final stabilization.

### INTERMEDIATE PHASE

BMPs from the Legend shown as Blue Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Intermediate Phase for temporary stabilization and remain in place in the Final Phase to achieve final stabilization.

### FINAL PHASE

BMPs from the Legend shown as Green Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Final Phase to achieve final stabilization.

If these items are applicable they are to be shown in the updated SWPPP using the Symbols given.

- |    |   |    |  |
|----|---|----|--|
| TS | Topsoil Stockpile   | M  | On-Site Construction Material Storage Area |
| B  | Borrow Area   | SK | Spill Kit                                  |
| CE | Stabilized Construction Entrance                              | WP | Work Platform                              |
| VB | Vegetated Buffer Strip  | CC | Cover Crop Seeding                         |
| CW | Concrete Washout  | WS | Wetland Topsoil Stockpile                  |
| AP | Asphalt Plant Site  | E  | Excavation Material Stockpile              |
| CP | Concrete Plant Site   | R  | Riprap Stockpile                           |
| V  | Vehicle and Equipment Parking, Fueling, and Maintenance Areas |    |  |
| D  | Dumpster or other Trash and Debris Containers                 |    |  |




The signs illustrated are not required if the work space is behind a barrier, more than 2 feet behind the curb, or 15 feet or more from the edge of any roadway.

The signs illustrated will be used where there are distracting situations; such as: vehicles parked on shoulder, vehicles accessing the work site via the highway, and equipment traveling on or crossing the roadway to perform work operations.


The ROAD WORK AHEAD sign may be replaced with other appropriate signs, such as the SHOULDER WORK sign. The SHOULDER WORK sign may be used for work adjacent to the shoulder.

\* If the work space is on a divided highway, an advance warning sign should also be placed on the left side of the directional roadway.

For short term, short duration, or mobile operations, all signs and channelizing devices may be eliminated if a vehicle with an activated flashing or revolving yellow light is used.

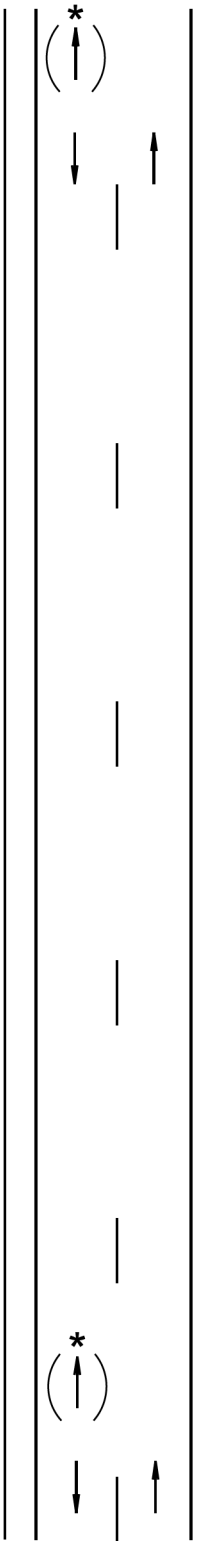


Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)
0 - 30	200
35 - 40	350
45 - 50	500
55	750
60 - 80	1000

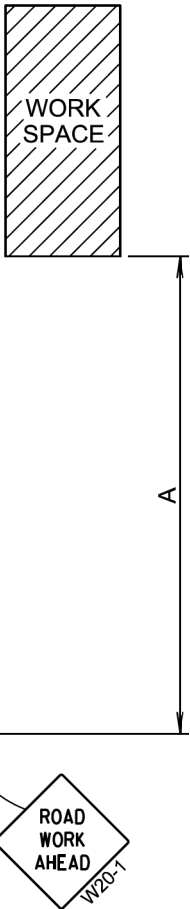


January 22, 2021

Published Date: 2024	S D D O T	WORK BEYOND THE SHOULDER	PLATE NUMBER 634.01
			Sheet 1 of 1

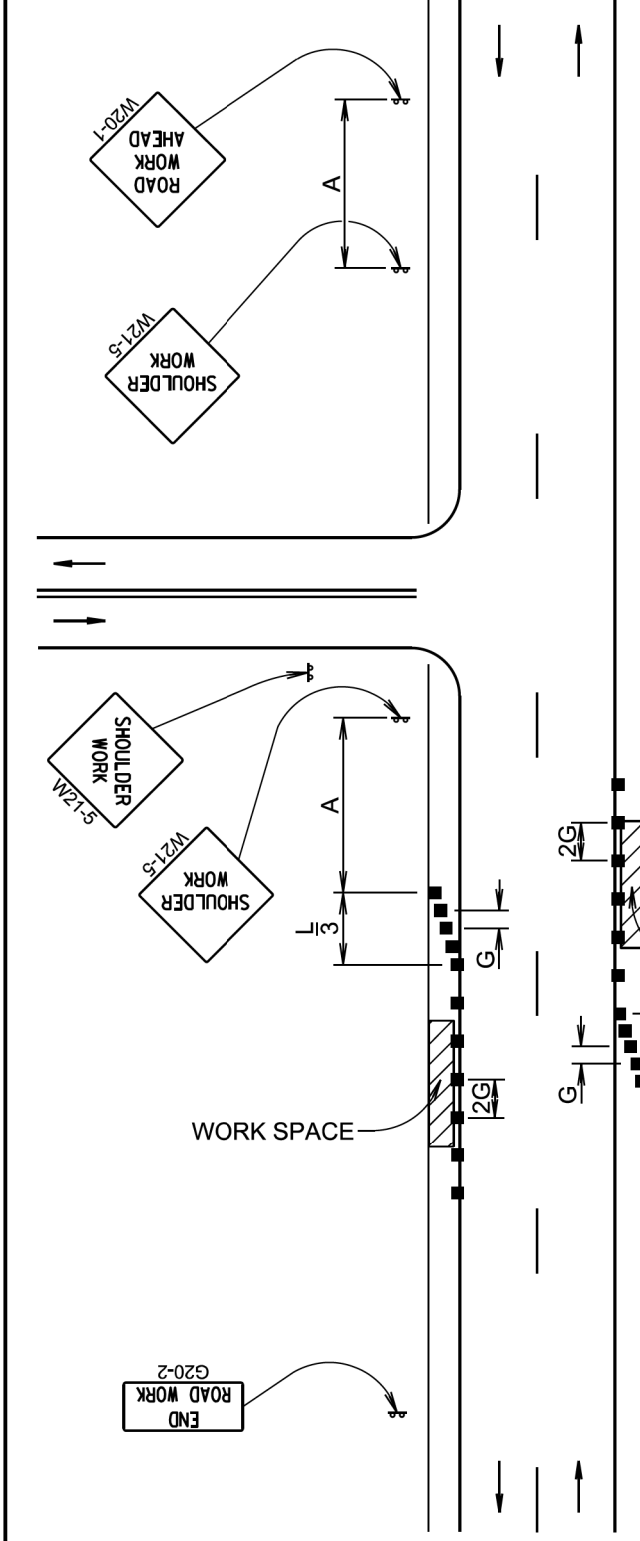

Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)	Taper Length (Feet) (L)	Spacing of Channelizing Devices (Feet) (G)
0 - 30	200	180	25
35 - 40	350	320	25
45	500	600	25
50	500	600	50
55	750	660	50
60 - 65	1000	780	50

Channelizing Device




The channelizing devices will be drums or 42" cones if traffic control must remain overnight.

For short duration operations (1 hour or less) all channelizing devices may be eliminated if a vehicle with an activated flashing or revolving yellow light is used.

Worker signs (W21-1 or W21-1a) may be used instead of SHOULDER WORK signs.

A SHOULDER WORK sign should be placed on the left side of a divided or one-way roadway only if the left shoulder is affected.

The SHOULDER WORK sign on an intersecting roadway is not required if drivers emerging from that roadway will encounter another advance warning sign before they reach a work activity area.

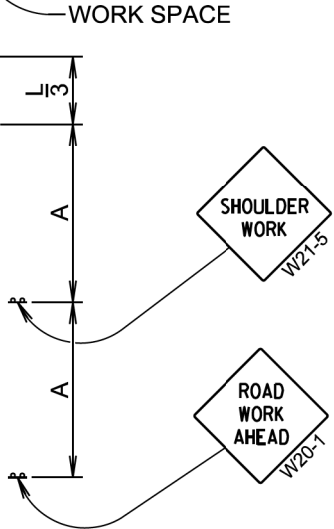



January 22, 2021

Published Date: 2024	S D D O T	WORK ON SHOULDERS	PLATE NUMBER 634.03
			Sheet 1 of 1



Plot Scale - 1:200

Plotted From - TRMO:INT04

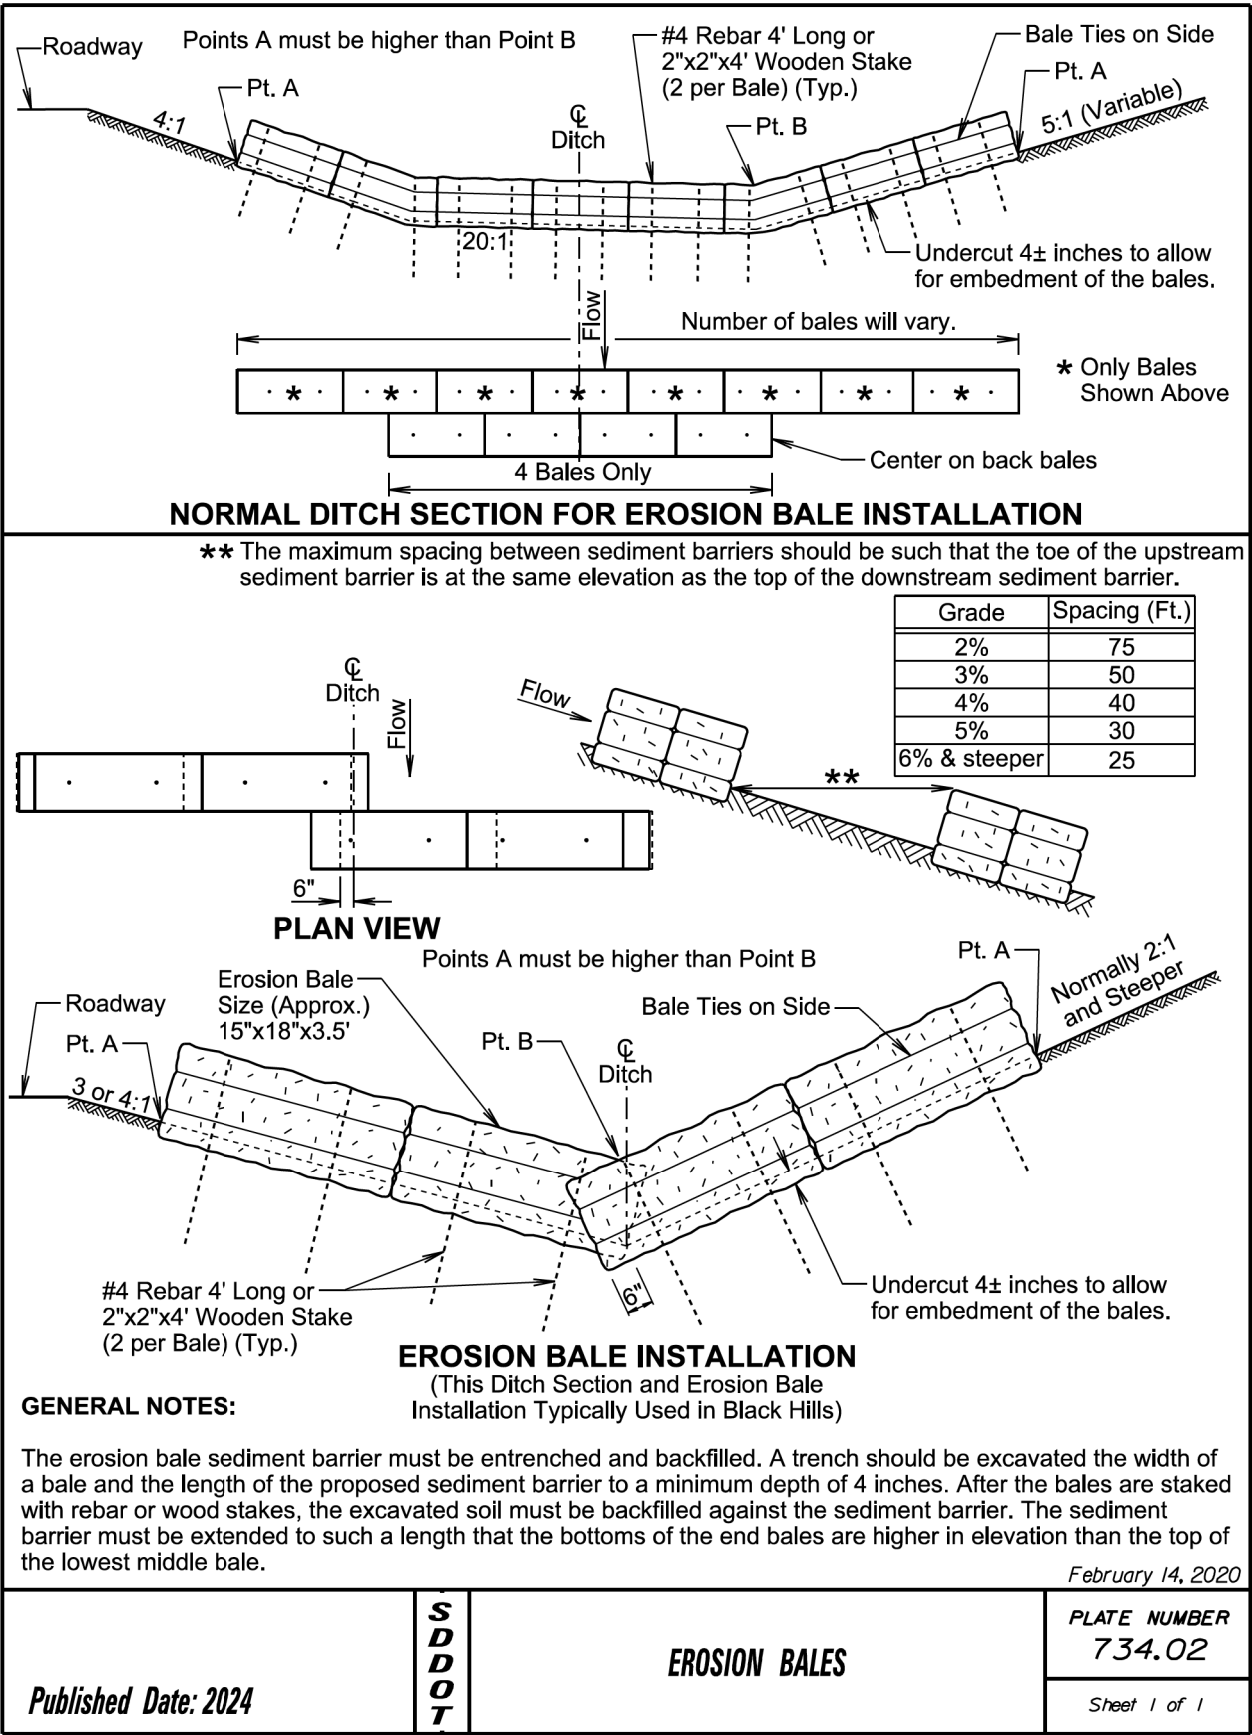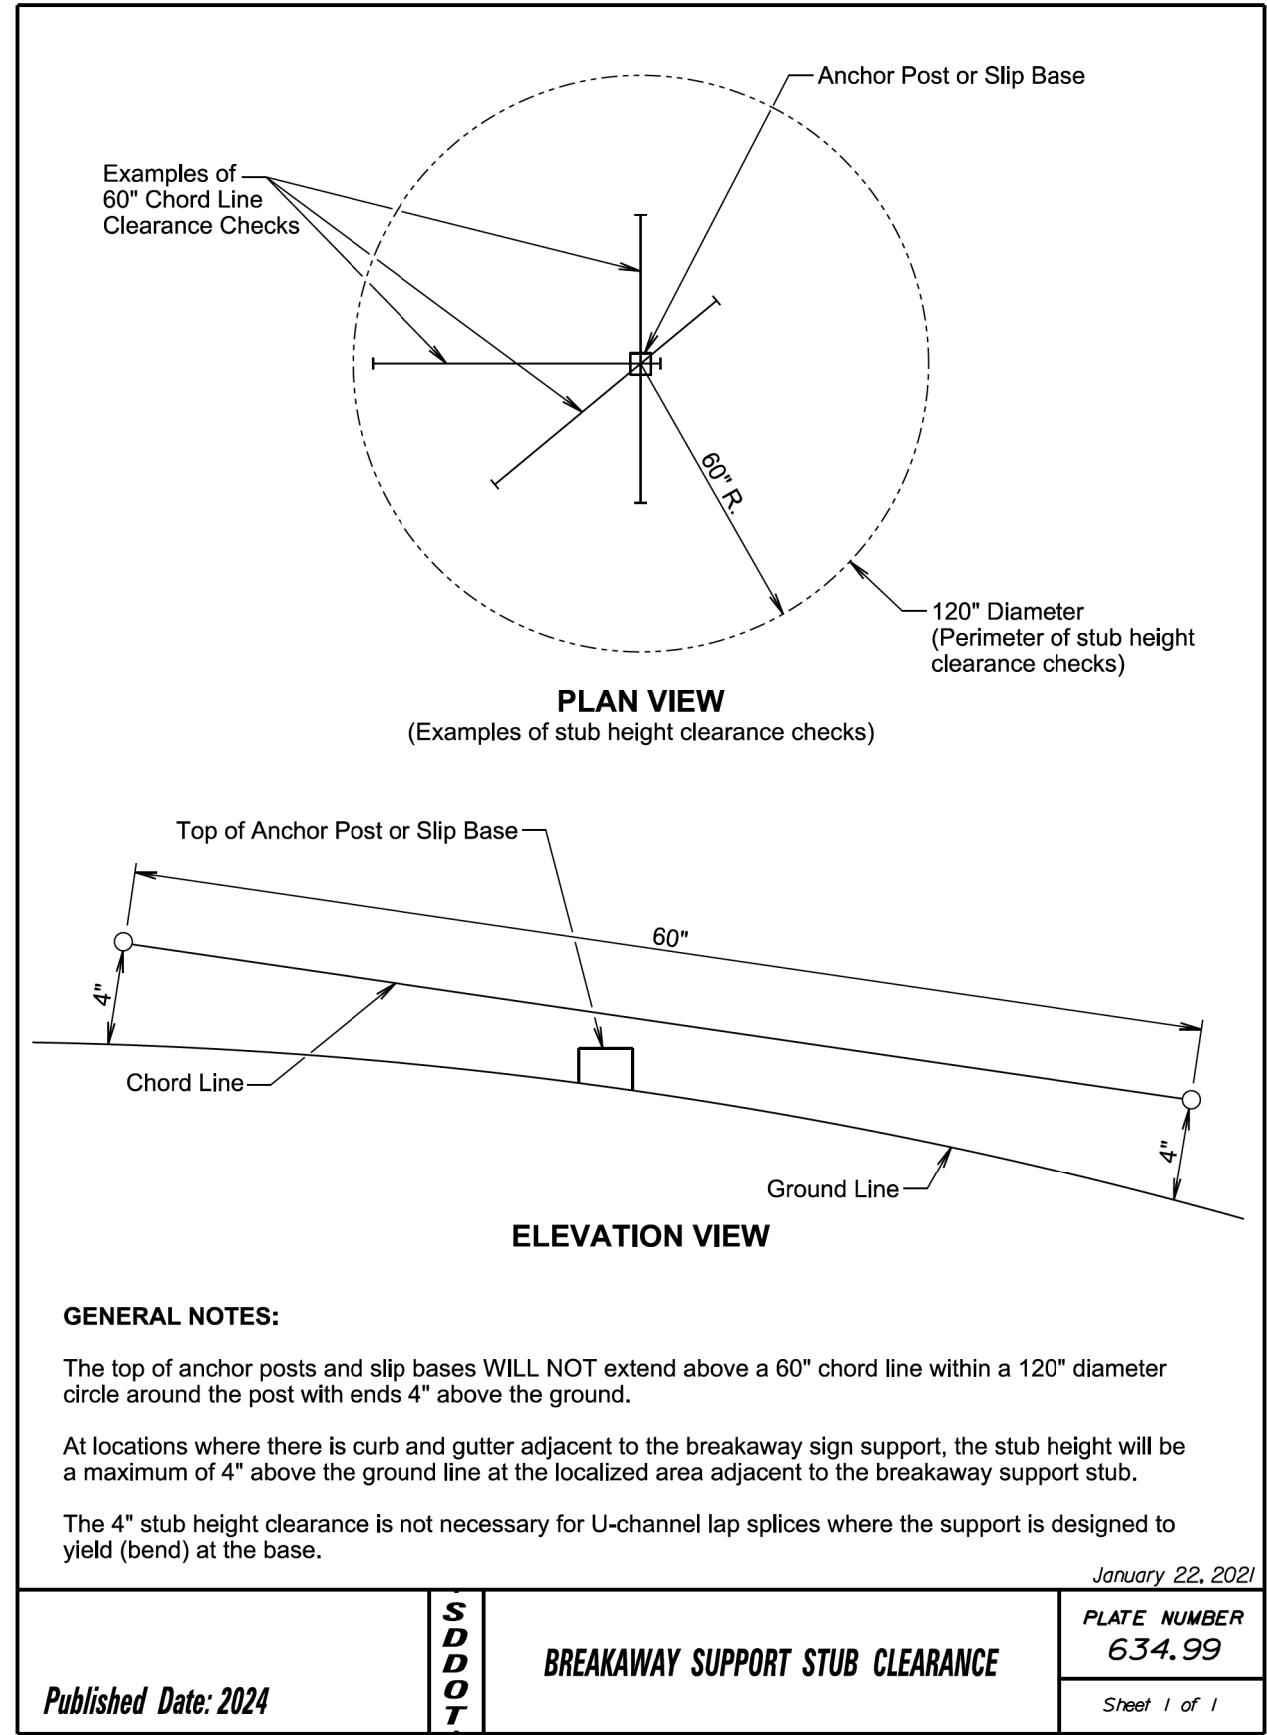


File - ...I:\dev\I4YW\63499\_s\73402.dgn



STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	22	25

Plotting Date: 08/01/2023

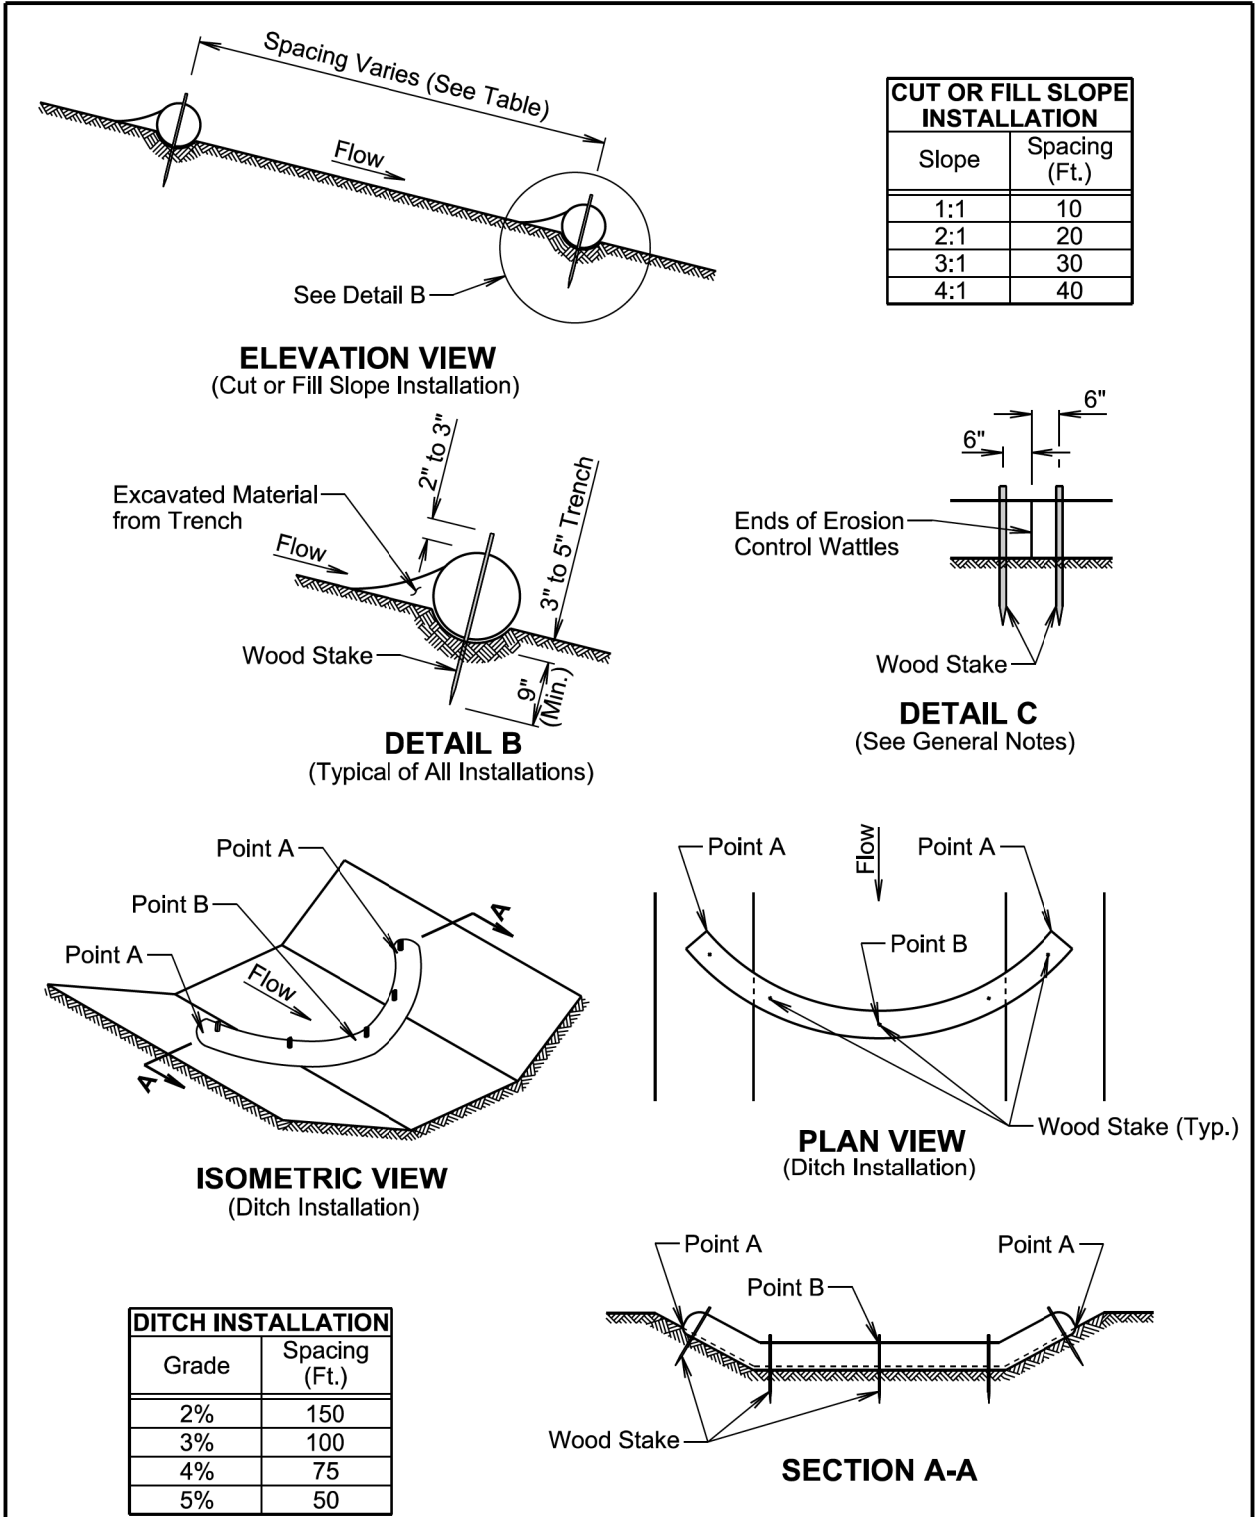

February 14, 2020

Published Date: 2024	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 1 of 2

**GENERAL NOTES:**

At cut or fill slope installations, wattles will be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor will dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes will be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes will be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles will be 3' to 4'.

Where installing running lengths of wattles, the Contractor will butt the second wattle tightly against the first and will not overlap the ends. See Detail C.

The Contractor and Engineer will inspect the erosion control wattles in accordance with the storm water permit. The Contractor will remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping will be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping will be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials will be incidental to the contract unit price per foot for the corresponding erosion control wattle contract item.


All costs for removing the erosion control wattle from the project including labor, equipment, and materials will be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".

February 14, 2020

Published Date: 2024	S D D O T	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
			Sheet 2 of 2

08/01/2023







Plotting Date:

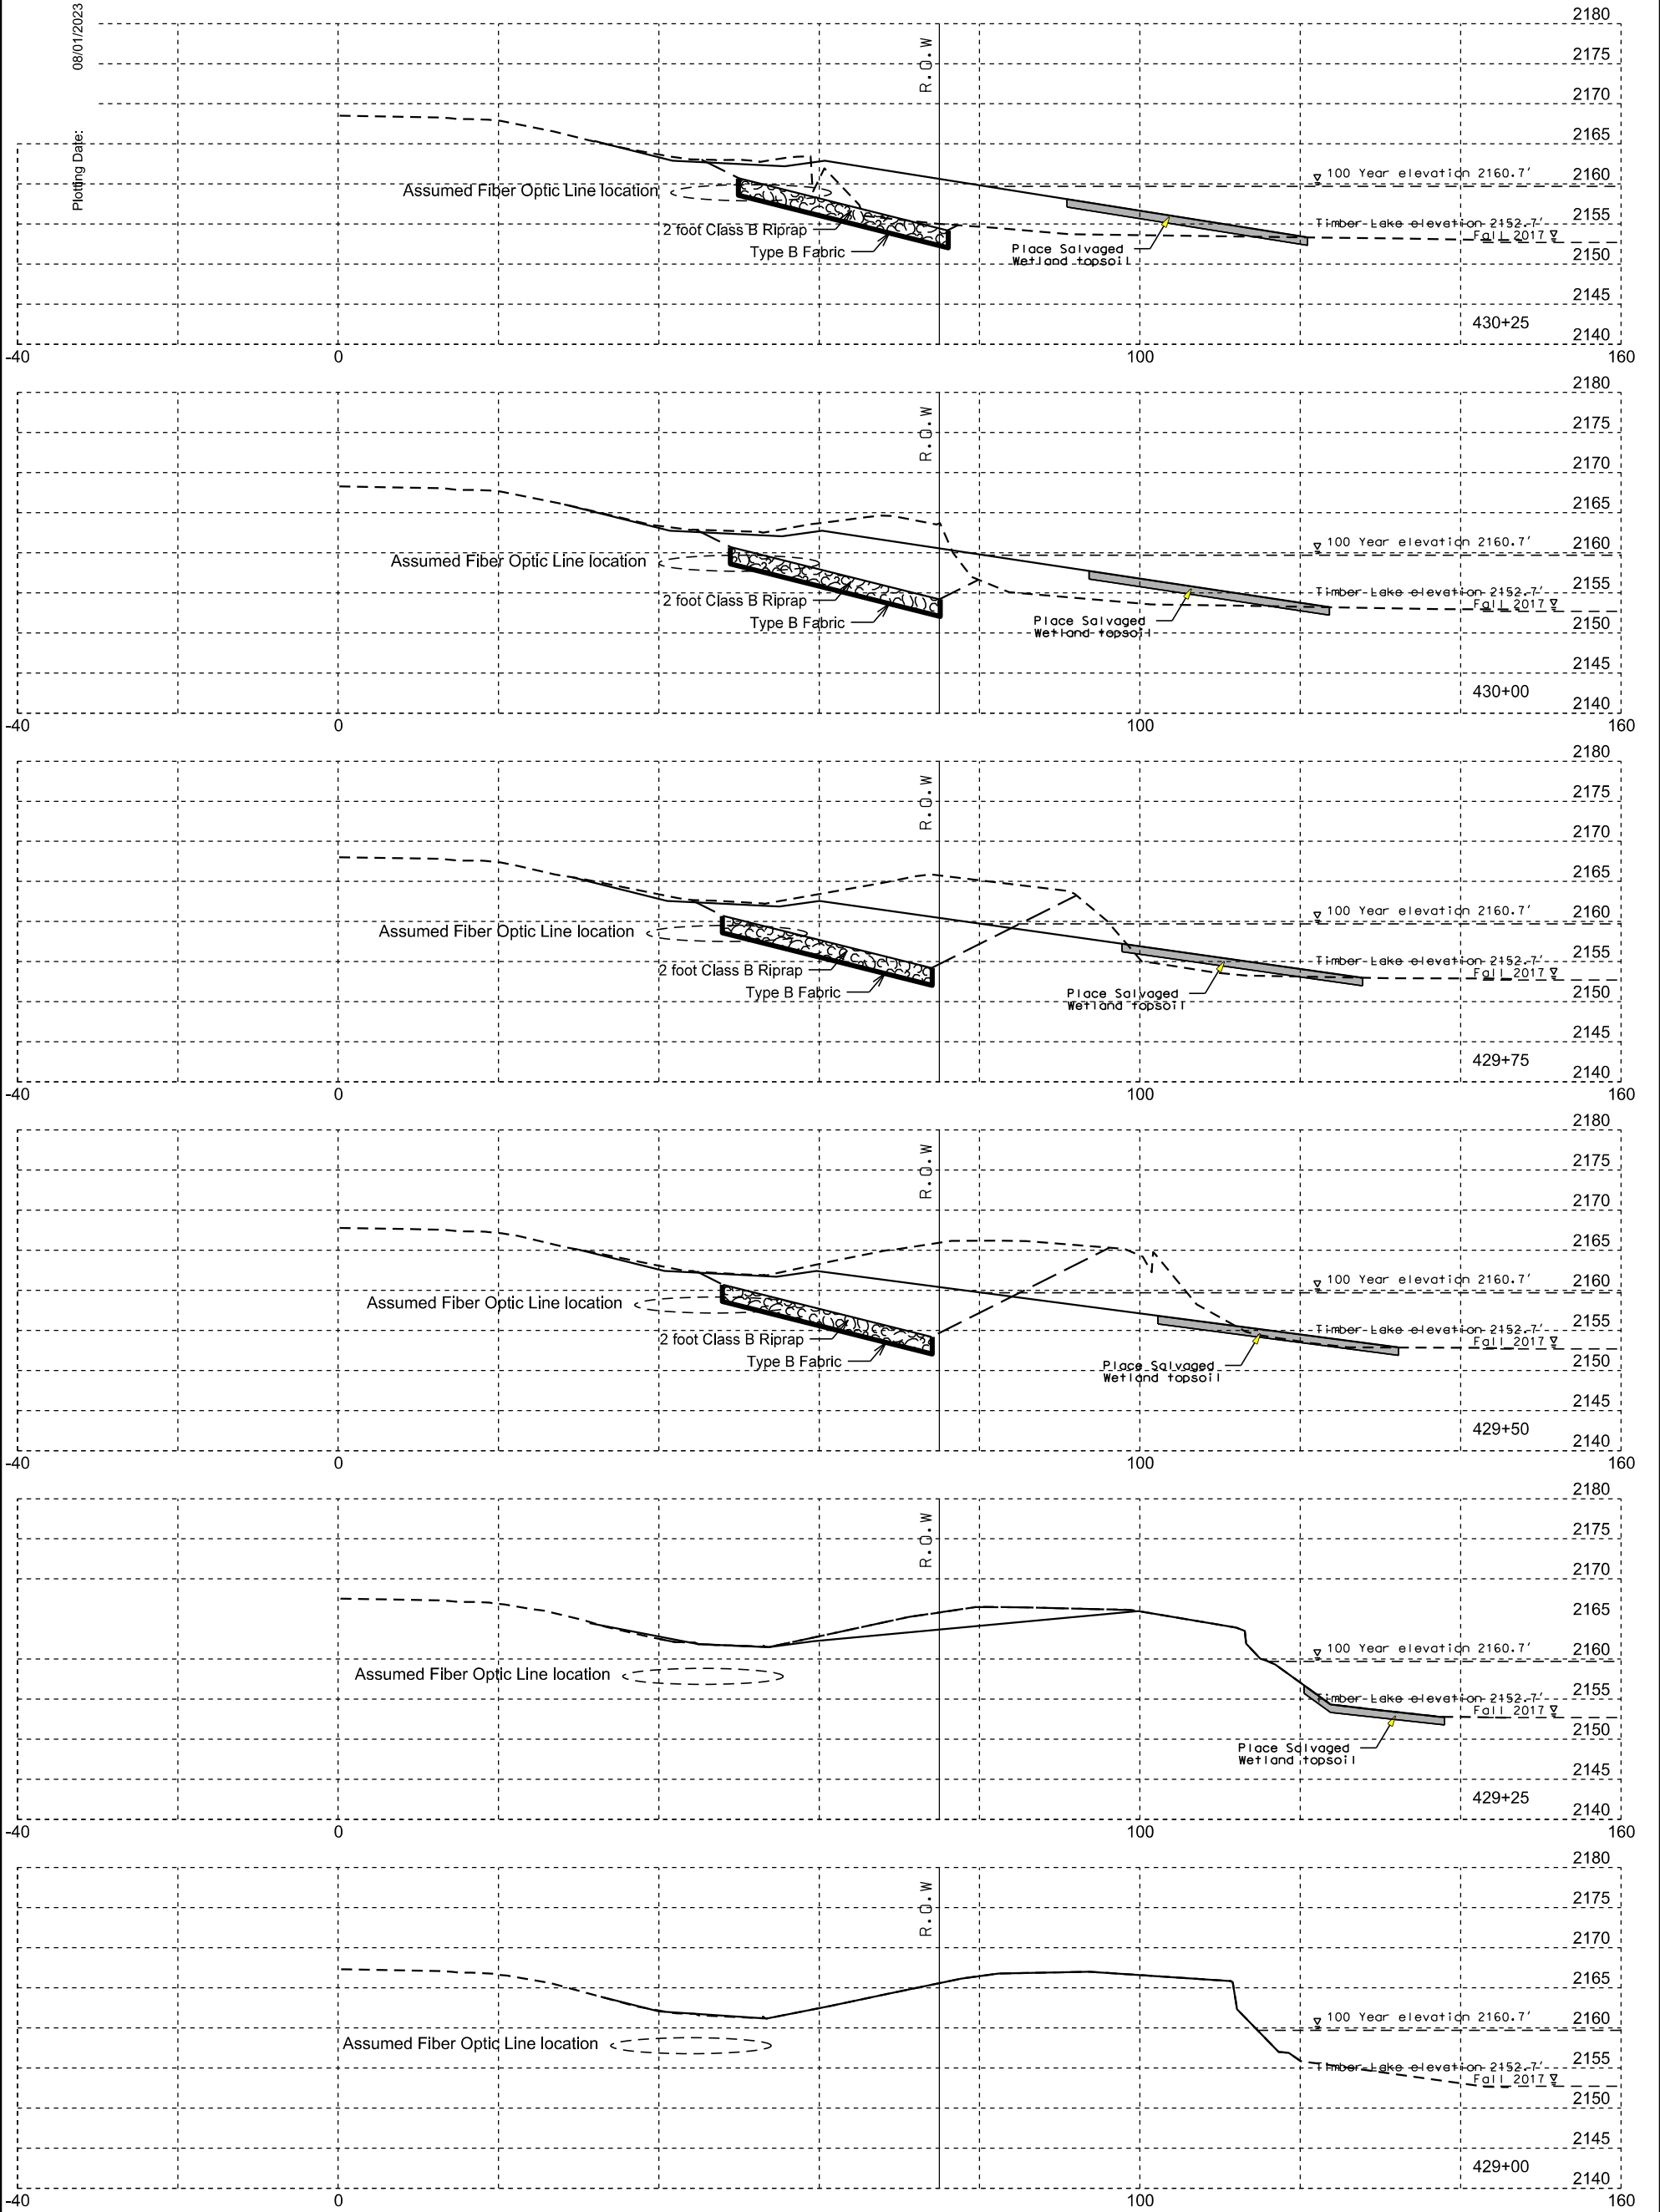

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	23	25

08/01/2023

Plotting Date:

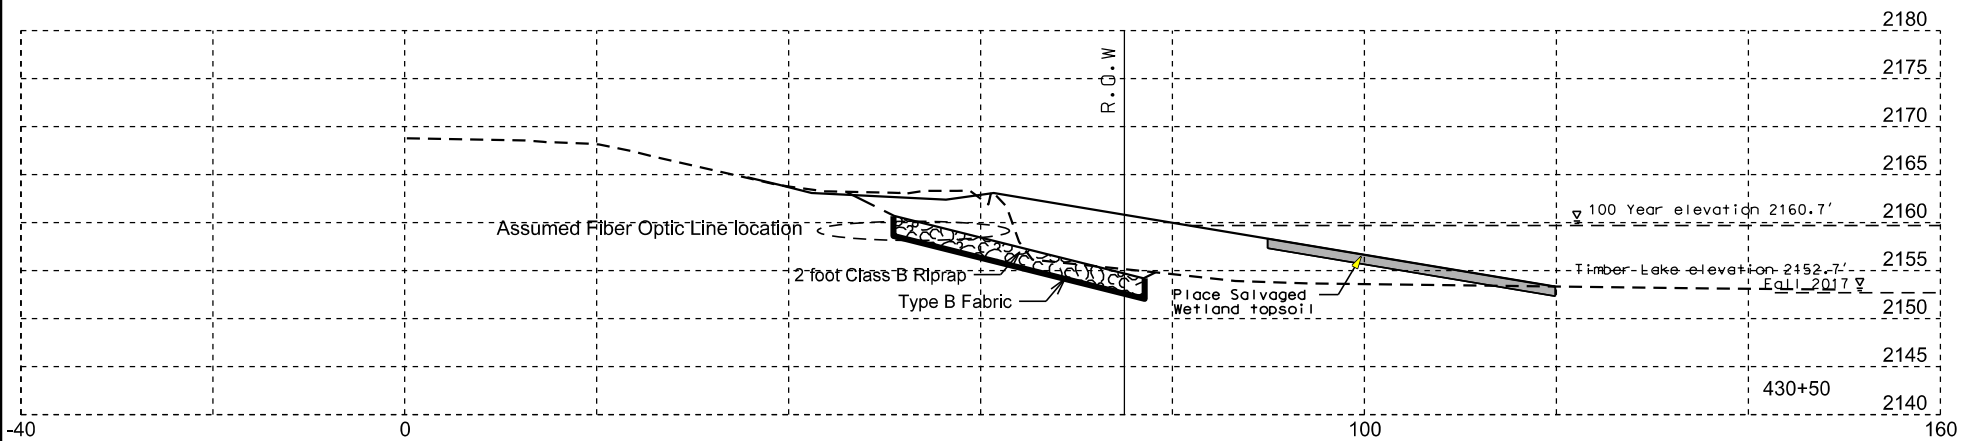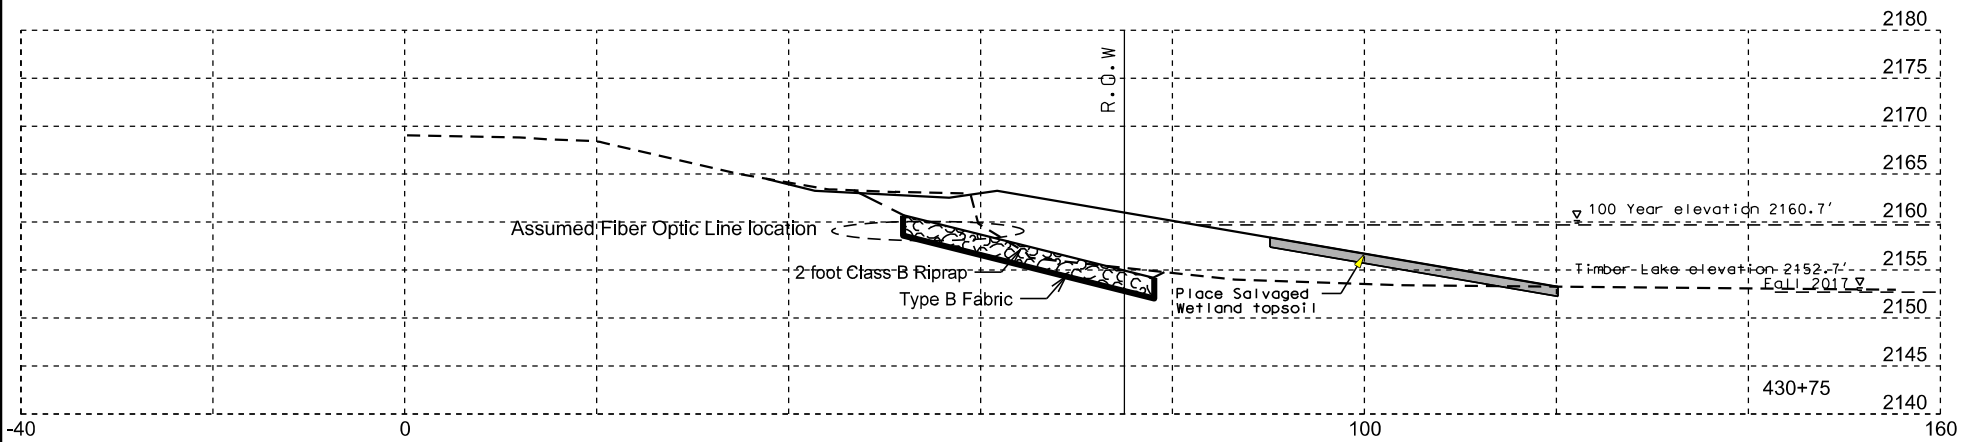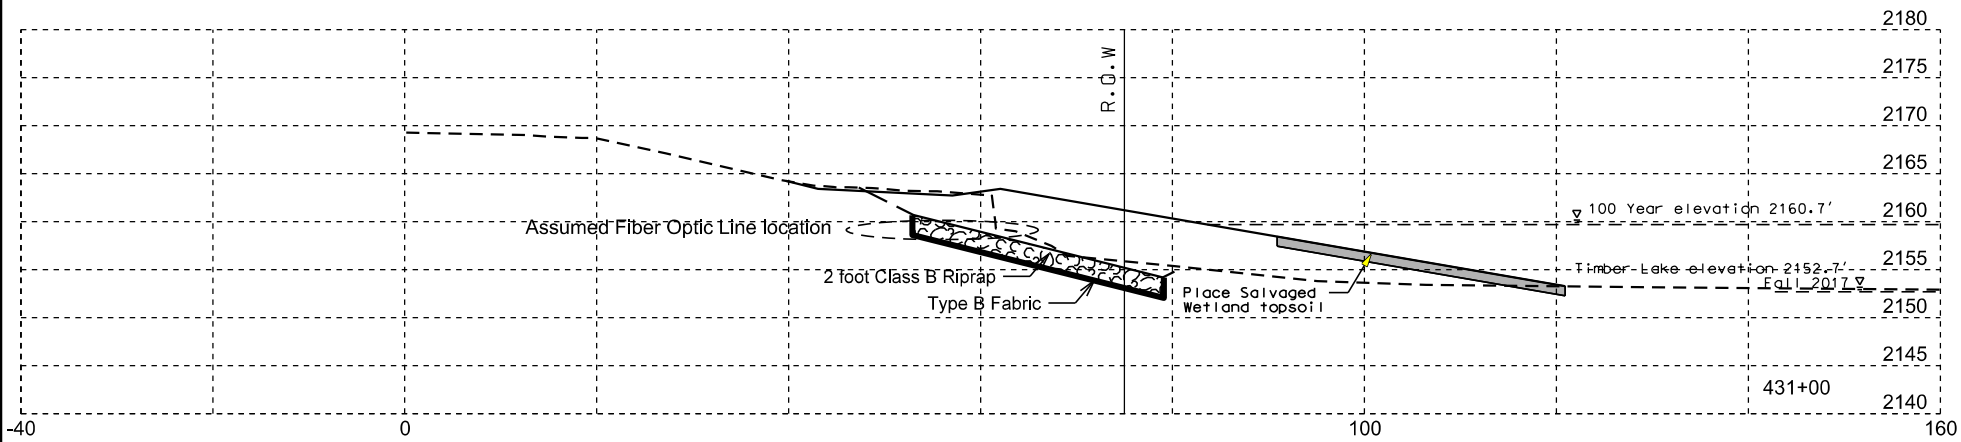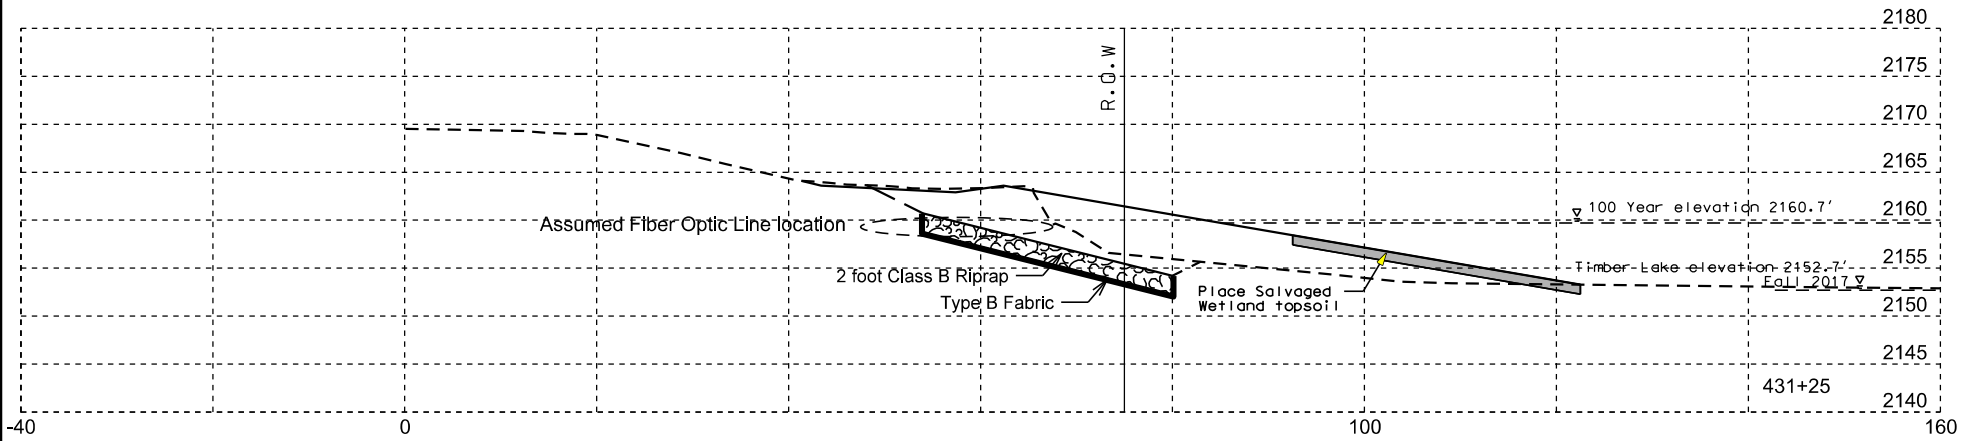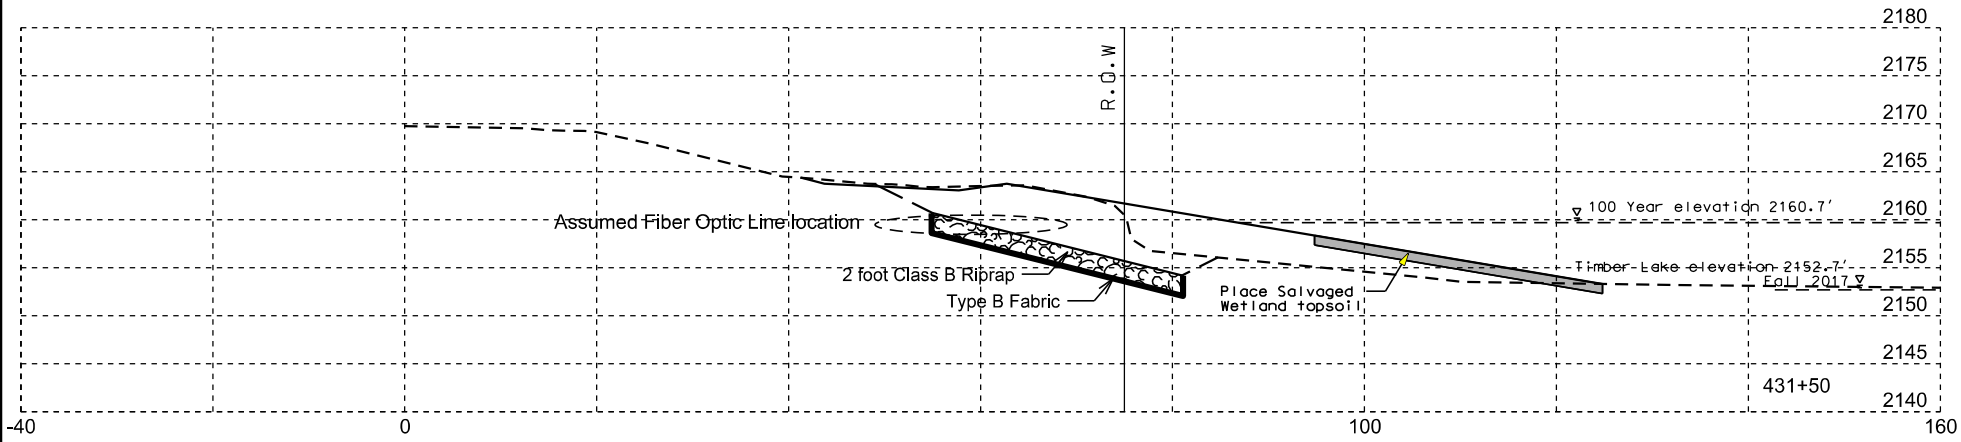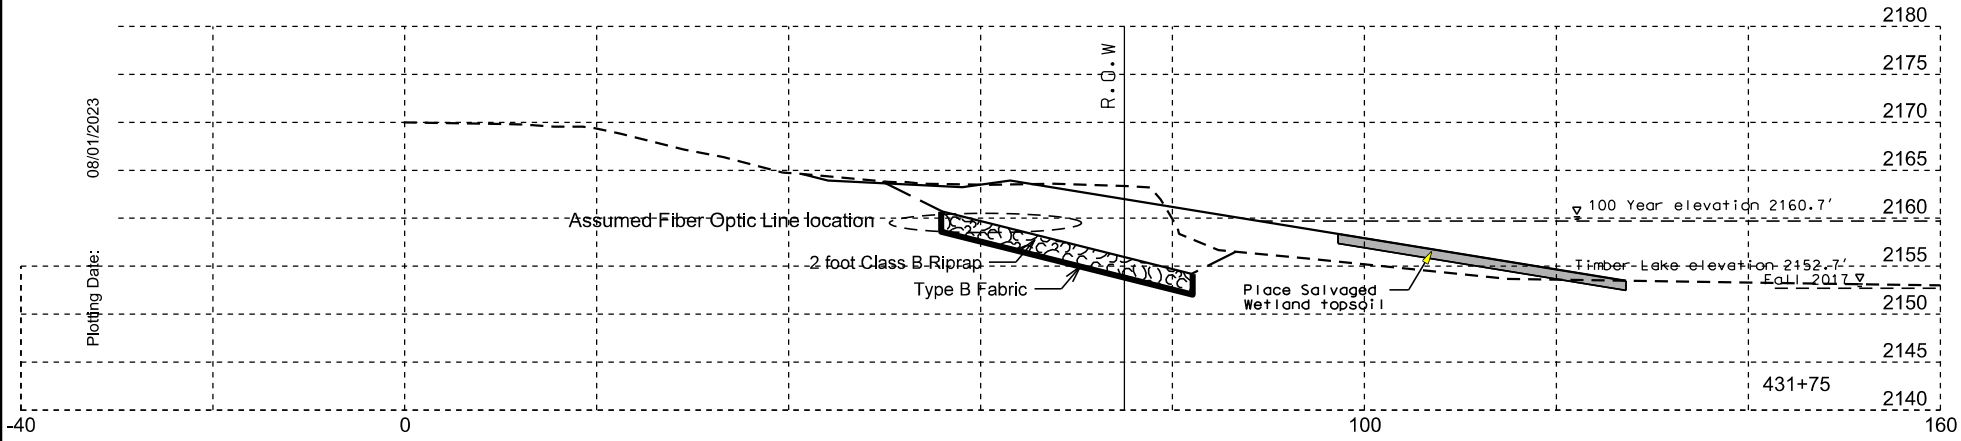

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	24	25


1:20

Plot Scale -

TRMO1N104

Plotted From -

Plotting Date: 08/01/2023

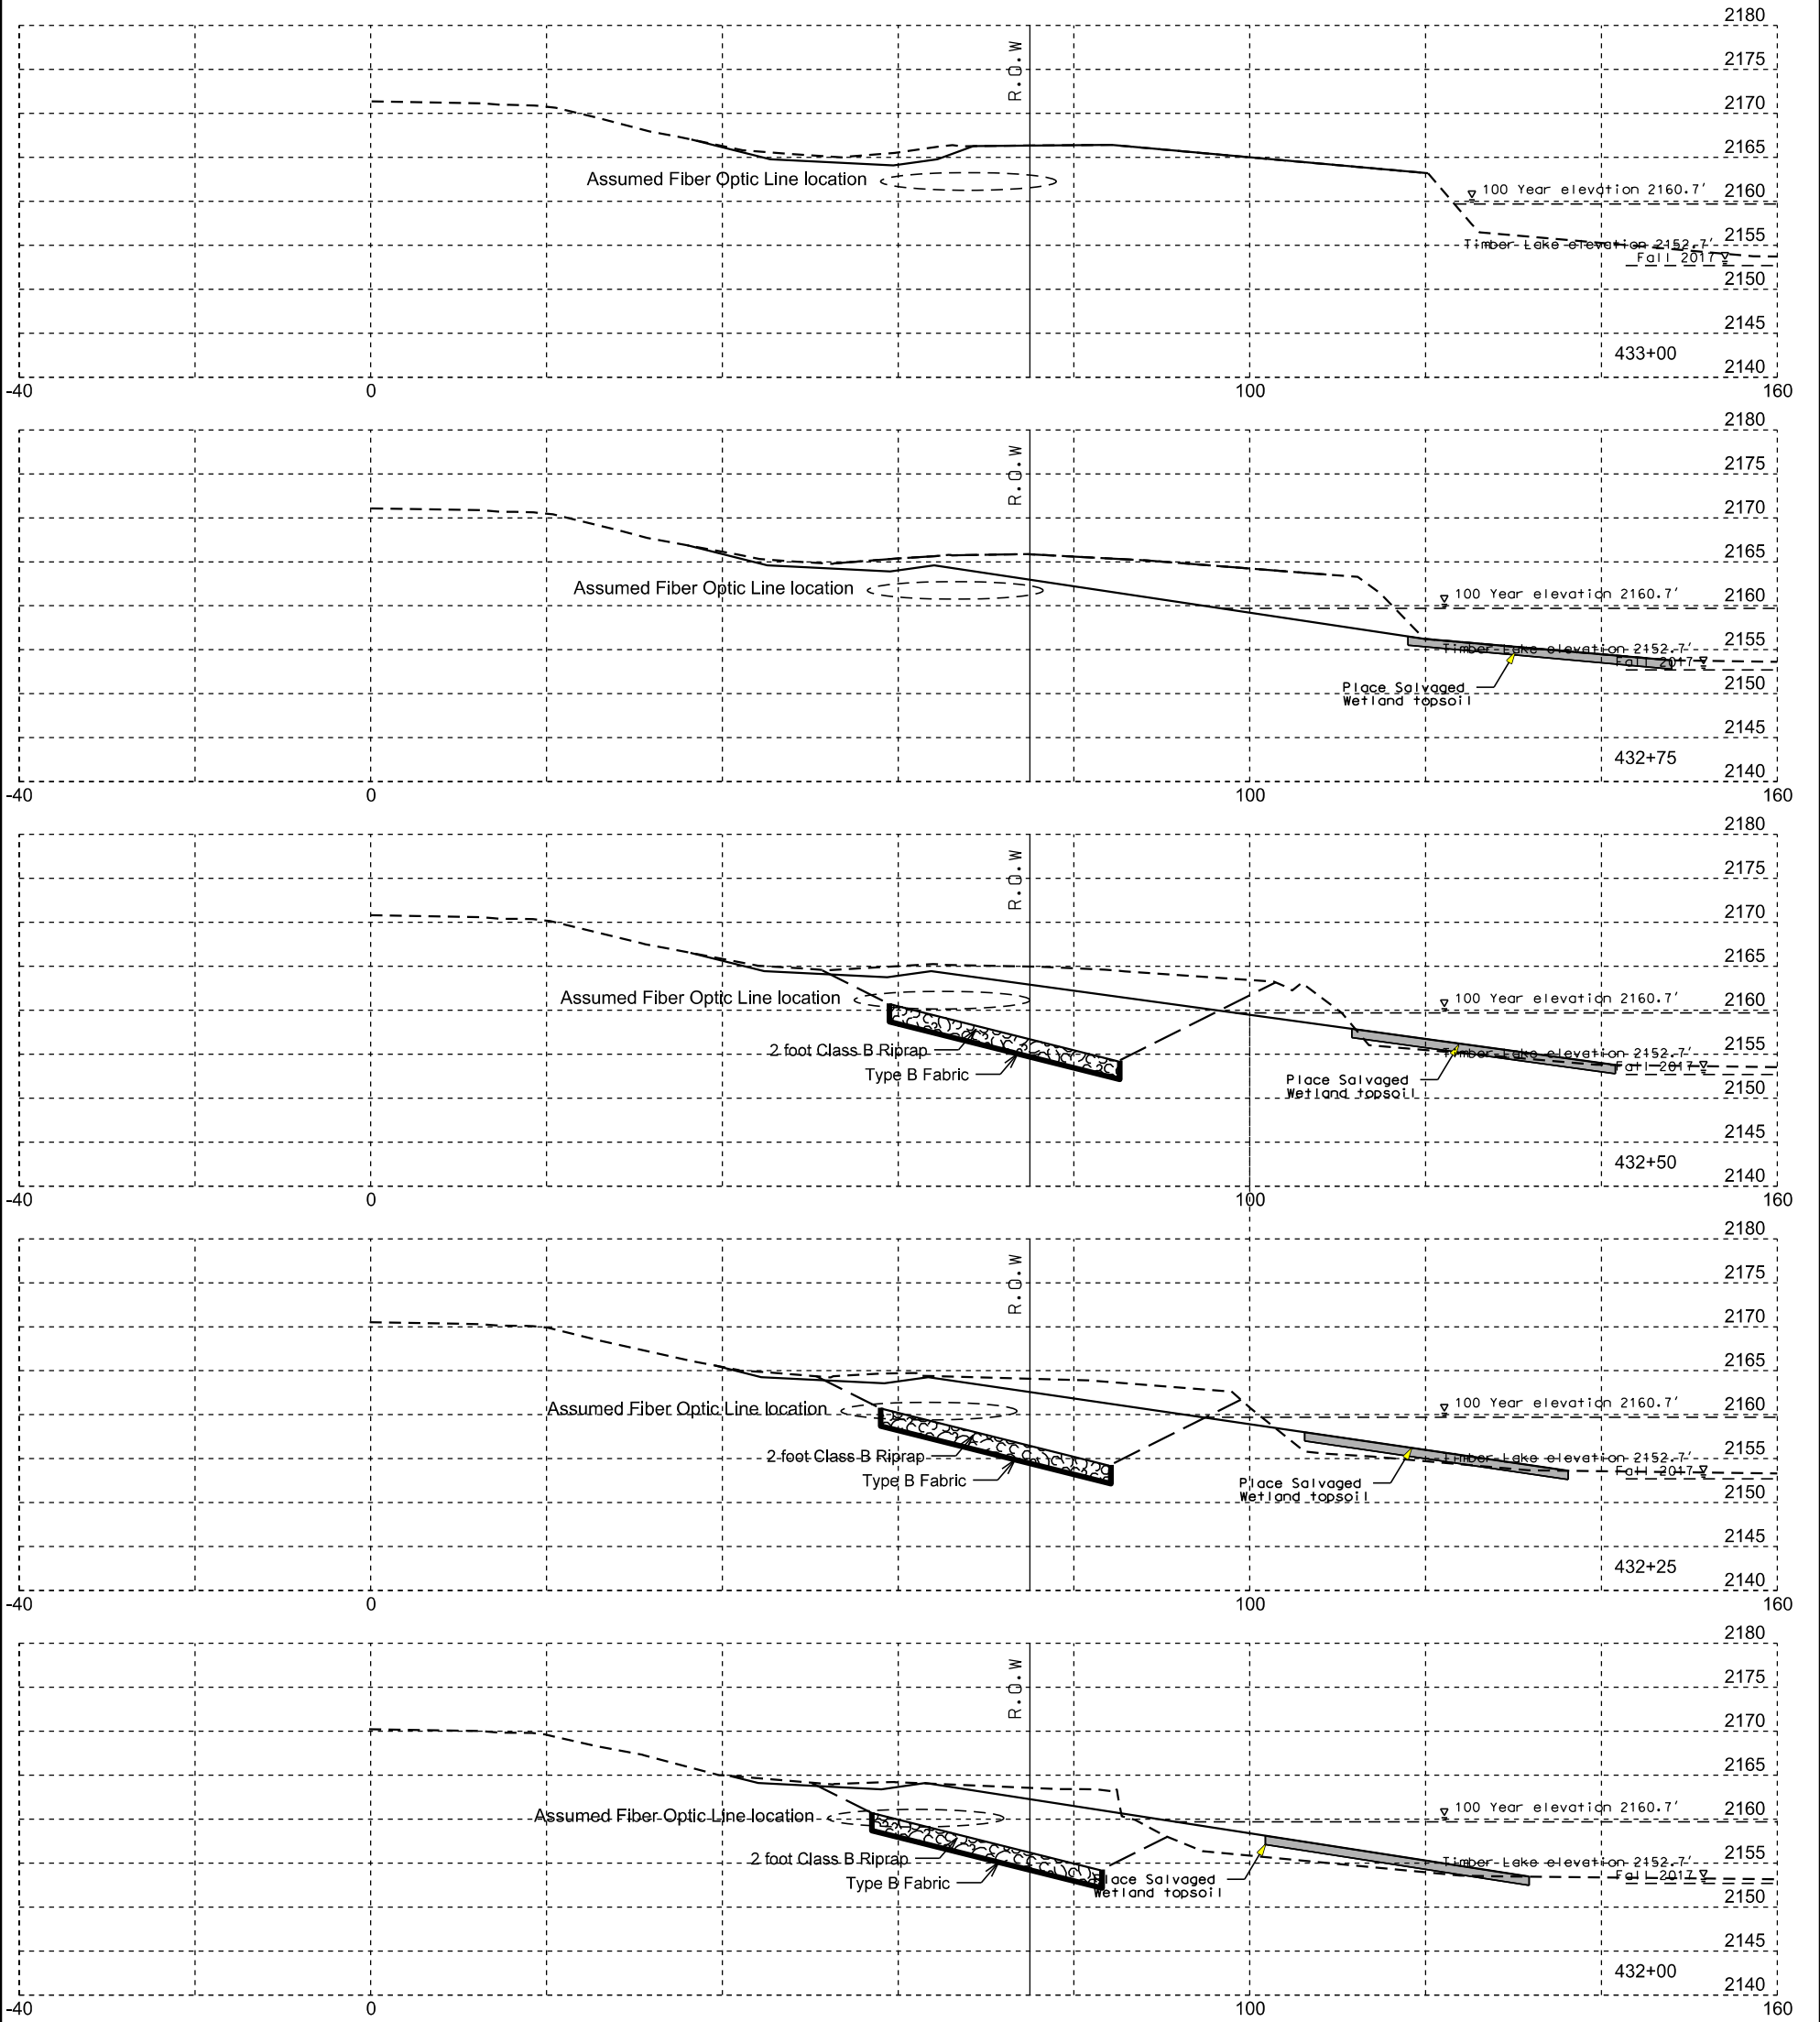

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	020-372 PCN I4YW	25	25