


WINNER AREA
MODIFIED COVER AGGREGATE
STOCKPILE LOCATION

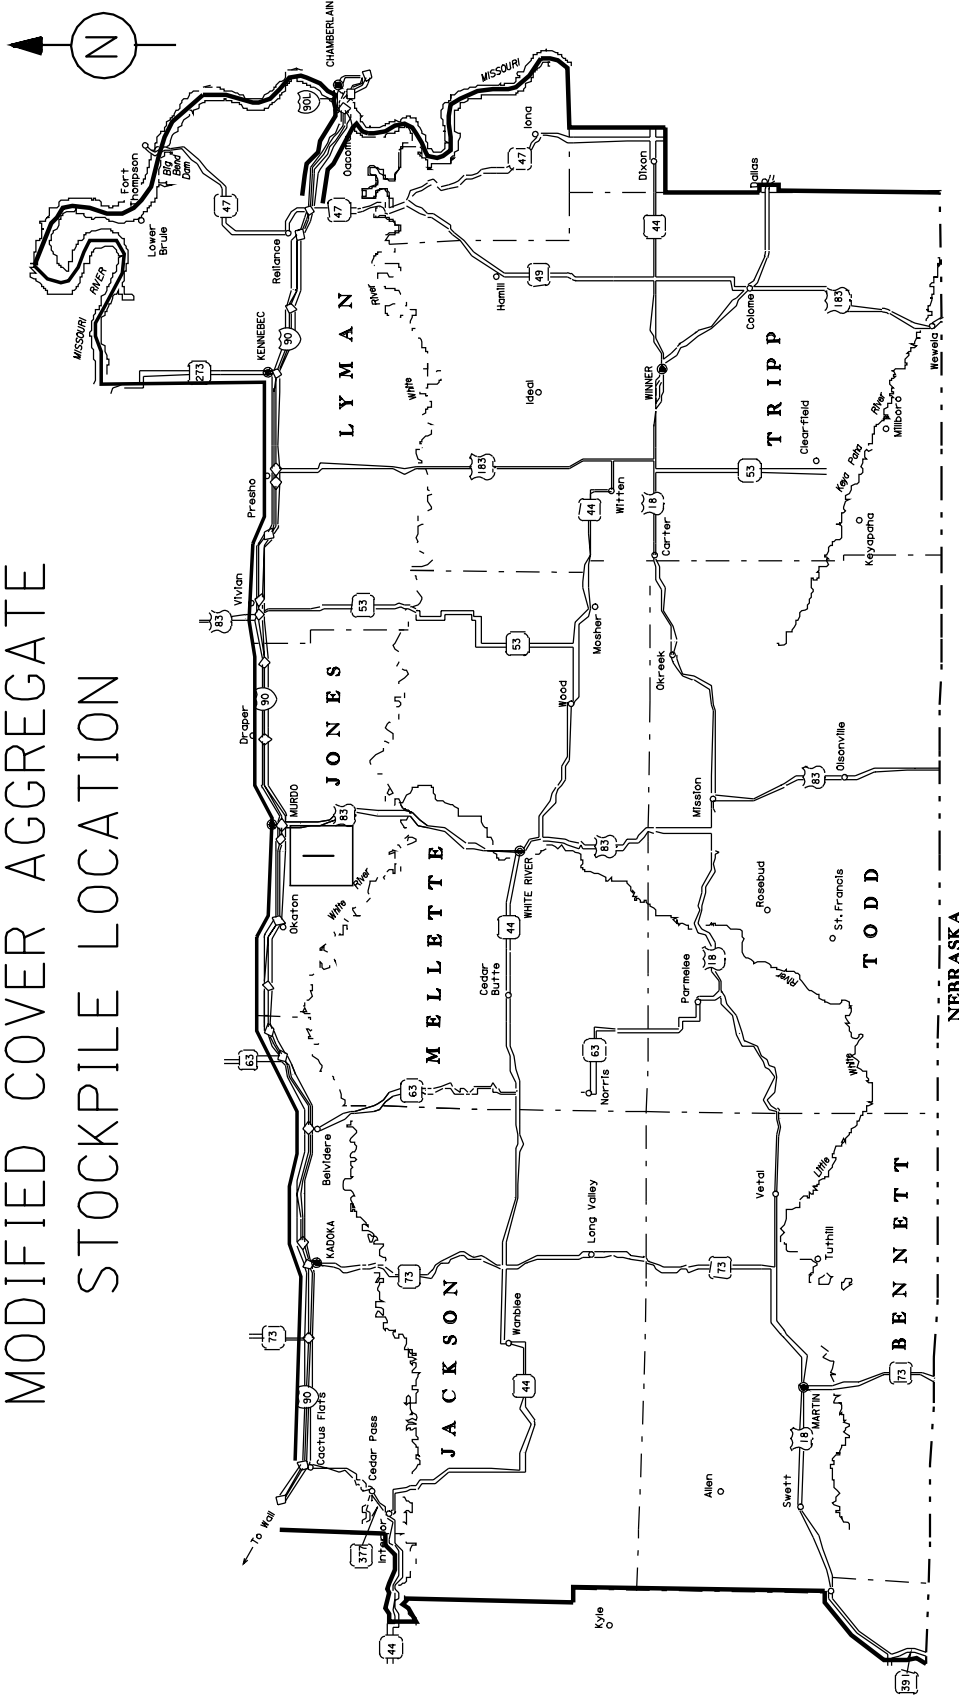

PILE IS DESIGNATED BY A CIRCLED NUMBER AND DESCRIBED ON SUBSEQUENT SHEETS.

1 = 3941C

3941C
Jones County

PILE	STOCKPILE#	PCN	COUNTY	LOCATION
1	3941C	i1e7	Jones	Murdo Maintenance Yard Legal: NE1/4 SEC 13 T2S R28 E

INDEX OF PLAN SHEETS

SHEET NOS. 1 AND 2	LAYOUT MAP & LOCATION DESCRIPTION FOR MODIFIED COVER AGGREGATE STOCKPILE
SHEET NO. 3	INDEX OF PLAN SHEETS AND ESTIMATE OF QUANTITIES
SHEET NOS. 3 AND 4	SPECIFICATIONS & NOTES

ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	TOTAL QUANTITY
009E0010	Mobilization	LUMP SUM
360E1200	Modified Cover Aggregate (Murdo Maintenance Yard – 3941C)	3, 000 TONS

SPECIFICATIONS

Standard Specifications for Roads and Bridges, 2004 Edition and Required Provisions, Supplemental Specifications and/or Special Provisions as included in the Proposal.

PRIOR TO STOCKPILE CONSTRUCTION

The Contractor is responsible for contacting the following person prior to stockpile construction:

Stockpile # 3941C
Tim Huffman, Maintenance Supervisor, at 669-2371

The Contractor shall find out the exact location to place the stockpile at each site and also the desired shape of the finished stockpile. If the shape and location are not done properly as per the Maintenance Supervisors instructions, the contractor will be held accountable to correct the stockpile before any payment of materials is made.

COVER AGGREGATE MODIFIED

Aggregate for Cover Aggregate Modified shall conform to the following gradation requirements:

Passing a 3/8 Inch Sieve	100%
Passing a No. 4 Sieve	50-95%
Passing a No. 8 Sieve	0-30%
Passing a No. 40 Sieve	0-6%
Passing a No. 200 Sieve	0-3.0%

Aggregate may be crushed or uncrushed.

All other requirements of the Standard Specifications (Section 881) for Type 1B shall apply.

Cover Aggregate Modified shall be furnished by the Contractor.

The contract unit price per ton shall include all costs for furnishing and stockpiling the modified cover aggregate.

MAINTENANCE OF TRAFFIC

The Contractor shall furnish and install 48" x 48" TRUCK CROSSING signs, W8-6, to be placed on State or County highways or other well-traveled roadways. The signs shall be located a minimum of 550' in advance of intersections and approaches to the highway where the haul route crosses or turns onto/from the highway. The TRUCK CROSSING signs shall be installed for both directions of traffic travel. The exact number and location of the signs will be determined based on the pit location and haul road approved for use.

The TRUCK CROSSING signs shall be displayed at all times when the haul vehicles are hauling material from the pit to the stockpile site. During non-working hours, the fixed signs shall be covered and the portable signs shall be removed from view. Hinged signs may be used.

There will be no direct payment for the TRUCK CROSSING signs. All costs for furnishing, installing, maintaining and removing the signs shall be incidental to other contract items.