


Plot Scale - 1:200

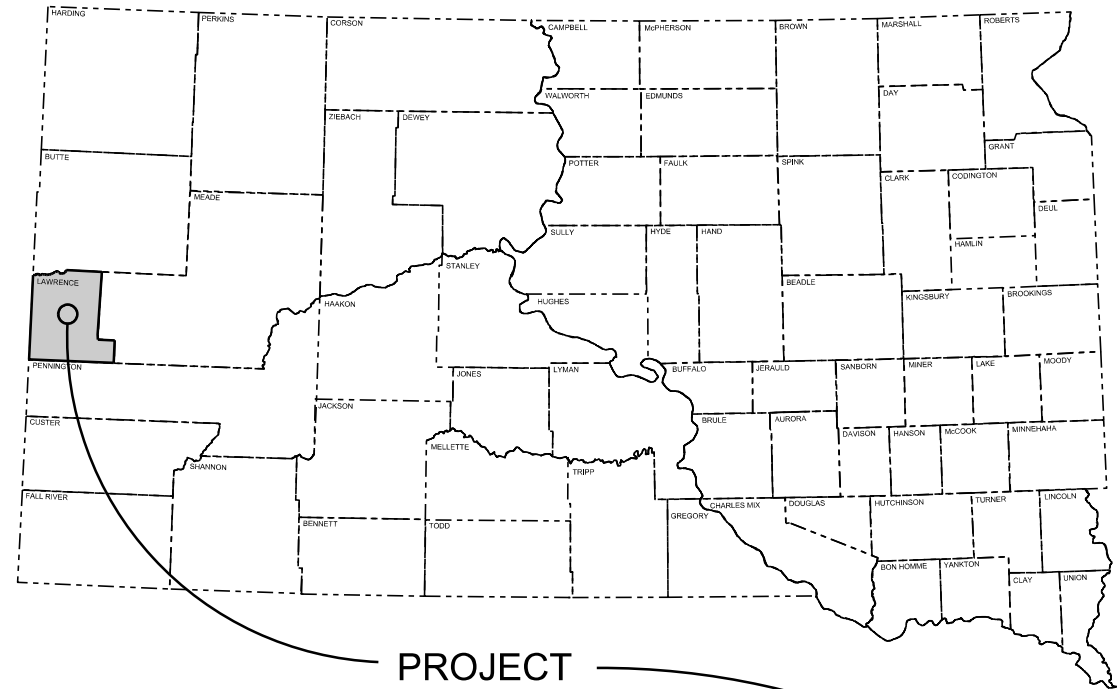

PROJECT
US 14A
MRM 37.63 &
MRM 37.66

STATE OF SOUTH DAKOTA
DEPARTMENT OF TRANSPORTATION
PLANS FOR PROPOSED
PROJECT 014A-451
US HIGHWAY 14A
LAWRENCE COUNTY
CREEK BANK STABILIZATION
PCN i2tv

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	014A-451	1	15

Plotting Date: 02/07/2013

INDEX OF SHEETS

Sheet No.	1:	Title and Index
Sheets No.	2 - 7:	Estimate, Notes, & Tables
Sheet No.	8:	Fixed Location Signs
Sheets No.	9 - 10:	Riprap Details
Sheet No.	11:	Erosion Control
Sheets No.	12 - 15:	Standard Plates


DESIGN DESIGNATION

ADT (2011)	4292
ADT (2031)	4957
DHV	996.4
D	51%
T DHV	3.8
T ADT	8.4%
V	45 mph

STORM WATER PERMIT

Major Receiving
Body of Water: Deadwood Creek
Area Disturbed: 0.07 ac
Total Project Area: 0.07 ac
Approx. Begin Lat/Long 44°21'25.41"N / 103°46'45.28"W

T 5 N

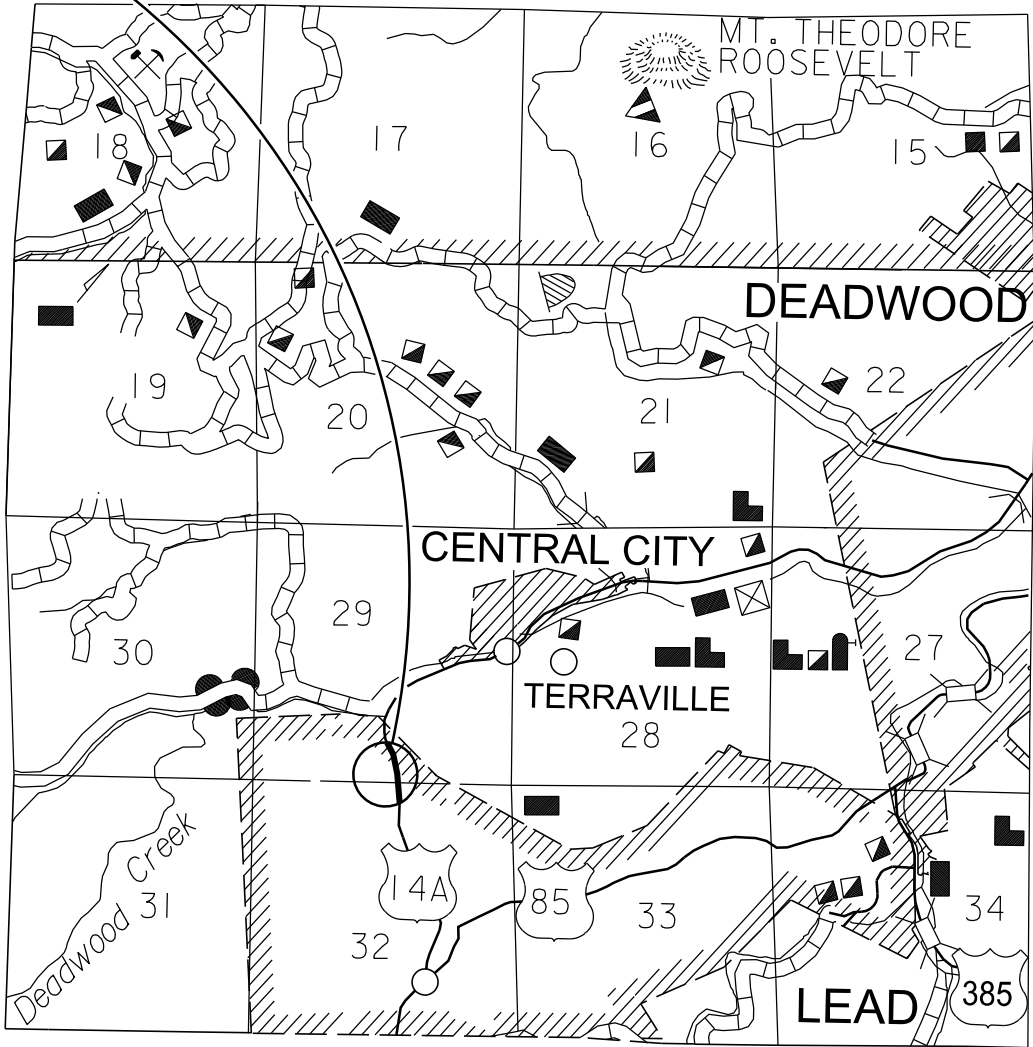

R 3 E

trc12608

ESTIMATE OF QUANTITIES

Bid Item Number	Item	Quantity	Unit
009E0010	Mobilization	Lump Sum	LS
100E0020	Clear and Grub Tree	2	Each
100E0100	Clearing	Lump Sum	LS
110E1700	Remove Silt Fence	144	Ft
634E0010	Flagging	80	Hour
634E0100	Traffic Control	340	Unit
634E0120	Traffic Control, Miscellaneous	Lump Sum	LS
634E0420	Type C Advance Warning Arrow Panel	1	Each
700E0310	Class C Riprap	423.0	Ton
734E0010	Erosion Control	Lump Sum	LS
734E0602	Low Flow Silt Fence	144	Ft
734E0610	Mucking Silt Fence	9	CuYd
831E0110	Type B Drainage Fabric	476	SqYd

SPECIFICATIONS

Standard Specifications for Roads & Bridges, 2004 Edition and Required Provisions, Supplemental Specifications and/or Special Provisions as included in the Proposal.

UTILITIES

Utilities are not planned to be affected on this project. If utilities are identified near the improvement area through the SD One Call Process as required by South Dakota Codified Law 49-7A and Administrative Rule Article 20:25, the contractor shall contact the project engineer to determine modifications that will be necessary to avoid utility impacts.

Any damage done to a utility will be the Contractor's responsibility to repair.

Utilities, if identified within the limits of the proposed construction, shall be adjusted by the owner as addressed in SDCL 31-26-23 unless otherwise indicated in these plans.

CLEARING

Before clearing activities begin, the Contractor shall contact the Engineer to determine the limits of clearing for the project. If the trees or shrubs that are supposed to remain within the limits of work are damaged or destroyed by the Contractor, the Contractor shall replace them with the same size and type at the Contractor's expense.

CLEARING AND DISPOSAL OF TIMBER

Merchantable timber shall become the property of the Contractor.

The Contractor shall follow the prescribed burning provisions of the Fire Plan in his/her preparation for and conduction of all burning operations. Location of slash piles and all other aspects of slash disposal by burning must be approved in advance by the Engineer.

WATER SOURCE

The Contractor shall not withdraw water with equipment previously used outside the State of South Dakota without prior approval from the DOT Environmental Office.

The DOT Environmental Office contact is the Environmental Project Scientist, 605-773-3268. The WATER SOURCE plan note does not relieve the Contractor of his/her responsibility to obtain the necessary permits from other agencies such as the Department of Environment and Natural Resources (DENR) and the United States Army Corps of Engineers (COE).

WORK AFFECTING WATERWAYS

Surface Water Quality

The Contractor is advised the South Dakota Surface Water Quality Standards, administered by the Department of Environment and Natural Resources (DENR), apply to this project.

The tributary of Deadwood Creek is classified as a cold water permanent fishery with a total suspended solids standard of 30 milligrams/liter.

Storm Water

The Contractor is advised this project is regulated under the Phase II Storm Water Regulations and must receive coverage under the DENR General Permit for Construction Activities. A Notice of Intent (NOI) will be submitted to DENR a minimum of 15 days prior to project start by the DOT Environmental Office. A letter must be received from DENR that acknowledges project coverage under this general permit before project start. The Contractor is advised that permit coverage may also be required by offsite activities, such as borrow and staging areas, which are the responsibility of the Contractor.

A major component of the storm water construction permit is development and implementation of a storm water pollution prevention plan (SWPPP). This plan is a joint effort and responsibility of the DOT and the Contractor. The SWPPP is a dynamic document and is to be available on-site at all times. Information on storm water requirements and SWPPP are available on the following websites:
DOT: http://www.sddot.com/pe/projdev/environment_stormwater.asp
DENR: <http://www.denr.sd.gov/des/sw/stormwater.aspx>

HISTORICAL PRESERVATION OFFICE CLEARANCES

To obtain State Historical Preservation Office (SHPO) clearance, a cultural resources survey may need to be conducted by a qualified archaeologist. In lieu of a cultural resources survey, the Contractor could request a records search from Jim Donohue, State Archaeological Research Center (SARC). Provide SARC with the following: a topographical map or aerial view on which the site is clearly outlined, site dimensions, project number, and PCN. If applicable, provide evidence that the site has been previously disturbed by farming, mining, or construction activities with a landowner statement that no artifacts have been found on the site. The Contractor shall arrange and pay for the cultural resource survey and/or records search.

If any earth disturbing activities occur within the current geographical or historic boundaries of any South Dakota reservation, the Contractor shall obtain Tribal Historical Preservation Office (THPO) clearance. If no THPO exists, the required SHPO clearance shall suffice, with documentation of Tribal contact efforts provided to SHPO.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	014A-451	2	15

HISTORICAL PRESERVATION OFFICE CLEARANCES (CONTINUED)

To facilitate SHPO or THPO responses, the Contractor should submit a records search or cultural resources survey report to the DOT Environmental Engineer, 700 East Broadway Avenue, Pierre, SD 57501-2586 (605-773-3268). Allow 30 days from the date this information is submitted to the Environmental Engineer for SHPO/THPO approval. The Contractor is responsible for obtaining all required permits and clearances for staging areas, borrow sites, waste disposal sites, and all material processing sites. The Contractor shall provide the required permits and clearances to the Engineer at the preconstruction meeting.

WASTE DISPOSAL SITE

The Contractor will be required to furnish a site(s) for the disposal of construction/demolition debris generated by this project.

Construction/demolition debris may not be disposed of within the State ROW.

The waste disposal site(s) shall be managed and reclaimed in accordance with the following from the General Permit for Highway, Road, and Railway Construction/Demolition Debris Disposal Under the South Dakota Waste Management Program issued by the Department of Environment and Natural Resources.

The waste disposal site(s) shall not be located in a wetland, within 200 feet of surface water, or in an area that adversely affects wildlife, recreation, aesthetic value of an area, or any threatened or endangered species, as approved by the Engineer.

If the waste disposal site(s) is located such that it is within view of any ROW, the following additional requirements shall apply:

- Construction/demolition debris consisting of concrete, asphalt concrete, or other similar materials shall be buried in a trench completely separate from wood debris. The final cover over the construction/demolition debris shall consist of a minimum of 1 foot of soil capable of supporting vegetation. Waste disposal sites provided outside of the State ROW shall be seeded in accordance with Natural Resources Conservation Service recommendations. The seeding recommendations may be obtained through the appropriate County NRCS Office. The Contractor shall control the access to waste disposal sites not within the State ROW through the use of fences, gates, and placement of a sign or signs at the entrance to the site stating "No Dumping Allowed".

WASTE DISPOSAL SITE (CONTINUED)

2. Concrete and asphalt concrete debris may be stockpiled within view of the ROW for a period of time not to exceed the duration of the project. Prior to project completion, the waste shall be removed from view of the ROW or buried and the waste disposal site reclaimed as noted above.

The above requirements will not apply to waste disposal sites that are covered by an individual solid waste permit as specified in SDCL 34A-6-58, SDCL 34A-6-1.13, and ARSD 74:27:10:06.

Failure to comply with the requirements stated above may result in civil penalties in accordance with South Dakota Solid Waste Law, SDCL 34A-6-1.31.

All costs associated with furnishing waste disposal site(s), disposing of waste, maintaining control of access (fence, gates, and signs), and reclamation of the waste disposal site(s) shall be incidental to the various contract items.

GENERAL MAINTENANCE OF TRAFFIC

1. Traffic control shall be in accordance with MUTCD Standards, the Standard Specifications and the layouts contained in these plans.
2. The Contractor shall at all times, keep the portion of the project being used by public traffic in a condition that will adequately and safely accommodate traffic.
3. Temporary Road Markers shall be used for lane closure tapers or lane shift tapers. Temporary Road Markers used for tapers and shifts will not be measured for payment and will be incidental to the contract lump sum price for Traffic Control, Miscellaneous.
4. Storage of vehicles, materials, and equipment shall be no closer than 30' from the edge of the driving lane. Contractor's employees should mobilize at a location off the right-of-way and arrive at the work sites in a minimum number of vehicles necessary to perform the work. Indiscriminate driving and parking of vehicles within the right-of-way will not be permitted. Any damage to the vegetation, surfacing, embankment, delineators, and existing signs resulting from such indiscriminate use shall be repaired and/or restored by the Contractor, at no expense to the State, and to the satisfaction of the Engineer.
5. The Contractor shall provide documentation that all breakaway sign supports comply with FHWA NCHRP 350 or MASH crash-worthy requirements. The Contractor shall provide installation details at the preconstruction meeting for all breakaway sign support assemblies.
6. Non-applicable signing shall be covered or removed and reset during periods of in-activity. All costs to do this work shall be incidental to Traffic Control, Miscellaneous.
7. Construction signing that remains in the same location for more than 3 days shall be on fixed location, ground mounted, breakaway supports, unless approved by the Engineer.

GENERAL MAINTENANCE OF TRAFFIC (CONTINUED)

8. The Contractor or designated traffic control subcontractor shall make night (after dark) inspections at the initial set up of traffic control and every week thereafter to ensure the adequacy, legibility and reflectivity of each sign and device. A written summary of each inspection shall be given to the Engineer within 24 hours after completion of the inspection. The cost for the nighttime inspection work shall be incidental to the related contract items.
9. The Contractor shall be required to have a person available 24 hour/day, 7 days/week to maintain traffic control devices. The name and cellular telephone number of this individual shall be given to the Engineer at the preconstruction meeting.
10. The Contractor shall coordinate his operations such that during non-working hours the roadway shall be open to two-way traffic on a uniform driving surface for the entire width of the roadway.
11. Work activities shall only be during daylight hours. Daylight hours are considered to be ½ hour before sunrise until ½ hour after sunset.
12. Removing, relocating, covering, salvaging and resetting of permanent traffic control devices, including delineation, shall be the responsibility of the Contractor. The cost of this work shall be incidental to the various contract bid items unless otherwise specified in the plans. Any delineators and signs damaged or lost shall be replaced by the Contractor at no cost to the State.

INVENTORY OF TRAFFIC CONTROL DEVICES

SIGN CODE	SIGN SIZE	DESCRIPTION	NUMBER REQUIRED	UNITS PER SIGN	UNITS
G20-2	36" x 18"	END ROAD WORK	4	17	68
W4-2	48" x 48"	LEFT OR RIGHT LANE ENDS (SYMBOL)	1	34	34
W20-1	48" x 48"	ROAD WORK ##### FT. OR AHEAD	5	34	170
W20-4	48" x 48"	ONE LANE ROAD AHEAD	2	34	68
W20-5	48" x 48"	LT. OR RT. LANE CLOSED AHEAD	1	34	34
W20-7a	48" x 48"	FLAGGER	2	34	68
W21-5	48" x 48"	SHOULDER WORK	1	34	34
TOTAL UNITS					476

CLASS C RIPRAP

The Contractor shall not stockpile or dump riprap directly on the road or curb & gutter. Any damage to the surfacing, curb & gutter, or striping shall be repaired by the Contractor at no additional cost to the state.

Type B Drainage Fabric shall be placed underneath the Class C Riprap.

It is estimated that 201 tons of Class C Riprap and 225 SqYd of Type B Drainage Fabric will be required at MRM 37.63 to build to the limits shown in these plans. It is estimated that 222 tons of Class C Riprap and 251 SqYd of Type B Drainage Fabric will be required at MRM 37.66 to build to the limits shown in these plans.

Excess material generated from shaping the existing embankment for placement of Class C Riprap shall be handled as waste and disposed of by the Contractor. All costs associated with this work shall be incidental to the contract unit price per ton for Class C Riprap.

A factor of 1.4 Tons/CuYd was used to convert CuYds of Class C Riprap to Tons.

EROSION CONTROL

Areas disturbed or damaged shall be seeded, fertilized and mulched.

All permanent seed shall be planted in the topsoil at a depth of ¼” to ½”.

All seed broadcast must be raked or dragged in (incorporated) within the top ¼” to ½” of topsoil when possible. Hand raking may be required. This requirement may be waived by the Engineer during construction when raking or dragging is deemed not feasible by conventional methods.

Type F Permanent Seed Mixture shall consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/1000 SqFt)
Western Wheatgrass	Flintlock, Rodan, Rosana	1.3
Green Needlegrass	Lodorm	0.8
Sideoats Grama	Butte, Killdeer, Pierre, Trailway	0.6
Blue Grama	Bad River, Willis	0.4
Oats or Spring Wheat: April through July; Winter Wheat: August through November		1.9
Total:		5.0

A commercial fertilizer with a minimum guaranteed analysis of 13-13-13, 18-46-0, 11-52-0, or an approved alternate fertilizer sold for use as a lawn starter fertilizer shall be applied to all areas designated for permanent seeding. The application rate of fertilizer shall be 3 pounds per 1000 SqFt.

Fiber mulch shall be applied in a separate operation following permanent seeding.

An additional 2% by weight of tackifier shall be added to the fiber mulch product selected from the list below. If the product selected has guar gum tackifier included, then the additional 2% of tackifier shall be guar gum. If the product selected has synthetic tackifier included, then the additional 2% of tackifier shall be synthetic.

EROSION CONTROL (CONTINUED)

Fiber mulch shall be applied at the rate of 2000 pounds per acre.

The Contractor shall allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

All costs for the additional tackifier added to the fiber mulch including labor, equipment, and materials shall be incidental to the contract lump sum price for Erosion Control.

The fiber mulch used on this project shall be one from the list below:

<u>Product</u>	<u>Manufacturer</u>
Mat-Fiber Plus	Mat, Inc. Floodwood, MN Phone: 1-888-477-3028 www.matinc.biz
Conwed Hydro Mulch 2000	Profile Products LLC Buffalo Grove, IL Phone: 1-800-366-1180 www.conwedfibers.com
EcoFibre Plus Tackifier	Profile Products LLC Buffalo Grove, IL Phone: 1-800-366-1180 www.profile-eco.com
Terra Wood with Tacking Agent 3	Profile Products LLC Buffalo Grove, IL Phone: 1-800-726-6371 www.terra-mulch.com
Bindex Wood WT	American Excelsior Co. Arlington, TX Phone: 1-800-777-7645 www.curlex.com
Second Nature Wood Fiber Mulch Plus	Central Fiber LLC Canton, OH Phone: 1-888-452-2630 www.centralfiber.com

Approximately 1000 SqFt will require permanent seeding. The Engineer may adjust this quantity up or down depending on damage to the area surrounding the project.

All costs associated with permanent seeding, fertilizing, and fiber mulching shall be incidental to the contract lump sum for price for Erosion Control.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	014A-451	4	15

HIGH FLOW SILT FENCE

The high flow silt fence fabric provided shall be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<http://apps.sd.gov/Applications/HC54ApprovedProducts/main.asp>

High flow silt fence shall be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.05 for details.

MUCKING SILT FENCE

Mucking silt fence shall consist of removing muck trapped by the silt fence and spreading the material evenly over the adjacent area to conform to the existing grade.

REMOVE SILT FENCE

Silt fence shall be removed at the conclusion of the project.

STORM WATER POLLUTION PREVENTION PLAN CHECKLIST

(The numbers right of the title headings are **reference numbers** to the GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES)

- ❖ **SITE DESCRIPTION (4.2 1)**

➤ **Project Limits: See Title Sheet (4.2 1.b)**

➤ **Project Description: See Title Sheet (4.2 1.a.)**

➤ **Site Map(s): See Title Sheet and Plans (4.2 1.f. (1)-(6))**

➤ **Major Soil Disturbing Activities** (check all that apply)

☒Clearing and grubbing

☒Excavation/borrow

☐Grading and shaping

☐Filling

☐Cutting and filling

☐Other (describe):

➤ **Total Project Area (4.2 1.b.)**

➤ **Total Area To Be Disturbed (4.2 1.b.)**

➤ **Existing Vegetative Cover (%)**

➤ **Soil Properties:** AASHTO Soil Soil Series Classification A-4, A-6, or A-7, probably with alluvial or colluvial rock mixed in **(4.2 1. d.)**

➤ **Name of Receiving Water Body/Bodies** Deadwood Creek **(4.2 1.e.)**

❖ **ORDER OF CONSTRUCTION ACTIVITIES (4.2 1.c.)**

(Stabilization measures shall be initiated as soon as possible, but in no case later than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased. Initiation of final or temporary stabilization may exceed the 14-day limit if earth disturbing activities will be resumed within 21 days.)

➤ **Install perimeter protection where runoff sheets from the site.**

➤ **Install channel and ditch bottom protection.**

➤ **Clearing and grubbing.**

➤ **Remove and store topsoil.**

➤ **Stabilize disturbed areas.**

➤ **Complete final grading.**

➤ **Reseed areas disturbed by removal activities.**

❖ **EROSION AND SEDIMENT CONTROLS (4.2 2.a.(1)(a)-(f))**

(Check all that apply)

➤ **Stabilization Practices (See Detail Plan Sheets)**

☐Temporary Seeding (Cover Crop Seeding)

☒Permanent Seeding

☐Sodding

☐Planting (Woody Vegetation for Soil Stabilization)

☐Mulching (Grass Hay or Straw)

☒Hydraulic Mulch (Wood Fiber Mulch)

☐Soil Stabilizer

☐Bonded Fiber Matrix

☐Erosion Control Blankets or Mats

☐Vegetation Buffer Strips

☐Roughened Surface (e.g. tracking)

☐Dust Control

☐Other:
- **Structural Temporary Erosion and Sediment Controls**

☒Silt Fence

☐Floating Silt Curtain

☐Straw Bale Check

☐Temporary Berm

☐Temporary Slope Drain

☐Straw Wattles or Rolls

☐Turf Reinforcement Mat

☒Rip Rap

☐Gabions

☐Rock Check Dams

☐Sediment Traps/Basins

☐Inlet Protection

☐Outlet Protection

☐Surface Inlet Protection (Area Drain)

☐Curb Inlet Protection

☐Stabilized Construction Entrances

☐Entrance/Exit Equipment Tire Wash

☐Interceptor Ditch

☐Concrete Washout Area

☐Temporary Diversion Channel

☐Work Platform

☐Temporary Water Barrier

☐Temporary Water Crossing

☐Other:

➤ **Wetland Avoidance**

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes ☐ No ☐ If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

➤ **Storm Water Management (4.2 2.b., (1) and (2))**

Storm water management will be handled by temporary controls outlined in “EROSION AND SEDIMENT CONTROLS” above, and any permanent controls needed to meet permanent storm water management needs in the post construction period. Permanent controls will be shown on the plans and noted as permanent.

➤ **Other Storm Water Controls (4.2 2.c., (1) and (2))**

Waste Disposal

All liquid waste materials will be collected and stored in sealed metal containers approved by the project engineer. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal, and notices stating proper practices will be posted in the field office. The general contractor’s representative responsible for the conduct of work on the site will be responsible for seeing waste disposal procedures are followed.

Hazardous Waste

All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the individual designated as the contractor’s on-site representative will be responsible for seeing that these practices are followed.

Sanitary Waste

Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units in a timely manner by a licensed waste management contractor or as required by any local regulations.
- | | | | |
|-----------------------|----------|-------|--------------|
| STATE OF SOUTH DAKOTA | PROJECT | SHEET | TOTAL SHEETS |
| | 014A-451 | 5 | 15 |
- ❖ **Maintenance and Inspection (4.2 3. and 4.2 4.)**

➤ **Maintenance and Inspection Practices**

▪ Inspections will be conducted at least one time per week and after a storm event of 0.50 inches or greater.

▪ All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.

▪ Silt fence will be inspected for depth of sediment and for tears in order to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches ¹/₃ of the height of the silt fence.

▪ Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure’s capacity, and at the conclusion of the construction.

▪ Check dams will be inspected for stability. Sediment will be removed when depth reaches ¹/₂ the height of the dam.

▪ All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.

▪ Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.

▪ The SDDOT Project Engineer and contractor’s site superintendent are responsible for inspections. Maintenance, repair activities are the responsibility of the contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

❖ **Non-Storm Water Discharges (3.0)**

The following non-storm water discharges are anticipated during the course of this project (check all that apply).

➤ ☐Discharges from water line flushing.

➤ ☐Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.

➤ ☐Uncontaminated ground water associated with dewatering activities.

❖ **Materials Inventory (4.2. 2.c.(2))**

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the headings “EROSION AND SEDIMENT CONTROLS” and “SPILL PREVENTION” (check all that apply).

➤ ☐Concrete and Portland Cement

➤ ☐Detergents

➤ ☐Paints

➤ ☐Metals

➤ ☐Bituminous Materials

➤ ☐Petroleum Based Products

➤ ☐Cleaning Solvents

➤ ☐Wood

➤ ☐Cure

➤ ☐Texture

➤ ☒Chemical Fertilizers

➤ ☐Other:

❖ **Spill Prevention (4.2 2.c.(2))**

➤ **Material Management**

- Housekeeping
 - Only needed products will be stored on-site by the contractor.
 - Except for bulk materials the contractor will store all materials under cover and in appropriate containers.
 - Products must be stored in original containers and labeled.
 - Material mixing will be conducted in accordance with the manufacturer's recommendations.
 - When possible, all products will be completely used before properly disposing of the container off site.
 - The manufacturer's directions for disposal of materials and containers will be followed.
 - The contractor's site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
 - Dust generated will be controlled in an environmentally safe manner.
 - Vegetation areas not essential to the construction project will be preserved and maintained as noted on the plans.
- Hazardous Materials
 - Products will be kept in original containers unless the container is not resealable.
 - Original labels and material safety data sheets will be retained in a safe place to relay important product information.
 - If surplus product must be disposed of, manufacturer's label directions for disposal will be followed.
 - Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, de-greasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
 - Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any storm water system or storm water treatment system.
 - Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of storm water runoff.

➤ **Product Specific Practices (6.8)**

- Petroleum Products

All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.
- Fertilizers

Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to storm water. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.
- Paints

All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the manufacturer's instructions and any applicable state and local regulations.

- Concrete Trucks

Contractors will provide designated truck washout areas on the site. These areas must be self-contained and not connected to any storm water outlet of the site. Upon completion of construction washout areas will be properly stabilized.
- **Spill Control Practices (4.2 2 c.(2))**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

 - For all hazardous materials stored on site, the manufacturer's recommended methods for spill clean-up will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
 - Appropriate cleanup materials and equipment will be maintained by the contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for clean-up purposes.
 - All spills will be cleaned immediately after discovery and the materials disposed of properly.
 - The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
 - After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
 - The contractor's site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator. The contractor is responsible for ensuring that the site superintendent has had appropriate training for hazardous materials handling, spill management, and cleanup.
- **Spill Response (4.2 2 c.(2))**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into storm water runoff and conveyance systems. If the release has impacted on-site storm water, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens storm water or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

 - The contractor's site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
 - If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.
 - Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the contractor at the site.
 - If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.

- If a spill occurs the superintendent or the superintendent's designee will be responsible for completing the spill reporting form and for reporting the spill to SD DENR.
- Personnel with primary responsibility for spill response and clean-up will receive training by the contractor's site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

❖ **Spill Notification**

- In the event of a spill, the contractor's site superintendent will make the appropriate notification(s), consistent with the following procedures:
- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to DENR immediately **if any one of the following** conditions exists:
 - The discharge threatens or is in a position to threaten the waters of the state (surface water or ground water).
 - The discharge causes an immediate danger to human health or safety.
 - The discharge exceeds 25 gallons.
 - The discharge causes a sheen on surface water.
 - The discharge of any substance that exceeds the ground water quality standards of ARSD (Administrative Rules of South Dakota) chapter 74:51:01.
 - The discharge of any substance that exceeds the surface water quality standards of ARSD chapter 74:51:01.
 - The discharge of any substance that harms or threatens to harm wildlife or aquatic life.
 - The discharge of crude oil in field activities under SDCL (South Dakota Codified Laws) chapter 45-9 is greater than 1 barrel (42 gallons).

To report a release or spill, call DENR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central time). To report the release after hours, on weekends or holidays, call State Radio Communications at 605-773-3231. Reporting the release to DENR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, the responsible person must also contact local authorities to determine the local reporting requirements for releases. DENR recommends that spills also be reported to the National Response Center at (800) 424-8802.

❖ **Construction Changes (4.4)**

When changes are made to the construction project that will require alterations in the temporary erosion controls of the site, the Storm Water Pollution Prevention Plan (SWPPP) will be amended to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP plan (DOT 298) and drawings to reflect the needed changes. Copies of changes will be routed per DOT 298. Copies of forms and the SWPPP will be retained in a designated place for review over the course of the project.

❖ **CERTIFICATIONS**

➤ **Certification of Compliance with Federal, State, and Local Regulations**

The Storm Water Pollution Prevention Plan (SWPPP) for this project reflects the requirements of all local municipal jurisdictions for storm water management and sediment and erosion control as established by ordinance, as well as other state and federal requirements for sediment and erosion control plans, permits, notices or documentation as appropriate.

➤ **South Dakota Department of Transportation**

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Authorized Signature (See the General Permit, Section 6.7.1.C.)

➤ **Prime Contractor**

This section is to be executed by the General Contractor after the award of the contract. This section may be executed any time there is a change in the Prime Contractor of the project.

I certify under penalty of law that this document and all attachments will be revised or maintained under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature

❖ **CONTACT INFORMATION**

➤ **Contractor Information:**

- Prime Contractor Name:
- Contractor Contact Name:
- Address:
- Address:
- City: State: Zip:
- Office Phone: Field:
- Cell Phone: Fax:

➤ **Erosion Control Supervisor**

- Name:
- Address:
- Address:
- City: State: Zip:
- Office Phone: Field:
- Cell Phone: Fax:

➤ **SDDOT Project Engineer**

- Name:
- Business Address:
- Job Office Location:
- City: State: Zip:
- Office Phone: Field:
- Cell Phone: Fax:

➤ **SD DENR Contact Spill Reporting**

- Business Hours Monday-Friday (605) 773-3296
- Nights and Weekends (605) 773-3231

➤ **SD DENR Contact for Hazardous Materials.**

- (605) 773-3153

➤ **National Response Center Hotline**


- (800) 424-8802.

FIXED LOCATION SIGNS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	014A-451	8	15

Plotting Date: 02/07/2013

Plot Scale - 1:200

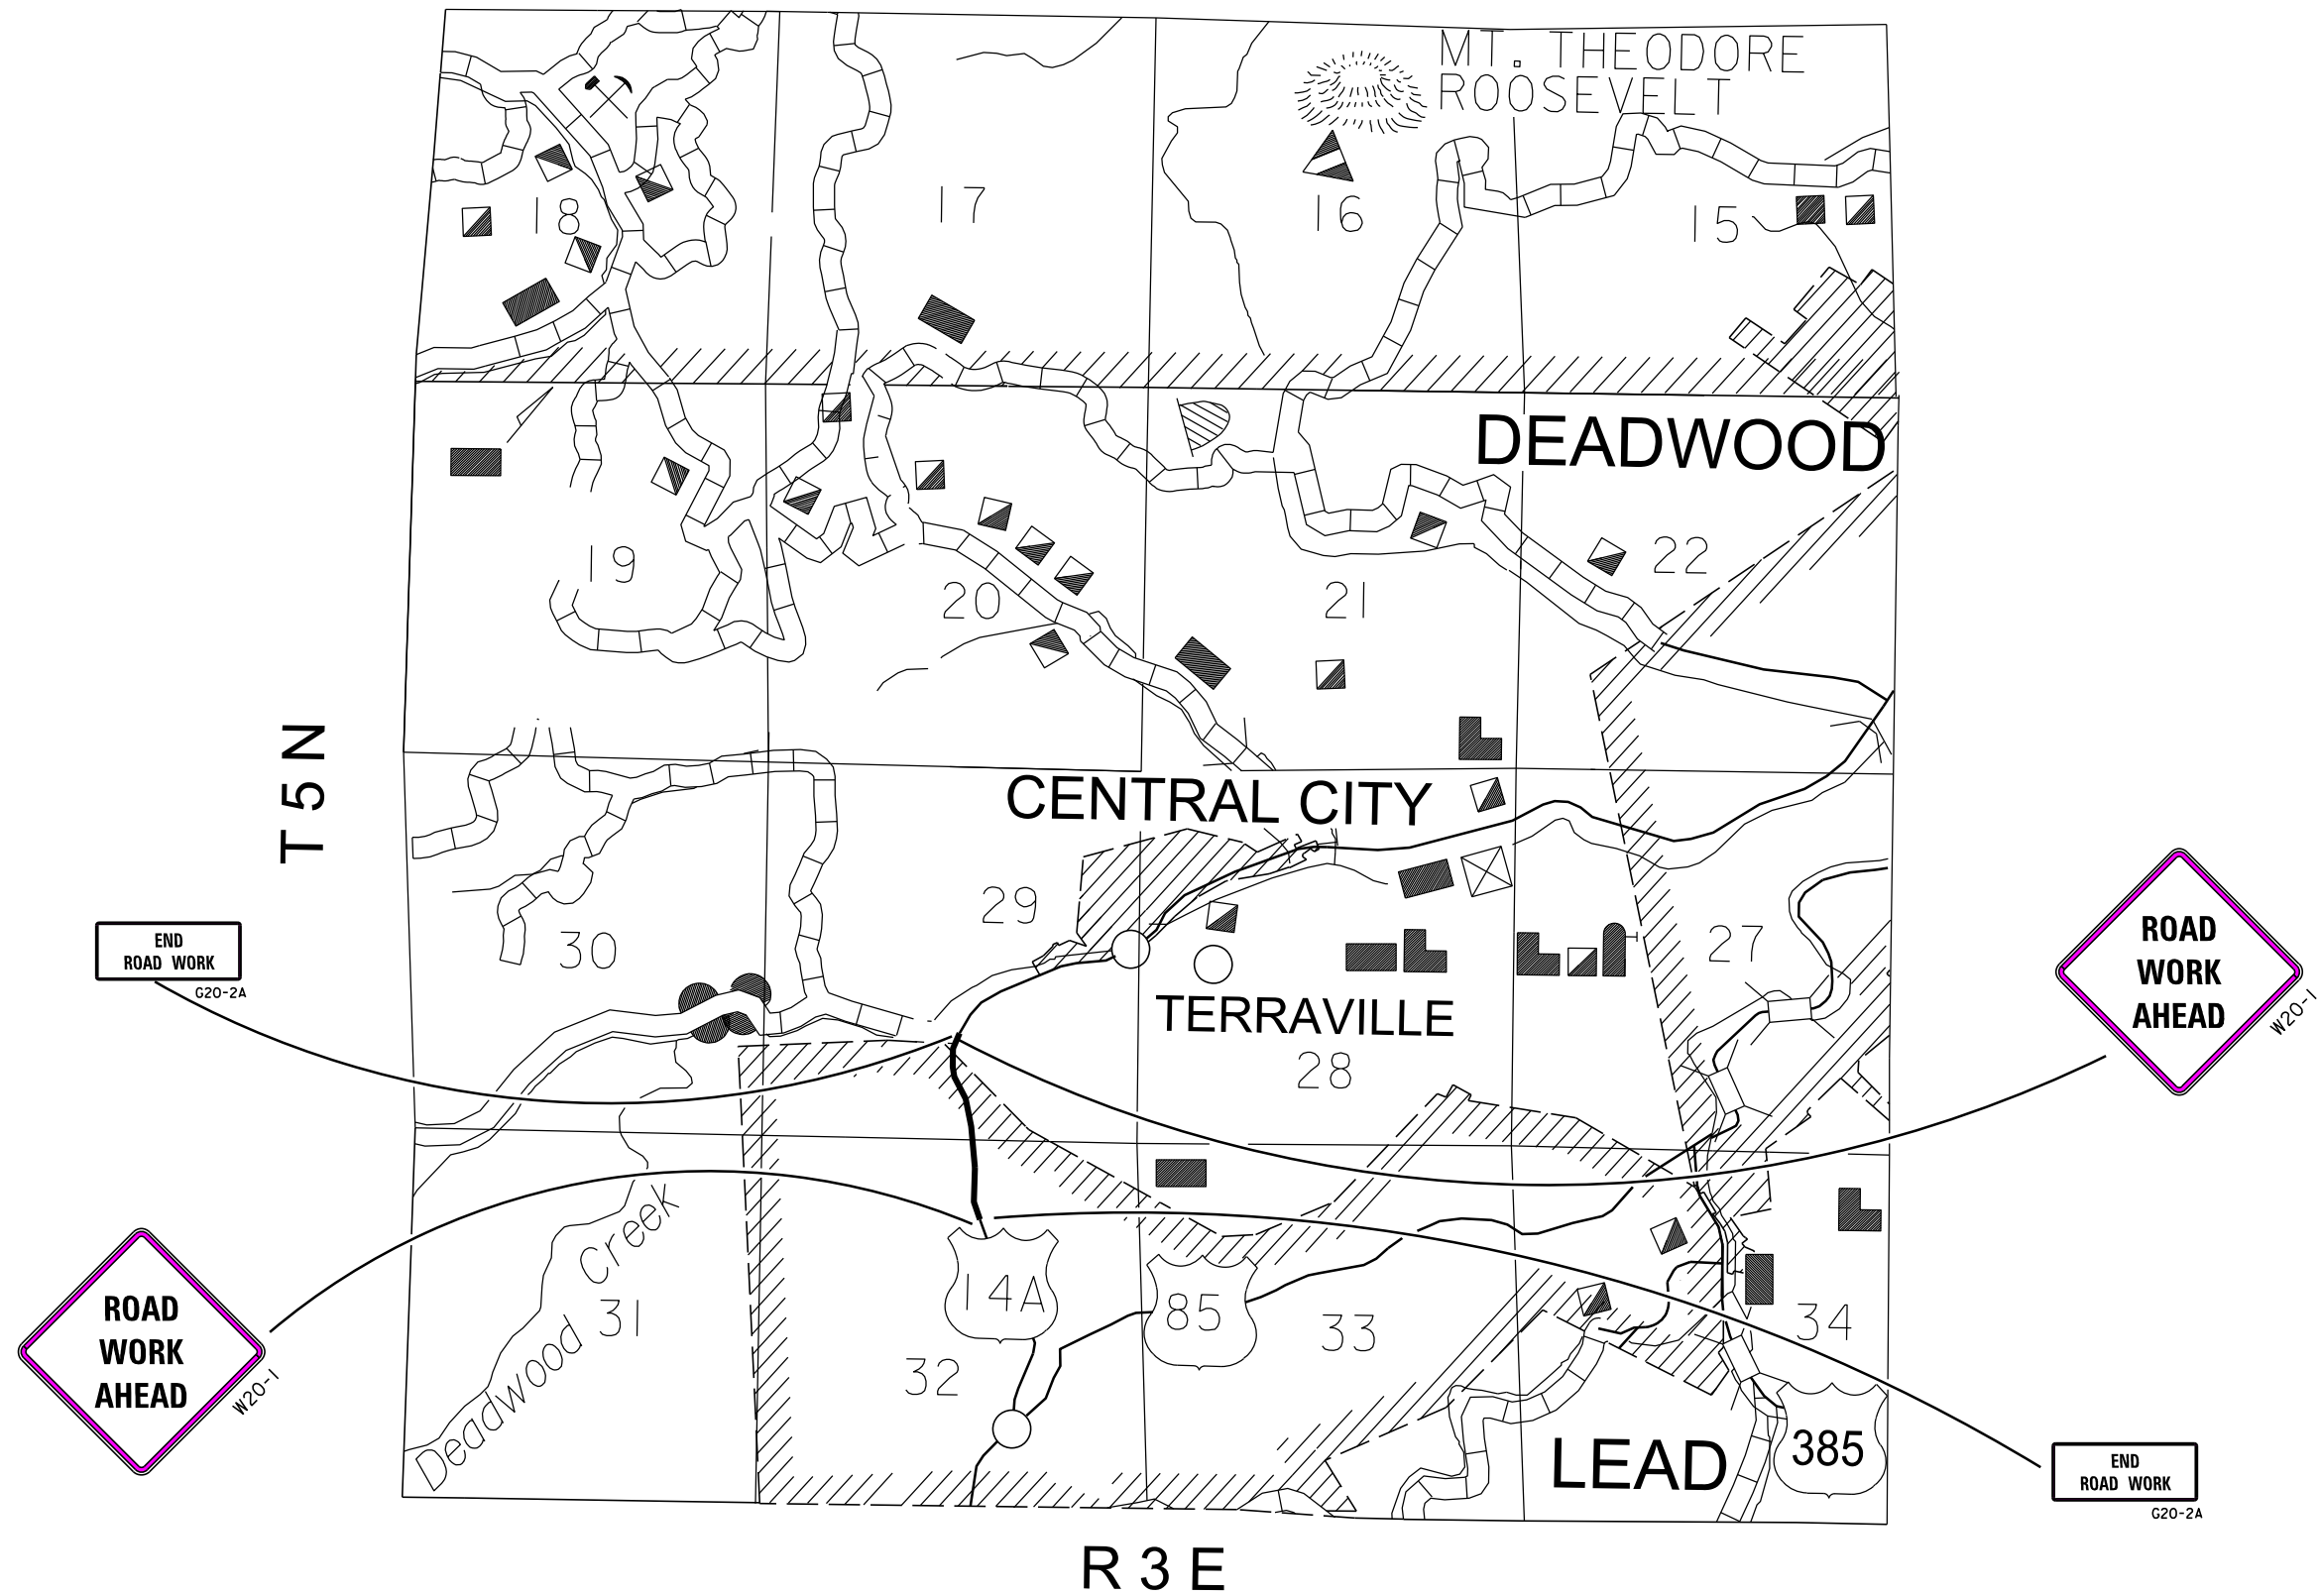

trrs12608


RIPRAP DETAILS

MRM 37.63


STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	014A-451	9	15

Plotting Date: 02/07/2013

Plan View

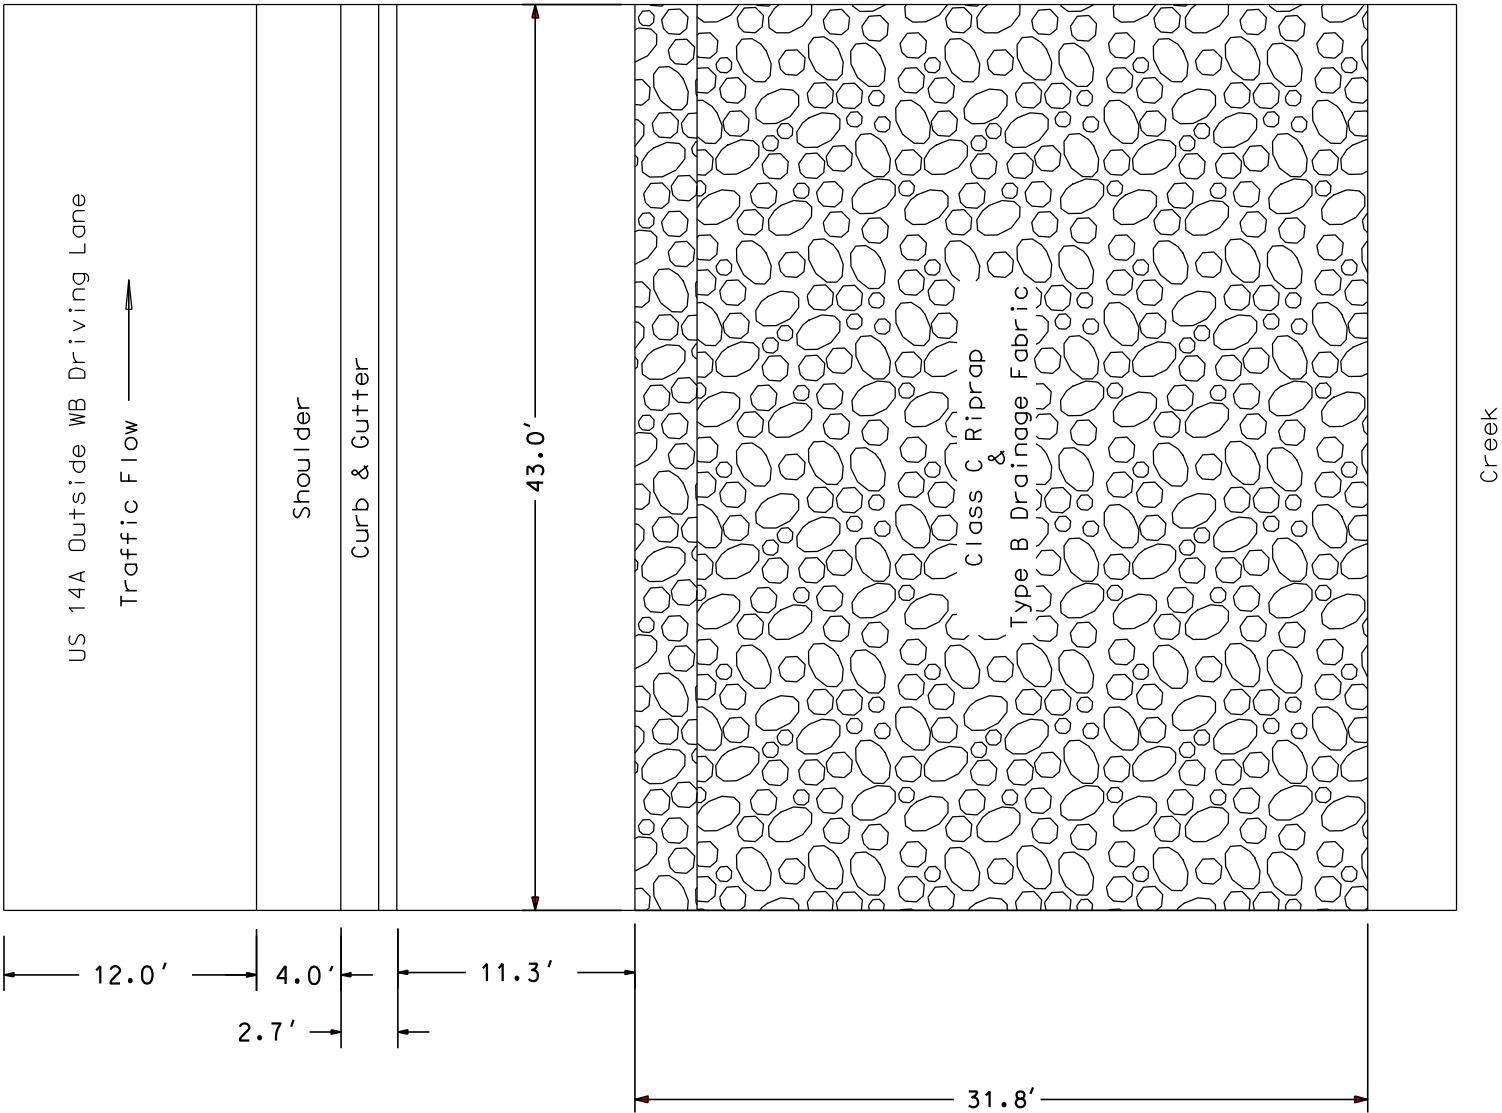

Typical Section

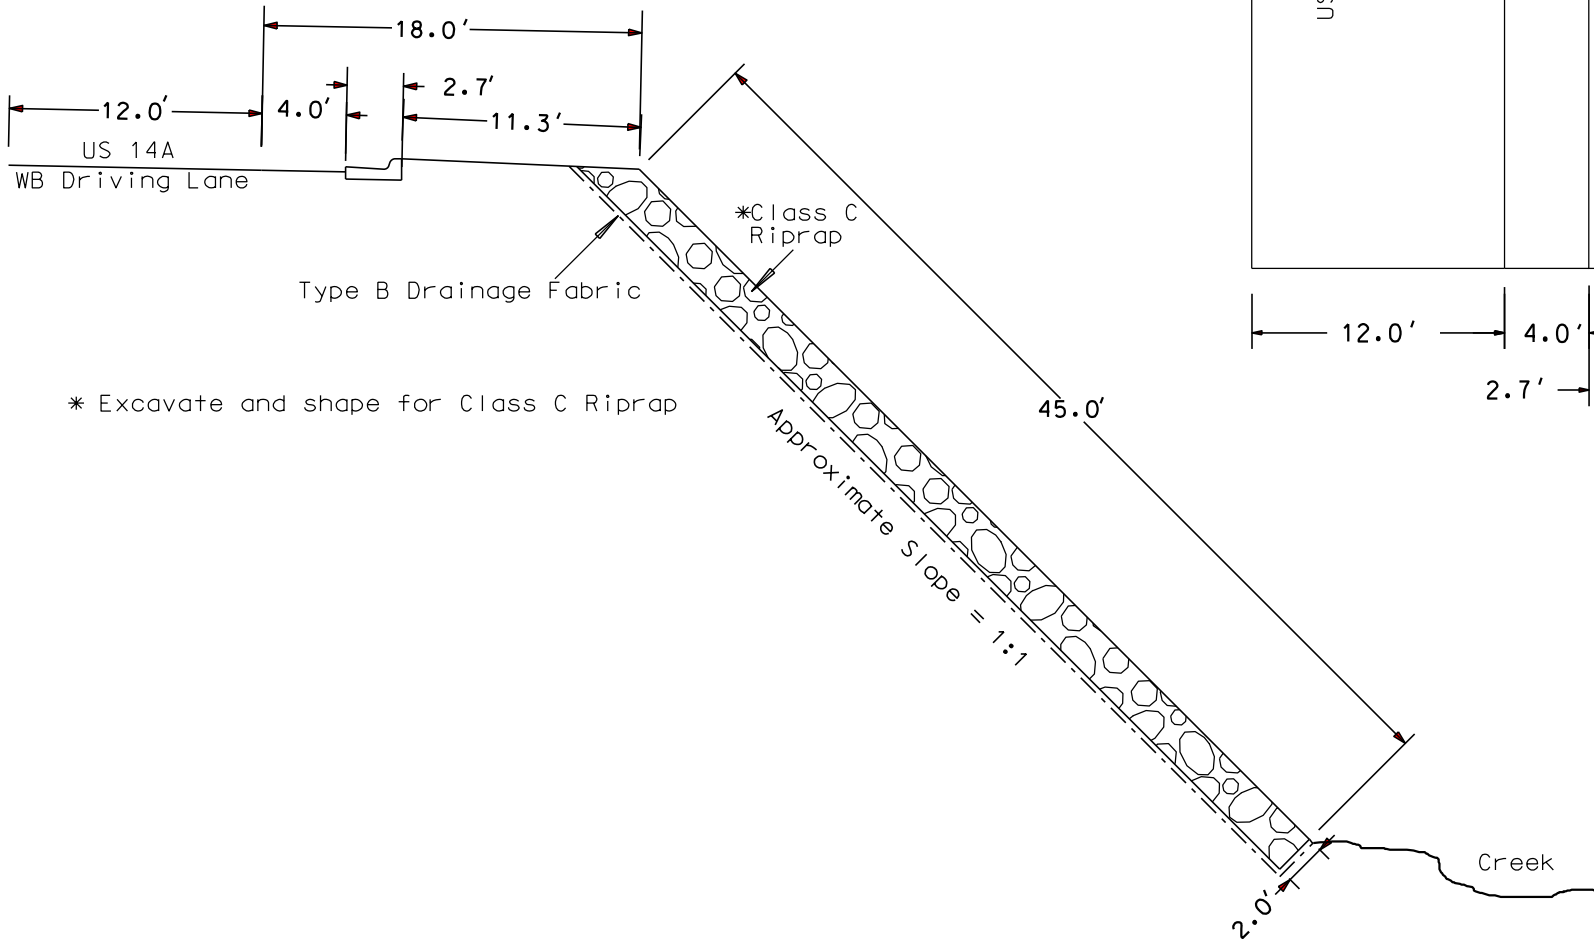


RIPRAP DETAILS

MRM 37.66


STATE OF SOUTH DAKOTA	PROJECT 014A-451	SHEET 10	TOTAL SHEETS 15
-----------------------------	-------------------------	-----------------	---------------------------

Plotting Date: 02/07/2013

Plan View

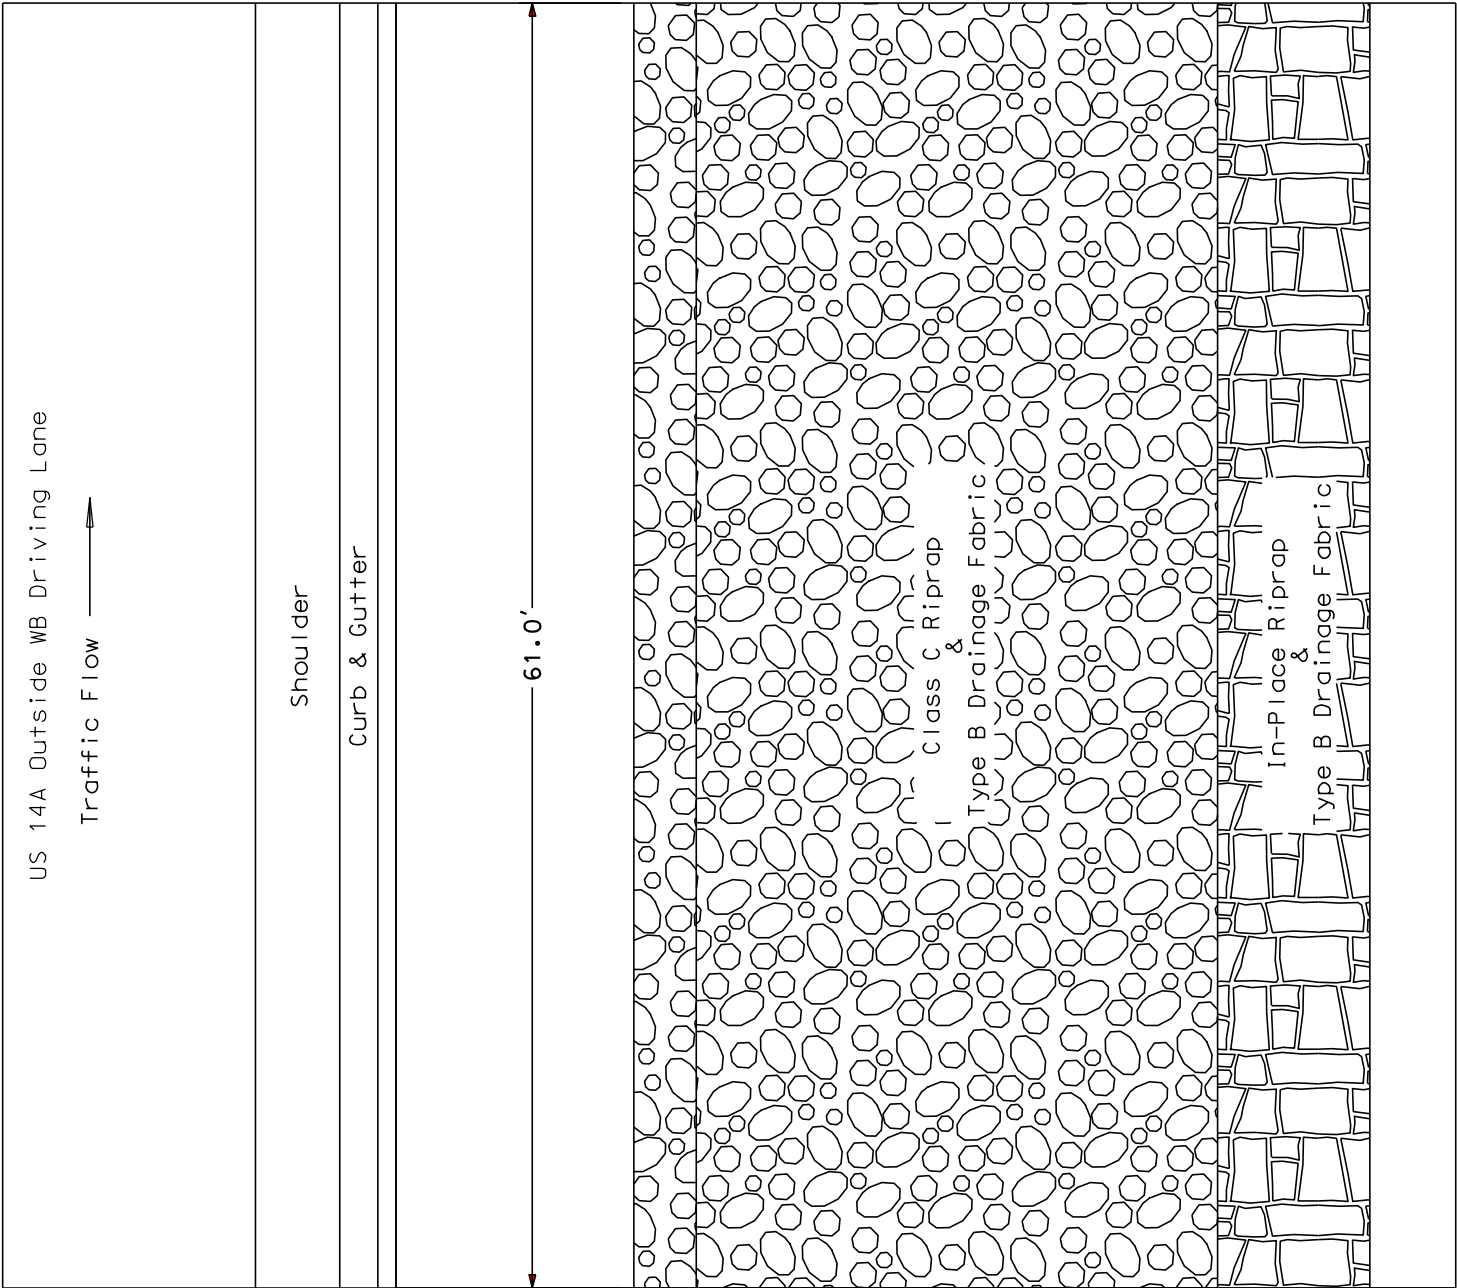

Typical Section

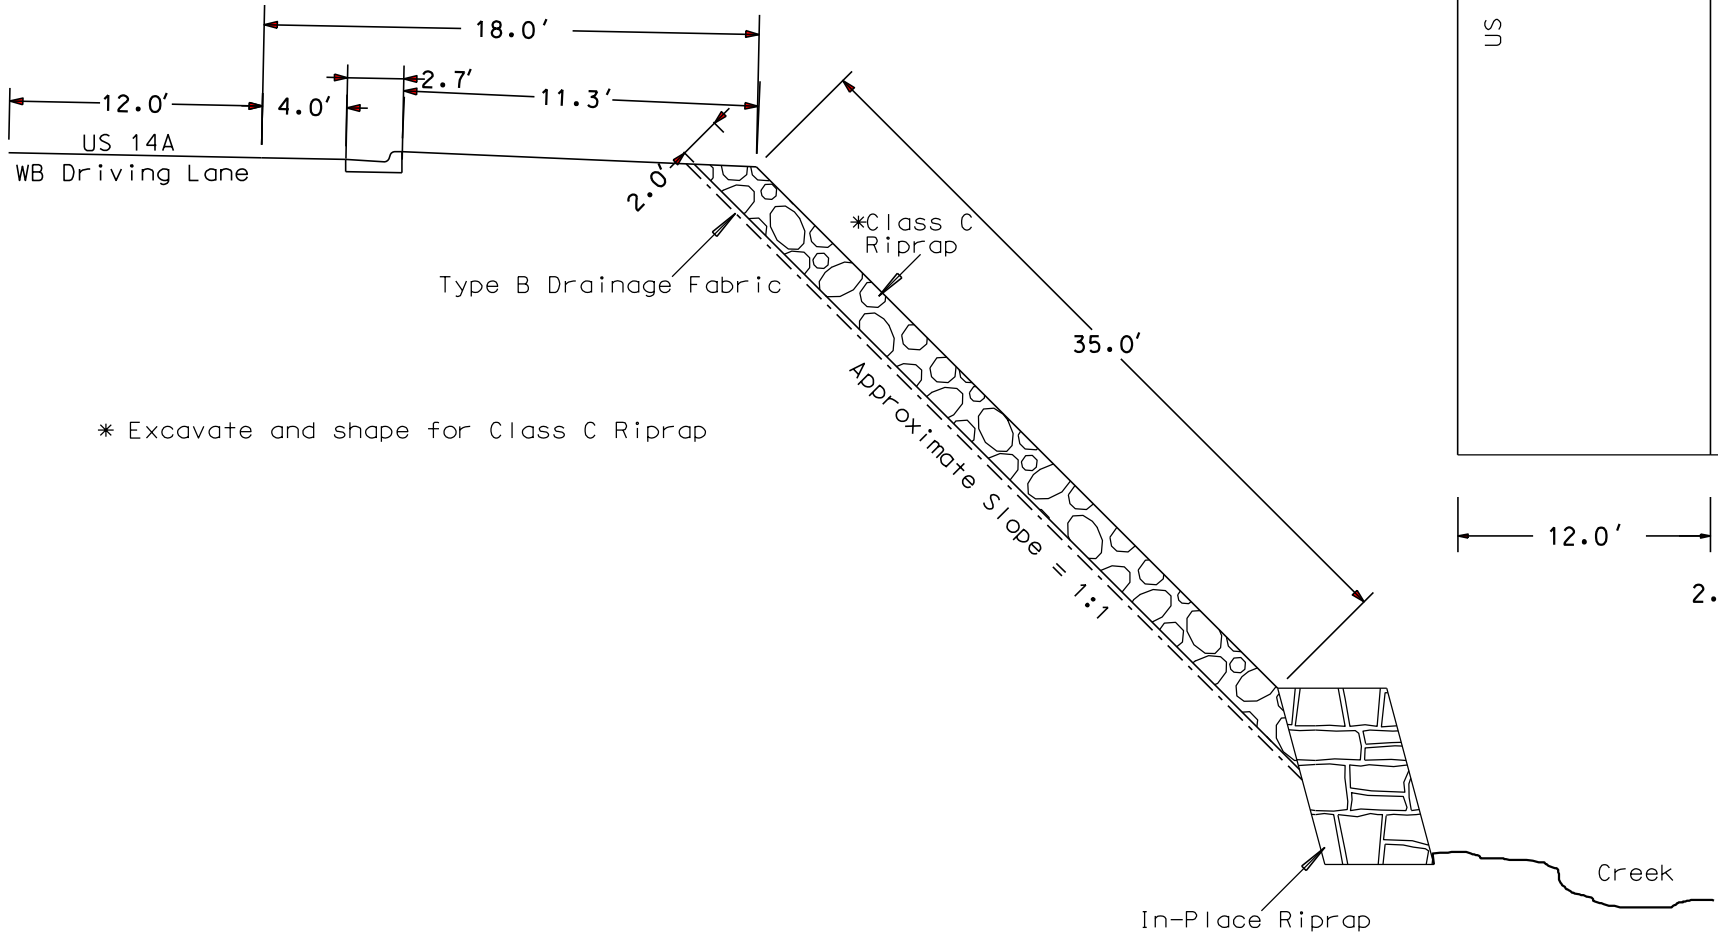

* Excavate and shape for Class C Riprap

Plot Scale - 1:9.1125


Plotted From - trcs12808

File - ...Typ.dgn

EROSION CONTROL

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	014A-451	11	15

Plotting Date: 02/07/2013

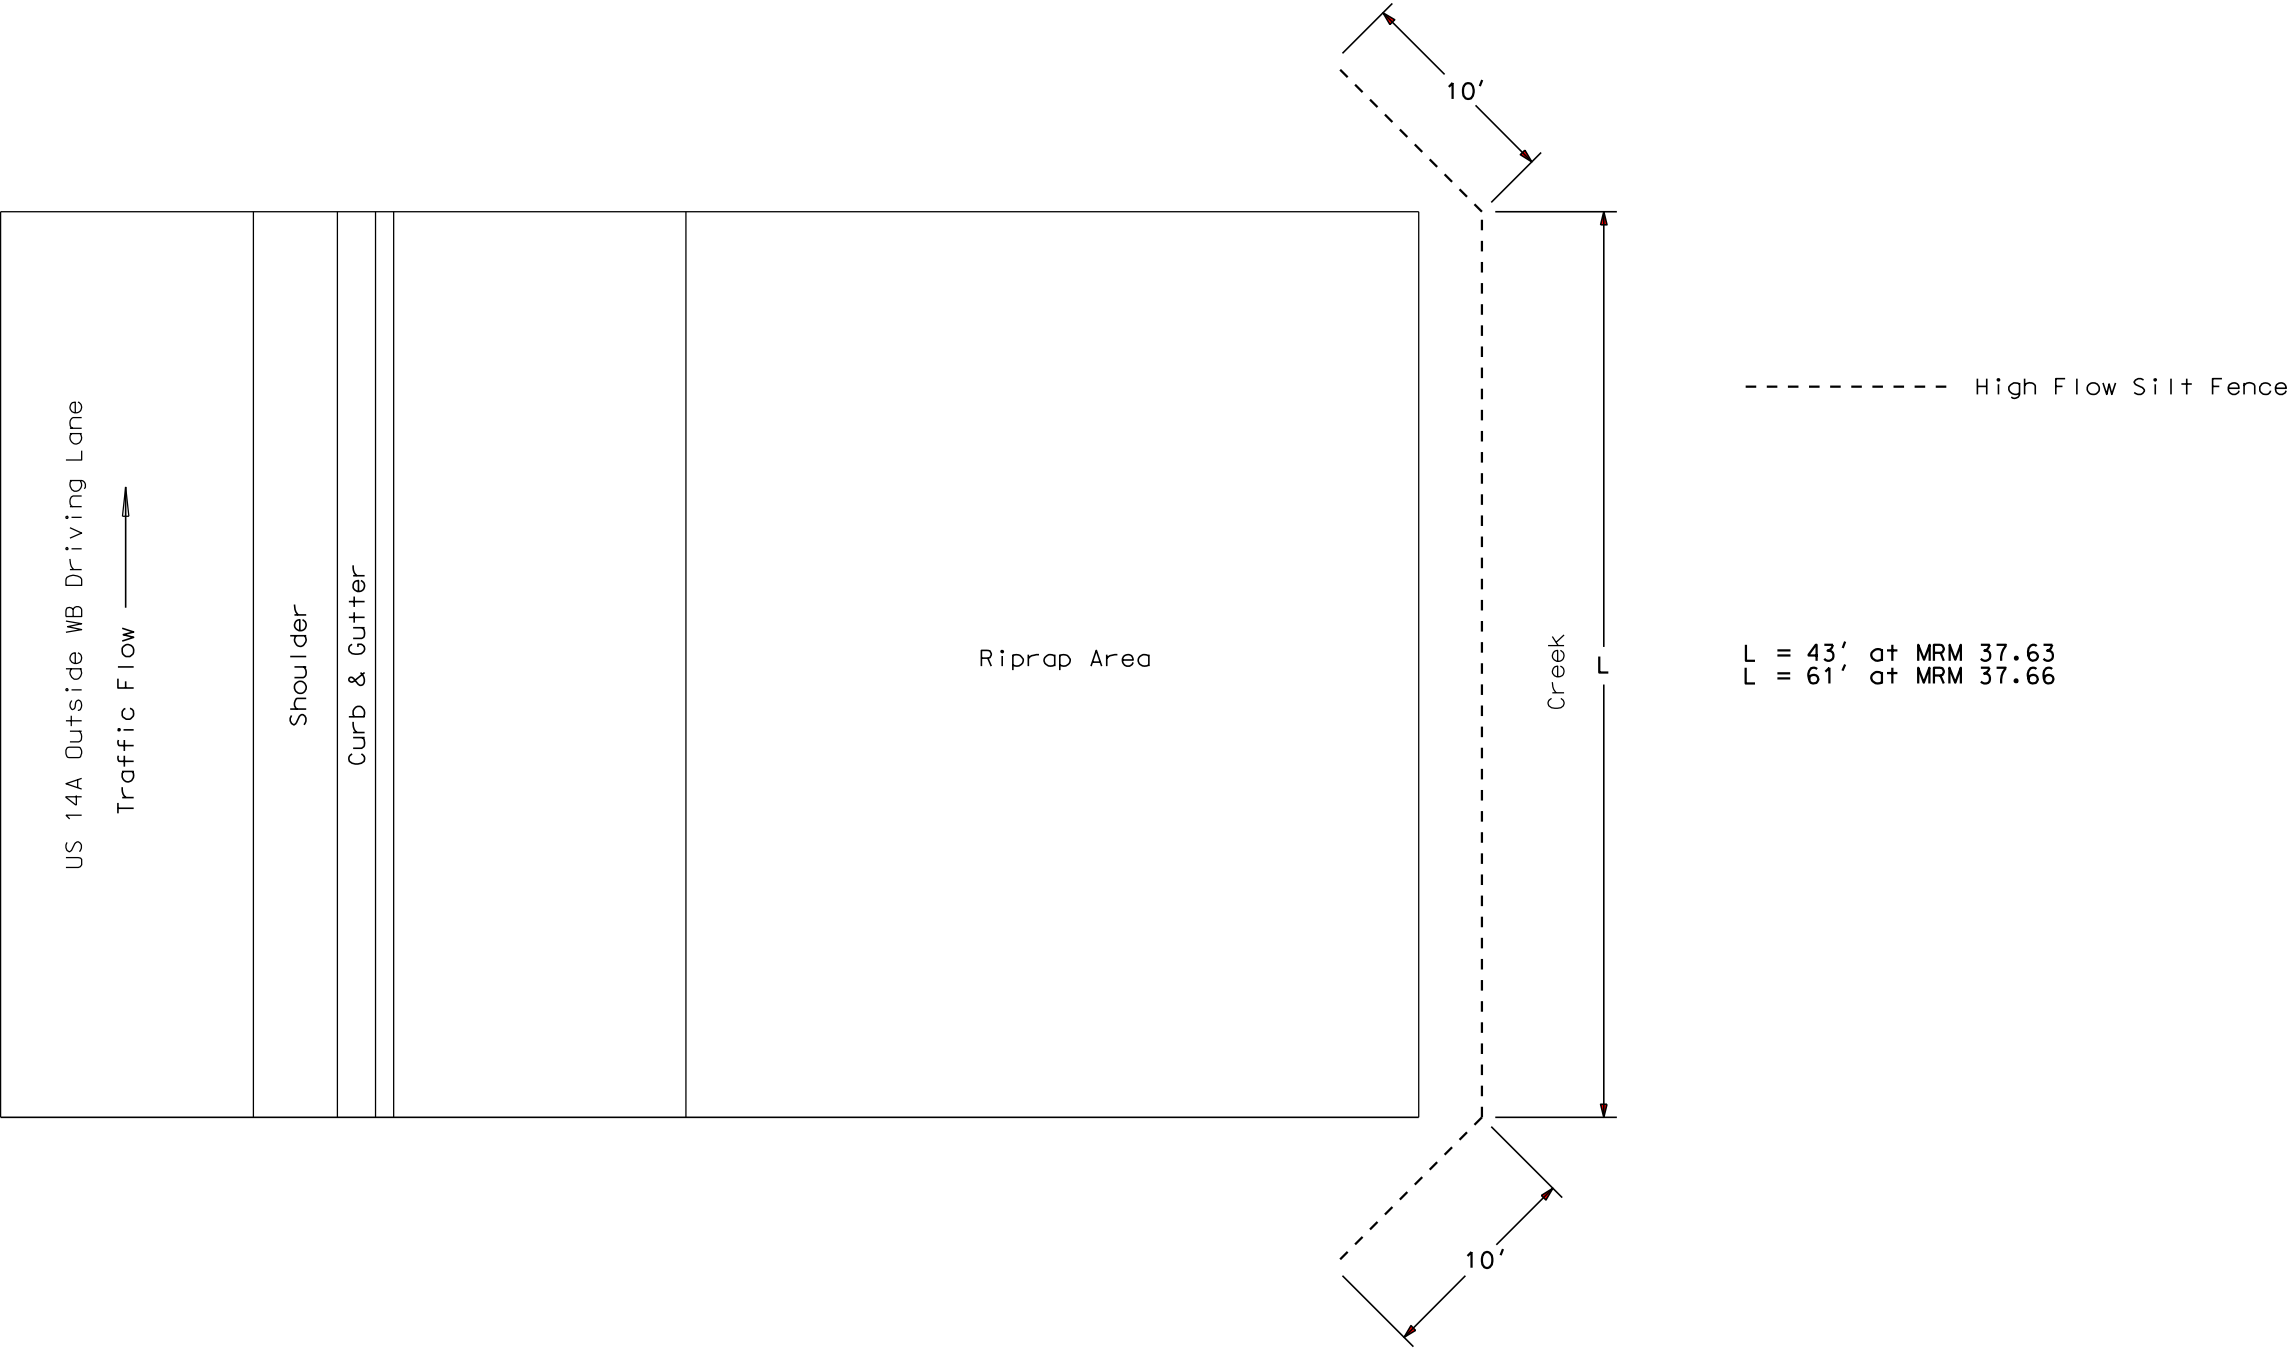

The signs illustrated are not required if the work space is behind a barrier, more than 2 feet behind the curb, or 15 feet or more from the edge of any roadway.

The signs illustrated shall be used where there are distracting situations; such as: vehicles parked on shoulder, vehicles accessing the work site via the highway, and equipment traveling on or crossing the roadway to perform work operations.


The ROAD WORK AHEAD sign may be replaced with other appropriate signs, such as the SHOULDER WORK sign. The SHOULDER WORK sign may be used for work adjacent to the shoulder.

* If the work space is on a divided highway, an advance warning sign should also be placed on the left side of the directional roadway.

For short term, short duration, or mobile operations, all signs and channelizing devices may be eliminated if a vehicle with an activated flashing or revolving yellow light is used.



Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)
0 - 30	200
35 - 40	350
45 - 50	500
55	750
60 - 75	1000



July 1, 2005


Published Date: 4th Qtr. 2012

S
D
D
O
T

GUIDES FOR TRAFFIC CONTROL DEVICES
WORK BEYOND THE SHOULDER


PLATE NUMBER
634.01

Sheet 1 of 1

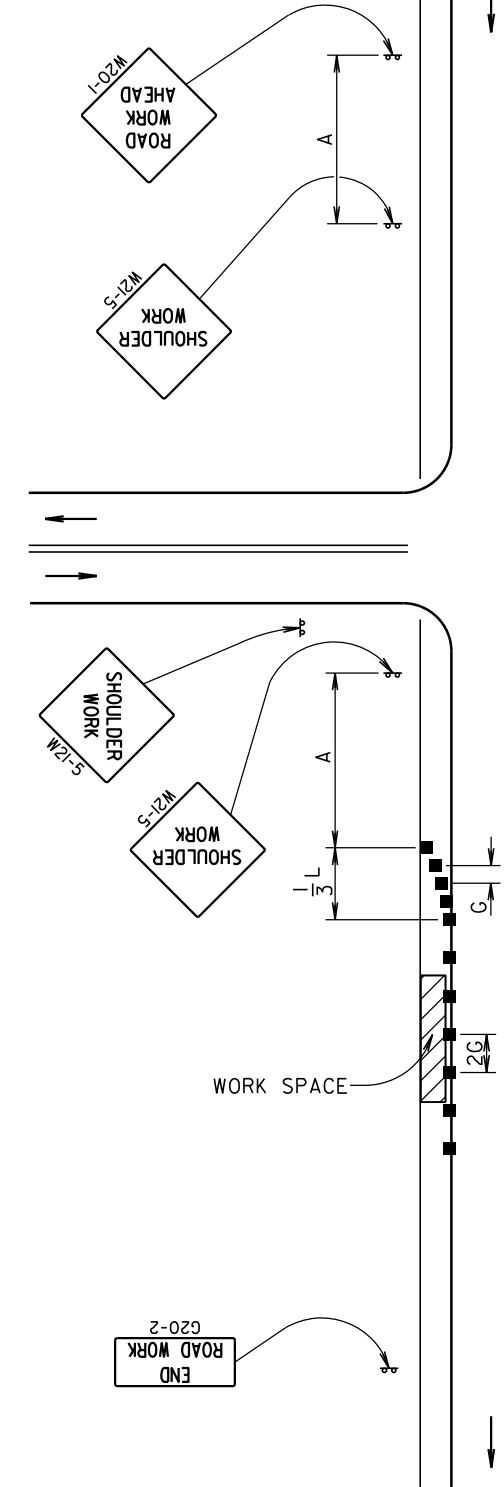

Posted Speed Prior to Work (M.P.H.)	Spacing of Advance Warning Signs (Feet) (A)	Taper Length (Feet) (L)	Spacing of Channelizing Devices (Feet) (G)
0 - 30	100 - 200	180	25
35 - 40	350	320	25
45 - 50	500	600	50
55	750	660	50
60 - 65	1000	780	50

■ Channelizing Device




The channelizing devices shall be drums or 42" cones if traffic control must remain overnight or longer.

For short duration operations (1 hour or less) all signs and channelizing devices may be eliminated if a vehicle with an activated flashing or revolving yellow light is used.

Worker signs (W21-1 or W21-1a) may be used instead of SHOULDER WORK signs.

A SHOULDER WORK sign should be placed on the left side of a divided or one-way roadway only if the left shoulder is affected.

The SHOULDER WORK sign on an intersecting roadway is not required if drivers emerging from that roadway will encounter another advance warning sign before they reach a work activity area.

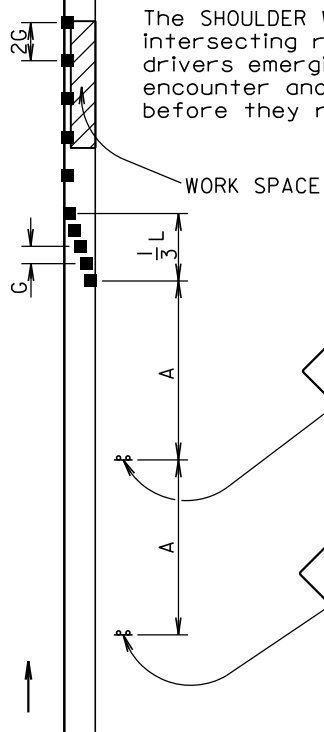

February 14, 2011


Published Date: 4th Qtr. 2012

S
D
D
O
T


GUIDES FOR TRAFFIC CONTROL DEVICES
WORK ON SHOULDERS

PLATE NUMBER
634.03

Sheet 1 of 1

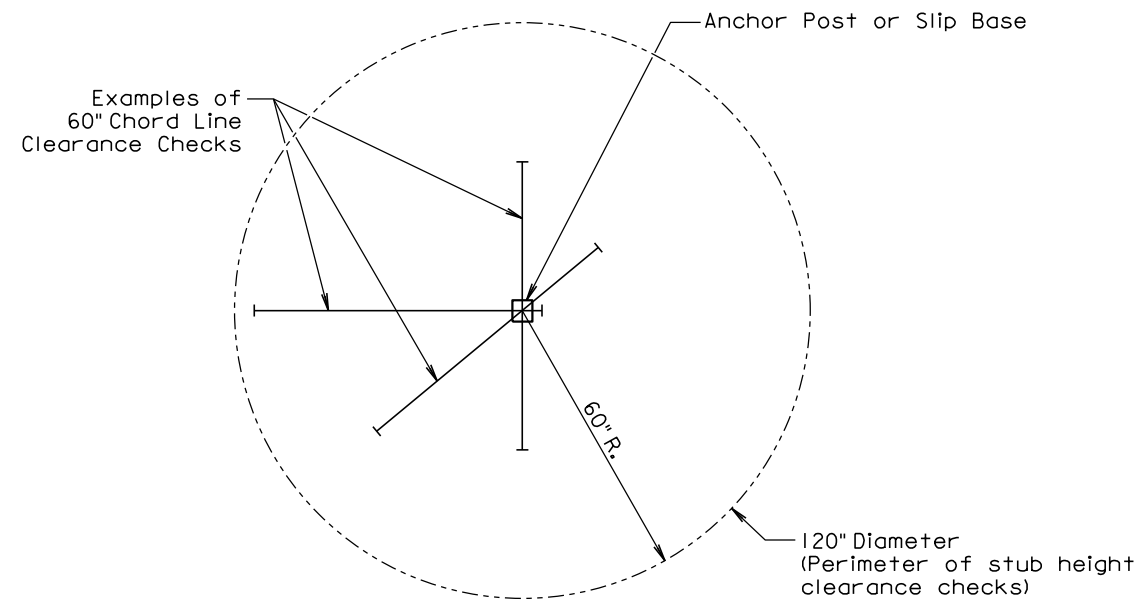

PLAN VIEW
(Examples of stub height clearance checks)

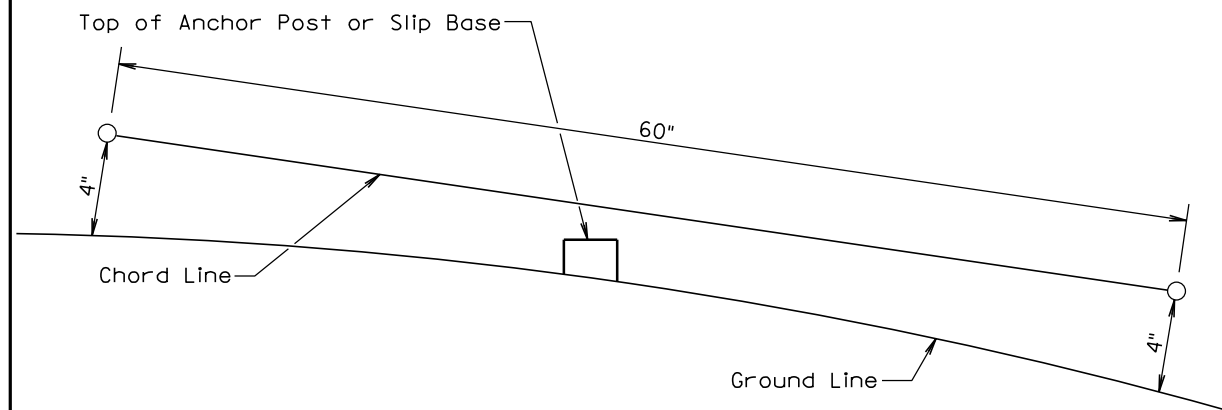

ELEVATION VIEW

GENERAL NOTES:

The top of anchor posts and slip bases SHALL NOT extend above a 60" chord line within a 120" diameter circle around the post with ends 4" above the ground.

At locations where there is curb and gutter adjacent to the breakaway sign support, the stub height shall be a maximum of 4" above the ground line at the localized area adjacent to the breakaway support stub.

The 4" stub height clearance is not necessary for U-channel lap splices where the support is designed to yield (bend) at the base.

July 1, 2005

Published Date: 4th Qtr. 2012

S
D
D
O
T

BREAKAWAY SUPPORT STUB CLEARANCE

PLATE NUMBER
634.99

Sheet 1 of 1


MANUAL HIGH FLOW SILT FENCE INSTALLATION

① EXCAVATE TRENCH

② DRIVE STEEL T FENCE POSTS

③ ATTACH SILT FENCE FABRIC

④ BACKFILL TRENCH AND WHEEL COMPACT SOIL

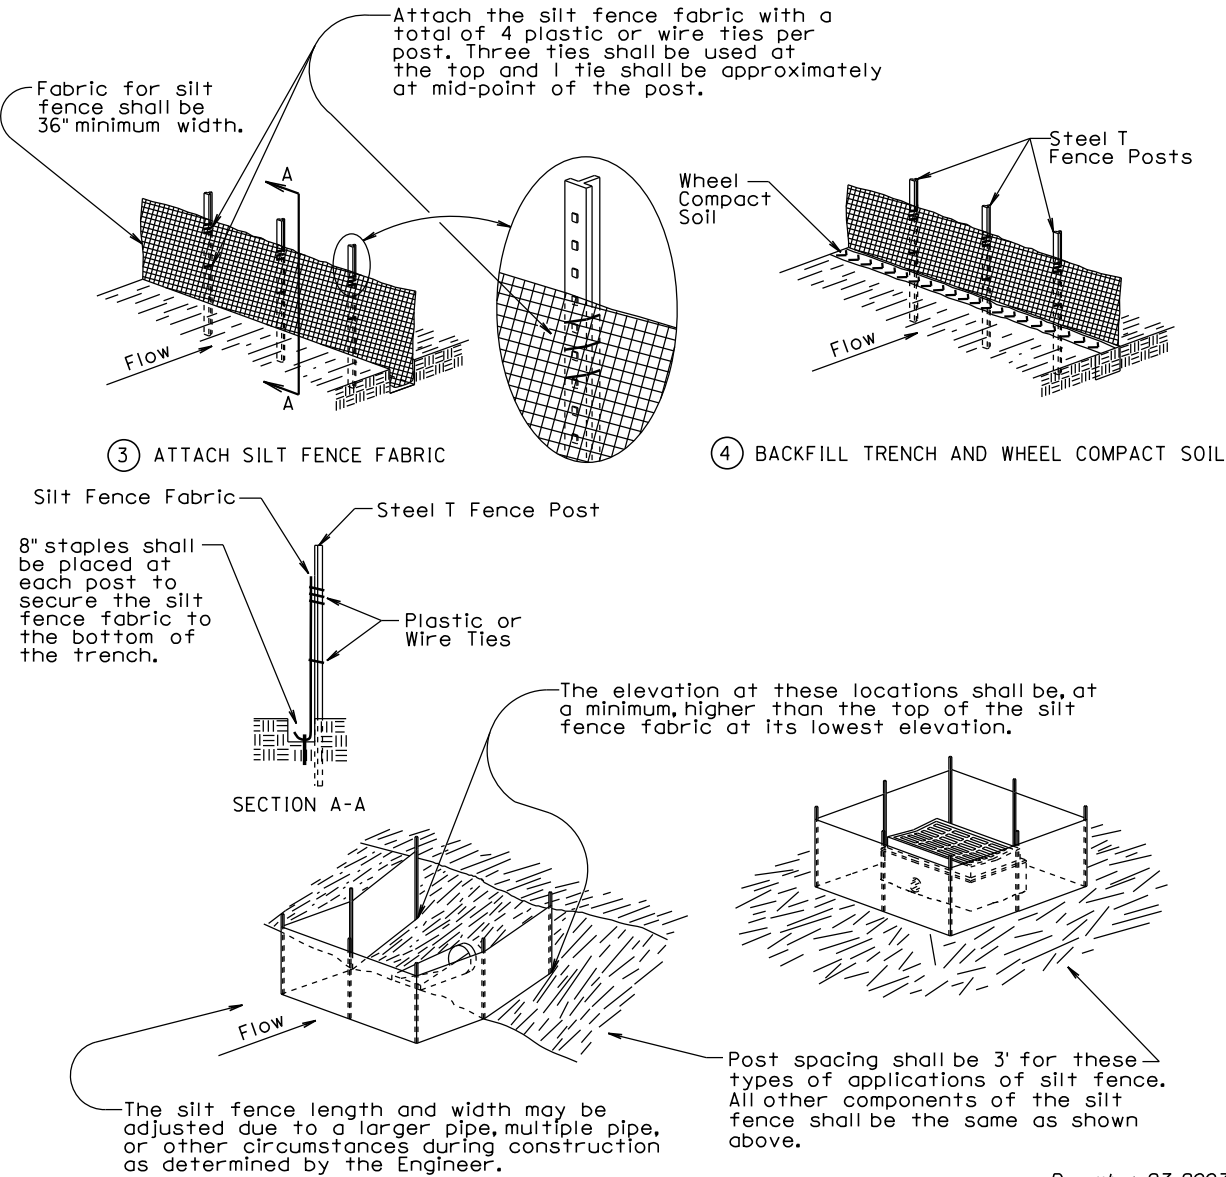

December 23, 2003

Published Date: 4th Qtr. 2012

S
D
D
O
T

HIGH FLOW SILT FENCE

PLATE NUMBER
734.05


Sheet 1 of 2

MACHINE SLICED HIGH FLOW SILT FENCE INSTALLATION

① INSTALL SILT FENCE FABRIC BY MACHINE SLICING METHOD.

② WHEEL COMPACT SOIL ABOVE SLICED IN PORTION OF FABRIC AND THEN DRIVE STEEL T FENCE POSTS.

③ ATTACH SILT FENCE FABRIC

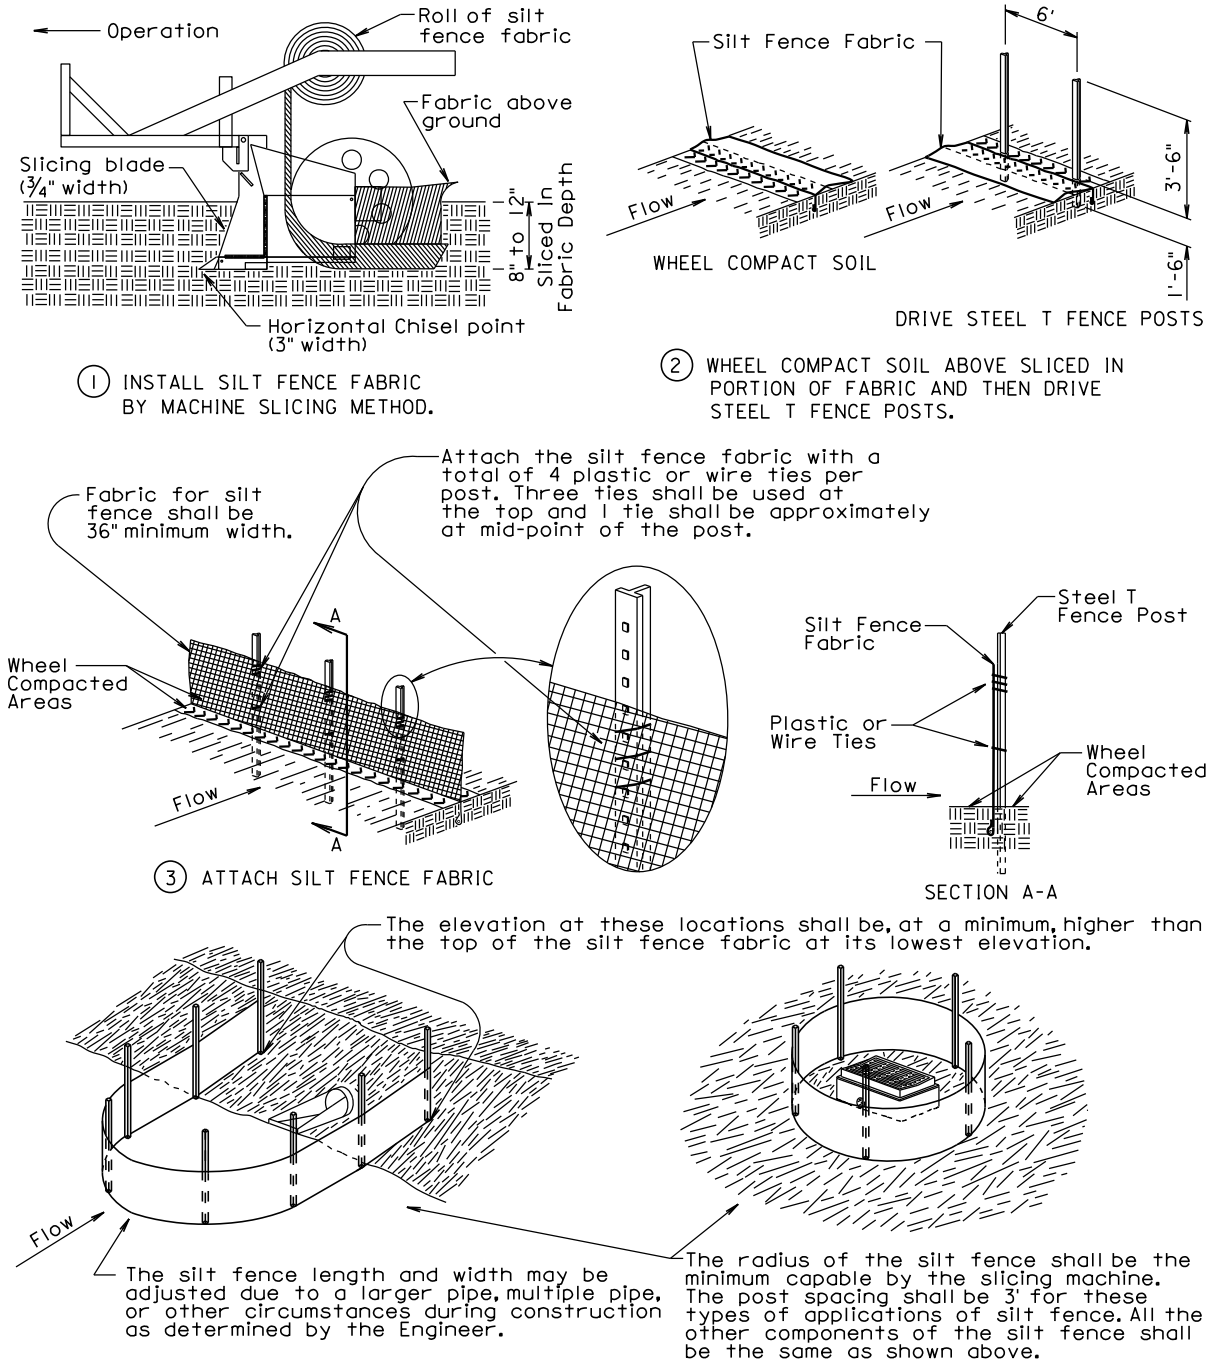

GENERAL NOTE:

If a trench can not be dug or the silt fence fabric can not be sliced in due to the type of earthen material (such as rock), then a row of 30 to 40 pound sandbags butted end to end shall be provided on top of the extra length of silt fence fabric to prevent underflow.

December 23, 2003

Published Date: 4th Qtr. 2012

S
D
D
O
T

HIGH FLOW SILT FENCE

PLATE NUMBER
734.05

Sheet 2 of 2