

# Department of Transportation

## Rapid City Region Office

2300 Eglin Street

P.O. Box 1970

Rapid City, SD 57709-1970

Phone: 605/394-2244

FAX: 605/394-1904

July 8, 2021

### **ADDENDUM NO. 1**

RE: July 22, 2021 Rapid City Region Office Informal Letting  
085-451, Lawrence County, PCN i62e  
Retaining Wall Backfill Repair

### **TO WHOM IT MAY CONCERN:**

The following addenda to the plans shall be inserted and made part of your proposal for the referenced project.

### **PROPOSAL:**

- No change.

### **PLANS:**

- Replace Sheet 6 with attached Sheet 6. Changing the note 16+94 R from Cellular Grout to Control Density Fill to match bid item.

Sincerely,

---

John Rehorst  
Region Design Engineer

16+94 to 17+04 R  
Remove sidewalk  
16+96 R to 17+04 R  
Remove Fence for Reset - 8'  
Reset Fence - 8'


16+94 R  
Attach Timber to Top of Concrete Retaining Wall  
with New Steel Bracket  
Incidental Work

16+94 R  
Install control density fill to  
plug and fill void between  
timber and concrete retaining  
wall

16+94 to 17+04 R  
Install 4" concrete sidewalk

STATE OF SOUTH DAKOTA	PROJECT 085-451	SHEET 6	TOTAL SHEETS 10
-----------------------	--------------------	------------	--------------------

Plotting Date: 07/07/2021 Revised: 7-7-22 kh

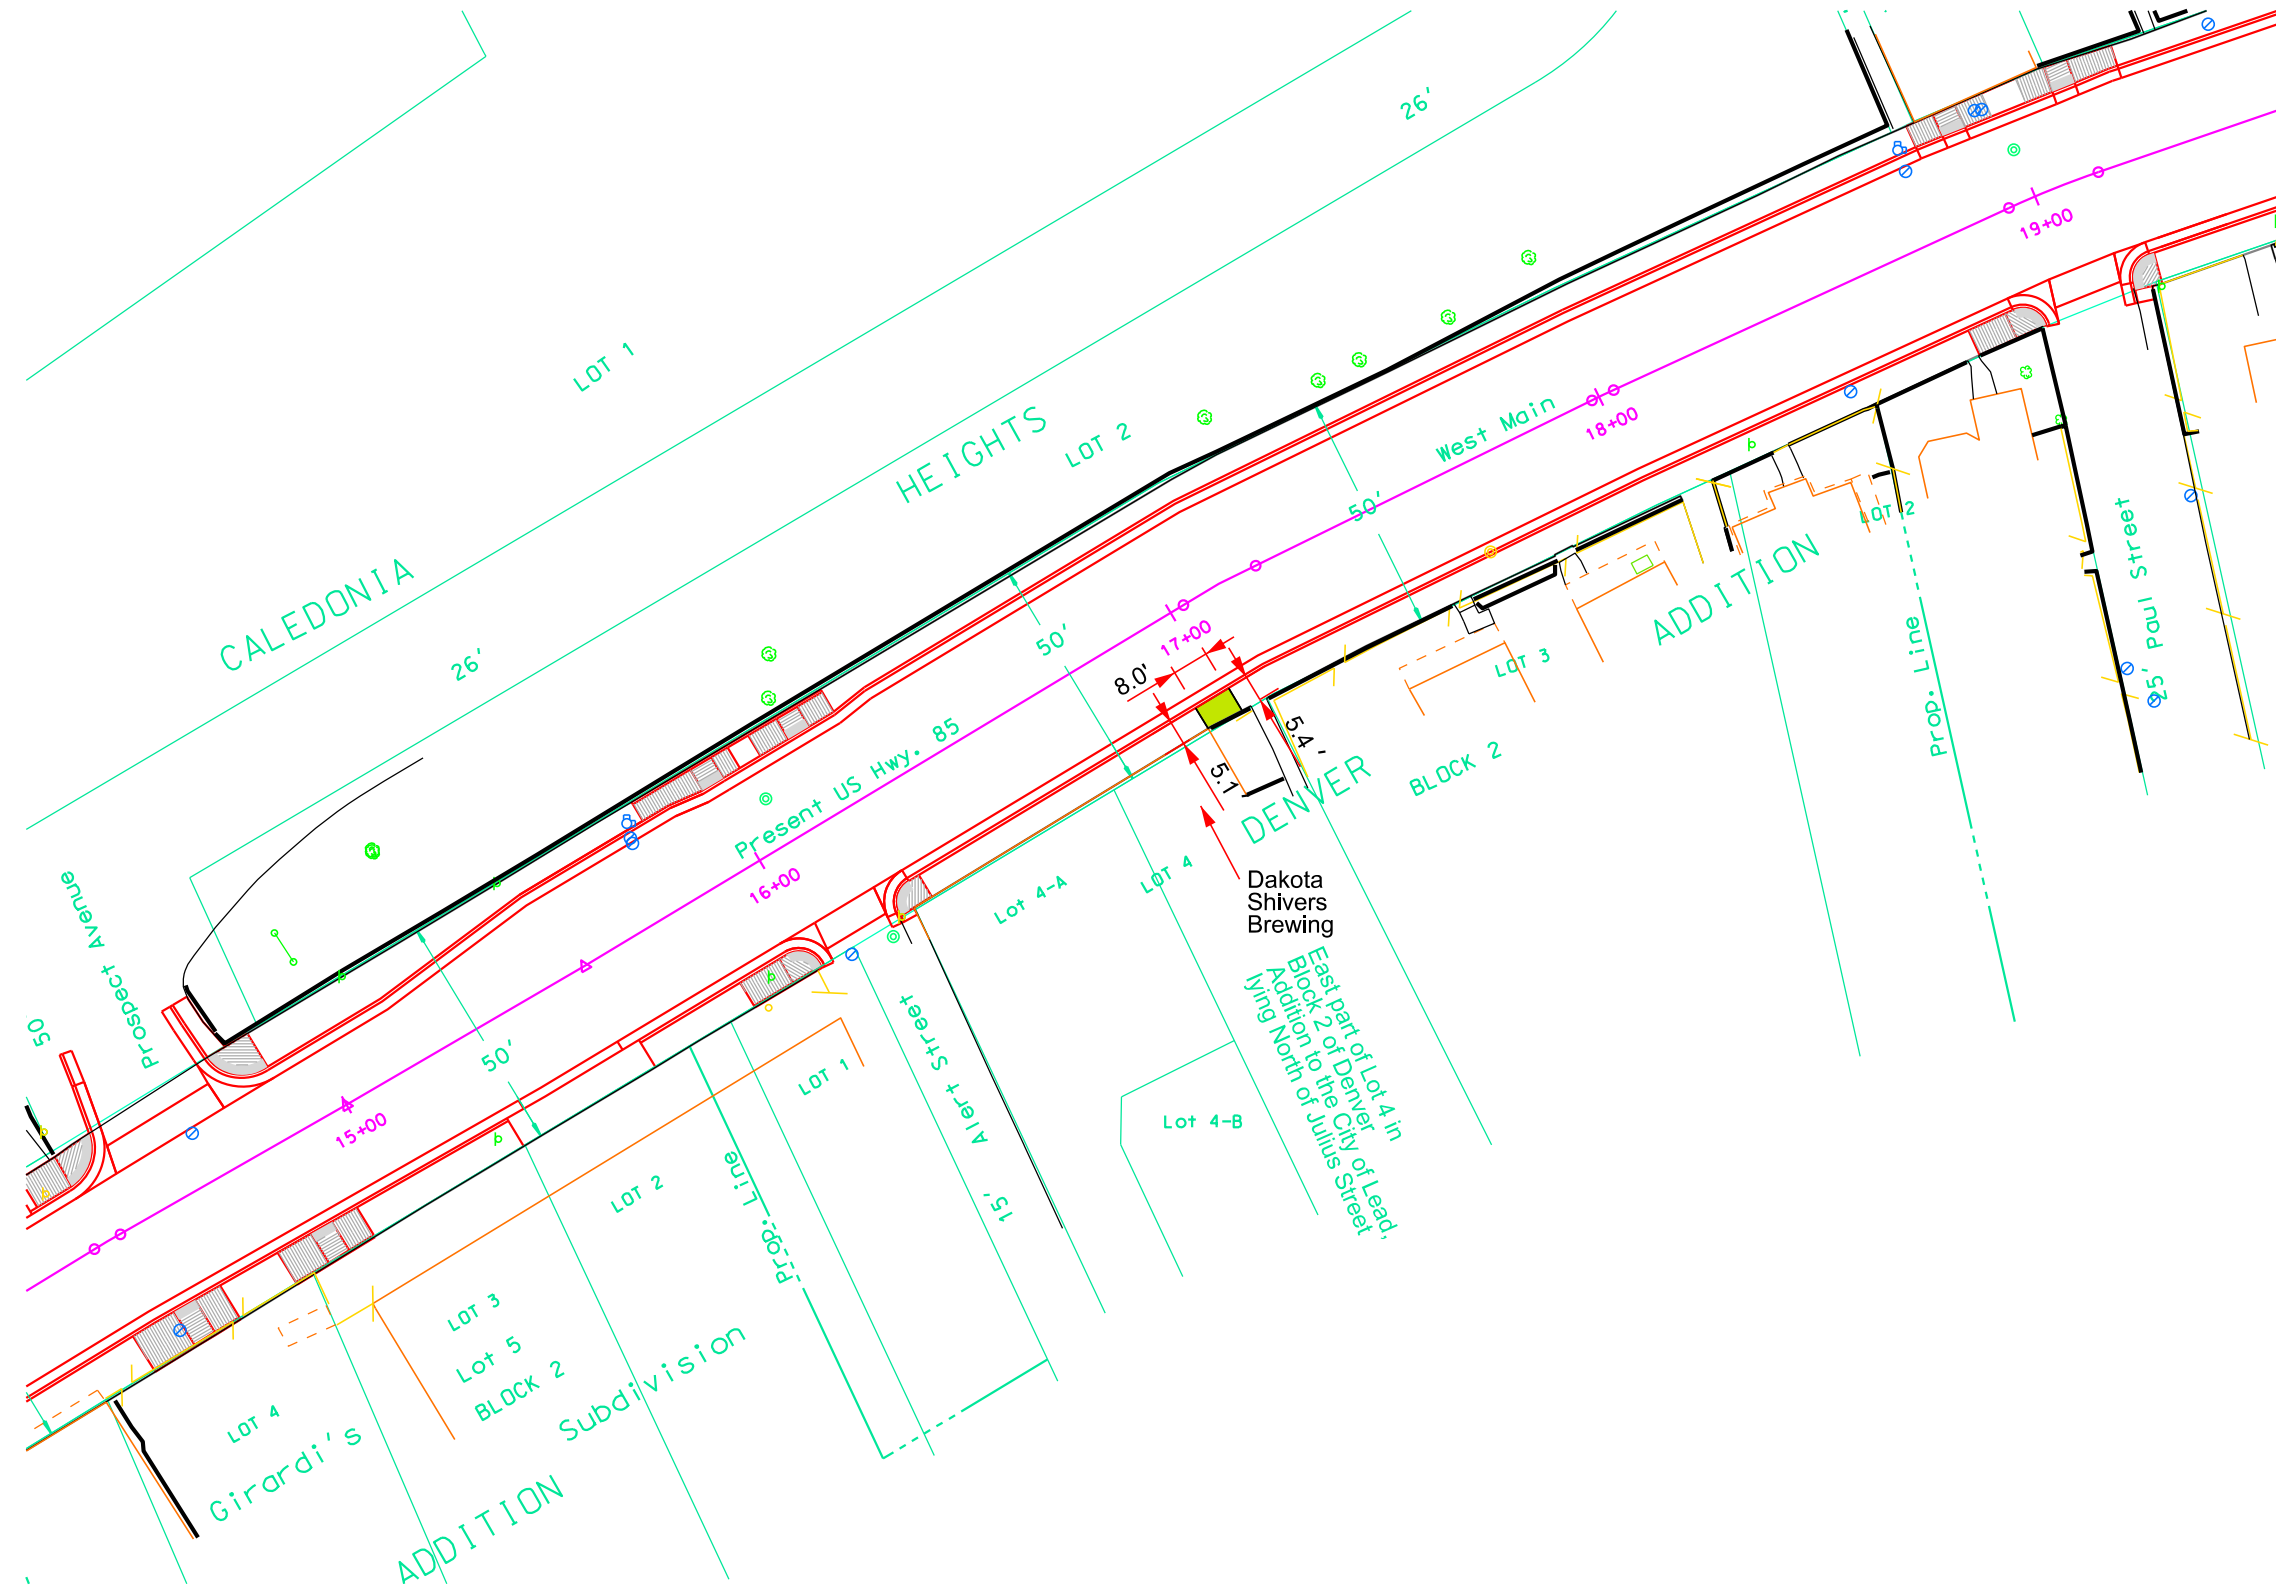

 Remove and Replace Concrete Sidewalk

Plot Scale - 1/40

Plotted From - TRR011610

File - ...plan.dgn