

SECTION D: EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0012(151)389	D1	D20

Plotting Date: 12/23/2014

INDEX OF SHEETS


- D1 General Layout with Index
- D2-D5 Estimate with General Notes and Tables
- D6-D8 Stormwater Pollution Prevention Plan Checklist
- D9 Erosion and Sediment Control Legend
- D10-D15 Erosion and Sediment Control Plan Sheets
- D16 Dewatering and Sediment Collection System Details
- D17 Construction Entrance Details
- D18-D20 Standard Plates



**BEGIN NH 0012(151)389
BEGIN GRADING**
Station 85+81.22

**END NH 0012(151)389
END RESURFACING**
Station 143+88.94

**END GRADING
BEGIN RESURFACING**
Station 120+99

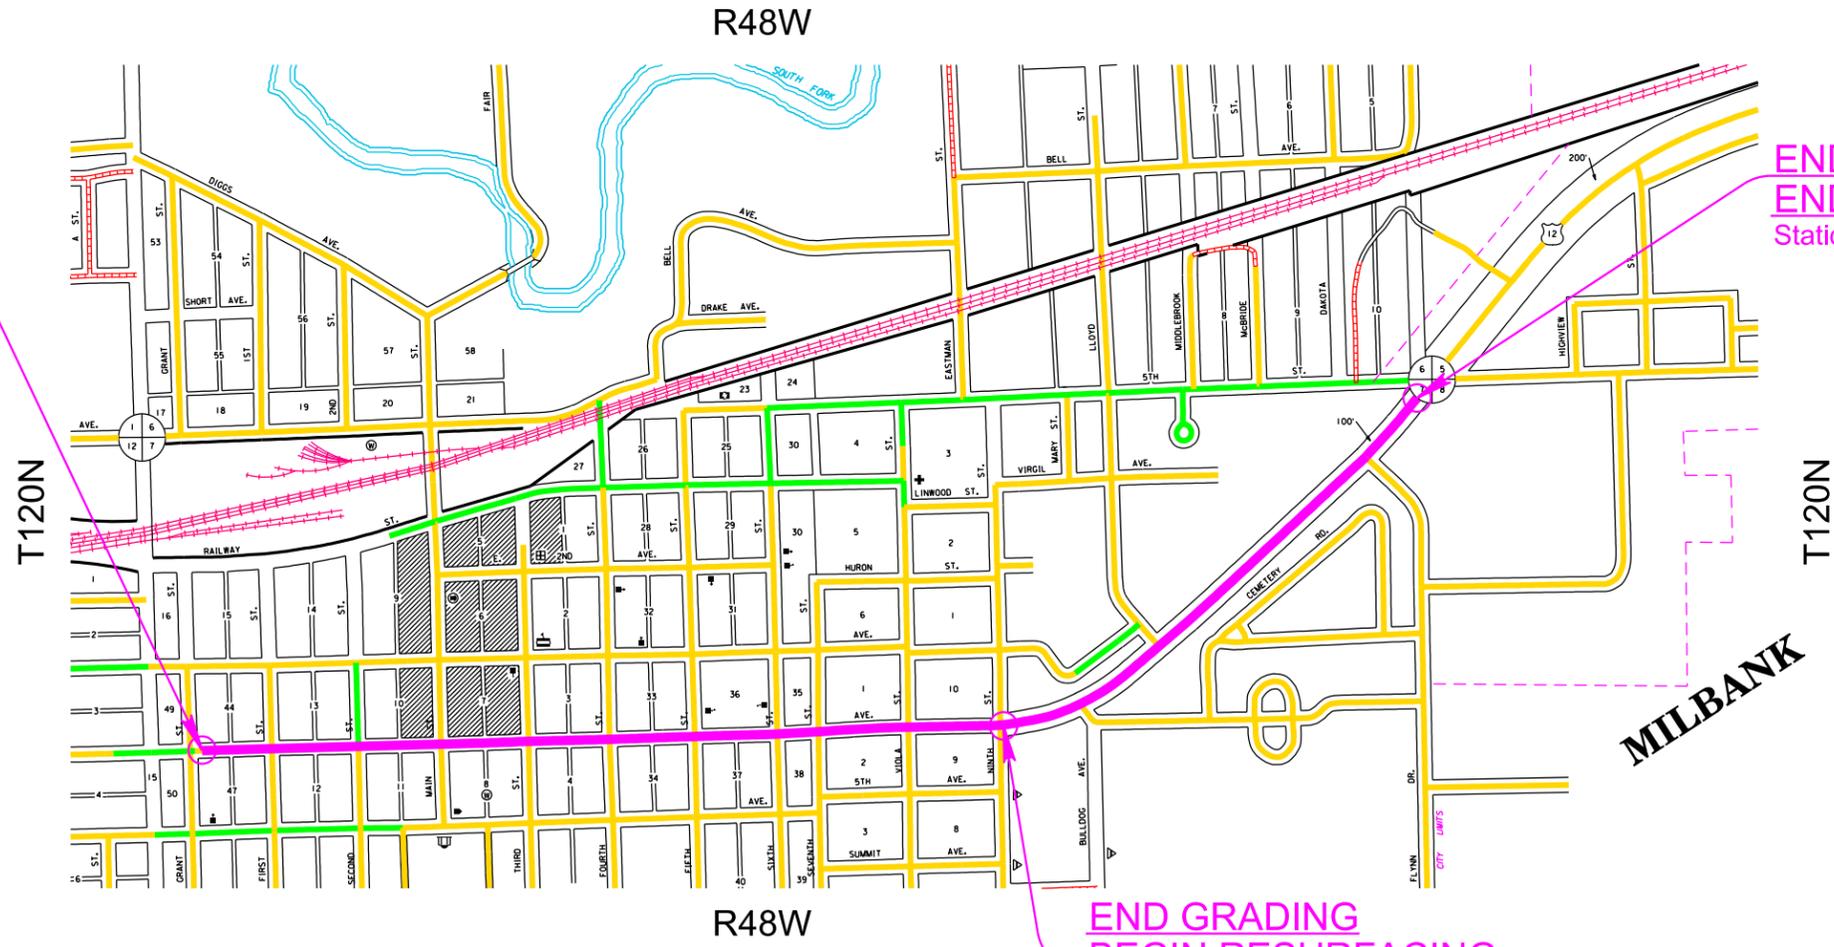

Plot Scale - 1:200

Plotted From - TRPR17200

File - U:\proj\gmt028\Titled.dgn

SECTION D ESTIMATE OF QUANTITIES

Bid Item Number	Item	Quantity	Unit
110E1690	Remove Sediment	10.0	CuYd
110E1693	Remove Erosion Control Wattle	100	Ft
110E1695	Remove Sediment Filter Bag	1,328	Ft
110E1700	Remove Silt Fence	286	Ft
230E0010	Placing Topsoil	1,387	CuYd
730E0206	Type D Permanent Seed Mixture	581	Lb
731E0200	Fertilizing	1.40	Ton
732E0200	Fiber Mulching	2.5	Ton
734E0154	12" Diameter Erosion Control Wattle	300	Ft
734E0165	Remove and Reset Erosion Control Wattle	75	Ft
734E0180	Sediment Filter Bag	1,328	Ft
734E0604	High Flow Silt Fence	1,142	Ft
734E0610	Mucking Silt Fence	9	CuYd
734E0620	Repair Silt Fence	286	Ft
734E0680	Flocculent Housing Unit	2	Each
734E0683	500K Gallon Treatment Flocculent Bag	2	Each
734E0845	Sediment Control at Inlet with Frame and Grate	22	Each
734E0847	Sediment Control at Type S Reinforced Concrete Drop Inlet	120	Ft
734E5005	Dewatering	Lump Sum	LS
734E5010	Sweeping	10	Hour
900E1320	Construction Entrance	2	Each

PLACING TOPSOIL

The thickness will be approximately 4 inches within the right-of-way and 6 inches on temporary easements.

The estimated amount of topsoil to be placed is as follows:

Station	to	Station	Topsoil (CuYd)
85+81.22	Begin	91+00	231
91+00		97+00	209
97+00		103+00	193
103+00		109+00	260
109+00		115+00	267
115+00		120+99 End	227
Total:			1,387

MYCORRHIZAL INOCULUM

Mycorrhizal inoculum shall consist of mycorrhizal fungi spores and mycorrhizal fungi-infected root fragments in a solid carrier. The carrier may include organic materials, calcinated clay, or other materials consistent with application and good plant growth. The supplier shall provide certification of the fungal species claimed and the live propagule count. The inoculum shall include the following fungal species:

<i>Glomus intraradices</i>	25%
<i>Glomus aggregatu</i>	25%
<i>Glomus mosseae</i>	25%
<i>Glomus etunicatum</i>	25%

All seed shall be inoculated by the seed supplier with a minimum of 20,000 live propagules of mycorrhizal fungi per 1,000 square feet. All costs of inoculating the seed shall be incidental to the contract unit price per pound for the corresponding permanent seed mixture.

The mycorrhizal inoculum shall be from the list below or an approved equal:

Product	Manufacturer
MycoApply	Mycorrhizal Applications, Inc. Grants Pass, OR Phone: 1-866-476-7800 http://www.mycorrhizae.com/

FERTILIZING

The Contractor shall apply an all-natural slow release fertilizer prior to seeding or placing sod. The all-natural fertilizer shall have a minimum guaranteed analysis of 4-6-4 and be USDA Certified BioBased. It should provide a minimum of 4% (N) nitrogen with a minimum water insoluble nitrogen (WIN) fraction of 3.2%, a minimum of 6% (P2O5) available phosphate, a minimum of 4% (K2O) soluble potash, and a maximum carbon to nitrogen ratio (C:N ratio) of 5:1. The all-natural fertilizer shall be free of weed-seed and pathogens accomplished through thermophilic composting, and not mechanical or chemical sterilization, to assure presence of beneficial soil microbiology. The fertilizer shall have a near neutral pH, a low salt index, a low biological oxygen demand, contain organic humic and fulvic acids, and have high aerobic organism counts. The fertilizer shall also be stable, free of bad odors, and be unattractive as a food source for animals. It should also be in a granular form that is easily spread.

The application rate is 34 pounds per 1,000 square feet.

The all-natural slow release fertilizer shall be applied according to the manufacturer's application recommendations.

The all-natural slow release fertilizer shall be from the list below or an approved equal:

Product	Manufacturer
Sustane	Sustane Corporate Headquarters Cannon Falls, Minnesota Phone: 1-800-352-9245 http://www.sustane.com/

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D2	TOTAL SHEETS D20
-----------------------	----------------------------	-------------	---------------------

Plotting Date: 12/23/2014

DRILLS

In addition to the drills specified in Section 730 of the Standard Specifications, other types of drills including no-till drills will be allowed as long as they have baffles, partitions, agitators, or augers which keep the seed distributed throughout the seed box and the seed is planted at a depth of 1/4" to 1/2".

PERMANENT SEEDING

The areas to be seeded consist of all newly graded areas within the project limits except for the top of roadways and temporary easements under cultivation.

All permanent seed shall be planted in the topsoil at a depth of 1/4" to 1/2".

All seed broadcast must be raked or dragged in (incorporated) within the top 1/4" to 1/2" of topsoil when possible. This requirement may be waived by the Engineer during construction when raking or dragging is deemed not feasible by conventional methods.

On areas to receive a turf grass seed mixture the ground shall be tilled to a minimum depth of 3 inches and shaped to remove mounds and low spots to provide a smooth even surface to match grade and cross section as shown in the plans. Rocks greater than 3/4 inches in size shall be removed.

After seeding and fertilizing, the seedbed shall be rolled or otherwise worked by a method approved by the Engineer to firm the seedbed and break up lumps or clods so they are no more than 2 inches in size. The Contractor shall sweep all fertilizer misplaced on adjacent pavement onto the seedbed.

The varieties listed for seed mixtures are preferred varieties.

Native harvest seed will be allowed.

Type D Permanent Seed Mixture shall consist of the following:

Grass Species	Variety	Pure Live Seed (PLS) (Pounds/1000 SqFt)
Kentucky Bluegrass	Avalanche, Appalachian, Wildhorse, Blue Bonnet	1.4
Perennial Ryegrass	Turf Type varieties	1.4
Creeping Red Fescue	Epic, Boreal	1.4
Chewings Fescue	Ambrose, K2, Zodiac	1.4
Alkali Grass	Fults, Fults II, Quill, Salty	1.4
Total:		7

FIBER MULCHING

Fiber mulch shall be applied in a separate operation following permanent seeding.

An additional 2% by weight of tackifier shall be added to the fiber mulch product selected from the approved product list. If the product selected has guar gum tackifier included, then the additional 2% of tackifier shall be guar gum. If the product selected has synthetic tackifier included, then the additional 2% of tackifier shall be synthetic.

Fiber mulch shall be applied at the rate of 60 pounds per 1,000 SqFt.

The Contractor shall allow the fiber mulch to cure a minimum of 18 hours prior to watering or any storm event to ensure proper cohesion between the soil and fiber particles.

All costs for the additional tackifier added to the fiber mulch including labor, equipment, and materials shall be incidental to the contract unit price per ton for "Fiber Mulching".

The fiber mulch provided shall be from the approved product list. The approved product list for fiber mulch may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

EROSION CONTROL WATTLE

A quantity of 300 feet of Erosion Control Wattles has been included in the Estimate of Quantities for restraining the flow of runoff and sediment as ditch checks and for perimeter control at locations as determined by the Engineer during construction. Refer to Standard Plate 734.06 for details.

The Contractor shall provide certification that the erosion control wattles do not contain noxious weed seeds.

Erosion control wattles shall remain on the project to decompose or a quantity may be removed as necessary in accordance with the Engineer.

The erosion control wattle provided shall be from the approved product list. The approved product list for erosion control wattle may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

REMOVE AND RESET EROSION CONTROL WATTLE

Erosion control wattles may be removed and reset as necessary as work progresses. The erosion control wattles removed and reset shall be in useable condition. All costs for removing and resetting the erosion control wattles shall be incidental to the contract unit price per foot for "Remove and Reset Erosion Control Wattle".

HIGH FLOW SILT FENCE

The high flow silt fence fabric provided shall be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

High flow silt fence shall be placed at the locations noted in the table and at locations that will minimize siltation of adjacent streams, lakes, dams, or drainage areas as determined by the Engineer during construction. Refer to Standard Plate 734.05 for details.

An additional quantity of High Flow Silt Fence has been included in the Estimate of Quantities for temporary sediment control.

TABLE OF HIGH FLOW SILT FENCE

Station	Location	Quantity (Ft)
101+72-37' L	PERIMETER OF TYPE C DROP INLET	24
	ADDITIONAL QUANTITY	100
	Total:	124

Note: This table does not include the quantity of High Flow Silt Fence that is to be used for Interim Sediment Control at Inlets, Manholes, and Junction Boxes After Surfacing Removal and Before Placement of Surfacing.

MUCKING SILT FENCE

Mucking silt fence shall consist of removing muck trapped by the silt fence and spreading the material evenly over the adjacent area to conform to the existing grade.

REMOVE SILT FENCE

Silt fence shall be removed when vegetation is established. Some or all of the silt fence may be left on the project until vegetation is established.

INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING

Refer to Standard Plate 734.05 for details of installation of high flow silt fence at drop inlets, manholes, and junction boxes.

The high flow silt fence fabric provided shall be from the approved product list. The approved product list for high flow silt fence may be viewed at the following internet site:

<http://sddot.com/business/certification/products/Default.aspx>

In addition, the Contractor shall do the following for this installation:

- A space of at least 1' shall be provided between the silt fence installation and the inlet. This space shall be filled completely with a 2" depth of aggregate, 2" minus or smaller.
- The top elevation of the silt fence shall be such that a 12" horizontal flap of silt fence will remain at the bottom.
- The base of the silt fence shall conform to the natural ground profile but does not need to be trenched in at the bottom.
- The extra 12" of the silt fence material may be cut so that the material will lay flat upon the subgrade.
- Sediment filter bags shall be placed on the 12" flap around the perimeter of the silt fence installation. The sediment filter bags shall overlap 6" at the ends and be placed tightly together.
- The sediment filter bags shall be filled with clean aggregate 2" minus or smaller.

Product	Sediment Filter Bag Manufacturer
Snake Bag	Sacramento Bag Manufacturing Co. Sacramento, CA Phone: 1-800-287-2247 www.sacbag.com

The sediment filter bag shall be the Snake Bag from Sacramento Bag Manufacturing Company or an approved equal.

All costs for furnishing and installing the sediment filter bags shall be incidental to the contract unit price per foot for "Sediment Filter Bag."

All costs for removing the sediment filter bags shall be incidental to the contract unit price per foot for "Remove Sediment Filter Bag".

Payment for high flow silt fence shall be as stated in Section 734.5 of the Standard Specifications.

All costs for furnishing, installing, and removing the 2" depth of aggregate shall be incidental to other erosion and sediment control bid items.

INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING (continued)

All costs for removing and disposing of sediment collected by the sediment control device shall be incidental to the contract unit price per cubic yard for "Remove Sediment".

The removed sediment shall be placed at a location away from the drop inlet where the sediment will not be washed back into the drop inlet or other storm sewer system.

The Contractor and Engineer shall inspect and maintain the sediment control device once every week and within 24 hours after every rainfall event greater than 1/2".

TABLE OF INTERIM SEDIMENT CONTROL AT INLETS, MANHOLES, AND JUNCTION BOXES AFTER SURFACING REMOVAL AND BEFORE PLACEMENT OF SURFACING

Station	High Flow Silt Fence Quantity (Ft)	Sediment Filter Bag Quantity (Ft)
88+32-21.17' L	18	24
88+32-21.17' R	22	32
88+81-21.17' R	28	32
91+73-23.63' L	38	48
91+73-23.63' R	38	48
92+49-25' L	28	32
93+12-23.63' L	38	48
93+12-23.63' R	38	48
98+07-30' L	28	32
99+42-21.71' R	18	24
99+65-48' L	18	24
100+27-21.17' R	22	32
100+27-21.17' L	22	32
103+12-21.17' R	22	32
103+12-21.17' L	22	32
103+33.72-50.5' L	38	48
103+36-47.80' R	22	32
103+50-50.50' L	28	32
103+50-47.80' R	28	32
103+69-47.80' R	18	24
103+71.38-50.5' L	18	24
106+75-21.17' L	22	24
106+75-21.17' R	18	24
106+99-46.87' L	22	32
107+34-47.70' L	18	24
110+42-21.17' R	18	24
110+42-21.17' L	18	24
110+66-47.80' L	18	24
110+66-47.80' R	18	24
110+90-21.20' R	28	32
110+90-47.80' L	28	32
110+90-47.80' R	28	32
111+00-47.80' R	18	24

111+00-47.80' L	18	24
112+08-23.63' R	38	48
112+08-23.63' L	38	48
112+54-23.50' R	28	32
113+13-23.63' R	38	48
113+13-23.63' L	38	48
117+08-21.17' R	18	24
117+08-21.17' L	18	24
Totals:	1,018	1,328

SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES

This type of sediment control device should be used where there is pavement in the vicinity of the drop inlets and storm water or sediment could possibly enter the frame and grate. Sediment Control at Inlets with Frame and Grates shall be installed prior to working in the vicinity of the drop inlets.

The Contractor shall be responsible for maintaining and repairing the sediment control devices for the duration of the project for which sediment control measures are required. Maintenance shall be scheduled to prevent storm water from backing up into the driving lane.

"Sediment Control at Inlets with Frames and Grates" will be paid for one time at each location, regardless of the number of times the sediment control devices are installed, inspected, cleaned, removed, repaired, or replaced. All costs associated with furnishing, installing, inspecting, maintaining, cleaning, sediment removal, and repairing Sediment Control at Inlets with Frames and Grates shall be incidental to the contract unit price per each for "Sediment Control at Inlet with Frame and Grate".

Sediment collection devices shall be:

A commercial made sediment collection device from the "Sediment Control at Inlet with Frame and Grate" list or an approved equal. The device shall be installed in reinforced concrete drop inlets according to the manufacturer's recommendations.

Sediment Control at Inlet with Frame and Grate Approved List:

Product	Manufacturer
InfraSafe Debris Collection Device with filter sock	Royal Environmental Systems, Inc. Stacy, MN Phone: 1-800-817-3240 www.royalenterprises.net
Dandy Curb Sack	Dandy Products Inc. Dublin, OH Phone: 1-800-591-2284 www.dandyproducts.com
Silt Trapper	Storm Water Solutions Lakeville, MN Phone: 1-952-461-4376 www.silttrapper.com
DIP Basket	Skyview Construction Co., LLC Waubay, SD Phone: 1-605-520-0555 www.skyviewconst.com

FLEXSTORM Inlet Filters

Inlet and Pipe Protection, Inc.
Naperville, IL
Phone: 1-866-287-8655
www.inletfilters.com

GR-8 Guard
or
Combo Guard

ERTEC Environmental Systems LLC
Alameda, CA
Phone: 1-866-521-0724
www.ertecsystems.com

Sediment Catchers

Shaun Jensen
Brookings, SD
Phone: 1-605-690-4950
Enviroscape ECM, Ltd.
Oakwood, OH
Phone: 1-419-594-3210
www.strawblanket.com

Grate FX, Slammer, or VertPro

BX Inlet Sediment Boxes

BX Civil and Construction
Dell Rapids, SD
Phone: 1-605-428-5483
bx-cc.com

TABLE OF SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES

Station	Quantity (Each)
88+32-21.17' L	1
88+32-21.17' R	1
99+42-21.71' R	1
99+65-48' L	1
100+27-21.17' R	1
100+27-21.17' L	1
103+12-21.17' R	1
103+12-21.17' L	1
103+36-47.80' R	1
103+69-47.80' R	1
106+75-21.17' R	1
106+75-21.17' L	1
106+99-46.87' L	1
107+34-47.70' L	1
110+42-21.17' R	1
110+42-21.17' L	1
110+66-47.80' L	1

Plotting Date: 12/23/2014

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0012(151)389	D4	D20

TABLE OF SEDIMENT CONTROL AT INLETS WITH FRAMES AND GRATES (continued)

110+66-47.80' R	1
111+00-47.80' R	1
111+00-47.80' L	1
117+08-21.17' R	1
117+08-21.17' L	1
Totals:	22

SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLETS

The sediment control device provided shall be from the list shown below. Refer to Standard Plate 734.11 for details.

Product	Manufacturer
Dandy Curb	Dandy Products Inc. Dublin, OH Phone: 1-800-591-2284 www.dandyproducts.com
Gutterbuddy	ACF Environmental Richmond, VA Phone: 1-800-448-3636 www.acfenvironmental.com
SS-300	Silt-Saver, Inc. Conyers, GA Phone: 1-888-382-7458 www.siltsaver.com
Curb Inlet Guard	ECTEC Environmental Systems LLC Alameda, CA Phone: 1-866-521-0724 www.ertecsystems.com

TABLE OF SEDIMENT CONTROL AT TYPE S REINFORCED CONCRETE DROP INLETS

Station	Clear Opening Width (Ft)	Quantity* (Ft)
91+73-23.63' L	11	12
91+73-23.63' R	11	12
93+12-23.63' L	11	12
93+12-23.63' R	11	12
103+33.72-50.5' L	11	12
103+71.38-50.5' L	11	12
112+08-23.63' R	11	12
112+08-23.63' L	11	12
113+13-23.63' R	11	12
113+13-23.63' L	11	12
Total:		120

* Quantity shown is the minimum length required and shall be the basis of payment.

DEWATERING AND SEDIMENT COLLECTING

The Contactor has the option to treat sediment laden water trapped within the project limits using the method shown in the DEWATERING AND SEDIMENT COLLECTION SYSTEM detail, or the Contractor may elect to transport sediment laden water off the project.

If the Contractor elects to transport sediment laden water off the project, no additional payment for loading, transporting, and labor costs will be made. Water transported off the project limits shall not be disposed of in an area where it can enter a waterway. The disposal site must be approved by the Engineer.

STREET SWEEPING

Vehicle tracking of sediment from the construction site shall be minimized. Street sweeping shall be used if erosion and sediment control best management practices are not adequate to prevent sediment from being tracked onto the street.

The Contractor shall use a pickup broom having integral self-contained storage to clean the roadway. The pickup broom used shall be a minimum of 6 feet wide and have working gutter brooms.

At a minimum, sweeping will be required:

1. Prior to opening any segment or roadway to traffic.
2. Following pavement grooving operations and prior to the application of the pavement marking tape.
3. When sawing operations are underway in the inside driving lanes, the outside driving lanes and gutter may need to be swept to control dust.

All costs for cleaning the roadway with a pickup broom shall be incidental to the contract unit price per hour for "Sweeping".

CONSTRUCTION ENTRANCE

The Contractor shall install a Construction Entrance at locations where there is a potential for mud tracking and sediment flow from the construction site and work area onto a paved public roadway.

It is the Contractor's option to use the SDDOT Construction Entrance (See SDDOT Construction Entrance notes and details), a product from the list provided in these notes, or other products or processes as approved by the Engineer during construction.

If the Contractor elects to use one of the products listed in the table, then the Contractor shall install the construction entrance product in accordance with the manufacturer's installation instructions or as directed by the Engineer.

The Contractor shall maintain the construction entrance such that mud tracking and sediment flow will not enter the roadway or adjacent drainage areas. The construction entrance shall be routinely inspected and the Contractor shall repair or replace material as deemed necessary by the Engineer.

All costs for furnishing, installing, maintaining, and removal of the construction entrance including equipment, labor, materials, and incidentals shall be included in the contract unit price per each for "Construction Entrance".

The following table is a list of known construction entrance products available for use:

Product	Manufacturer
Grizzly Rumble Grate (10' width and 24' length required)	Trackout Control, LLC Tempe, AZ Phone: 1-800-761-0056 www.trackoutcontrol.com
Rumble Grid (12' width and 24' length including combination of grids and ramps required)	Pro-Tec Equipment, Inc. Charlotte, MI Phone: 1-800-292-1225 www.pro-tecequipment.com

SDDOT CONSTRUCTION ENTRANCE

If the SDDOT Construction Entrance is utilized, then the Contractor shall install the SDDOT Construction Entrance in accordance with these notes and the detail drawings.

Pit run material shall be obtained from a granular source and shall conform to the following gradation:

Sieve Size	Percent Passing
6"	100%
#4	0-60%
#200	0-20%

The pit run material shall be compacted to the satisfaction of the Engineer.

The aggregate for the granular material shall conform to the following gradation requirements:

Sieve Size	Percent Passing
3"	100%
2 1/2"	90-100%
1 1/2"	25-60%
3/4"	0-10%
1/2"	0-5%

The granular material shall be placed in 6" maximum lifts.

It is anticipated that the granular material will need to be periodically removed and replaced as it becomes inundated with mud and sediment.

The MSE geotextile shall conform to Section 831 of the Standard Specifications. The MSE geotextile shall be on the Approved Products List for this material or will be certified by the supplier to meet this specification prior to installation.

The MSE geotextile should be kept as taut as possible prior to placing.

Equipment shall not be allowed on the MSE geotextile until the first lift of granular material is in place.

All seams in the MSE geotextile shall be overlapped at least 2' and shingled.

STORM WATER POLLUTION PREVENTION PLAN CHECKLIST

(The numbers right of the title headings are reference numbers to the GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES)

❖ **SITE DESCRIPTION (4.2 1)**

- **Project Limits: See Title Sheet (4.2 1.b)**
- **Project Description: See Title Sheet (4.2 1.a.)**
- **Site Map(s): See Title Sheet and Plans (4.2 1.f. (1)-(6))**
- **Major Soil Disturbing Activities** (check all that apply)
 - Clearing and grubbing
 - Excavation/borrow
 - Grading and shaping
 - Filling
 - Cutting and filling
 - Other (describe): Lighting and Signals
- **Total Project Area 10.2 Acres (4.2 1.b.)**
- **Total Area To Be Disturbed 8.6 Acres (4.2 1.b.)**
- **Existing Vegetative Cover (%) 65**
- **Soil Properties: AASHTO Soil Classification: A-7-6, A-6, A-7-5, A-6**
- **Sandy Clay, Clay Sand, Silty Clay, Silty Sand (4.2 1. d.)**
- **Name of Receiving Water Body/Bodies**
S Fork Whetstone River **(4.2 1.e.)**

❖ **ORDER OF CONSTRUCTION ACTIVITIES (4.2 1.c.)**

- (Stabilization measures shall be initiated as soon as possible, but in no case later than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased. Initiation of final or temporary stabilization may exceed the 14-day limit if earth disturbing activities will be resumed within 21 days.)
- **Special sequencing requirements (see Section C.)**
 - **Install stabilized construction entrances as needed.**
 - **Install perimeter protection where runoff sheets from the site.**
 - **Remove and store topsoil.**
 - **Stabilize disturbed areas with silt fence, erosion control wattles, temporary inlet protection, etc.**
 - **Install Curb & Gutter, Storm Sewer, Lighting and Signals, and Sidewalk.**
 - **Complete final grading.**
 - **Complete AC Surfacing.**
 - **Place topsoil, permanent seed and mulch, and install inlet protection for final stabilization.**

❖ **EROSION AND SEDIMENT CONTROLS (4.2 2.a.(1)(a)-(f))**

- (Check all that apply)
- **Stabilization Practices (See Detail Plan Sheets)**
 - Temporary Seeding (Cover Crop Seeding)
 - Permanent Seeding
 - Sodding
 - Planting (Woody Vegetation for Soil Stabilization)
 - Mulching (Grass Hay or Straw)
 - Hydraulic Mulch (Wood Fiber Mulch)
 - Soil Stabilizer
 - Bonded Fiber Matrix
 - Erosion Control Blankets or Mats
 - Vegetation Buffer Strips
 - Roughened Surface (e.g. tracking)
 - Dust Control
 - Other:

➤ **Structural Temporary Erosion and Sediment Controls**

- Silt Fence
- Floating Silt Curtain
- Straw Bale Check
- Temporary Berm
- Temporary Slope Drain
- Straw Wattles or Rolls
- Turf Reinforcement Mat
- Rip Rap
- Gabions
- Rock Check Dams
- Sediment Traps/Basins
- Inlet Protection
- Outlet Protection
- Surface Inlet Protection (Area Drain)
- Curb Inlet Protection
- Stabilized Construction Entrances
- Entrance/Exit Equipment Tire Wash
- Interceptor Ditch
- Concrete Washout Area
- Temporary Diversion Channel
- Work Platform
- Temporary Water Barrier
- Temporary Water Crossing
- Other:

➤ **Wetland Avoidance**

Will construction and/or erosion and sediment controls impinge on regulated wetlands? Yes No If yes, the structural and erosion and sediment controls have been included in the total project wetland impacts and have been included in the 404 permit process with the USACE.

➤ **Storm Water Management (4.2 2.b., (1) and (2))**

Storm water management will be handled by temporary controls outlined in "EROSION AND SEDIMENT CONTROLS" above, and any permanent controls needed to meet permanent storm water management needs in the post construction period. Permanent controls will be shown on the plans and noted as permanent.

➤ **Other Storm Water Controls (4.2 2.c., (1) and (2))**

- **Waste Disposal**
All liquid waste materials will be collected and stored in sealed metal containers approved by the project engineer. All trash and construction debris from the site will be deposited in the approved containers. Containers will be serviced as necessary, and the trash will be hauled to an approved disposal site or licensed landfill. All onsite personnel will be instructed in the proper procedures for waste disposal, and notices stating proper practices will be posted in the field office. The general contractor's representative responsible for the conduct of work on the site will be responsible for seeing waste disposal procedures are followed.
- **Hazardous Waste**
All hazardous waste materials will be disposed of in a manner specified by local or state regulations or by the manufacturer. Site personnel will be instructed in these practices, and the individual designated as the contractor's on-site representative will be responsible for seeing that these practices are followed.
- **Sanitary Waste**
Portable sanitary facilities will be provided on all construction sites. Sanitary waste will be collected from the portable units in a timely manner by a licensed waste management contractor or as required by any local regulations.

❖ **Maintenance and Inspection (4.2 3. and 4.2 4.)**

➤ **Maintenance and Inspection Practices**

- Inspections will be conducted at least one time per week and after a storm event of 0.50 inches or greater.
- All controls will be maintained in good working order. Necessary repairs will be initiated within 24 hours of the site inspection report.
- Silt fence will be inspected for depth of sediment and for tears in order to ensure the fabric is securely attached to the posts and that the posts are well anchored. Sediment buildup will be removed from the silt fence when it reaches 1/3 of the height of the silt fence.
- Sediment basins and traps will be checked. Sediment will be removed when depth reaches approximately 50 percent of the structure's capacity, and at the conclusion of the construction.
- Check dams will be inspected for stability. Sediment will be removed when depth reaches 1/2 the height of the dam.
- All seeded areas will be checked for bare spots, washouts, and vigorous growth free of significant weed infestations.
- Inspection and maintenance reports will be prepared on form DOT 298 for each site inspection, this form will also be used to document changes to the SWPPP. A copy of the completed inspection form will be filed with the SWPPP documents.
- The SDDOT Project Engineer and contractor's site superintendent are responsible for inspections. Maintenance, repair activities are the responsibility of the contractor. The SDDOT Project Engineer will complete the inspection and maintenance reports and distribute copies per the distribution instructions on DOT 298.

❖ **Non-Storm Water Discharges (3.0)**

The following non-storm water discharges are anticipated during the course of this project (check all that apply).

- Discharges from water line flushing.
- Pavement wash-water, where no spills or leaks of toxic or hazardous materials have occurred.
- Uncontaminated ground water associated with dewatering activities.

❖ **Materials Inventory (4.2. 2.c.(2))**

The following materials or substances are expected to be present on the site during the construction period. These materials will be handled as noted under the headings "EROSION AND SEDIMENT CONTROLS" and "SPILL PREVENTION" (check all that apply).

- Concrete and Portland Cement
- Detergents
- Paints
- Metals
- Bituminous Materials
- Petroleum Based Products
- Cleaning Solvents
- Wood
- Cure
- Texture
- Chemical Fertilizers
- Other: Organic Fertilizer

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D7	TOTAL SHEETS D20
-----------------------------	----------------------------	-------------	------------------------

Plotting Date: 12/23/2014

❖ **Spill Prevention (4.2 2.c.(2))**

➤ **Material Management**

▪ **Housekeeping**

- Only needed products will be stored on-site by the contractor.
- Except for bulk materials the contractor will store all materials under cover and in appropriate containers.
- Products must be stored in original containers and labeled.
- Material mixing will be conducted in accordance with the manufacturer's recommendations.
- When possible, all products will be completely used before properly disposing of the container off site.
- The manufacturer's directions for disposal of materials and containers will be followed.
- The contractor's site superintendent will inspect materials storage areas regularly to ensure proper use and disposal.
- Dust generated will be controlled in an environmentally safe manner.
- Vegetation areas not essential to the construction project will be preserved and maintained as noted on the plans.

▪ **Hazardous Materials**

- Products will be kept in original containers unless the container is not resealable.
- Original labels and material safety data sheets will be retained in a safe place to relay important product information.
- If surplus product must be disposed of, manufacturer's label directions for disposal will be followed.
- Maintenance and repair of all equipment and vehicles involving oil changes, hydraulic system drain down, degreasing operations, fuel tank drain down and removal, and other activities which may result in the accidental release of contaminants will be conducted on an impervious surface and under cover during wet weather to prevent the release of contaminants onto the ground.
- Wheel wash water will be collected and allowed to settle out suspended solids prior to discharge. Wheel wash water will not be discharged directly into any storm water system or storm water treatment system.
- Potential pH-modifying materials such as: bulk cement, cement kiln dust, fly ash, new concrete washings, concrete pumping, residuals from concrete saw cutting (either wet or dry), and mixer washout waters will be collected on site and managed to prevent contamination of storm water runoff.

➤ **Product Specific Practices (6.8)**

▪ **Petroleum Products**

All on-site vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers which are clearly labeled.

▪ **Fertilizers**

Fertilizers will be applied only in the amounts specified by the SDDOT. Once applied, fertilizers will be worked into the soil to limit the exposure to storm water. Fertilizers will be stored in an enclosed area. The contents of partially used fertilizer bags will be transferred to sealable containers to avoid spills.

▪ **Paints**

All containers will be tightly sealed and stored when not required for use. The excess will be disposed of according to the

manufacturer's instructions and any applicable state and local regulations.

▪ **Concrete Trucks**

Contractors will provide designated truck washout areas on the site. These areas must be self contained and not connected to any storm water outlet of the site. Upon completion of construction washout areas will be properly stabilized.

➤ **Spill Control Practices (4.2 2 c.(2))**

In addition to the previous housekeeping and management practices, the following practices will be followed for spill prevention and cleanup if needed.

- For all hazardous materials stored on site, the manufacturer's recommended methods for spill clean up will be clearly posted. Site personnel will be made aware of the procedures and the locations of the information and cleanup supplies.
- Appropriate cleanup materials and equipment will be maintained by the contractor in the materials storage area on-site. As appropriate, equipment and materials may include items such as brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for clean up purposes.
- All spills will be cleaned immediately after discovery and the materials disposed of properly.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- After a spill a report will be prepared describing the spill, what caused it, and the cleanup measures taken. The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, as well as clean up instructions in the event of reoccurrences.
- The contractor's site superintendent, responsible for day-to-day operations, will be the spill prevention and cleanup coordinator. The contractor is responsible for ensuring that the site superintendent has had appropriate training for hazardous materials handling, spill management, and cleanup.

➤ **Spill Response (4.2 2 c.(2))**

The primary objective in responding to a spill is to quickly contain the material(s) and prevent or minimize migration into storm water runoff and conveyance systems. If the release has impacted on-site storm water, it is critical to contain the released materials on-site and prevent their release into receiving waters. If a spill of pollutants threatens storm water or surface water at the site, the spill response procedures outlined below must be implemented in a timely manner to prevent the release of pollutants.

- The contractor's site superintendent will be notified immediately when a spill or the threat of a spill is observed. The superintendent will assess the situation and determine the appropriate response.
- If spills represent an imminent threat of escaping erosion and sediment controls and entering receiving waters, personnel will be directed to respond immediately to contain the release and notify the superintendent after the situation has been stabilized.
- Spill kits containing appropriate materials and equipment for spill response and cleanup will be maintained by the contractor at the site.
- If oil sheen is observed on surface water (e.g. settling ponds, detention ponds, swales), action will be taken immediately to remove the material causing the sheen. The contractor will use appropriate materials to contain and absorb the spill. The source of the oil sheen will also be identified and removed or repaired as necessary to prevent further releases.

- If a spill occurs the superintendent or the superintendent's designee will be responsible for completing the spill reporting form and for reporting the spill to SD DENR.
- Personnel with primary responsibility for spill response and clean up will receive training by the contractor's site superintendent or designee. The training must include identifying the location of the spill kits and other spill response equipment and the use of spill response materials.
- Spill response equipment will be inspected and maintained as necessary to replace any materials used in spill response activities.

❖ **Spill Notification**

In the event of a spill, the contractor's site superintendent will make the appropriate notification(s), consistent with the following procedures:

- A release or spill of a regulated substance (includes petroleum and petroleum products) must be reported to DENR immediately **if any one of the following** conditions exists:
 - The discharge threatens or is in a position to threaten the waters of the state (surface water or ground water).
 - The discharge causes an immediate danger to human health or safety.
 - The discharge exceeds 25 gallons.
 - The discharge causes a sheen on surface water.
 - The discharge of any substance that exceeds the ground water quality standards of ARSD (Administrative Rules of South Dakota) chapter 74:51:01.
 - The discharge of any substance that exceeds the surface water quality standards of ARSD chapter 74:51:01.
 - The discharge of any substance that harms or threatens to harm wildlife or aquatic life.
 - The discharge of crude oil in field activities under SDCL (South Dakota Codified Laws) chapter 45-9 is greater than 1 barrel (42 gallons).


To report a release or spill, call DENR at 605-773-3296 during regular office hours (8 a.m. to 5 p.m. Central time). To report the release after hours, on weekends or holidays, call State Radio Communications at 605-773-3231. Reporting the release to DENR does not meet any obligation for reporting to other state, local, or federal agencies. Therefore, the responsible person must also contact local authorities to determine the local reporting requirements for releases. DENR recommends that spills also be reported to the National Response Center at (800) 424-8802.

❖ **Construction Changes (4.4)**

When changes are made to the construction project that will require alterations in the temporary erosion controls of the site, the Storm Water Pollution Prevention Plan (SWPPP) will be amended to provide appropriate protection to disturbed areas, all storm water structures, and adjacent waters. The SDDOT Project Engineer will modify the SWPPP plan (DOT 298) and drawings to reflect the needed changes. Copies of changes will be routed per DOT 298. Copies of forms and the SWPPP will be retained in a designated place for review over the course of the project.

EROSION AND SEDIMENT CONTROL LEGEND

SYMBOLOLOGY FOR BEST MANAGEMENT PRACTICES

-  STORM WATER DISCHARGE POINT
-  LOW FLOW SILT FENCE
-  HIGH FLOW SILT FENCE
-  HIGH FLOW SILT FENCE AT PIPE INLET
-  SILT TRAP
-  SEDIMENT CONTROL AT INLET BEFORE PLACEMENT OF SURFACING
-  TEMPORARY SEDIMENT BARRIER
-  TEMPORARY WATER BARRIER
-  FLOATING SILT CURTAIN
-  SEDIMENT FILTER BAGS
-  TRIANGULAR SILT BARRIERS
-  EROSION CONTROL WATTLES ON SLOPES
-  EROSION CONTROL WATTLES AT INLETS
-  EROSION CONTROL WATTLES IN DITCHES
-  EROSION BALES
-  SURFACE ROUGHENING
-  SOIL STABILIZER / TEMPORARY MULCH / DUST CONTROL
-  CUT INTERCEPTOR DITCH
-  TEMPORARY SLOPE DRAIN
-  SEDIMENT CONTROL AT INLET AFTER PLACEMENT OF SURFACING
-  INTERMEDIATE PHASE--SOIL STABILIZER, FINAL PHASE--FIBER REINFORCED MATRIX
-  ROCK CHECK DAM
-  VEGETATED BUFFER STRIP
-  TYPE 1 EROSION CONTROL BLANKET
-  TYPE 2 EROSION CONTROL BLANKET
-  TYPE 3 EROSION CONTROL BLANKET
-  TYPE 4 EROSION CONTROL BLANKET
-  TYPE 1 TURF REINFORCEMENT MAT
-  TYPE 2 TURF REINFORCEMENT MAT
-  TYPE 3 TURF REINFORCEMENT MAT
-  SYNTHETIC CHANNEL PROTECTION
-  TYPE 1 SEDIMENT TRAP
-  TYPE 2 SEDIMENT TRAP
-  TYPE 3 SEDIMENT TRAP

BEST MANAGEMENT PRACTICES

Best Management Practices (BMPs) are split into three categories and are to be used throughout construction.

INITIAL PHASE

BMPs from the Legend shown as Orange Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Initial Phase prior to earth disturbing activities and remain in place for the Intermediate Phase for temporary stabilization and in the Final Phase to achieve final stabilization.

INTERMEDIATE PHASE

BMPs from the Legend shown as Blue Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Intermediate Phase for temporary stabilization and remain in place in the Final Phase to achieve final stabilization.

FINAL PHASE

BMPs from the Legend shown as Green Symbols on the Erosion and Sediment Control Plan Sheets are to be installed in the Final Phase to achieve final stabilization.

If these items are applicable they are to be shown in the updated SWPPP using the Symbols given.

-  TOPSOIL STOCKPILES
-  ON-SITE CONSTRUCTION MATERIAL STORAGE AREAS
-  BORROW AREAS
-  SPILL KIT
-  STABILIZED CONSTRUCTION ENTRANCES
-  WORK PLATFORM
-  VEGETATED BUFFER STRIPS
-  CONCRETE WASHOUTS
-  ASPHALT PLANT SITES
-  CONCRETE PLANT SITES
-  VEHICLE AND EQUIPMENT PARKING, FUELING, AND MAINTENANCE AREAS
-  DUMPSTER OR OTHER TRASH AND DEBRIS CONTAINERS

EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D10	TOTAL SHEETS D20
-----------------------	----------------------------	--------------	---------------------

Plotting Date: 12/23/2014

INTERMEDIATE PHASE

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:

- 88+32-21.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 88+32-21.17' R 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 88+81-21.17' R 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags


FINAL PHASE

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:

- 88+32-21.17' L 1 Each
- 88+32-21.17' R 1 Each



BEGIN NH 0012(151)389
Station 85+81.22

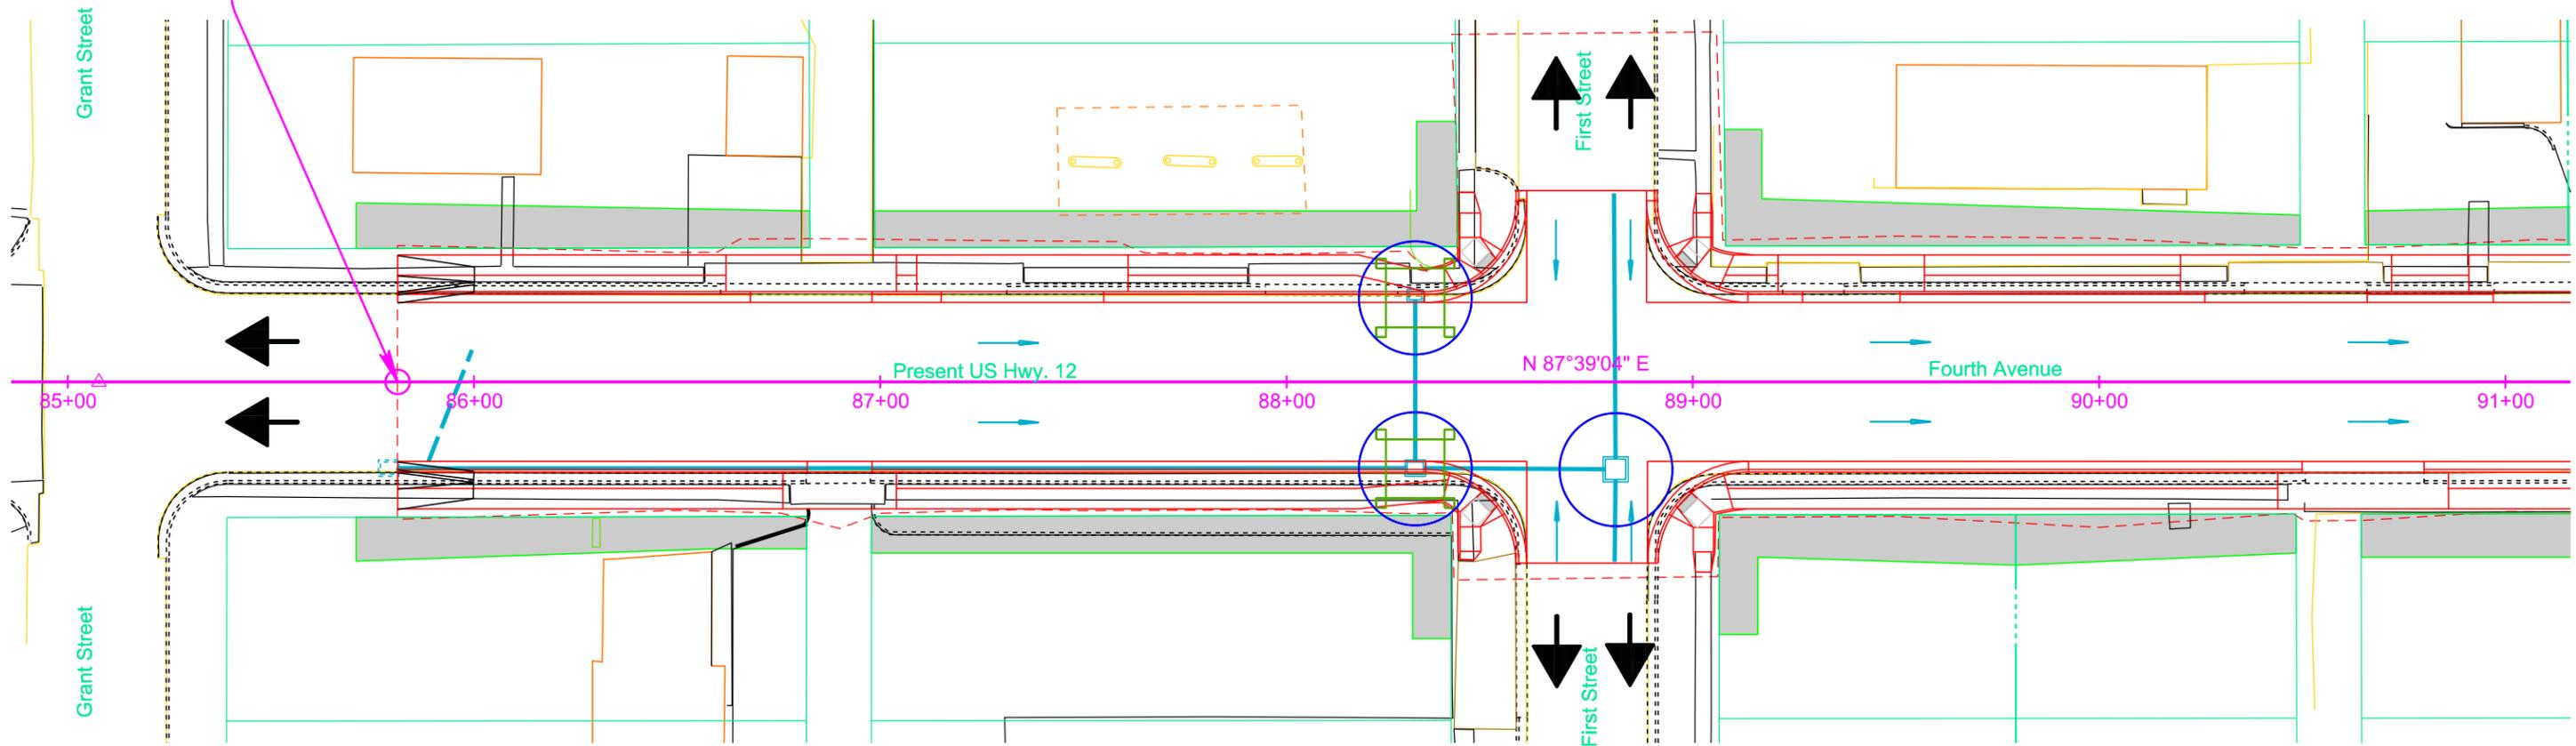

MILBANK

Sec. 7 - T120N - R48W

Plot Scale - 1:40,000

Plotted From - TRPR17200

File - U:\v\proj\gmt028\T108sec.dgn

EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D11	TOTAL SHEETS D20
-----------------------	----------------------------	--------------	---------------------

Plotting Date: 12/23/2014


INTERMEDIATE PHASE

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
 91+73-23.63' L 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
 91+73-23.63' R 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
 92+49-25' L 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
 93+12-23.63' L 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
 93+12-23.63' R 38 Ft High Flow Silt Fence 48 Ft Sediment Filter bags

FINAL PHASE

Install Sediment Control at Type S drop inlets after the placement of surfacing at the following locations:
 91+73-23.63' L 1 Each
 91+73-23.63' R 1 Each
 93+12-23.63' L 1 Each
 93+12-23.63' R 1 Each

Sec. 7 - T120N - R48W

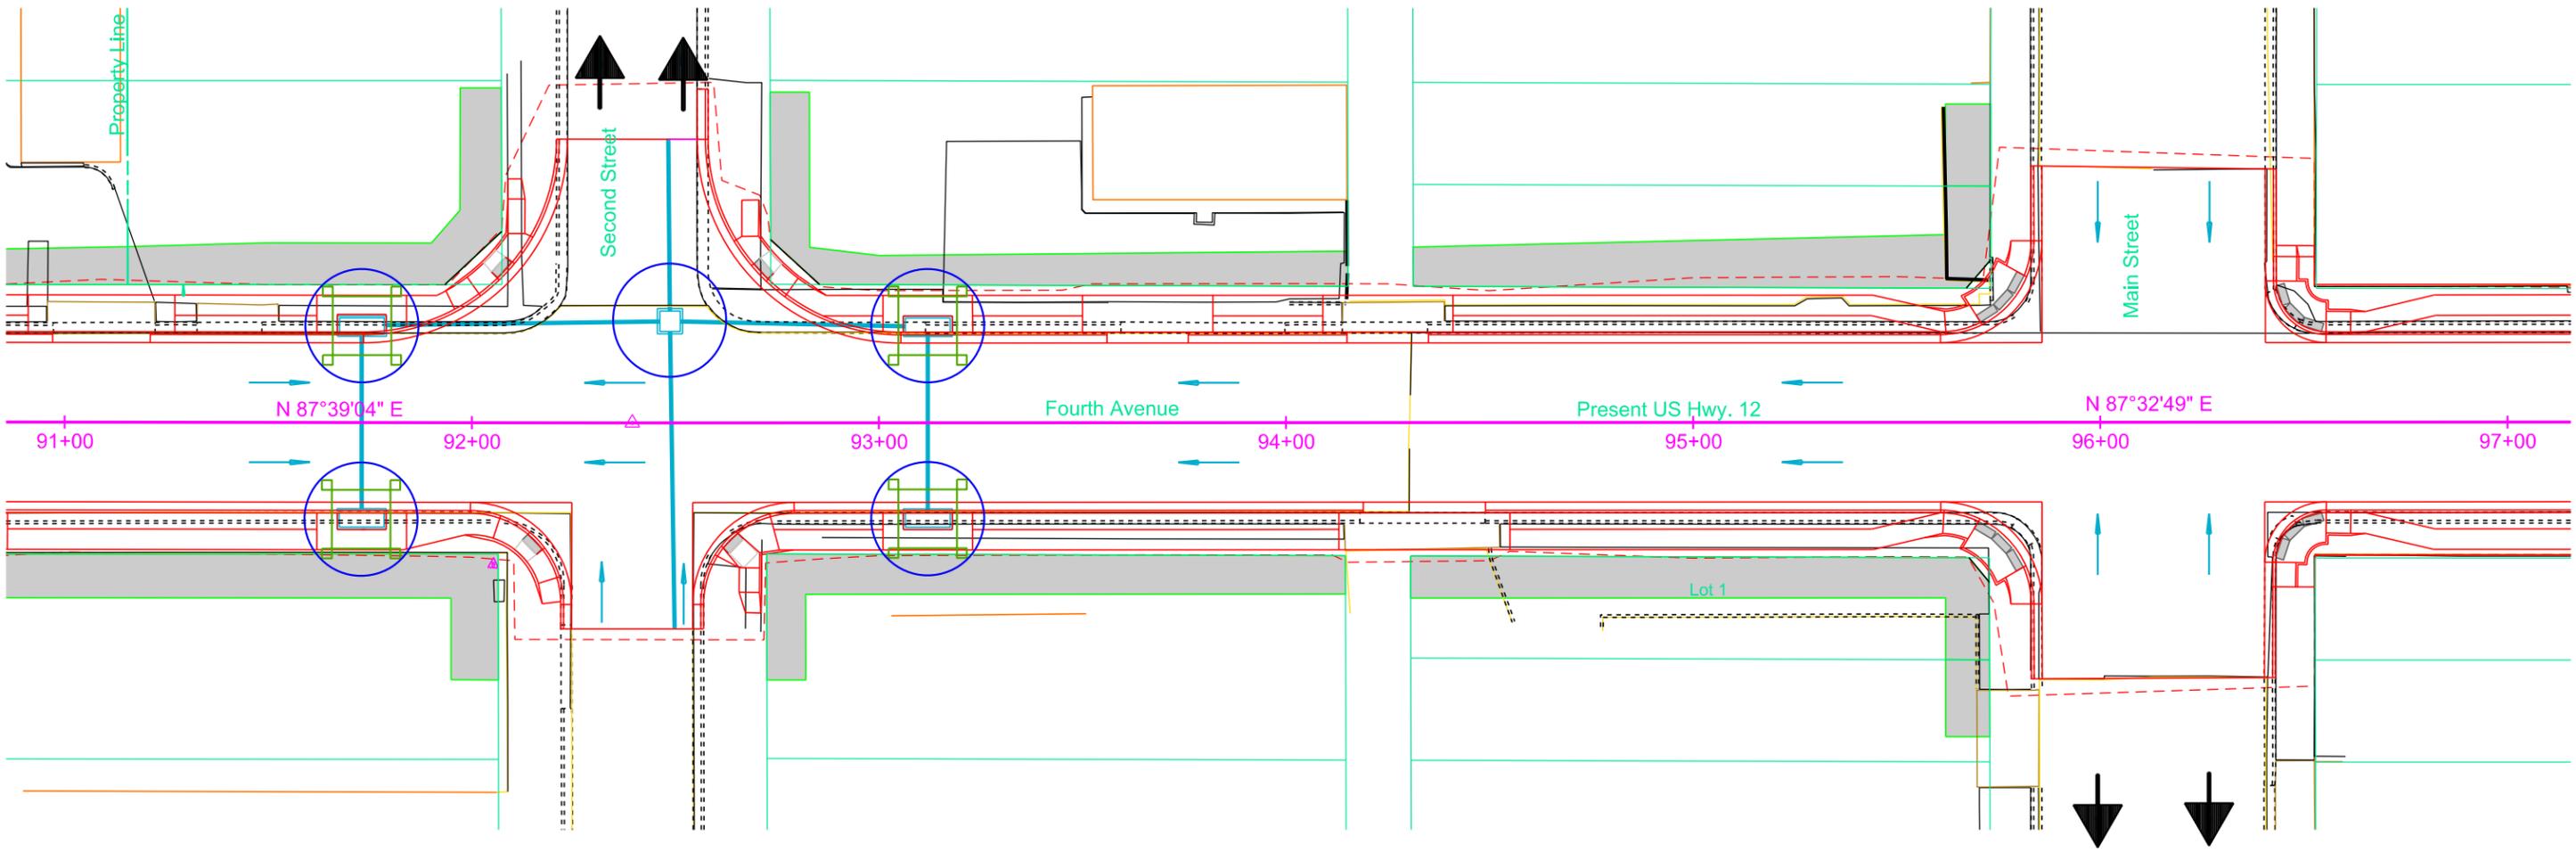

MILBANK

Plot Scale - 1"=40'

Plotted From - TRPR17200

File - U:\proj\gmt028\T1091rec.dgn

EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	NH 0012(151)389	D12	D20

Plotting Date: 12/23/2014

INTERMEDIATE PHASE

Install High Flow Silt Fence at the following locations:
101+72-37' L Perimeter of Type C Drop Inlet 24 Ft


INTERMEDIATE PHASE

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
98+07-30' L 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
99+42-21.71' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
99+65-48' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
100+27-21.17' R 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
100+27-21.17' L 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags

FINAL PHASE

Install Sediment Control at inlets with frames and grates after the placement of surfacing at the following locations:
99+42-21.71' R 1 Each
99+65-48' L 1 Each
100+27-21.17' R 1 Each
100+27-21.17' L 1 Each

Sec. 7 - T120N - R48W

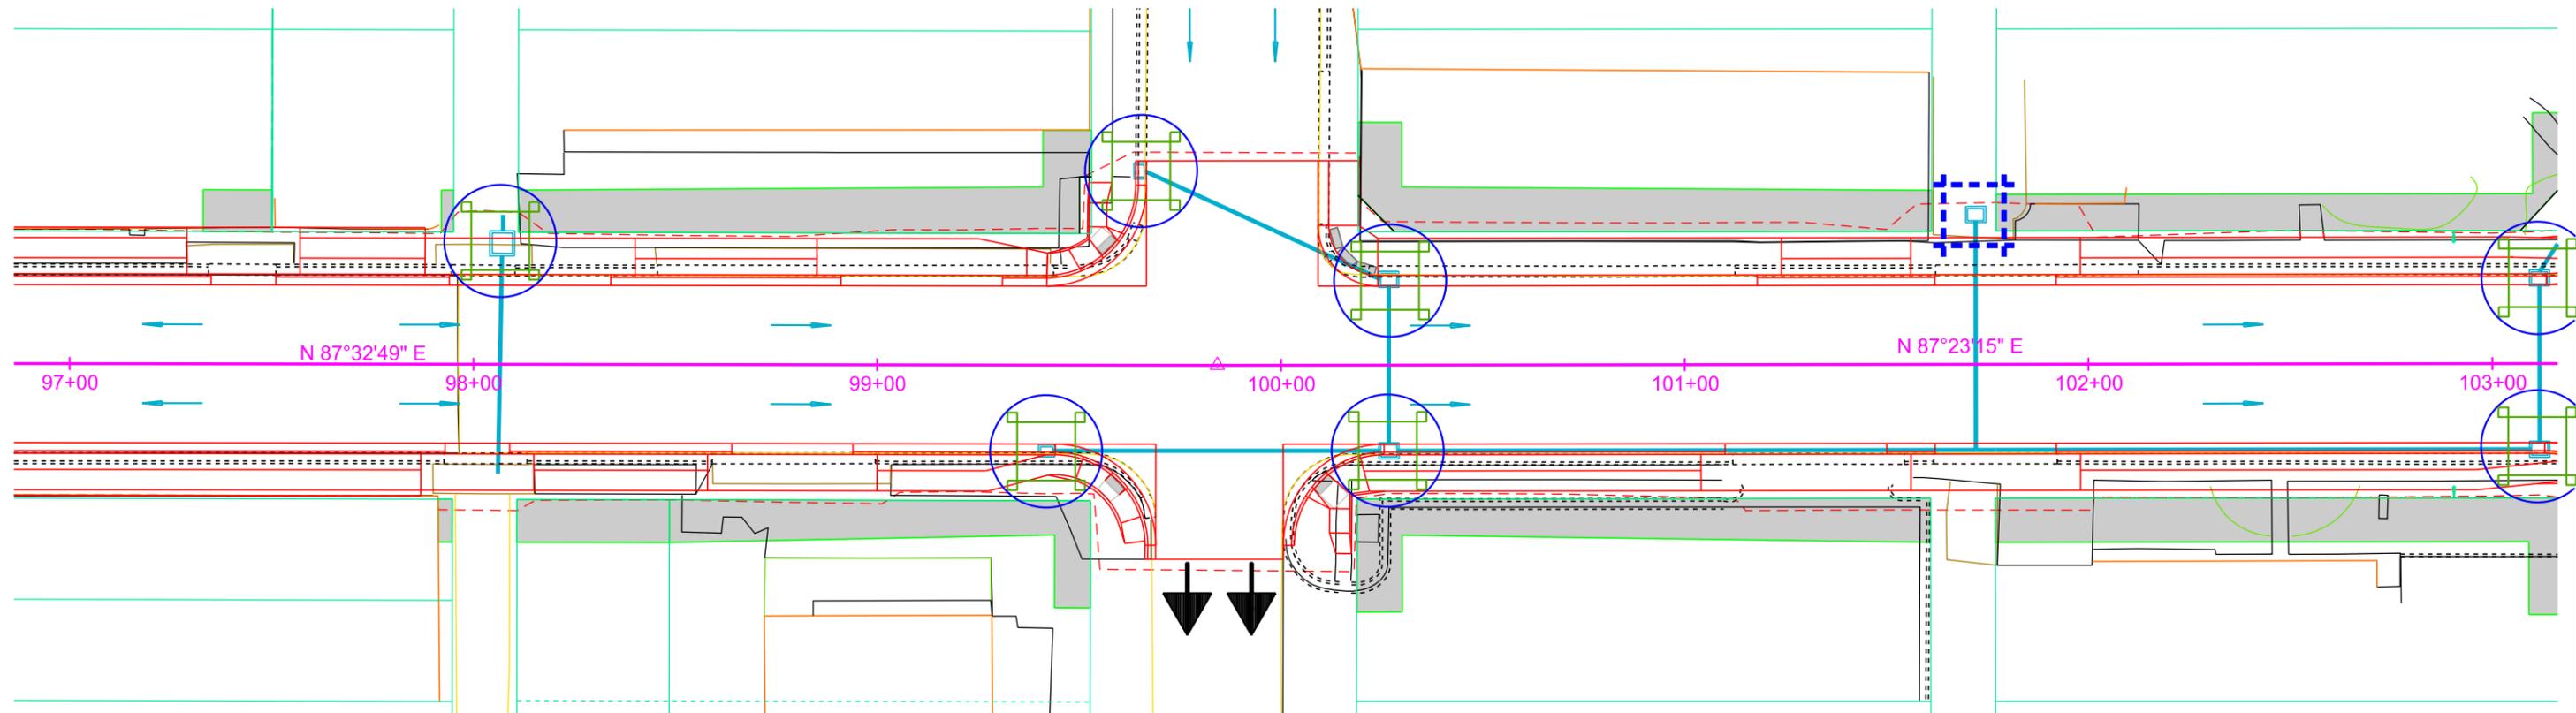

MILBANK

Plot Scale - 1:40

Plotted From - TRPR17200

File - U:\trp\jgmt0281\097.ec.dgn

EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D13	TOTAL SHEETS D20
-----------------------	----------------------------	--------------	---------------------

Plotting Date: 12/23/2014 REV CJ 10/20/2014

INTERMEDIATE PHASE

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:

- 103+12-21.17' R 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 103+12-21.17' L 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 103+33.72-50.5' L 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
- 103+36-47.80' R 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 103+50-50.50' L 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 103+50-47.80' R 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 103+69-47.80' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 103+71.38-50.5' L 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
- 106+75-21.17' L 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 106+75-21.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 106+99-46.87' L 22 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 107+34-47.70' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags

FINAL PHASE

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:


- 103+12-21.17' R 1 Each
- 103+12-21.17' L 1 Each
- 103+36-47.80' R 1 Each
- 103+69-47.80' R 1 Each
- 106+75-21.17' R 1 Each
- 106+75-21.17' L 1 Each
- 106+99-46.87' L 1 Each
- 107+34-47.70' L 1 Each

FINAL PHASE

Install Sediment Control at Type S drop inlets after the placement of surfacing at the following locations:

- 103+33.72-50.5' L 12 Ft
- 103+71.38-50.5' L 12 Ft

Sec. 7 - T120N - R48W

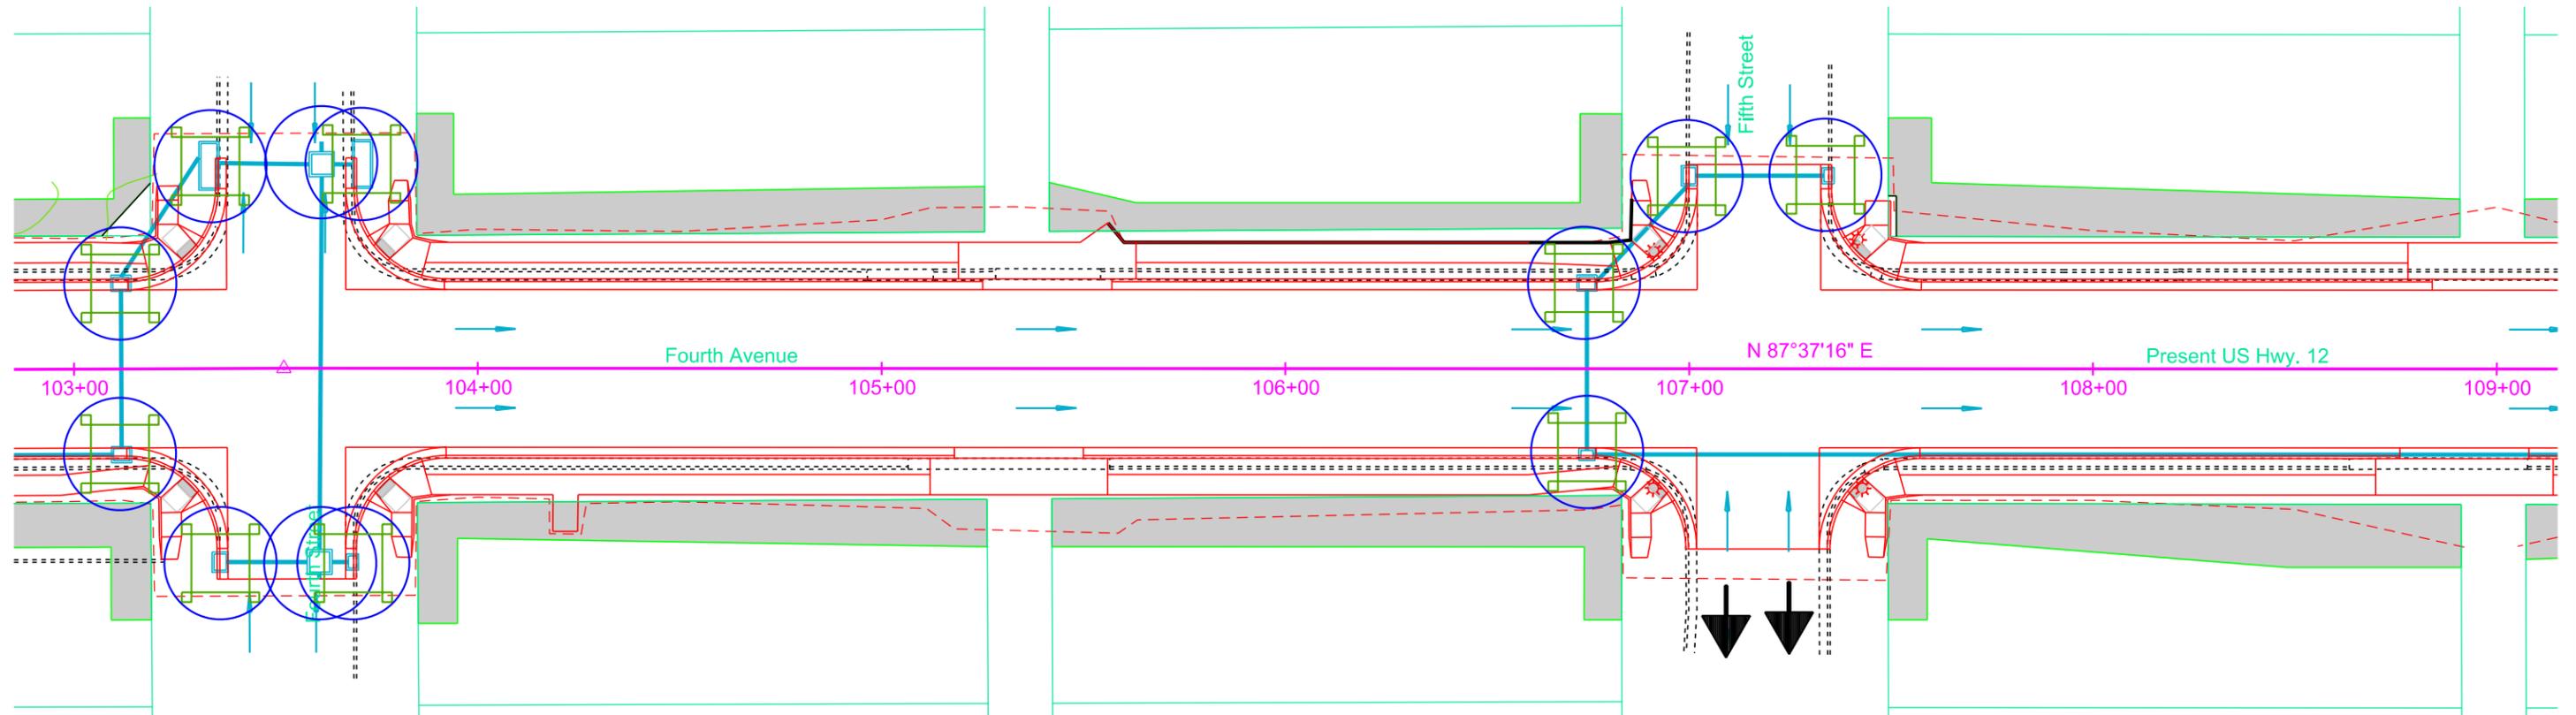

Plot Scale - 1"=40'

Plotted From - TRPR17200

File - U:\proj\gmt028\T103sec.dgn

EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D14	TOTAL SHEETS D20
-----------------------	----------------------------	--------------	---------------------

Plotting Date: 12/23/2014

INTERMEDIATE PHASE

Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:

- 110+42-21.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 110+42-21.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 110+66-47.80' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 110+66-47.80' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 110+90-21.20' R 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 110+90-47.80' L 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 110+90-47.80' R 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 111+00-47.80' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 111+00-47.80' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
- 112+08-23.63' R 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
- 112+08-23.63' L 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
- 112+54-23.50' R 28 Ft High Flow Silt Fence 32 Ft Sediment Filter Bags
- 113+13-23.63' R 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags
- 113+13-23.63' L 38 Ft High Flow Silt Fence 48 Ft Sediment Filter Bags

FINAL PHASE


Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:

- 110+42-21.17' R 1 Each
- 110+42-21.17' L 1 Each
- 110+66-47.80' L 1 Each
- 110+66-47.80' R 1 Each
- 111+00-47.80' R 1 Each
- 111+00-47.80' L 1 Each

FINAL PHASE

Install Sediment Control at Type S drop inlets after the placement of surfacing at the following locations:

- 112+08-23.63' R 12 Ft
- 112+08-23.63' L 12 Ft
- 113+13-23.63' R 12 Ft
- 113+13-23.63' L 12 Ft

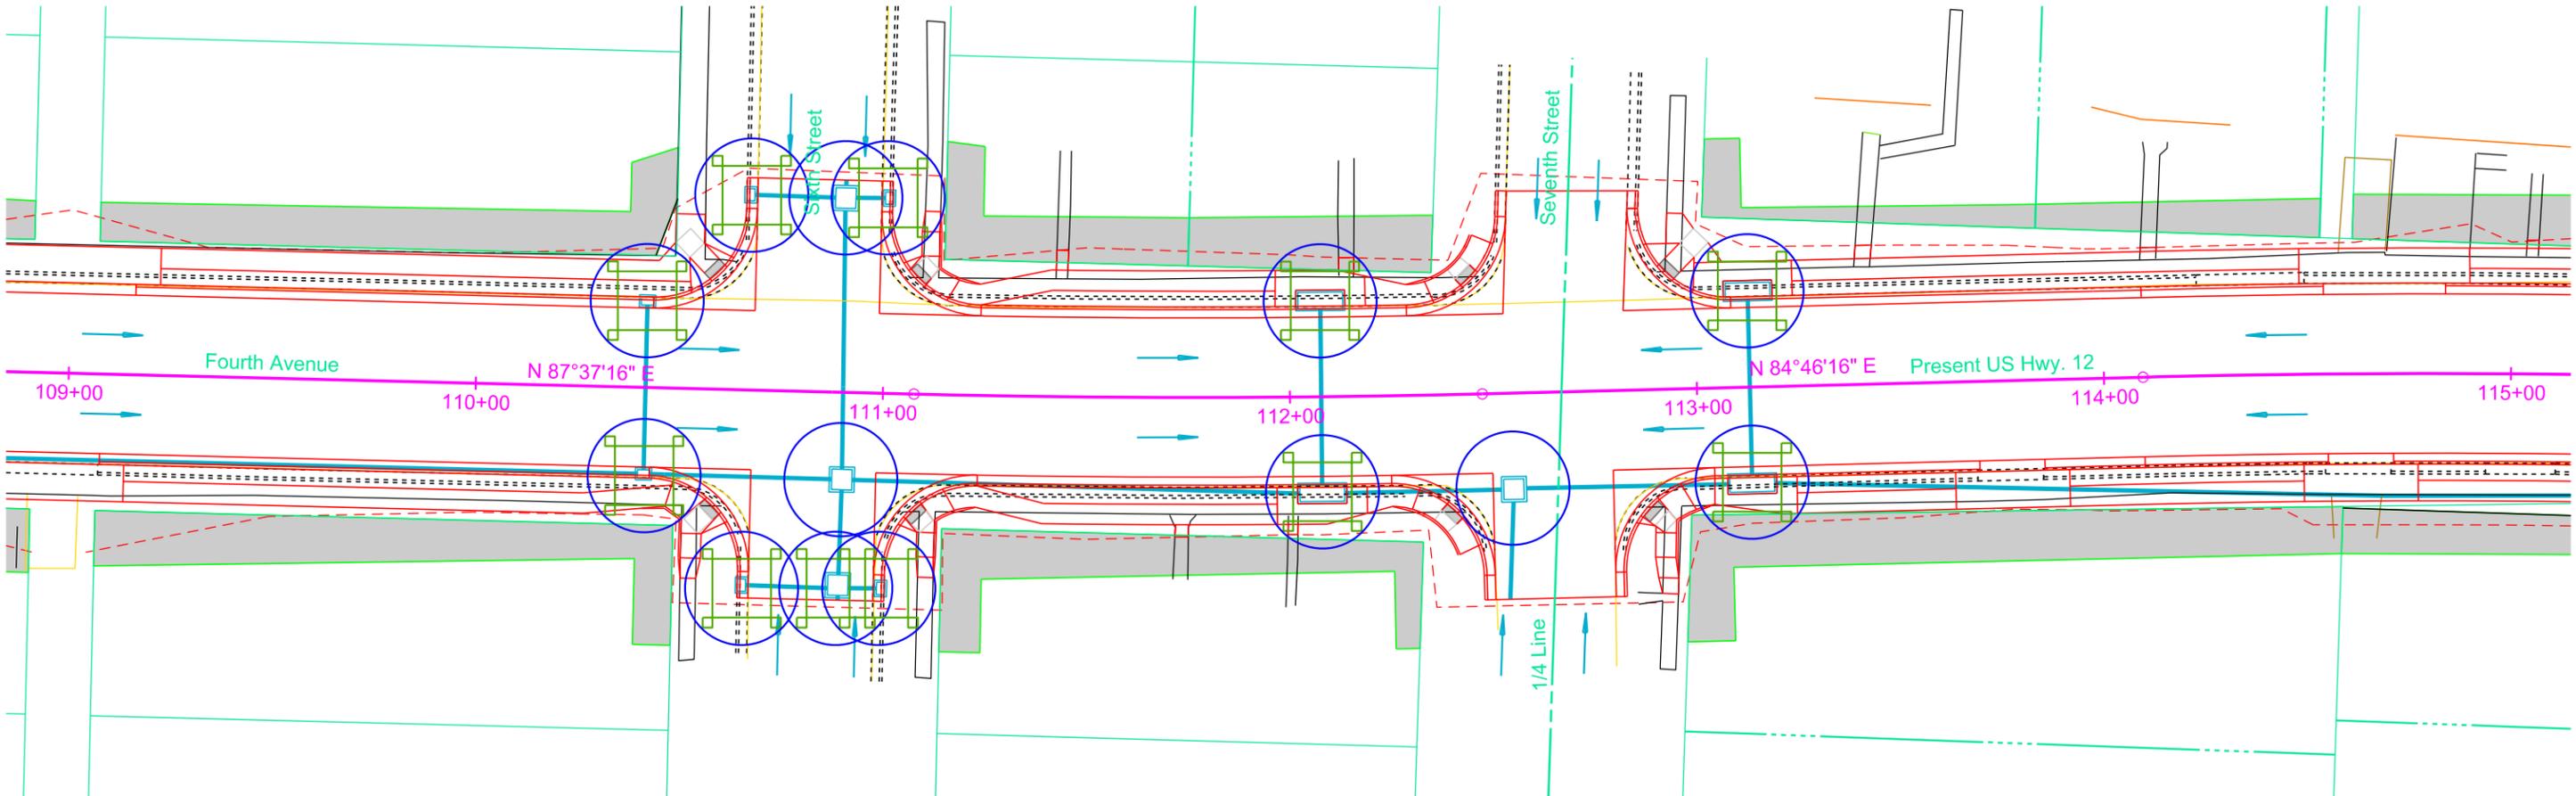

Sec. 7 - T120N - R48W

MILBANK

Plot Scale - 1"=40'

Plotted From - TRPR17200

File - U:\proj\gmt028\T109ec.dgn

EROSION AND SEDIMENT CONTROL PLAN

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D15	TOTAL SHEETS D20
-----------------------	----------------------------	--------------	---------------------

Plotting Date: 12/23/2014



INTERMEDIATE PHASE


Install Interim Sediment Control at Inlets, Manholes, and Junction Boxes before the placement of surfacing at the following locations:
 117+08-21.17' R 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags
 117+08-21.17' L 18 Ft High Flow Silt Fence 24 Ft Sediment Filter Bags

FINAL PHASE

Install Sediment Control at Inlets with Frames and Grates after the placement of surfacing at the following locations:
 117+08-21.17' R 1 Each
 117+08-21.17' L 1 Each

**END GRADING
 BEGIN RESURFACING**
 Station 120+99

Sec. 7 - T120N - R48W

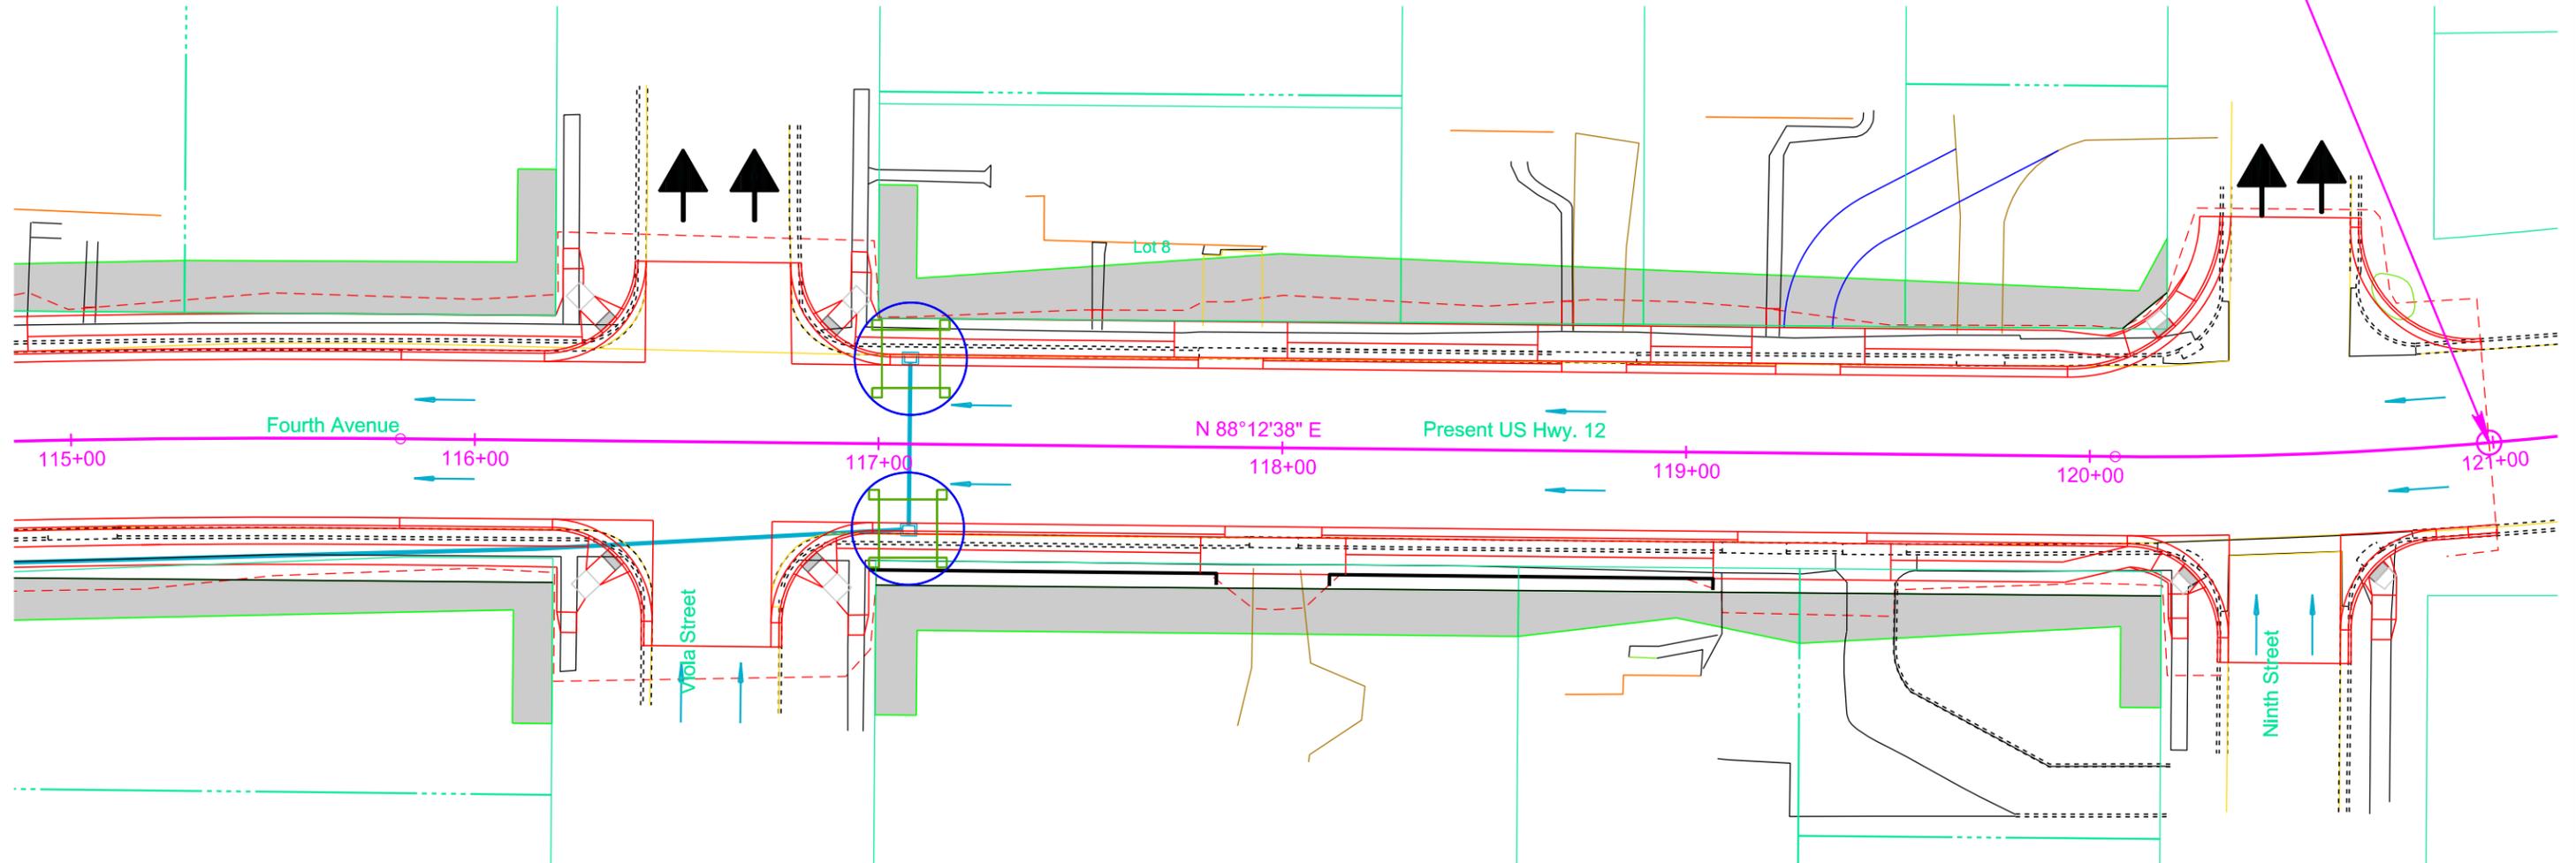

MILBANK


Plot Scale - 1:40

Plotted From - TRPR17200



File - U:\trp\jgm\028T115ec.dgn

DEWATERING AND SEDIMENT COLLECTION SYSTEM

Plotting Date: 12/23/2014

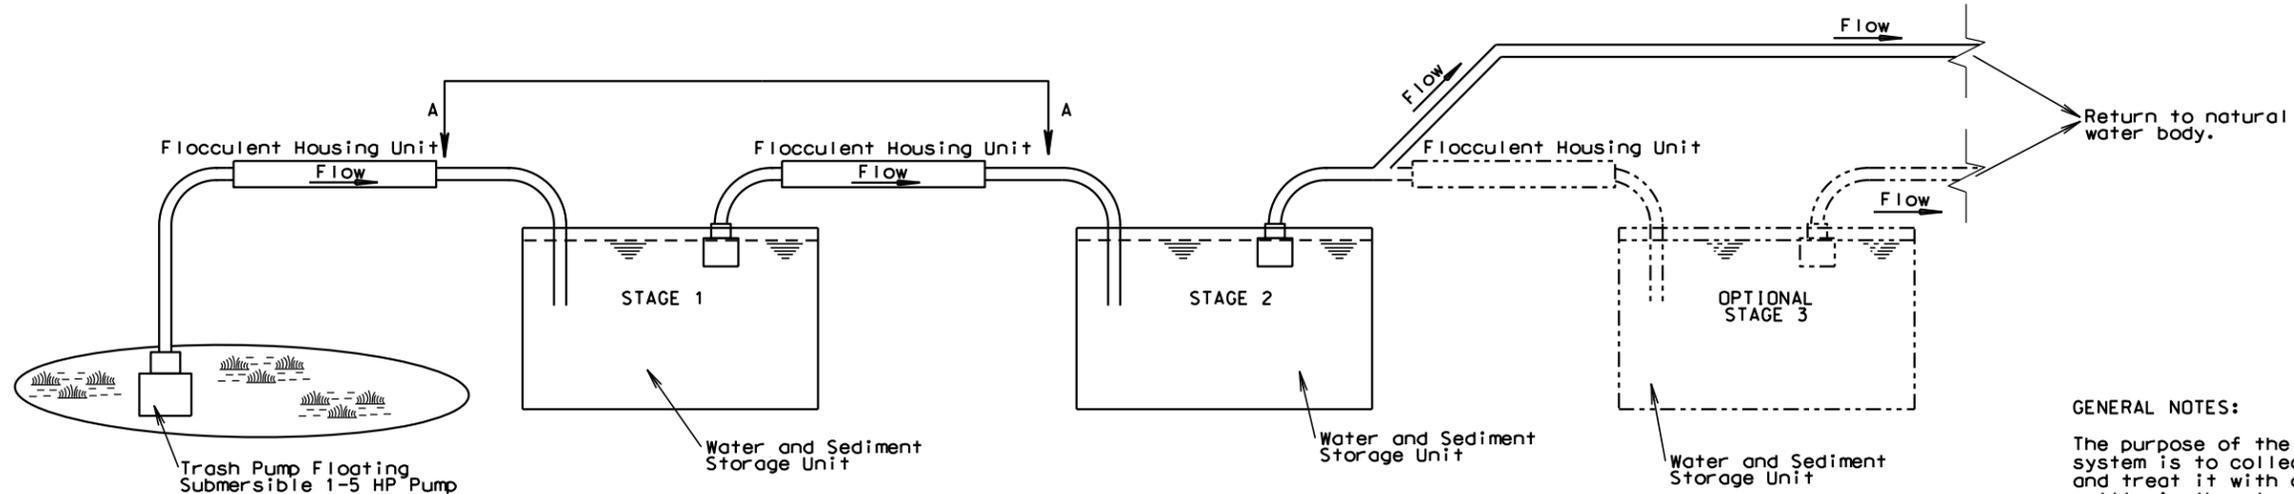


ELEVATION VIEW
CASCADE SYSTEM

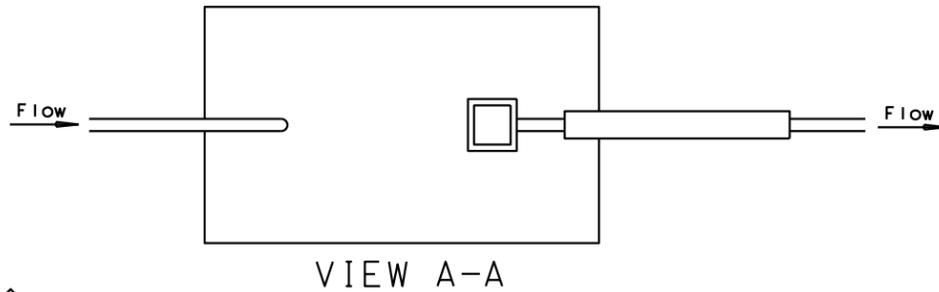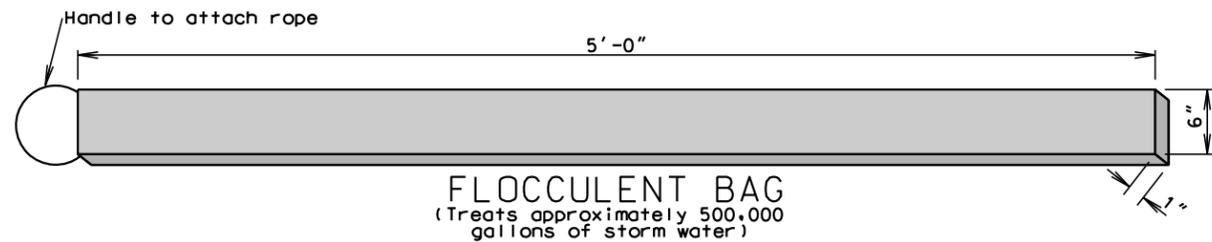

FLOCCULENT HOUSING UNIT (Estimated Quantities) (For Information Only)			
NO.	DESCRIPTION	QUANTITY	UNIT
1	4" or 6" Dia. Sch. 40 Gate Valve	1	Each
2	4" X 6" or 6" X 8" Sch. 40 PVC Bushing	2	Each
3	6" or 8" Dia. Sch. 40 PVC "Y"	1	Each
4	6" or 8" Dia. Sch. 40 PVC Female Threaded Cap	1	Each
5	1" Dia. Sch. 80 PVC Drain Valve	1	Each
6	1/2" Eye Bolt With Wing Nut and Rubber Gromets	1	Each
7	6" or 8" Dia. Sch. 40 PVC Pipe	10	Ft.
8	6" or 8" Dia. Sch. 40 PVC Male Adapter	1	Each
9	4" or 6" Dia. Sch. 40 PVC Swing Check Valve	1	Each

MAXIMUM PUMPING TIME			
Pump Type	Flow Rate (gpm)	No. of 500 K Gallon Treatment Floc. Bags Required	Expended After: (Hours)
2"	50-250	1	30
3" gas	250-350	1	30-40
4" diesel	500-750	1-2	24-33
6" diesel	750-1000	2-3	25-36

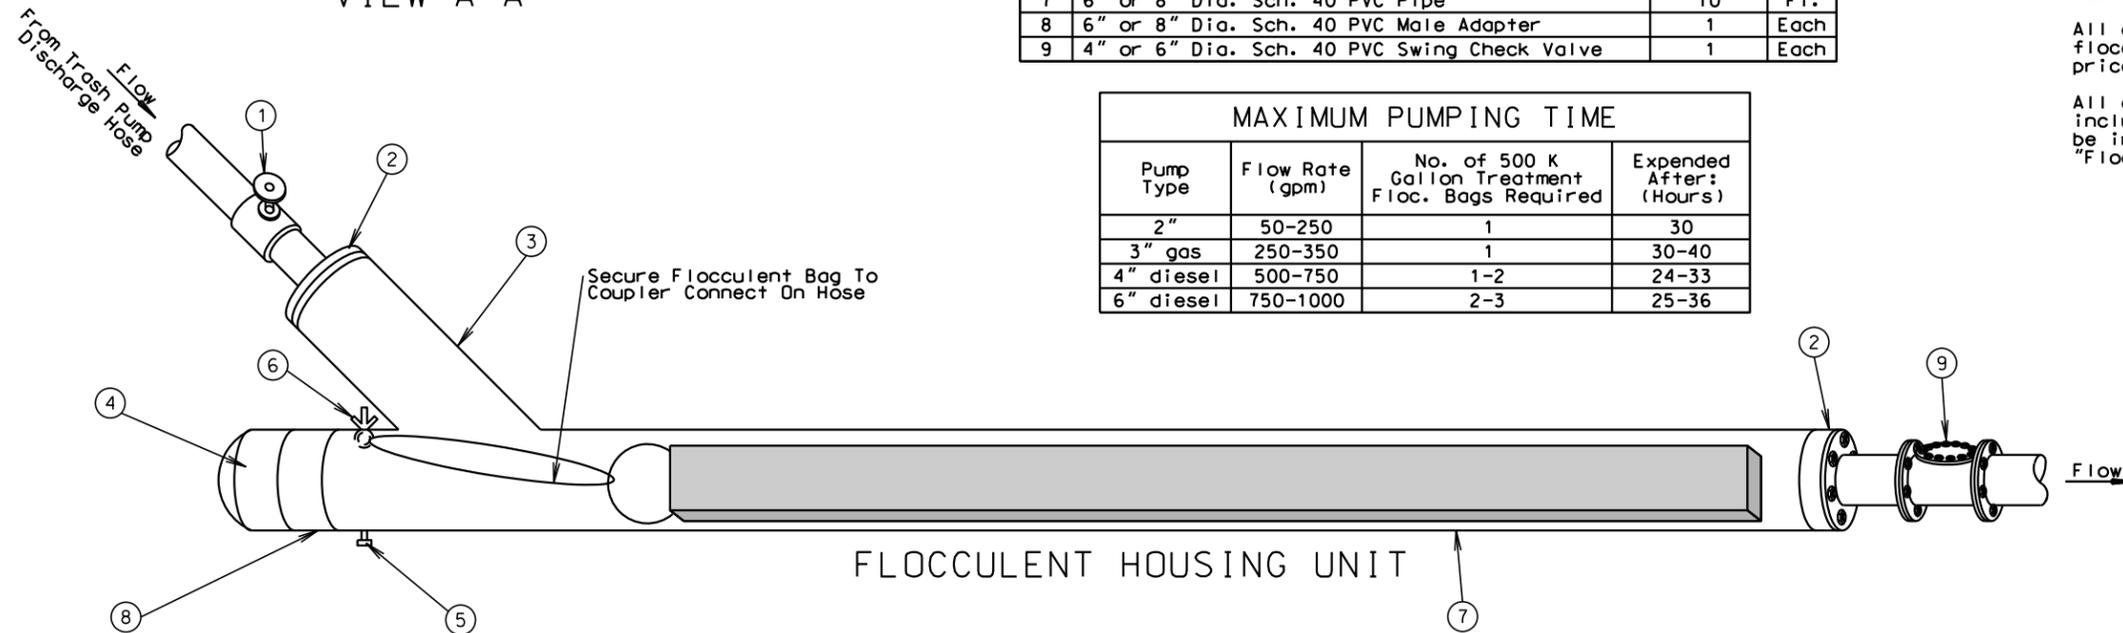

GENERAL NOTES:

The purpose of the dewatering and sediment collection system is to collect turbid storm water on the project and treat it with a flocculent. The sediment would then settle in the storage units and the clear water would then be discharged into the storm sewer, lake, stream, vegetated ditch, or other Engineer approved site. Clear water for this project is defined as having a maximum of 30 mg/L of suspended solids. The clear water discharged shall have a ph between 6.1 and 8.5, with a ph of 7.0 preferred.

The drawing of the cascade system is for conceptual purposes only; however, the cascade system shall at a minimum incorporate the use of 2 flocculent housing units and 2 water and sediment storage units.

Design and construction of the water and sediment storage units are project site specific and shall be the Contractor's responsibility. A water and sediment storage unit may consist of a storage bin lined with plastic, the bed of a dump truck lined with plastic, a sediment basin, or other Engineer approved unit.

The 500,000 gallon treatment flocculent bag shall be a BIOSTAR™CH product or approved equal. Information concerning the product may be found on the Internet at the following location: <http://www.biostar-ch.com>

All costs for the dewatering and sediment collection system including disposing of sediment collected in the water and sediment storage units, pumping, furnishing and using the water and sediment collection units, labor, materials, and incidentals necessary for the dewatering and sediment collection system shall be incidental to the contract unit price per hour for "Dewatering". Measurement shall be based on the number of hours pumping occurs for the dewatering and sediment collection system.




All costs for furnishing the 500,000 gallon treatment flocculent bag shall be incidental to the contract unit price per each for "500 K Gallon Treatment Flocculent Bag".

All costs for furnishing the flocculent housing unit including all labor, materials, and incidentals shall be incidental to the contract unit price per each for "Flocculent Housing Unit".

SDDOT CONSTRUCTION ENTRANCE

STATE OF SOUTH DAKOTA	PROJECT NH 0012(151)389	SHEET D17	TOTAL SHEETS D20
-----------------------	----------------------------	--------------	---------------------

Plotting Date: 12/23/2014

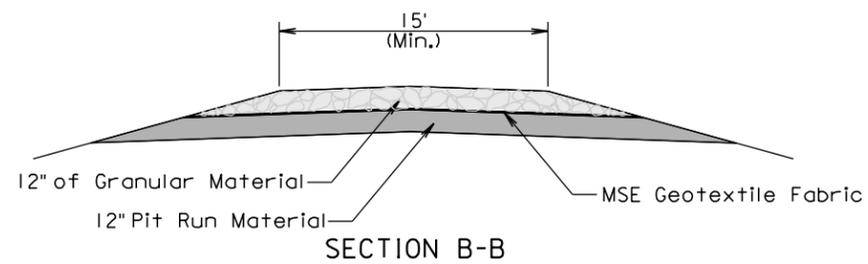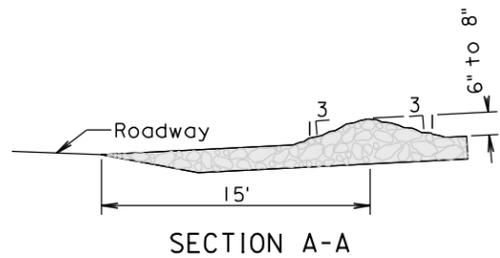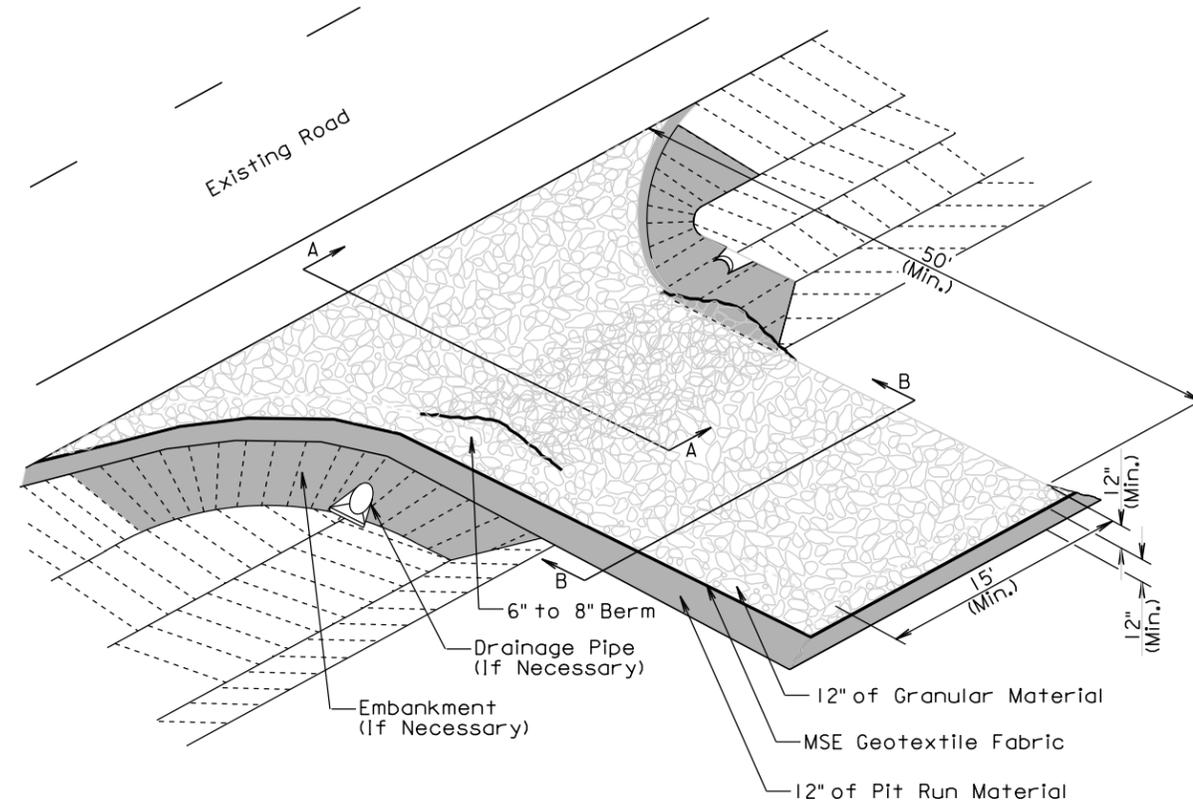




GENERAL NOTES:

If the grade of the entrance slopes down to the roadway, a berm of extra rock shall be used to prevent sediment or mud from being deposited on the roadway. See SECTION A-A.

If a drainage pipe is necessary the size and type shall be determined by the Contractor to meet field conditions. All cost shall be incidental to the various bid items.


If embankment is necessary it shall be pit run material.

TRANSVERSE TO ROADWAY

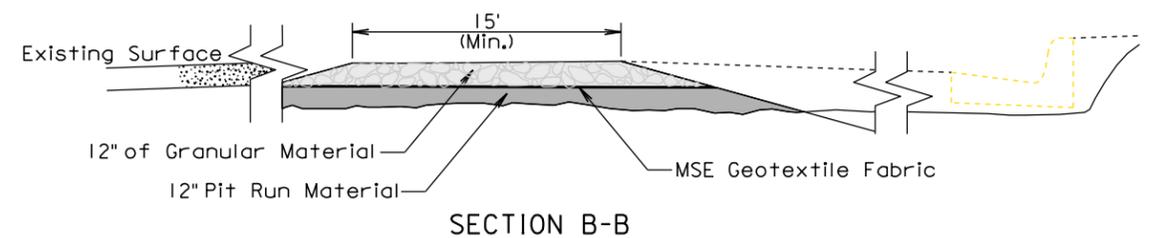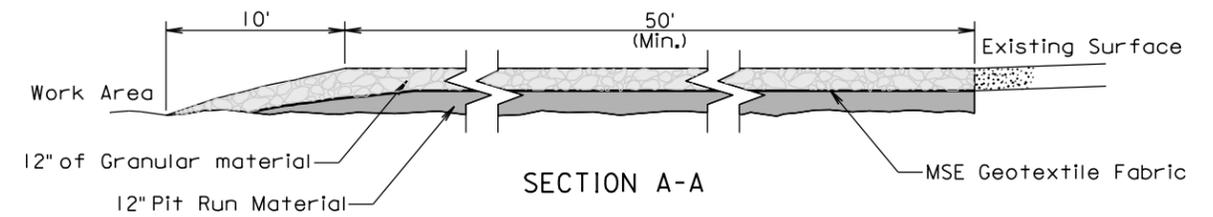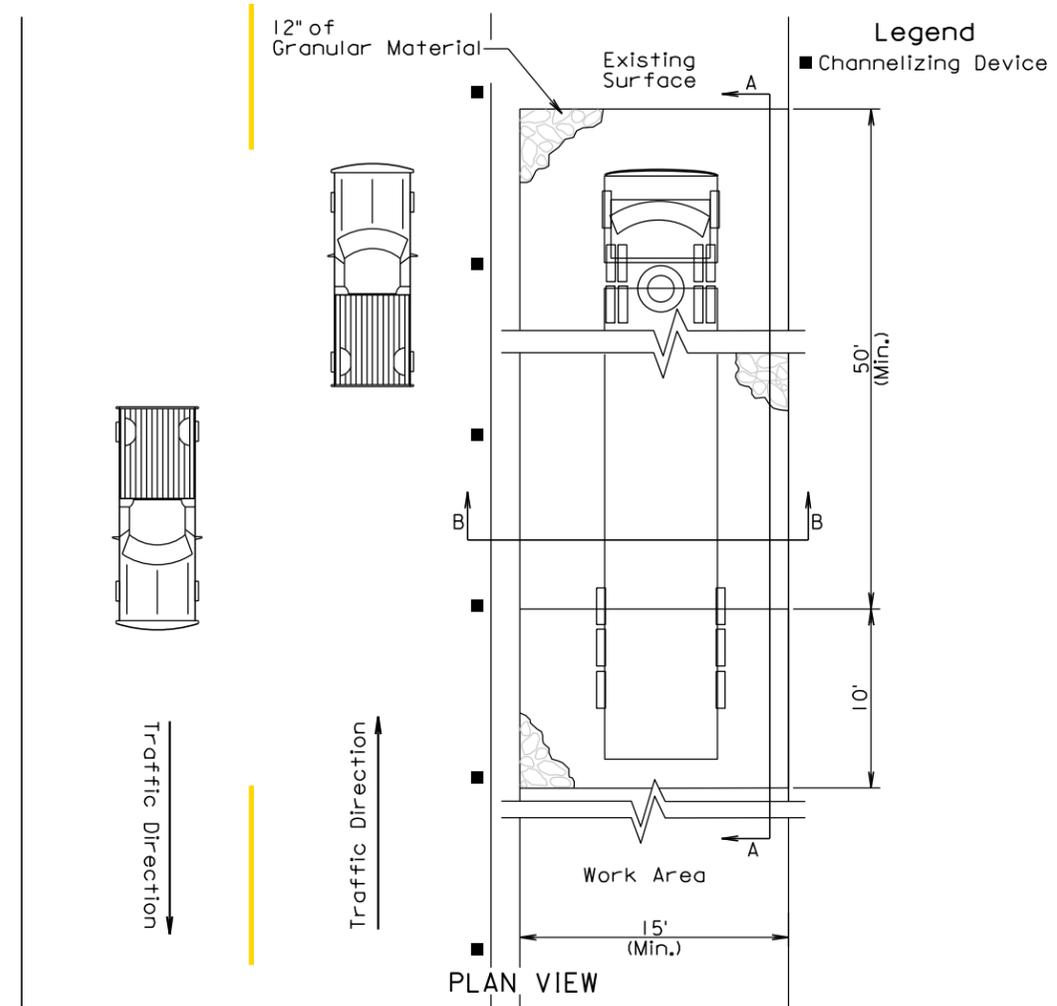


PARALLEL TO ROADWAY


MANUAL HIGH FLOW SILT FENCE INSTALLATION

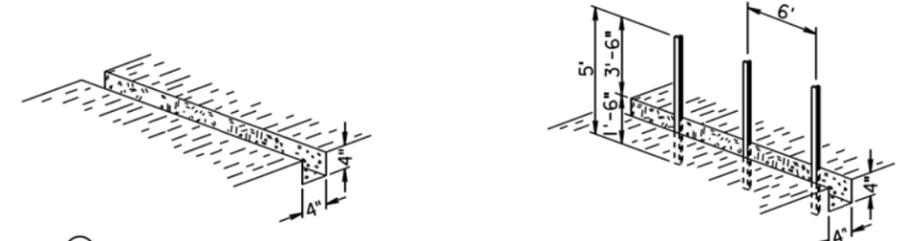

- EXCAVATE TRENCH
- DRIVE STEEL T FENCE POSTS

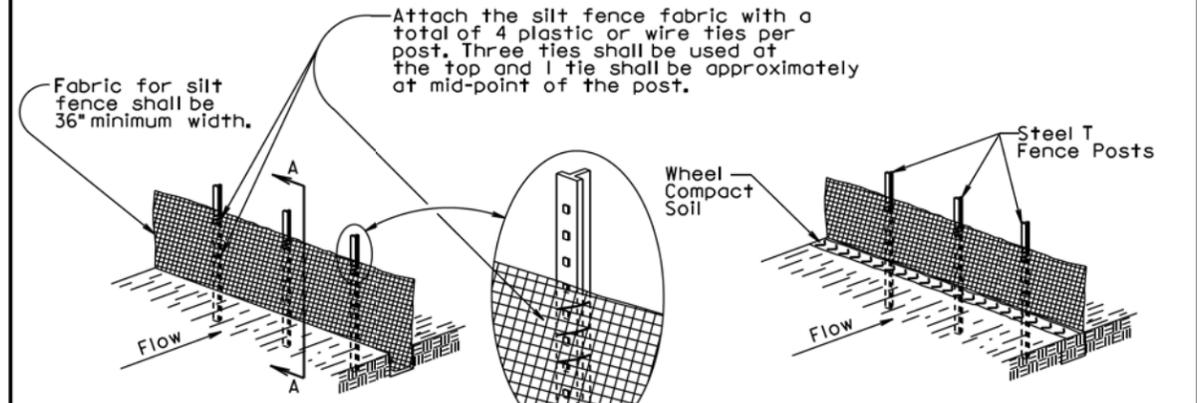


- ATTACH SILT FENCE FABRIC
- BACKFILL TRENCH AND WHEEL COMPACT SOIL

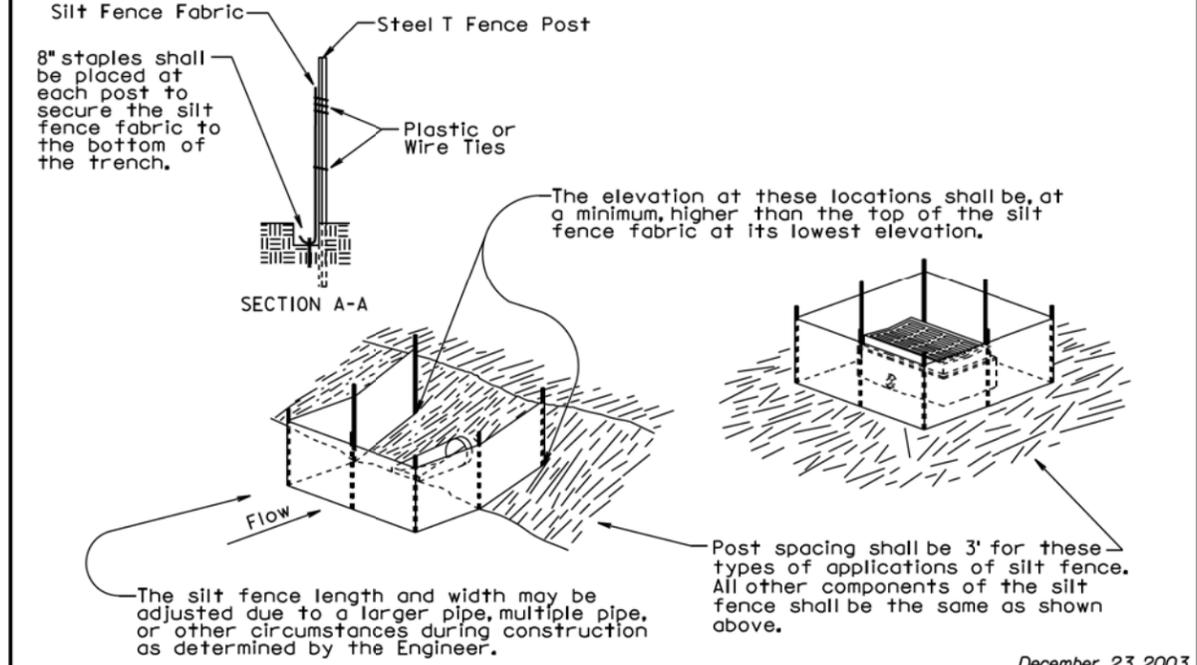


December 23, 2003

S D D O T	HIGH FLOW SILT FENCE	PLATE NUMBER 734.05
	Published Date: 4th Qtr. 2014	Sheet 1 of 2


MACHINE SLICED HIGH FLOW SILT FENCE INSTALLATION

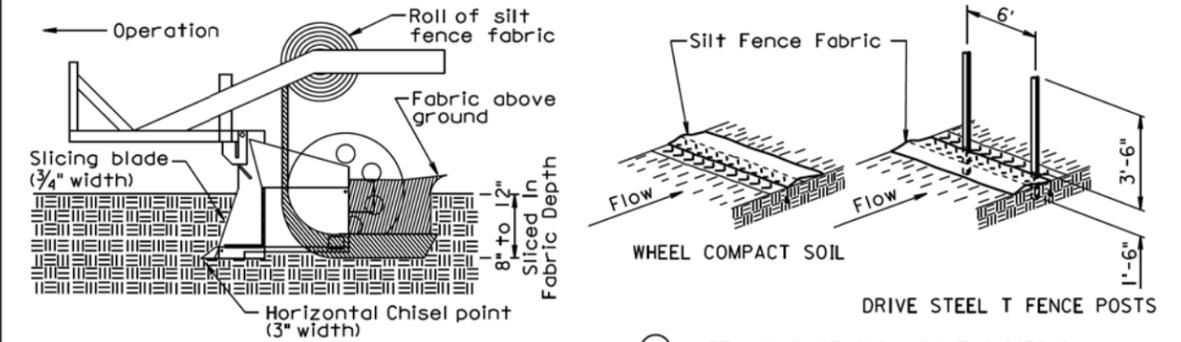

- INSTALL SILT FENCE FABRIC BY MACHINE SLICING METHOD.
- WHEEL COMPACT SOIL ABOVE SLICED IN PORTION OF FABRIC AND THEN DRIVE STEEL T FENCE POSTS.

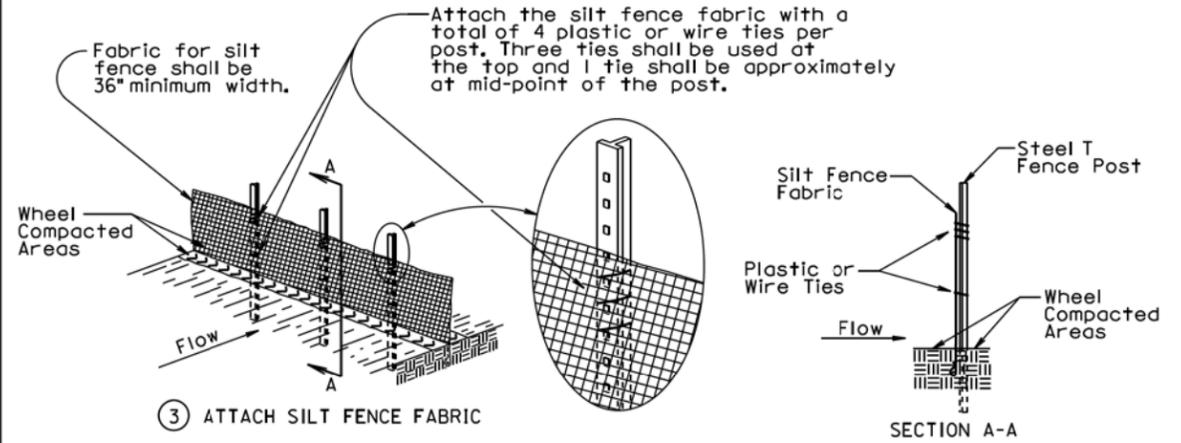

- ATTACH SILT FENCE FABRIC

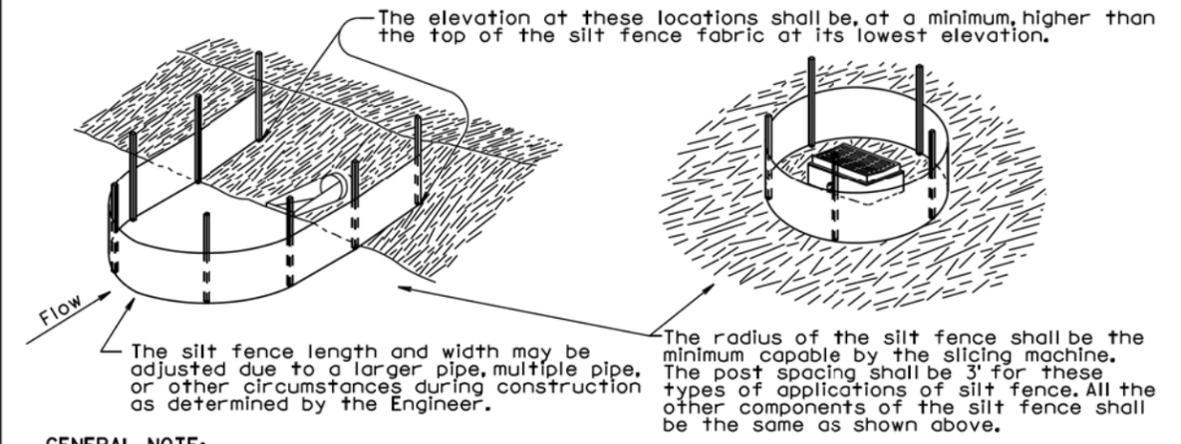

GENERAL NOTE:

If a trench can not be dug or the silt fence fabric can not be sliced in due to the type of earthen material (such as rock), then a row of 30 to 40 pound sandbags butted end to end shall be provided on top of the extra length of silt fence fabric to prevent underflow.


December 23, 2003

S D D O T	HIGH FLOW SILT FENCE	PLATE NUMBER 734.05
	Published Date: 4th Qtr. 2014	Sheet 2 of 2

Plot Scale: 1:200

Plotted From: TRPR17200

File: ...agmt0281s73405_1s73405_2.dgn

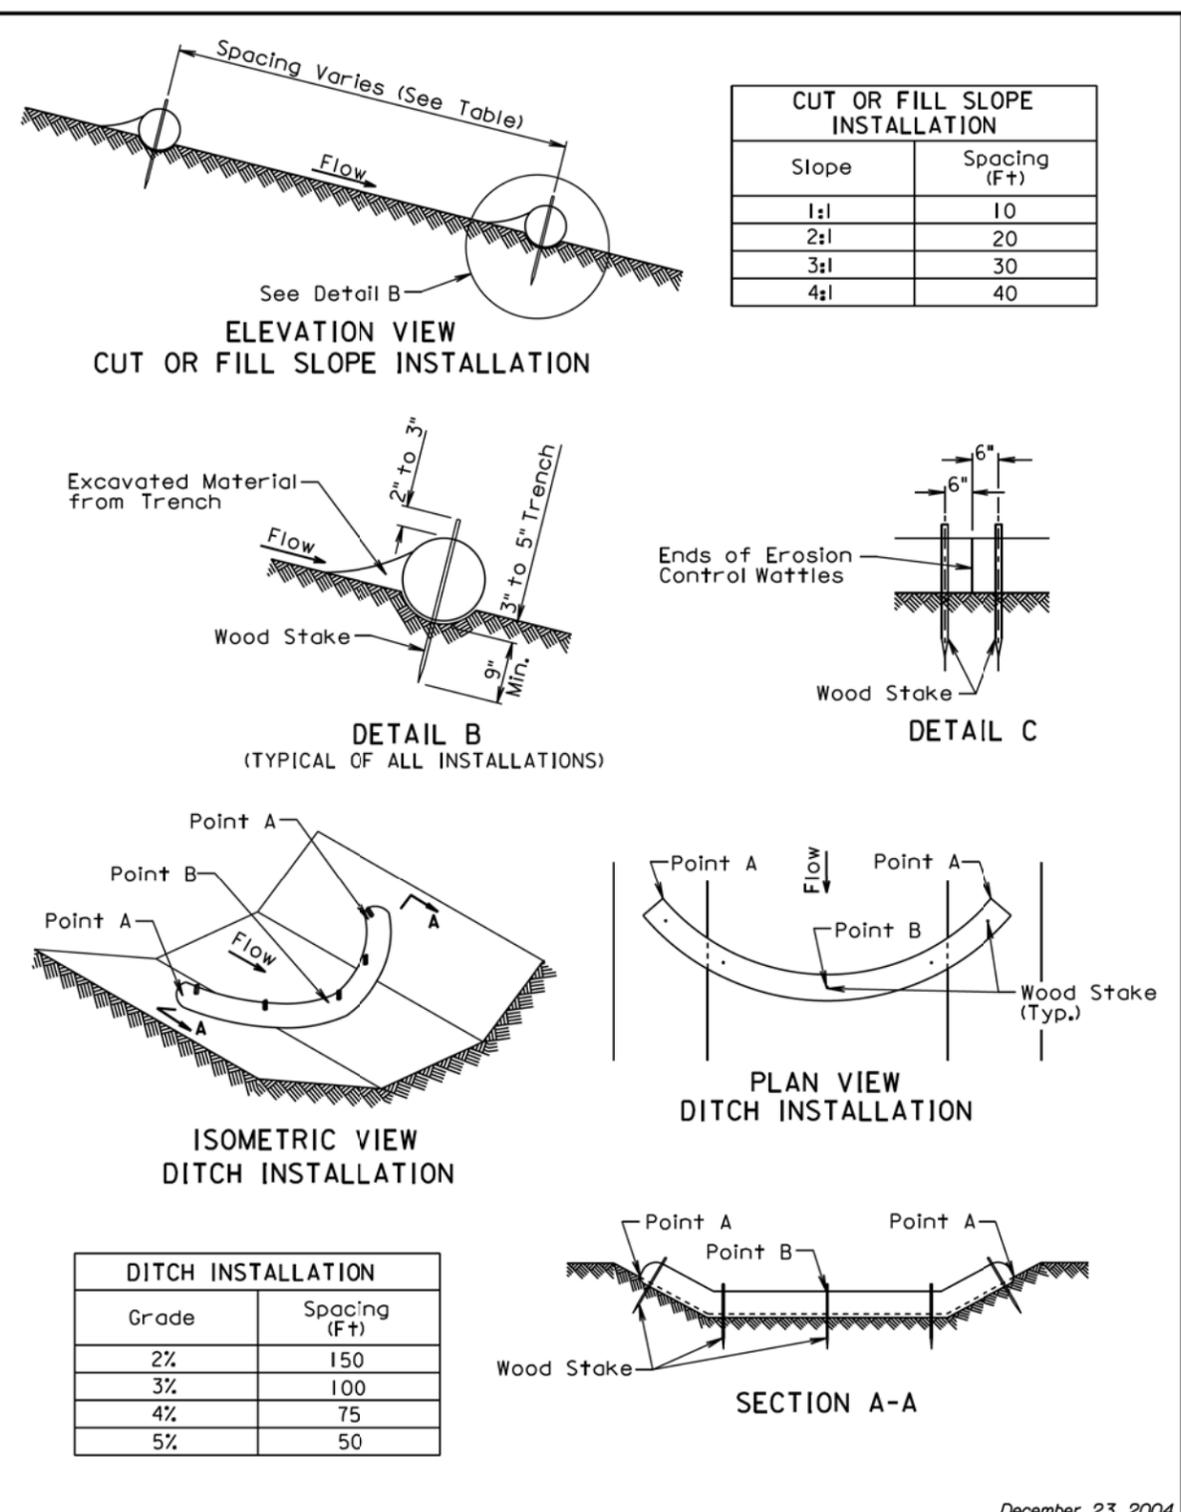

December 23, 2004

S D D O T Published Date: 4th Qtr. 2014	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
		Sheet 1 of 2

GENERAL NOTES:

At cut or fill slope installations, wattles shall be installed along the contour and perpendicular to the water flow.

At ditch installations, point A must be higher than point B to ensure that water flows over the wattle and not around the ends.

The Contractor shall dig a 3" to 5" trench, install the wattle tightly in the trench so that daylight can not be seen under the wattle, and then compact the soil excavated from the trench against the wattle on the uphill side. See Detail B.

The stakes shall be 1"x2" or 2"x2" wood stakes, however, other types of stakes such as rebar may be used only if approved by the Engineer. The stakes shall be placed 6" from the ends of the wattles and the spacing of the stakes along the wattles shall be 3' to 4'.

Where installing running lengths of wattles, the Contractor shall butt the second wattle tightly against the first and shall not overlap the ends. See Detail C.

The Contractor and Engineer shall inspect the erosion control wattles once every week and within 24 hours after every rainfall event greater than 1/2". The Contractor shall remove, dispose, or reshape the accumulated sediment when necessary as determined by the Engineer.

Sediment removal, disposal, or necessary shaping shall be as directed by the Engineer. All costs for removing accumulated sediment, disposal of sediment, and necessary shaping shall be incidental to the contract unit price per cubic yard for "Remove Sediment".

All costs for furnishing and installing the erosion control wattles including labor, equipment, and materials shall be incidental to the contract unit price per foot for the corresponding erosion control wattle bid item.

All costs for removing the erosion control wattle from the project including labor, equipment, and materials shall be incidental to the contract unit price per foot for "Remove Erosion Control Wattle".


December 23, 2004

S D D O T Published Date: 4th Qtr. 2014	EROSION CONTROL WATTLE	PLATE NUMBER 734.06
		Sheet 2 of 2

Plot Scale - 1:200

Plotted From - TRPR17200

...Agmt028Tns73406_1s73406_2.dgn

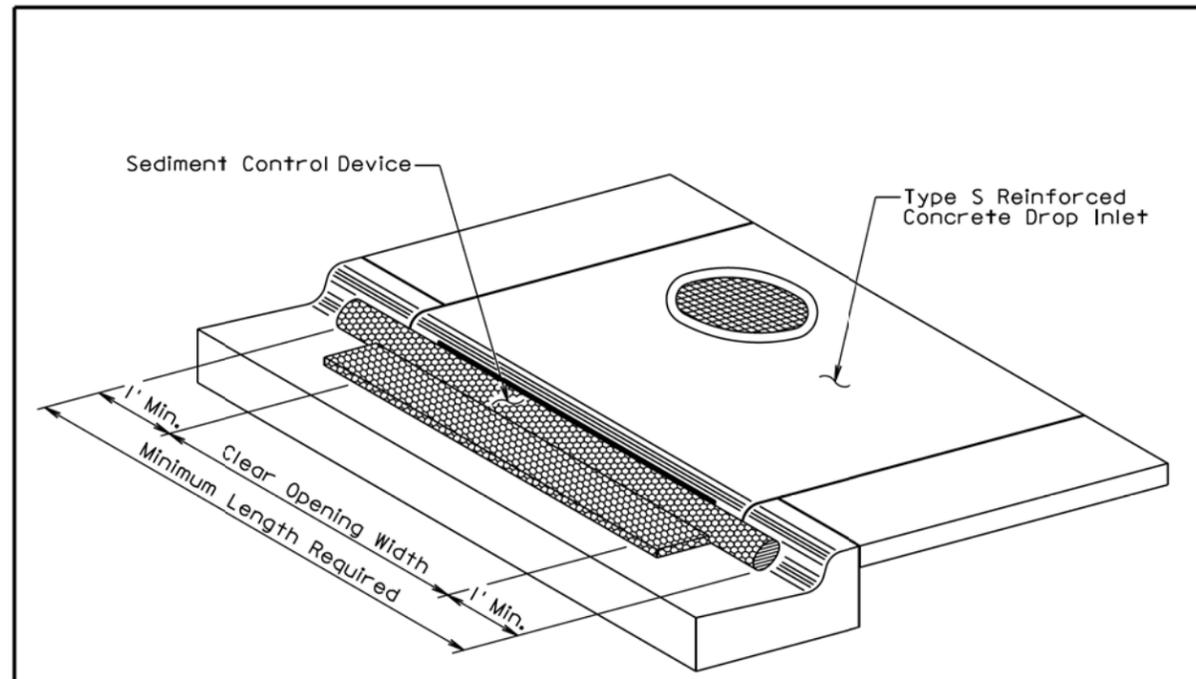

ISOMETRIC VIEW

GENERAL NOTES:

- The type of sediment control device shown is for illustrative purposes only.
- The type of sediment control device used shall be one of the types as specified in the plans.
- The sediment control device shall be placed at the drop inlets according to the manufacturers' installation instructions.
- The sediment control at inlet for type S reinforced concrete drop inlet shall be placed at locations stated in the plans or at locations determined by the Engineer.
- The Contractor shall inspect and maintain the sediment control device once every week and within 24 hours after every rainfall event. The Contractor shall maintain the sediment control device by removing the device, removing accumulated sediment, and resetting the device.
- The removed sediment shall be placed at a location away from the drop inlet where the sediment will not be washed back into the drop inlet or other storm sewer system.
- Payment for the "Sediment Control at Type S Drop Inlet" shall be based on the minimum length required at the drop inlets. Some of the sediment control devices specified in the plans will have to be longer due to available length.
- All costs for furnishing, installing, inspecting, maintaining, removing, and resetting the sediment control device at the drop inlet including labor, equipment, and materials shall be incidental to the contract unit price per foot for "Sediment Control at Type S Reinforced Concrete Drop Inlet".

September 14, 2005

S D D O T	SEDIMENT CONTROL AT INLETS FOR TYPE S REINFORCED CONCRETE DROP INLETS	PLATE NUMBER 734.11
		Sheet 1 of 1

Published Date: 4th Qtr. 2014

Plot Scale - 1:200

Plotted From - TRPR17200

File - U:\proj\gmt028\1573411_1.dgn