
SECTION M: PERMANENT PAVEMENT MARKING PLANS

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-B 0248(16)173	M1	M3

INDEX OF SHEETS

M1 General Layout with Index
M2-M3 General Notes and Tables

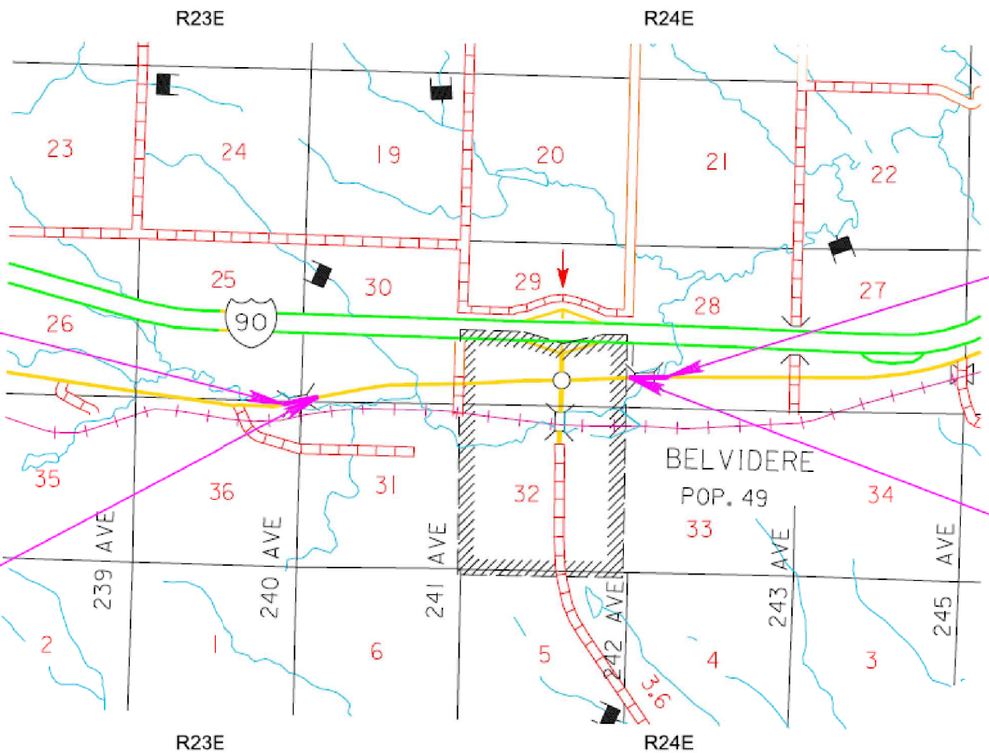

BEGIN PROJECT P-B 0248(16)173
Station 20+20.00
Located 113.64' North and
25.11 feet East of the Southwest Corner
Section 30, Township 2 S, Range 24 E
of the Black Hills Meridian

BEGIN EXCEPTION
Station 26+75.00

END PROJECT P-B 0248(16)173
Station 139+00.00
Located 1119 feet North and
438 feet East of the Southwest Corner of
Section 28, Township 2 S, Range 243 E
of the Black Hills Meridian

END EXCEPTION
Station 130+00.00

Plot Scale - 1:200
Plotted From - TRPP25291
File - ...\region\Prj\Jack06NH\Title.dgn

SECTION M ESTIMATE OF QUANTITIES

BID ITEM NUMBER	ITEM	QUANTITY	UNIT
633E1200	High Build Waterborne Pavement Marking Paint, White	18	Gal
633E1205	High Build Waterborne Pavement Marking Paint, Yellow	4	Gal

PAVEMENT MARKING PAINT

The Contractor will advise the Engineer a minimum of 3 weeks prior to the application of the permanent pavement marking to allow the State to check and mark the location of no passing zones.

The application of permanent pavement marking will begin no sooner than 7 calendar days following completion of the fog or flush seal. Application of permanent pavement marking will be completed within 14 calendar days following completion of the final surfacing.

HIGH BUILD WATERBORNE PAVEMENT MARKING PAINT

All materials will be applied as per manufacturer's recommendations. High build waterborne pavement marking paint will conform to the supplemental specifications for Section 980.1 B.

Reflective media will consist of glass beads. Reflective media will require a Certificate of Compliance for Certification for each source and lot. Acceptance sampling will not be required.

RATES OF MATERIALS FOR HIGH BUILD WATERBORNE PAVEMENT MARKING PAINT

Solid 4" line = 22.5 Gals/Mile
Dashed 4" line = 6.2 Gal/Mile
Glass Beads = 8 Lbs/Gal.

All cost for materials, labor, and equipment necessary to furnish and install the pavement markings will be incidental to the contract unit price for the respective High Build Waterborne Pavement Marking Paint items.

RETROREFLECTIVITY FOR PAVEMENT MARKING PAINT

The Department may take retroreflectivity readings on the pavement marking lines after 2 days and within 30 days of the line application using either a portable or mobile retroreflectometer that conforms to 30-meter geometry. If the Department chooses to take retroreflectivity readings, three retroreflectivity readings will be taken on each line at each test location. The three readings will be averaged and become the reading for that test location.

If the Department chooses to take retroreflectivity readings, three readings will be taken on the edge lines and lane lines in the direction of application. For combination solid yellow and skip yellow lines for turn lanes and for centerline markings on two-way roadways, three readings will be taken in one direction, the reflectometer will be turned 180 degrees and three more readings will be taken. The six readings for the centerline markings will be averaged and become the test reading for that test location.

If the Department chooses to take readings, the minimum retroreflectivity values will be 275 mc/m^2/lux for white and 170 mc/m^2/lux for yellow.

DATA LOGGING SYSTEM

The Contractor will provide striper computerized data logging system files as described below. The pavement marking device will have an onboard monitoring system for the purpose of managing the amount of pavement marking materials being applied to the pavement surface.

The following will be included in the documentation from the data logging system:

- State project number and PCN
- Highway number
- Beginning and end MRMs of the section marked rounded to the nearest hundredth of a mile, including direction of travel
- Beginning and ending coordinates determined by a Global Positioning System receiver with 3-meter accuracy, including direction of travel
- Date and beginning and ending time of application
- Product applied
- Lot number(s) of product (binder and reflective material) applied
- Striping Contractor (striper code)
- Designation of the marking being applied (LEL – Left Edgeline, REL – Right Edgeline, CL – Centerline, LL – Lane Line Broken or Dotted, 1LL – leftmost LL in multilane, 2LL – second to leftmost LL in multilane, etc.)
- Width of marking being applied
- Presence of recess or rumble strip
- Presence of contrast
- Average material application rate and film thickness calculated for the section striped

The following data will be included in the documentation from the data logging system reported as an average for each drive mile (or other segment approved by the Engineer) installed:

- Application vehicle speed rounded to the nearest tenth of a mile per hour
- Weight (Lbs) and/or volume (Gal) as measured through a positive displacement pump (mechanism or flow meter) of liquid material used by color
- Weight (Lbs) of reflective material used
- Ratio of reflective material used (weight) per liquid material used (volume) reported as Lbs/Gal
- Ambient air temperature (in degrees Fahrenheit)
- Road surface temperature (in degrees Fahrenheit)
- Humidity (percent)
- Dew point (in degrees Fahrenheit)

Provide the measurement report in the form of an electronic database file, or delimited text file, containing raw data collected. Provide the Engineer with a printed summary and submit the electronic data to the Region Traffic Engineer at the e-mail below and copy the Engineer.

Hannah.Bolton@state.sd.us

The data logging system equipment will be operational, calibrated, and in use during pavement marking operations. Pavement marking installation without the use of a data logging system may not be accepted.


Upon request, provide to the Engineer the data logging system manufacturer's recommendations for equipment calibration frequency and provide certification that the equipment meets manufacturer's recommended calibration.

Verify that the physical and electronic measurement of distance travelled is consistent by travelling a 100-foot distance prior to the start of pavement marking operations.

All cost for materials, labor, and equipment necessary to provide the pavement marking data as described will be incidental to the contract unit price for the respective pavement marking items.

STATE OF SOUTH DAKOTA	PROJECT	SHEET	TOTAL SHEETS
	P-B 0248(16)173	M3	M3

TWO LANE ROADWAY

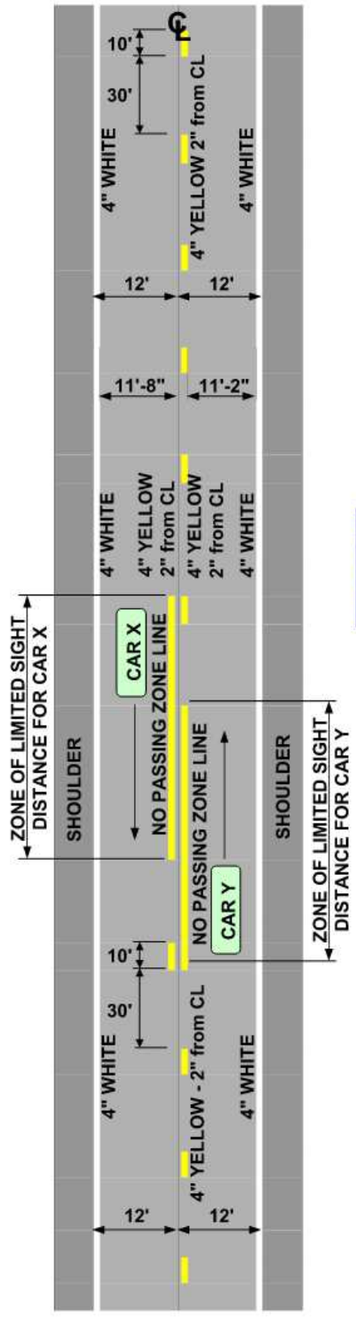

PAVEMENT MARKING

Typical pavement marking as shown on this sheet will be applied throughout the entire length of two lane roadway.

Traffic Control will be incidental to the cost of application. The striper and advance or trailing warning vehicle will be equipped with flashing amber lights and advance warning arrow board.

Application rates will be as follows:

Two Lane Roadway (Rates for one line)
Dashed Yellow Centerline Rate = 6.2 Gal/Pass-Mile
Solid Yellow Centerline Rate = 22.5 Gal/Mile
Solid White Edgeline Rate = 22.5 Gal/Mile

4" Yellow Skip Centerline (when not adjacent to a 4" Yellow No Passing Zone) will be placed consistently to the south or east side of centerline.

ESTIMATED QUANTITIES (BASED ON ONE APPLICATION)	
PAINT	**QUANTITY**
WHITE	**18 GALLONS**
YELLOW	**4 GALLONS**